

Introduction

By Wayne R. Belcher, Frank A. D’Agnese, and Grady M. O’Brien

Chapter A of

Death Valley Regional Groundwater Flow System, Nevada and California—Hydrogeologic Framework and Transient Groundwater Flow Model

Edited by Wayne R. Belcher and Donald S. Sweetkind

Prepared in cooperation with the
U.S. Department of Energy

Office of Environmental Management, National Nuclear Security Administration, Nevada Site Office,
under Interagency Agreement DE–AI52–01NV13944,
Office of Civilian Radioactive Waste Management,
under Interagency Agreement DE–AI28–02RW12167, and
Department of the Interior, National Park Service

Professional Paper 1711

**U.S. Department of the Interior
U.S. Geological Survey**

Contents

Introduction.....	5
Purpose and Scope	7
Site Description.....	7
Physiography	9
Climate	9
Soils and Vegetation.....	9
Land Management and Water Use.....	9
Previous Work.....	11
Early Groundwater Flow Models.....	12
Recent Hydrogeologic Framework and Groundwater Flow Models.....	13
Underground Test Area (DOE/NV-UGTA) Model	13
Yucca Mountain Project/Hydrologic Resource Management Program (YMP/HRMP) Model.....	13
Death Valley Regional Groundwater Flow System Prepumping Model	15
Summary.....	15
References Cited.....	16

Figures

A-1—A-5. Maps showing:	
A-1. Geographic and prominent topographic features of the Death Valley regional groundwater flow system region, Nevada and California.....	6
A-2. Delineations of the Death Valley regional groundwater flow system.....	8
A-3. Desert climatic zones of the Death Valley regional groundwater flow system region.....	10
A-4. Weather regimes of the Death Valley regional groundwater flow system region.....	11
A-5. Delineations of regional hydrogeologic framework models of the Death Valley regional groundwater flow system region	14

CHAPTER A. Introduction

By Wayne R. Belcher, Frank A. D’Agnese, and Grady M. O’Brien

In the early 1990s, two numerical models of the Death Valley regional groundwater flow system (DVRFS) were developed by the U.S. Department of Energy (DOE) (fig. A-1). The first model was used to support investigations at the Nevada Test Site (NTS), where nuclear tests were conducted from 1951 to 1992, for the Department of Energy/Nevada Operations Office (DOE-NV) (now the National Nuclear Security Administration/Nevada Site Office [NNSA/NSO]) Underground Test Area (UGTA) project and is designated the DOE/NV-UGTA model (IT Corporation, 1996a). The second model was used for programs at Yucca Mountain, Nev., the proposed repository for high-level nuclear waste and spent nuclear fuel, for the Office of Civilian Radioactive Waste Management’s (OCRWM) Yucca Mountain Project (YMP) and the DOE-NV Hydrologic Resource Management Program (HRMP) and is designated the YMP/HRMP model (D’Agnese and others, 1997).

The DOE/NV-UGTA flow model (IT Corporation, 1996a) was developed by HSI/GeoTrans Inc., using MODFLOW (McDonald and Harbaugh, 1988) to evaluate the transport of radionuclides from underground nuclear test sites on the NTS. The YMP/HRMP model (D’Agnese and others, 1997) was developed by the U.S. Geological Survey (USGS) using MODFLOWP (Hill, 1992) to characterize the regional groundwater flow system with respect to the potential release of radionuclides from the proposed geologic high-level radioactive waste repository at Yucca Mountain.

In general, the two models were based on the same hydrologic dataset. However, the models differed somewhat in the details of their particular interpretations of the regional hydrogeology. First, these differences were the result of the fact that the DOE/NV-UGTA model had 20 layers and encompassed areas in, adjacent to, and downgradient from the UGTAs of the NTS, whereas the YMP/HRMP model had only three layers but encompassed much of the DVRFS region. Second, differences between the two hydrogeologic frameworks occurred where different data sets were used or data were sparse and the results were highly interpretive. Third, the hydrogeologic units used in each framework differed, especially in the Cenozoic volcanic rocks. Finally, estimates of recharge were highly interpretive and differed significantly for each flow model domain. Together, these differences likely resulted in the different groundwater flow path and flux results from the two models.

In 1998, DOE requested that the USGS begin a 5-year project to develop an improved groundwater flow model of the DVRFS to support NNSA/NSO and YMP programs. This work was done by the USGS in cooperation with the U.S. Department of Energy under Interagency Agreements DE-AI52-01NV13944 and DE-AI28-02RW12167. Newly available data and modeling tools were used and the data and results of the previous two regional-scale models were integrated to produce a single regional-scale flow model. During this effort, the USGS cooperated with other Federal, State, and local entities in the region, including National Park Service (NPS), U.S. Fish and Wildlife Service (FWS), Bureau of Land Management (BLM), U.S. Air Force, Nye County in Nevada, and Inyo County in California, in order to benefit from their expertise. Many of these entities also contributed funds to this project.

Interest in the regional flow system is driven by the need to (1) understand the groundwater flow paths and traveltimes associated with potential movement of radioactive material from the NTS; (2) characterize the groundwater system in the vicinity of the proposed high-level radioactive waste repository at Yucca Mountain, Nev. (Hanks and others, 1999); and (3) address a variety of potential effects on users downgradient from the NTS and Yucca Mountain, including the agricultural communities in the Amargosa Desert, Death Valley National Park, and Native American interests.

The initial objectives of the DVRFS project included the construction and calibration of a steady-state model that represents prepumping conditions for the DVRFS. This model was intended to (1) provide a starting point for calibration of the transient groundwater flow model, (2) characterize regional three-dimensional (3D) groundwater flow paths, (3) define discharge and recharge locations, (4) estimate the magnitude of subsurface flux, and (5) represent the effects of regional geologic structural features on regional flow. The digital 3D hydrogeologic framework model (HFM) and steady-state prepumping numerical flow model are documented, respectively, in Belcher and others (2002) and D’Agnese and others (2002).

The ultimate objective of the DVRFS model project, and the subject of the chapters in this volume, is the construction and calibration of a transient model that simulates the groundwater conditions of the model domain through time. Over the long term, this model is intended to be used to

6 Death Valley Regional Groundwater Flow System Transient Flow Model



- Abbreviations**
- AF = Amargosa Farms
 - AM = Ash Meadows
 - BB = Busted Butte
 - BM = Bare Mountain
 - CF = Crater Flat
 - DVNP = Death Valley National Park
 - EM = Eagle Mountain
 - FC = Fluorspar Canyon
 - FMC = Fortymile Canyon
 - FW = Fortymile Wash
 - GWR = Greenwater Range
 - IH = Ibox Hills
 - JF = Jackass Flats
 - MM = Mt. Montgomery, Montgomery Mountains
 - MP = Mormon Point
 - MQM = Mesquite Mountains
 - PV = Pahrnatag Valley
 - RSR = Resting Spring Range
 - RV = Rock Valley
 - SH/LSM = Striped Hills/ Little Skull Mtn
 - SPH = Sperry Hills
 - SR = Specter Range
 - STV = Stewart Valley
 - SV = Shadow Valley
 - YM = Yucca Mountain

50,000-meter grid based on Universal Transverse Mercator projection, Zone 11
 Shaded-relief base from 1:250,000-scale Digital Elevation Model; sun illumination from northwest at 30 degrees above horizon

EXPLANATION

- Death Valley regional groundwater flow system model boundary
- - - Prepumping Death Valley regional groundwater flow system model boundary (D'Agnes and others, 2002)
- - - Yucca Mountain Project (YMP/HRMP model) groundwater flow model boundary (D'Agnes and others, 1997)
- Underground Test Area (DOE/NV-UGTA model) groundwater flow model boundary (IT Corporation, 1996a)
- Nevada Test Site boundary
- Desert boundary
- Populated location

Figure A-1. Geographic and prominent topographic features of the Death Valley regional groundwater flow system region, Nevada and California.

(1) provide the boundary conditions for the site-scale models at Yucca Mountain and the UGTA Corrective Action Units (CAUs) on the NTS, (2) evaluate the impacts of changes in system flux, regardless of whether the changes are natural or human induced, (3) provide a technical basis for decisions on the quantity of water available for defense and economic development activities on the NTS, (4) determine the potential effects of increased offsite water use on NTS water supplies, and (5) provide a framework for determining effective source plume, ambient trend, and point-of-use groundwater-quality monitoring locations.

Purpose and Scope

This report presents the hydrogeology, the conceptual hydrologic model, the hydrologic system inputs and outputs of the DVRFS region, and how this information is used to construct an HFM and a transient numerical groundwater flow model. The groundwater flow model simulates transient conditions from 1913 through 1998 using the modular groundwater flow model, MODFLOW-2000 (Harbaugh and others, 2000), and a simulated steady-state head distribution representing prepumping conditions (the initial conditions of the model). Transient stresses imposed on the regional groundwater flow system include groundwater pumpage that occurred from 1913 through 1998, and flows from springs affected by pumping; simulated areal recharge was held constant at average annual values.

The current understanding of regional groundwater flow in the Great Basin came from the basin studies done under the U.S. Geological Survey and the State of Nevada cooperative groundwater program. Maxey and Eakin (1949) compared recharge and discharge estimates of individual basins and realized that many basins were not closed to groundwater transfer to or from adjacent basins. Eakin (1966) identified a system of interconnected basins of the White River and Muddy River springs area. The water budget imbalances within and between basins was useful in discerning interbasin flow and defining the basins of the White River flow system to the east of the DVRFS. The concept of interbasin flow into the Death Valley region was first suggested by Hunt and Robinson (1960).

The DVRFS is a major regional flow system in which groundwater flows between recharge areas in the mountains of central and southern Nevada and discharge areas of wet playas and springs, south and west of the NTS and in Death Valley, Calif. (Rush, 1968; Harrill and others, 1988). Groundwater flow in the region is strongly influenced by the complex geologic framework of the DVRFS region. Numerical modeling of the regional groundwater flow system must incorporate the 3D distribution of the principal aquifers and confining units, as well as the principal geologic structures that may affect subsurface flow.

The scope of this study can be summarized as follows:


1. The study is limited to the DVRFS region.
2. The details of the hydrogeologic framework are limited to a particular interpretation of regional hydrogeologic conditions.
3. The period of simulation consists of a steady-state prepumping condition (prior to 1913) and transient condition (1913 to 1998).
4. The scale of investigation is regional, simulating features and processes that are appropriate at a 1:250,000 scale.

This report consists of six chapters that describe various aspects of the geology, hydrology, and transient simulation of the DVRFS region. Chapter A (this chapter) introduces the DVRFS transient flow modeling effort, describes the site, and outlines previous regional-scale simulations in this area. Chapter B describes the geologic and hydrogeologic framework of the DVRFS region, detailing the geologic history, the geologic and hydrogeologic units present in the region, and structural features that control regional groundwater flow. Chapter C describes various hydrologic evaluations and the basic hydrologic data of the regional groundwater flow system, including studies of recharge, evapotranspiration, spring discharge, pumpage rate, and hydraulic properties of the hydrogeologic units. Chapter D describes the hydrologic conceptual model of the region. The discussion includes the flow-system boundaries and subregions within the model area, occurrence of groundwater and surface water, and paleohydrology. Chapter E describes the construction of the HFM using the stratigraphic and structural data presented in Chapter B. Finally, Chapter F describes the construction and calibration of the numerical transient groundwater flow model of the DVRFS, from prepumping conditions (before 1913) to transient conditions from 1913 to 1998. Spatial data are available online at <http://mrgsc.cr.usgs.gov/dvrfsIntro/> (accessed November 1, 2007).

Site Description

In this report, the DVRFS region encompasses approximately 100,000 km² in Nevada and California and is bounded by latitudes 35°00'N. and 38°15'N. and by longitudes 115°00'W. and 118°00'W. The DVRFS boundary has been variably defined and named in the past by several investigators (Harrill and others, 1988; Bedinger and others, 1989; D'Agnese and others, 1997; Harrill and Prudic, 1998; Bedinger and Harrill, Appendix 1, this volume) (fig. A-2). Comparison of figures A-1 and A-2 shows that the DVRFS model boundary depicted in figure A-1 differs slightly from the flow system boundaries depicted on figure A-2. Because of the various definitions of the DVRFS boundary, the simulated area is referred to as the "model domain." The region surrounding the model domain, inclusive of the model domain, is referred to as the "DVRFS region." The DVRFS is approximately that area depicted in figure A-1.

8 Death Valley Regional Groundwater Flow System Transient Flow Model

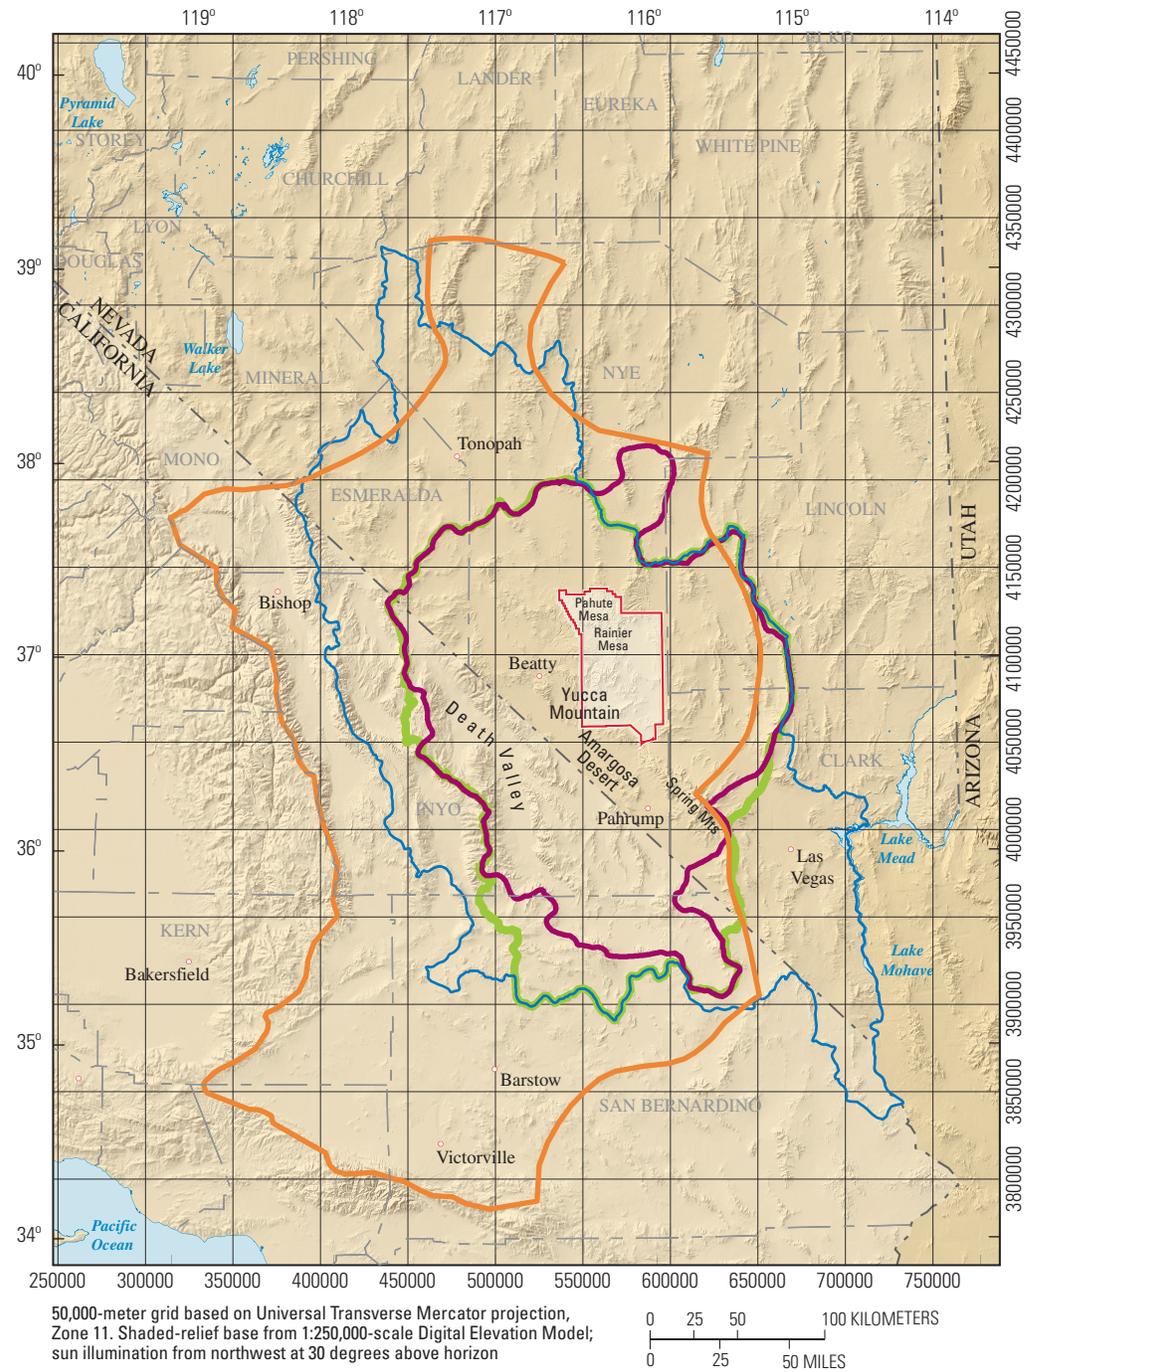

EXPLANATION

- Area contributing flow to the Death Valley regional groundwater flow system (Bedinger and Harrill, Appendix 1, this volume)
- Death Valley region (Bedinger and others, 1989)
- Death Valley regional flow system (Harrill and others, 1988; Harrill and Prudic, 1998)
- Death Valley regional flow system (D'Agnese and others, 1997)
- Nevada Test Site boundary
- Populated location

Figure A-2. Delineations of the Death Valley regional groundwater flow system.

Physiography

The DVRFS region is in the southern Great Basin, a subprovince of the Basin and Range physiographic province (Fenneman, 1931). The DVRFS region (fig. A-1) includes several large valleys, including the Amargosa Desert, Pahrump Valley, and Death Valley. The region also includes several major mountain ranges including the Spring Mountains and the Panamint, Sheep, Amargosa, Kawich, Kingston, Pahranaagat, Timpahute, and Last Chance Ranges. Late Cenozoic tectonic activity accounts for much of the observed topographic relief across the DVRFS region (Grose and Smith, 1989). Altitudes range from 86 meters (m) below sea level at Death Valley to 3,600 m above sea level at Charleston Peak in the Spring Mountains. The maximum relief, 3,500 m, occurs on the west side of Death Valley. The relief between valleys and adjoining mountains locally exceeds 1,500 m (Bedinger and others, 1989). Mountain ranges in the northern one-half of the model domain trend north-south, typical of the Basin and Range province, whereas principal mountain ranges in the southern one-half of the model domain trend northwest-southeast. Throughout the model domain the trends of intermediate-scale topographic features are quite variable.

Mountain ranges in the Basin and Range province typically occupy an area of about 25 percent of the total province (Peterson, 1981). The remainder is occupied by broad intermontane basins and, in the central part of the DVRFS region, a broad volcanic plateau. The basins are filled with sediment and some interbedded volcanic deposits that gently slope from the valley floors to the bordering mountain ranges (Peterson, 1981).

The valley floors are local depositional centers that usually contain playas that act as catchments for surface-water runoff (Grose and Smith, 1989). The Amargosa River (fig. A-1), an intermittent stream whose drainage basin encompasses about 15,000 km², discharges into the south end of the Death Valley saltpan, the largest playa in the DVRFS region (Hunt and others, 1966). Most of the basins seldom contain perennial surface water. Playas and alluvial flats lying within these intermontane basins constitute about 10 percent of the region (Bedinger and others, 1989). Many playas contain saline deposits that indicate the evaporation of surface water and(or) shallow groundwater from the playa surface. Some of the playas that have been deformed by Quaternary faulting contain springs where groundwater is forced to the surface by juxtaposed lacustrine and basin-fill deposits (Bedinger and others, 1989). The Amargosa Desert contains several spring pools and human-engineered reservoirs that are supported by regional groundwater discharge.

Climate

Climatic conditions in the DVRFS region vary significantly and are primarily controlled by altitude. The northern part of the region, including the Cactus, Kawich, and Timpahute Ranges (fig. A-1), forms part of the Great Basin

Desert and is characterized by warm, dry summers and cold, dry winters. The southern part of the region, including Death Valley and the eastern Mojave Desert, is characterized by hot, dry summers and warm, dry winters (Benson and Darrow, 1981). The central area around the NTS has been called the Transition Desert (Beatley, 1976), which represents a mixing of the two climates (fig. A-3).

Precipitation in the region is influenced by two distinct storm patterns, one occurring in the winter and the other in the summer. Winter precipitation (dominantly snow in the mountains and rain in the valleys) tends to be of low intensity and long duration and covers great areas. In contrast, most summer rains, resulting from local convective thunderstorms, are of high intensity and short duration (Hales, 1972, 1974).

Quiring (1965) and French (1983) analyzed the distribution of precipitation resulting from the winter and summer weather regimes across southern Nevada. Quiring (1965) concluded that the two sources of precipitation (fig. A-4) affect regions south of latitude 38°30'N. and primarily are orographically controlled (especially by the Sierra Nevada, fig. A-1). Because of these rain shadows, some areas of southern Nevada receive excess precipitation while other areas receive a precipitation deficit relative to mean precipitation (French, 1983).

Soils and Vegetation

The soils and vegetation of the DVRFS region are controlled to a substantial degree by climatic, geomorphic, and hydrologic factors and are highly variable and complex. Soils in the DVRFS region typically include soils weathered from bedrock (lithosols) on the mountains, medium- to coarse-textured soils on alluvial fans and terraces, and fine-grained, alluvial soils on the valley floors. In general, the soils of the mountains and hills are thin and coarse textured, with little moisture-holding capacity. The soils of the alluvial fans on the upper bajadas also are coarse textured but are thicker, so that infiltration rates are relatively high. Infiltration rates of the alluvial basin soils are low because the downward movement of water commonly is impeded by calcium-carbonate-cemented layers (pedogenic carbonate), fine-grained playa deposits, and less commonly, silicified hardpans that form within the soils over time (Beatley, 1976).

Vegetation distributions in the DVRFS region are influenced by water availability and temperature and vary by latitude and altitude. Thus, vegetation communities in the region demonstrate both topographic and geographic patterns. Mixing of the cold, northern Great Basin Desert climate with the warm, southern Mojave Desert climate results in a heterogeneous distribution of plant associations (Beatley, 1976).

Land Management and Water Use

Most of the land in the DVRFS region is owned by the U.S. Government and is administered by numerous Federal agencies. Privately owned land is scattered throughout the region, but most private ownership is concentrated near the

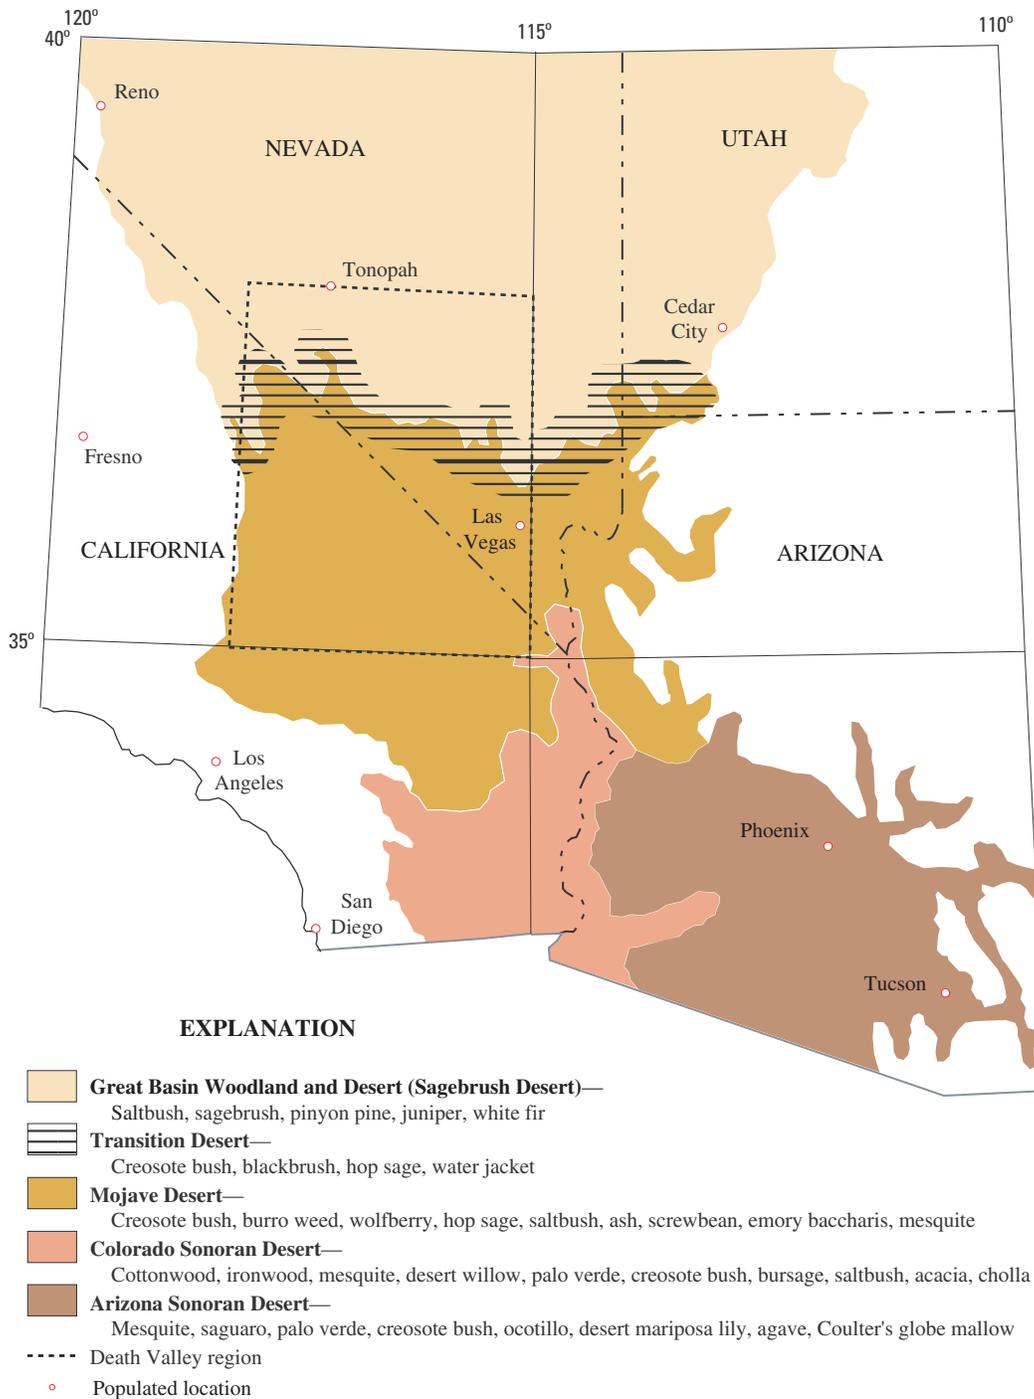


Figure A-3. Desert climatic zones of the Death Valley regional groundwater flow system region (modified from Benson and Darrow, 1981).

agricultural centers of Amargosa Desert and Pahrump Valley, the mining community of Beatty, Nev., and the towns of Shoshone, Tecopa, and Baker, Calif. (fig. A-1).

The major land-use activities in the region are agriculture, livestock ranching, recreation, and mining. Water within the DVRFS region is used mostly for domestic, commercial, agricultural, livestock, military, and mining purposes. Water

resources in the Amargosa Desert support biological communities protected by the National Park Service in Death Valley and by the U.S. Fish and Wildlife Service at Ash Meadows National Wildlife Refuge, such as the Devils Hole pupfish (*Cyprinidion diabolis*), whose continued existence depends on naturally occurring spring discharges and stable pool levels in Devils Hole.

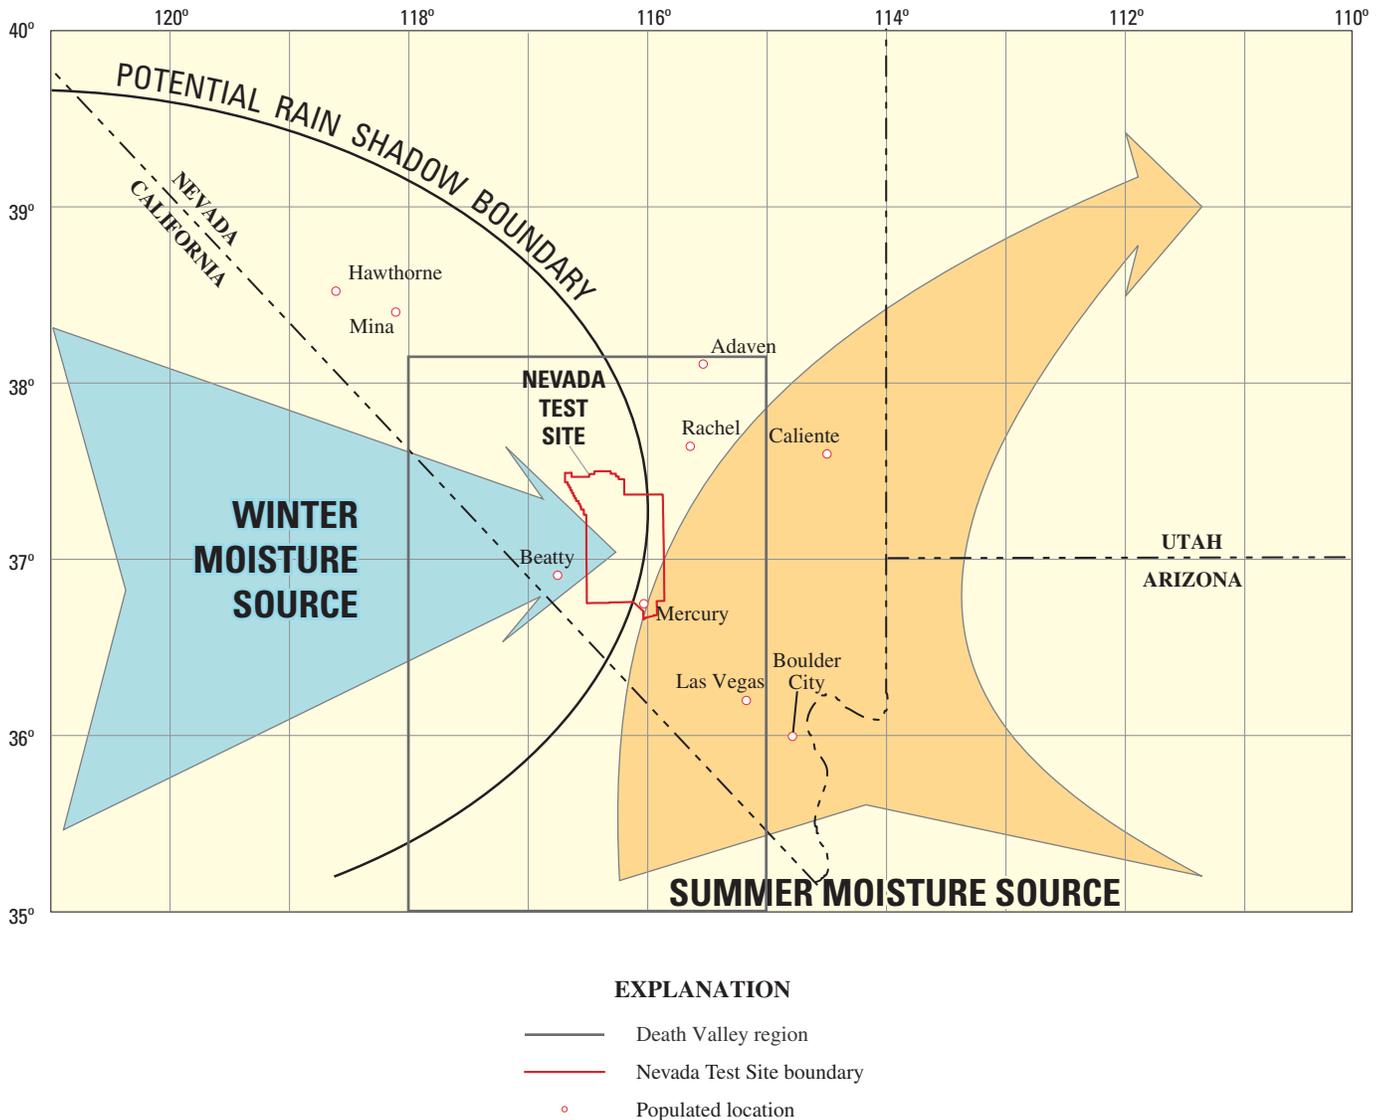


Figure A-4. Weather regimes of the Death Valley regional groundwater flow system region (modified from Quiring, 1965).

Previous Work

Regional-scale groundwater flow models developed over the last 2 decades have provided new insights into groundwater flow in the DVRFS region. The NNSA/NSO and YMP have supported the construction of several such models to evaluate groundwater flow in the DVRFS. Successive models incorporated additional hydrogeologic complexity and computational sophistication in an effort to address increasingly complex water-resource issues in the region. Each of these studies attempted to model the complex hydrology and hydrogeologic framework, but the heterogeneity of the flow system was oversimplified because practical methods for representing the complex hydrogeologic framework were not available. With each model, investigators refined the understanding of the 3D nature of the DVRFS.

Early numerical groundwater modeling efforts were based on simplified conceptual models of the geology and hydrology known to exist in the region. Two- and three-dimensional groundwater flow models developed in the 1980s contained considerable abstractions of the natural hydrogeologic conditions and depended on lumped system parameters (Waddell, 1982; Czarnecki and Waddell, 1984; Rice, 1984; Czarnecki, 1985; Sinton, 1987). Although these models were considered adequate for their intended purposes, the results of these investigations indicated that lumped-parameter representations do not necessarily adequately depict vertical groundwater flow components, sub-basin groundwater flux, steep hydraulic gradients, and physical subbasin boundaries.

In contrast, the more complex groundwater flow models developed in recent investigations allow for the examination of the spatial and process complexities of the 3D hydrogeologic

12 Death Valley Regional Groundwater Flow System Transient Flow Model

system (Prudic and others, 1995; IT Corporation, 1996a; D’Agnese and others, 1997; D’Agnese and others, 2002). These more geologically and hydrologically representative flow models usually require a 3D HFM to define the complexities of the hydrogeologic unit (HGU) geometry and structure.

Early Groundwater Flow Models

Waddell (1982) used a 2D, finite-element model to simulate the groundwater system of the NTS. Data from two wells [USW G–2 (USGS Site ID 365322116273501) and USW WT–24 (USGS Site ID 365301116271301)] drilled after the completion of Waddell’s model defined steep hydraulic gradients in the vicinity of Yucca Mountain and contradicted the results of the simulation. Waddell (1982) noted several model shortcomings:

1. The simulation was inaccurate in the eastern part of the Pahute Mesa area, possibly because of the limited amount of data available for the eastern and northeastern parts of the NTS.
2. Structural controls of groundwater flow were poorly represented.
3. Vertical flow components were ignored.
4. Estimation of transmissivity values from potentiometric data had large uncertainty.

Czarnecki and Waddell (1984) used a 2D, finite-element model to simulate and evaluate steady-state conditions in a subregional groundwater flow system in the Amargosa Desert. Parameter-estimation techniques using nonlinear regression were applied to head and flux data to estimate transmissivities within this flow system. Numerous simplifications were used to describe the flow system. As a result, the simulation did not adequately reproduce observed head values in areas where vertical-flow components and steep hydraulic gradients occurred. Sensitivity analyses indicated that rates of discharge and recharge provided important constraints on defining the groundwater flow system. Czarnecki (1985) improved on this model by adding a low-permeability zone that more accurately reproduced observed head values in the Amargosa Desert.

Rice (1984) developed a preliminary, 2D regional groundwater flow model of the NTS and vicinity using an approach similar to that used by Czarnecki and Waddell (1984). Although Rice’s model contained detailed estimates of recharge and discharge, it ignored 3D heterogeneity. Because the model was developed primarily to assess flux, Rice assumed that using transmissivity values eliminated the need for detailed hydrogeologic framework characterization. Ultimately this 2D modeling approach prevented adequate simulation of vertical groundwater flow in Pahute Mesa and resulted in calibration difficulties. Rice (1984) recommended that a 3D model be constructed to correct this problem.

Sinton (1987) used a more sophisticated, quasi-3D, steady-state approach to characterize the regional groundwater flow system for the NTS. This model included two transmissive layers that represented the NTS flow system more accurately than did earlier models. The uppermost layer represented a shallow aquifer composed of volcanic rocks, basin-fill deposits, and lacustrine carbonate rocks. The lowermost layer represented a deep aquifer composed of carbonate and volcanic rocks. Horizontal flow was simulated within aquifer layers and vertical flow was simulated between layers and controlled using a vertical conductance term. The sensitivity analysis implied that the primary controls on groundwater flow were (1) the spatial distribution of low-permeability HGUs, (2) the distribution and magnitude of discharge and recharge locations, and (3) the rates of discharge and recharge. The analysis also revealed that small adjustments in recharge or discharge rates commonly produced substantial changes in the simulated magnitude and direction of groundwater flow. As a consequence, Sinton recommended that the following aspects of the flow system be investigated further:

1. The interaction between the lower carbonate-rock aquifer and the overlying volcanic-rock units,
2. The discharge rates at Ash Meadows, Death Valley, Alkali Flat, and other areas, and
3. The potential for recharge along Fortymile Wash and Fortymile Canyon.

Prudic and others (1995) developed a regional-scale numerical model of the carbonate-rock province of the Great Basin. This model simulated a conceptualized groundwater flow system containing a relatively shallow component in which water moved from mountain ranges to basin-fill deposits beneath adjacent valleys, as well as a deeper component in which water moved primarily through the carbonate rocks. This conceptual model is the basis of subsequent numerical models that describe regional groundwater flow in the DVRFS region. The calibrated numerical model indicated that:

1. The transmissivity values for basin-fill deposits and carbonate rocks in the upper layer are greater than those for other consolidated rocks.
2. The transmissivity values in the lower layer are greater in areas of regional springs.
3. Groundwater flow is relatively shallow, moving from recharge areas in mountain ranges to discharge areas in valleys.
4. Groundwater discharges at deep regional springs or in areas with greater evapotranspiration rates.
5. Interbasin groundwater flow to larger regional springs occurs through carbonate rocks.

Recent Hydrogeologic Framework and Groundwater Flow Models

The 3D groundwater flow models developed in recent investigations allow for the examination of the spatial and process complexities of the hydrogeologic system. These more geologically and hydrologically representative flow models are based on 3D HFMs to define the intricacies of the HGU geometry and structure. A digital HFM provides a computer-based description of the geometry and composition of the HGUs. Digital models defining the geometry and composition of the HGUs were constructed for several of the regional-scale groundwater flow models completed in the 1990s and early 2000s as part of the UGTA program at the NTS, and the YMP. These include the DOE/NV-UGTA model (IT Corporation, 1996b) for the UGTA Phase I work, the YMP/HRMP model (D'Agnese and others, 1997), and the merged YMP/HRMP and DOE/NV-UGTA framework model (Belcher and others, 2002). Figure A-5 presents the boundaries of each of these HFMs.

Underground Test Area (DOE/NV-UGTA) Model

The DOE/NV-UGTA HFM is a 3D geologic model that describes the hydrogeologic framework for the regional groundwater flow system around the NTS (IT Corporation, 1996b). The detailed hydrogeologic framework was required for the systematic estimation of hydrologic and radionuclide attenuation properties of the rocks through which any radionuclides related to nuclear testing might migrate. The framework also was constructed to assess the regional distribution and thickness of aquifers and confining units as well as to determine the depth to the base of the groundwater flow system in a complex geologic terrane. The geologic model has constant grid-cell spacing of 2,000 m on a side and variable vertical thickness, extends from land surface to 7,600 m below sea level, and encompasses approximately 17,700 km². Twenty HGUs were modeled, including thrust bedrock units. The DOE/NV-UGTA geologic model domain is centered on the NTS and extends from Death Valley to east of the East Pahrnatag Range, and from the Black Mountains to north of Penoyer and the southern part of Railroad Valleys (fig. A-5). This model was developed on the basis of information from geologic reports, maps, measured stratigraphic sections, cross sections, well data, and geophysical interpretations. Fifty-four regional interpretive cross sections and approximately 700 lithologic well logs were used in constructing the HFM.

The DOE/NV-UGTA flow model is a regional 3D, steady-state flow model of the NTS and surrounding areas (IT Corporation, 1996a). This 20-layer model is designed to provide a basis for predicting the movement of contaminants from the underground nuclear testing areas on a regional scale. The model is used for estimating the amount

of water moving through the groundwater system, evaluating uncertainty in these predictions, and supplying boundary conditions for more detailed models of the underground testing areas.

The calibrated DOE/NV-UGTA model accurately simulates several observed hydrologic features on the NTS:


1. The steep hydraulic gradients between Emigrant Valley and Yucca Flat and north of the Yucca Mountain area,
2. The shape of the potentiometric surface in the western part of Yucca Flat,
3. A moderately flat hydraulic gradient beneath Timber Mountain, steepening to the north beneath Pahute Mesa,
4. The trough in the potentiometric surface located in Area 20 on the western part of Pahute Mesa, and
5. Water budgets generally within expected ranges.

Yucca Mountain Project/Hydrologic Resource Management Program (YMP/HRMP) Model

The YMP/HRMP HFM is a 3D geologic model that describes the hydrogeologic framework for the regional groundwater flow system around Yucca Mountain (D'Agnese and others, 1997). The purpose of the model was to provide a description of the geometry, composition, and hydraulic properties that control regional groundwater flow for use in a regional steady-state groundwater flow model of the present-day system. The model grid is 1,500 m on a side with variable vertical thickness, extends from land surface to 10,000 m below sea level, and encompasses approximately 70,000 km². The model cells are attributed to define both the HGU and faulting conditions. Ten HGUs were modeled. The model domain is centered on Yucca Mountain and the NTS and extends from Death Valley to the East Pahrnatag Range and from the Avawatz Mountains to Cactus Flat (fig. A-5). Development of the HFM was based on digital elevation models (DEM), geologic maps and sections, and lithologic well logs. Thirty-two regional cross sections, and approximately 700 lithologic well logs provided subsurface control for the HFM. Although thousands of faults have been mapped in the region, only 300 were used in constructing the HFM (D'Agnese and others, 1997).

The YMP/HRMP flow model is a 3D steady-state simulation of the present-day (pumped) DVRFS region (D'Agnese and others, 1997). The 3-layer model used a nonlinear least-squares regression technique to estimate aquifer-system variables (or parameters). The 3D simulation supported the analysis of interactions between the relatively shallow local and subregional flow paths and the deeper, dominant regional flow paths controlled by the regional carbonate-rock aquifer.

14 Death Valley Regional Groundwater Flow System Transient Flow Model

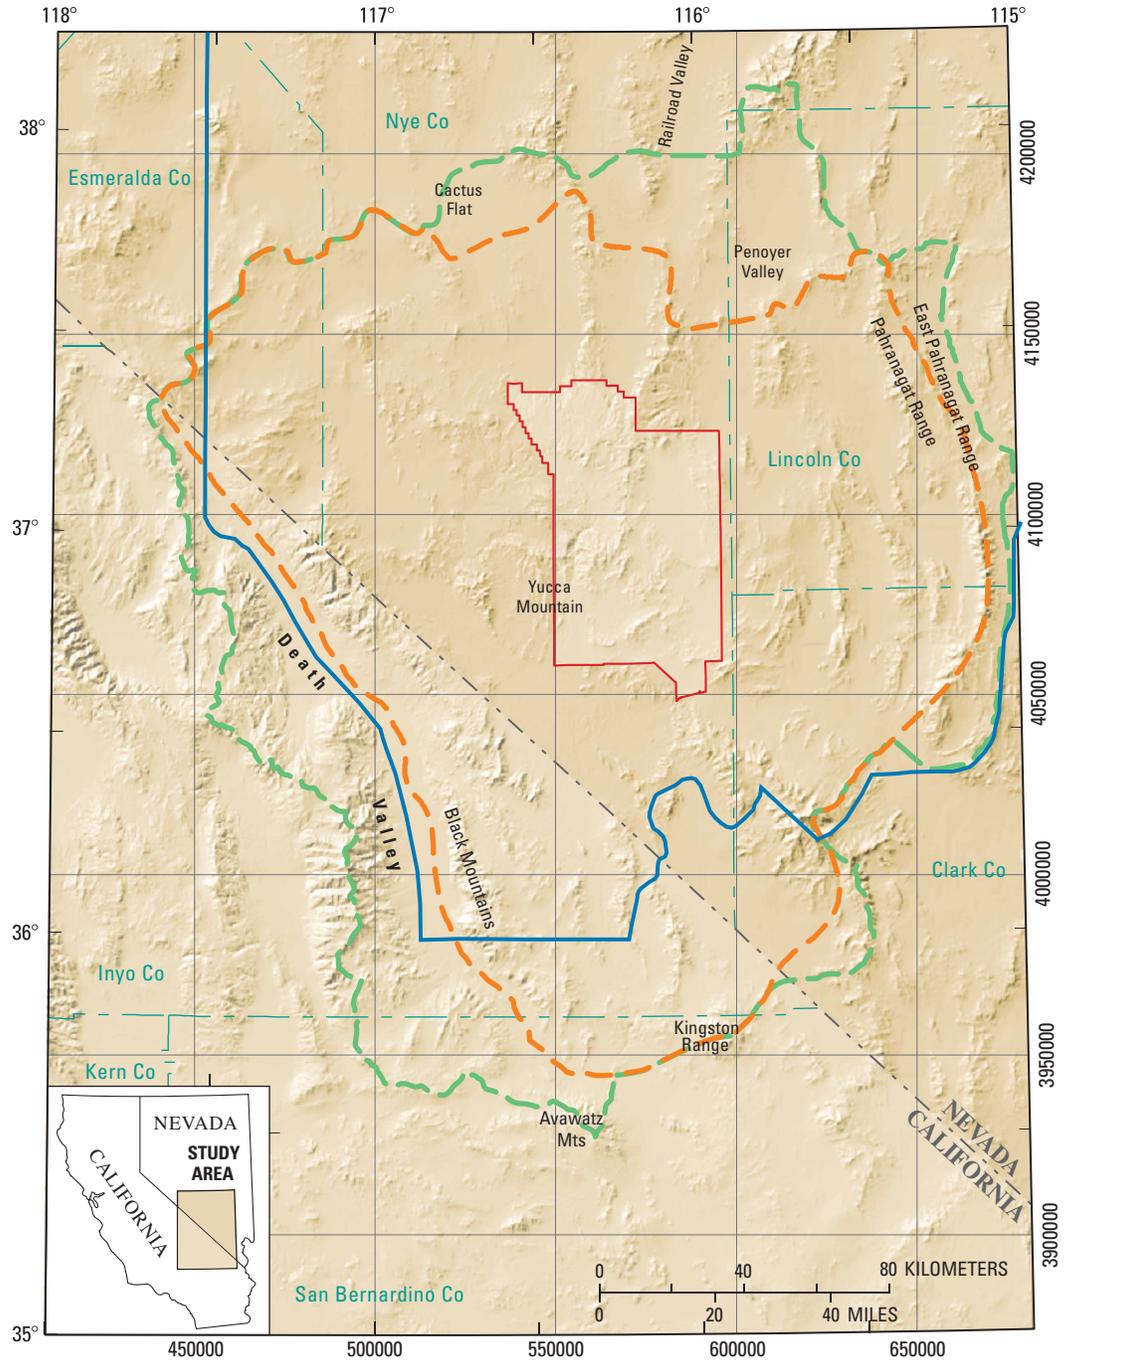

EXPLANATION

- Death Valley regional groundwater flow system hydrogeologic framework model boundary (Belcher and others, 2002)
- Yucca Mountain Project hydrogeologic framework groundwater flow model boundary (D'Agnese and others, 1997)
- Underground Test Area geologic model boundary (IT Corporation, 1996b)
- Nevada Test Site boundary

Figure A-5. Delineations of regional hydrogeologic framework models of the Death Valley regional groundwater flow system region.

Values of hydraulic head, spring flow, hydraulic conductivity, and water-budget components derived from the calibrated model were assessed for accuracy (D'Agnese and others, 1997). This assessment revealed that:

1. Simulated hydraulic heads matched observed conditions closely in nearly flat hydraulic-gradient areas and relatively well in steep hydraulic-gradient areas.
2. Simulated spring-flow volumes were generally less than observed values.
3. All estimated parameter values were within expected ranges.
4. Given the uncertainty, simulated water budgets were within the expected ranges for the flow system.
5. Weighted residuals were not entirely random, indicating some model error.

Death Valley Regional Groundwater Flow System Prepumping Model

Belcher and others (2002) merged the two regional framework models constructed for YMP/HRMP (D'Agnese and others, 1997) and DOE/NV-UGTA (IT Corporation, 1996b) to produce a single, integrated HFM for use with a steady-state prepumping groundwater flow model (D'Agnese and others, 2002). Because of project-scope limitations, few interpretations were made where these two framework models disagree (mostly with respect to the HGUs defined for each HFM), and the hydrogeologic representation of the flow system is limited. During the merging process, the Cenozoic volcanic HGUs of the YMP/HRMP framework model were replaced by the Cenozoic volcanic HGUs of the DOE/NV-UGTA framework model. The more detailed Cenozoic basin-fill HGUs from the DOE/NV-UGTA framework model were used, augmented by the playa-deposits HGU from the YMP/HRMP model.

The DVRFS steady-state prepumping flow model (D'Agnese and others, 2002) simulated the flow system using a 3D steady-state model that incorporated a nonlinear least-squares regression technique to estimate aquifer-system parameters. This model had a vertical discretization that resulted in 15 model layers. The accuracy of the final calibrated DVRFS steady-state model was tested by comparing measured (observed) and expected values for heads, groundwater discharges, and parameter values, such as hydraulic conductivity, with simulated values (D'Agnese and others, 2002). The analysis resulted in the following observations:

1. A good fit between simulated and observed hydraulic heads generally was achieved in areas of low hydraulic gradients; a moderate fit to observed heads was achieved in the remainder of the nearly flat hydraulic-gradient areas; a poorer fit to observed heads was achieved in steep hydraulic-gradient areas; and the poorest fit to observed hydraulic heads was achieved in the vicinity of Indian Springs, the western part of Yucca Flat, and

the southern part of the Bullfrog Hills. Most of the discrepancies can be attributed to (a) insufficient representation of the hydrogeology in the HFM, (b) misinterpretation of water levels, and (c) model error associated with grid-cell size.

2. Groundwater discharge residuals between simulated and observed values were generally interpreted to be random.
3. All resulting parameter values were within the range of expected values.

Overall evaluation of the model indicates that the steady-state prepumping DVRFS model reasonably represents the prepumping conditions for the DVRFS. Although the model is an improvement over previous representations of the flow system, important uncertainties and model errors remain. These uncertainties and errors include the quality of interpretation and representation of (1) flow-model observations, (2) geometry and spatial variability of hydrogeologic materials and structures in the hydrogeologic-framework and groundwater flow models, and (3) physical framework and the hydrologic conditions in the flow model (D'Agnese and others, 2002). Furthermore, it is unclear whether the model of D'Agnese and others (2002) adequately simulates the DVRFS because the water table was simulated substantially below the uppermost layer of the model, and the flow system was simulated as confined (Richard K. Waddell, GeoTrans, written commun., 2002).

Summary

The hydrogeology, conceptual hydrologic model, and the hydrologic system inputs and outputs of the Death Valley regional groundwater flow system (DVRFS) region are used in this report to construct a hydrogeologic framework model (HFM) and a transient numerical groundwater flow model. The groundwater flow model simulates transient conditions from 1913 through 1998 using the modular groundwater flow model, MODFLOW-2000, and a simulated steady-state head distribution representing prepumping conditions. Transient stresses imposed on the regional groundwater flow system include groundwater pumpage that occurred from 1913 through 1998 and flows from springs affected by pumping; simulated areal recharge was held constant at average annual values. The DVRFS region encompasses approximately 100,000 square kilometers (km²) in Nevada and California and is bounded by latitudes 35°00'N. and 38°15'N. and by longitudes 115°00'W. and 118°00'W.

More than 20 years of groundwater flow modeling in the Death Valley region has produced a succession of models that are increasingly more realistic representations of the hydrogeologic framework and groundwater flow system. The current transient simulation, described in the following chapters, builds upon this substantial body of previous work and provides the most refined model of the DVRFS region to date.

References Cited

- Beatley, J.C., 1976, Vascular plants of the Nevada Test Site and central-southern Nevada—Ecologic and geographic distributions: Technical Information Center, Office of Technical Information, Energy Research and Development Administration, Springfield, Va., 308 p.
- Bedinger, M.S., Langer, W.H., and Reed, J.E., 1989, Groundwater hydrology, *in* Bedinger, M.S., Sargent, K.A., and Langer, W.H., eds., Studies of geology and hydrology in the Basin and Range Province, southwestern United States, for isolation of high-level radioactive waste—Characterization of the Death Valley Region, Nevada and California: U.S. Geological Survey Professional Paper 1370-F, p. 28–35.
- Belcher, W.R., Faunt, C.C., and D’Agnese, F.A., 2002, Three-dimensional hydrogeologic framework model for use with a steady-state numerical ground-water flow model of the Death Valley regional flow system, Nevada and California: U.S. Geological Survey Water-Resources Investigations Report 2001–4254, 87 p. Accessed September 1, 2004, at <http://water.usgs.gov/pubs/wri/wri014254/>.
- Benson, Lyman, and Darrow, R.A., 1981, Trees and shrubs of the southwestern deserts: Tucson, University of Arizona Press, 416 p.
- Czarnecki, J.B., 1985, Simulated effects of increased recharge on the ground-water flow system of Yucca Mountain and vicinity, Nevada-California: U.S. Geological Survey Water-Resources Investigations Report 84–4344, 33 p.
- Czarnecki, J.B., and Waddell, R.K., 1984, Finite-element simulation of ground-water flow in the vicinity of Yucca Mountain, Nevada-California: U.S. Geological Survey Water-Resources Investigations Report 84–4349, 38 p.
- D’Agnese, F.A., Faunt, C.C., Turner, A.K., and Hill, M.C., 1997, Hydrogeologic evaluation and numerical simulation of the Death Valley regional ground-water flow system, Nevada and California: U.S. Geological Survey Water-Resources Investigations Report 96–4300, 124 p.
- D’Agnese, F.A., O’Brien, G.M., Faunt, C.C., Belcher, W.R., and San Juan, Carma, 2002, A three-dimensional numerical model of predevelopment conditions in the Death Valley regional ground-water flow system, Nevada and California: U.S. Geological Survey Water-Resources Investigations Report 02–4102, 114 p. Accessed September 22, 2004, at <http://pubs.water.usgs.gov/wri024102/>.
- Eakin, T.E., 1966, A regional interbasin groundwater system in the White River area, southeastern Nevada: Water Resources Research, v. 2, no. 2, p. 251–271.
- Fenneman, N.M., 1931, Physiography of western United States: New York, McGraw-Hill Book Company, Inc., 534 p.
- French, R.H., 1983, A preliminary analysis of precipitation in southern Nevada: Water Resources Center, Desert Research Institute, University of Nevada System, for the U.S. Department of Energy, DOE/NV/10162–10, 42 p.
- Grose, T.L., and Smith, G.I., 1989, Geology, *in* Bedinger, M.S., Sargent, K.A., and Langer, W.H., eds., Studies of geology and hydrology in the Basin and Range Province, southwestern United States, for isolation of high-level radioactive waste: U.S. Geological Survey Professional Paper 1370-F, p. 5–19.
- Hales, J.R., Jr., 1972, Surges of maritime tropical air northward over the Gulf of California: Monthly Weather Review, v. 100, p. 298–306.
- Hales, J.R., Jr., 1974, Southwestern United States summer monsoon source—Gulf of Mexico or Pacific Ocean?: Journal of Applied Meteorology, v. 13, p. 331–342.
- Hanks, T.C., Winograd, I.J., Anderson, R.E., Reilly, T.E., and Weeks, E.P., 1999, Yucca Mountain as a radioactive-waste repository: U.S. Geological Survey Circular C1184, 19 p.
- Harbaugh, J.W., Banta, E.R., Hill, M.C., and McDonald, M.G., 2000, MODFLOW-2000, The U.S. Geological Survey’s modular ground-water flow model—User guide to modularization concepts and the ground-water flow process: U.S. Geological Survey Open-File Report 2000–92, 121 p.
- Harrill, J.R., Gates, J.S., and Thomas, J.M., 1988, Major ground-water flow systems in the Great Basin region of Nevada, Utah, and adjacent States: U. S. Geological Survey Hydrologic Investigations Atlas HA–694–C, 2 sheets.
- Harrill, J.R., and Prudic, D.E., 1998, Aquifer systems in the Great Basin region of Nevada, Utah, and adjacent States: U.S. Geological Survey Professional Paper 1409–A, 66 p.
- Hill, M.C., 1992, A computer program (MODFLOWP) for estimating parameters of a transient three-dimensional, ground-water flow model using nonlinear regression: U.S. Geological Survey Open-File Report 91–484, 358 p.
- Hunt, C.B., and Robinson, T.W., 1960, Possible interbasin circulation of ground water in the southern part of the Great Basin: U.S. Geological Survey Professional Paper 400–B, p. B273–B274.
- Hunt, C.B., Robinson, T.W., Bowles, W.A., and Washburn, A.L., 1966, Hydrologic basin, Death Valley, California: U.S. Geological Survey Professional Paper 494–B, 138 p.
- IT Corporation, 1996a, Underground test area subproject, Phase I, Data analysis task, volume VI—Groundwater flow model data documentation package: Las Vegas, Nev., Report ITLV/10972–181 prepared for the U.S. Department of Energy, 8 volumes, various pagination.

- IT Corporation, 1996b, Underground test area subproject, Phase I, Data analysis task, volume I—Geologic model data documentation package: Las Vegas, Nev., Report ITLV/10972-181 prepared for the U.S. Department of Energy, 8 volumes, various pagination.
- Maxey, G.B., and Eakin, T.E., 1949, Ground water in White River Valley, White Pine, Nye, and Lincoln Counties, Nevada: Nevada State Engineer, Water Resources Bulletin Number 8, 59 p.
- McDonald, M.G., and Harbaugh, A.W., 1988, A modular three-dimensional finite-difference ground-water flow model: U.S. Geological Survey Techniques of Water-Resources Investigations, book 6, chap. A1, 576 p.
- Peterson, F.F., 1981, Landforms of the Basin and Range province defined for soil survey: Nevada Agricultural Bulletin No. 28, Max C. Fleischmann College of Agriculture, University of Nevada, Reno, Nev., 53 p.
- Prudic, D.E., Harrill, J.R., and Burbey, T.J., 1995, Conceptual evaluation of regional ground-water flow in the carbonate-rock province of the Great Basin, Nevada, Utah, and adjacent States: U.S. Geological Survey Professional Paper 1409-D, 102 p.
- Quiring, R.F., 1965, Annual precipitation amount as a function of elevation in Nevada south of 38-1/2 degree latitude, Las Vegas, Nevada: U.S. Weather Bureau Research Statistics, 14 p.
- Rice, W.A., 1984, Preliminary two-dimensional regional hydrologic model of the Nevada Test Site and vicinity: Albuquerque, N. Mex., Sandia National Laboratories Report SAND83-7466, 89 p.
- Rush, F.E., 1968, Index of hydrographic areas in Nevada: Carson City, Nevada Department of Conservation and Water Resources, Water Resources Reconnaissance Series Report 54, 25 p.
- Sinton, P.O., 1987, Three-dimensional, steady-state, finite-difference model of the ground-water flow system in the Death Valley ground-water basin, Nevada-California: Golden, Colorado School of Mines, unpublished Master's thesis, 145 p.
- Waddell, R.K., 1982, Two-dimensional, steady-state model of ground-water flow, Nevada Test site and vicinity, Nevada-California: U.S. Geological Survey Water-Resources Investigations Report 84-4267, 72 p.