

Effects of wildfire on the hydrology of Frijoles and Capulin Canyons in and near Bandelier National Monument, New Mexico

Introduction

In June 1977, the La Mesa wildfire burned 15,270 acres in and near Frijoles Canyon in Bandelier National Monument (BNM) and the adjacent Santa Fe National Forest, New Mexico (fig. 1). In April 1996,

effects on streamflow after the 1996 Dome fire.

Post-fire hydrologic changes have been observed, but not often documented, for wildfires in Arizona, California, Idaho, Montana, New Mexico, and Wyoming. In 1996, the Hondo fire near Taos, New

Mexico; the Buffalo Creek fire near Denver, Colorado; a fire in the Jicarilla Apache Reservation, New Mexico; and a fire in Mesa Verde National Monument all caused large increases in the magnitude of storm flows. In general, after each fire, peak flows increased, erosion and corresponding sediment transport increased, and channel geometry changed. This Fact Sheet summarizes the effects of the 1977 La Mesa wildfire on the hydrology of Frijoles Canyon and the 1996 Dome wildfire on the hydrology of Capulin Canyon in and near BNM from July 1996 to November 1998.

The study area is located in and near BNM in north-central New Mexico and includes parts of Frijoles Canyon and Capulin Canyon (fig. 1). Streamflow in these watersheds originates at higher elevations near the east rim of the Jemez Mountains, is in an easterly direction, and eventually enters the Rio Grande.

Rainfall was recorded and streamflow was monitored from 1996 to 1998 in and near Capulin Canyon after the 1996 Dome wildfire. The locations of selected rain gages, crest-stage gages, and streamflow-gaging stations are shown in figure 2. Slope-area and step-backwater indirect measurements were made at the three crest-stage gages and gaging station. The hydrologic assessment after the fire in Capulin Canyon was based, in part, on analysis of the gaging-station record for Frijoles Canyon collected before and after the 1977 La Mesa fire. Suspended-sediment samples of La Mesa post-fire runoff were collected from 1977 to 1988; samples also were collected as part of the USGS National Water-Quality Assessment (NAWQA) Program from 1993 to 1995. For a complete description of the methods used during this study, the reader is referred to Veenhuis (2002).

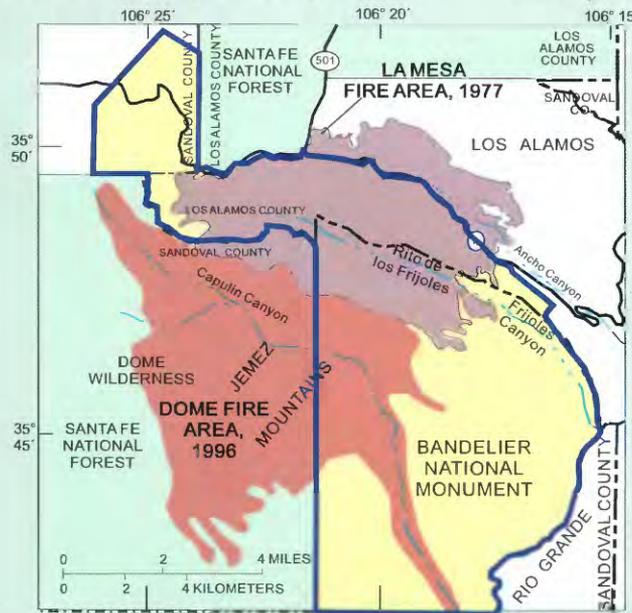


Figure 1. Location of Bandelier National Monument, extent of 1977 La Mesa wildfire, and extent of 1996 Dome wildfire.

the Dome wildfire in BNM burned 16,516 acres in and near Capulin Canyon and the surrounding Dome Wilderness area. Both Frijoles and Capulin Canyon watersheds are characterized by archeological artifacts that could be affected by increased runoff and accelerated rates of erosion, which typically occur after a fire. In response to this concern, the U.S. Geological Survey (USGS), in cooperation with the National Park Service, conducted a study to monitor and document the wildfire



Part of burned area in Capulin Canyon after 1996 Dome wildfire.

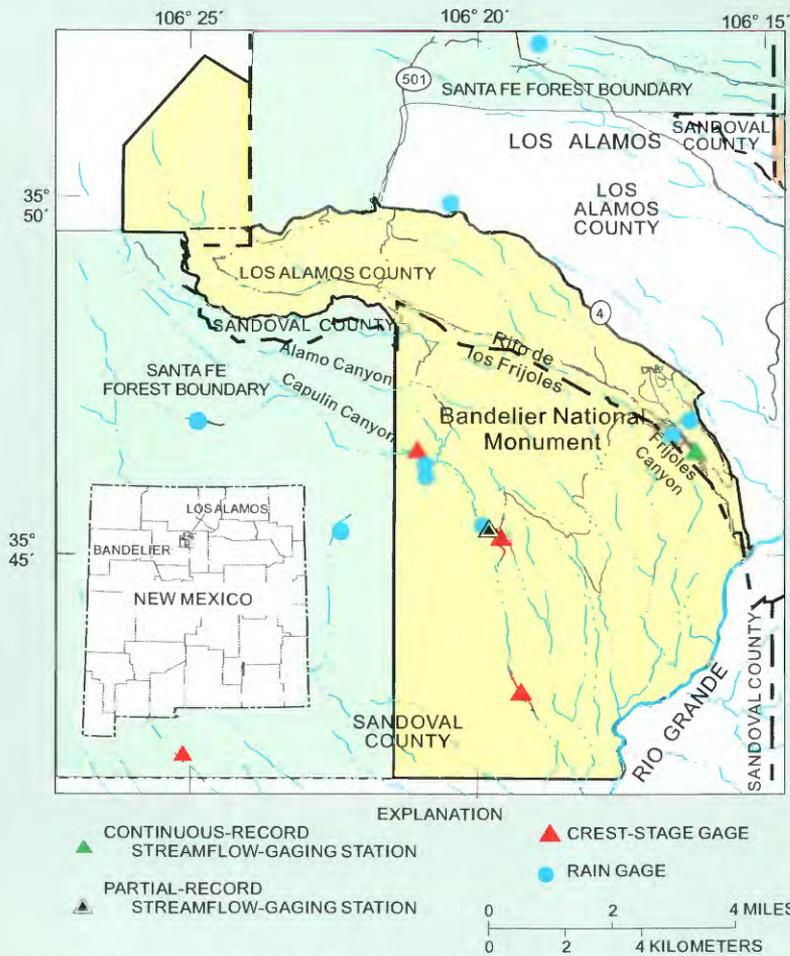


Figure 2. Frijoles Canyon and Capulin Canyon watersheds and location of selected gaging stations and rain gauges.



Average flow in Capulin Canyon.

an estimated 25 ft³/s, with a median annual peak flow of 15.2 ft³/s. Peak flows that occurred prior to the 1996 Dome wildfire in Capulin Canyon are similar in magnitude to peak flows recorded prior to the 1977 La Mesa wildfire in Frijoles Canyon.

During the NAWQA Program from 1993 to 1995, 22 suspended-sediment samples were collected; concentrations ranged from 6 to 44 mg/L (milligrams per liter), with a 3-year median of 16 mg/L (fig. 3). Streamflow during sample collection ranged from 0.26 to 8.4 ft³/s, with a median of 1.4 ft³/s. Because grasses and brush had re-established on the exposed soil by 1993, samples probably were collected long enough after the fire to be representative of a pre-fire unburned watershed in this type of geologic setting.

Pre-Fire Hydrologic Analysis

Annual precipitation is about 15 inches per year in and near BNM (Miller and others, 1973). More than 50 percent of this precipitation falls during June, July, August, and September. Most annual peak flows in Frijoles and Capulin Canyons result from rainfall during these 4 months. Thirty-three percent of annual peak flows at the Frijoles Canyon and Los Alamos gaging stations occurred in August when about 19 percent of total annual rain typically falls. When large thunderstorms do not occur in individual canyon watersheds, about 20 percent of the annual peak flows generally result from snowmelt in March, April, and May.

Pre-fire annual peak flows in Frijoles Canyon from 1964 to 1969 ranged from 2.4 to 19 ft³/s (cubic feet per second), with a median annual peak flow of 5.7 ft³/s. Pre-fire annual peak flows in Capulin Canyon from 1985 through 1994 ranged from 1.1 to

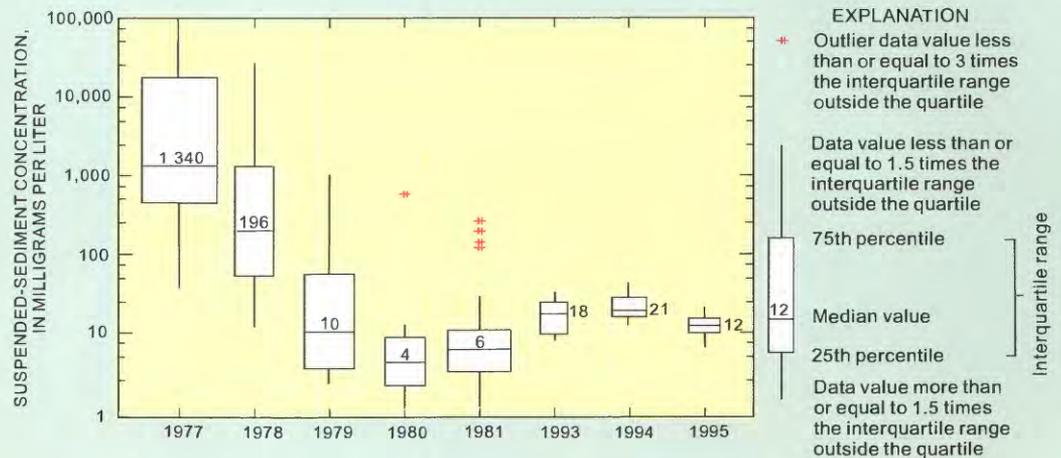


Figure 3. Suspended-sediment concentrations in samples collected in Frijoles Canyon.

Post-Fire Hydrologic Analysis

Because most peak flows occur during June, July, August, and September, this pattern is enhanced when a watershed is affected by fire because intense rainfall on exposed soil can produce greater peak flows. During the first year after the 1996 Dome wildfire, monthly precipitation was greater than the long-term average; most precipitation fell as low-intensity rainfall during the fall and spring, which helped to re-establish vegetation in the burned Capulin watershed. Maximum 24-hour rainfall for a given year can occur almost anytime during the year, but because fall and spring storms typically are less intense, these storms rarely cause the annual peak flow in a watershed.

Continuous streamflow data recorded at the Frijoles Canyon gaging station after the 1977 La Mesa wildfire show that peak flows increased in Frijoles Canyon (drainage area about 18 square miles) from a maximum of 19 ft³/s in 6 years of record (1964-69) before the fire to 3,030 ft³/s in July 1978, about 1 year after the fire. In general, flood magnitudes decreased from July 1977 to June 1979; peak flows were never greater than 354 ft³/s for 2 years after the fire. Even after 1979, however, there was still no tree canopy for transpiration or evaporation, and interception of rainfall by vegetation was still less than pre-fire conditions, which effectively doubled the magnitude of post-fire mean annual flows. However, 22 years after the fire, flood magnitudes still have not completely returned to pre-fire magnitudes. Peak flows appear to be more pronounced for about 3 years after the fire. As growth of vegetation continued during the second year, peak flows were about 10 to 15 times the pre-fire peak flows. During the third year, peak flows decreased to about three to five times the pre-fire maximum peak flow.

During the 6 years prior to the La Mesa fire in Frijoles Canyon, the

maximum peak flow was 19 ft³/s. From 1977 to 1979, the number of peak flows greater than 19 ft³/s was 15 in 1977, 9 in 1978, and 5 in 1979 (fig. 4). Of these flows, seven were greater than 100 ft³/s in 1977 and again in 1978 and three were greater in 1979. Similar to pre-fire peak flows, most of the larger flows occurred during July,



Runoff in Capulin Canyon during a storm on July 10, 1996. Silvery color of water is due to ash.

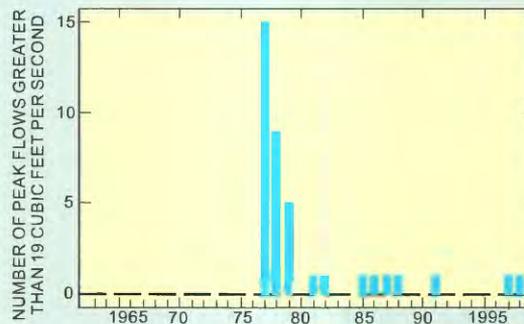


Figure 4. Number of peak flows greater than 19 ft³/s in Frijoles Canyon.

August, and September; however, four flows greater than 100 ft³/s were related to remnants of a Gulf of Mexico hurricane in November 1978.

The maximum peak flow recorded in Capulin Canyon (drainage area about 14.1 square miles) after the 1996 wildfire was 3,630 ft³/s. Peak flows decreased to less than 400 ft³/s in 1997 despite some large rainfalls within the watershed (Veenhuis, 2002). The re-establishment of vegetation the first year after the wildfire is probably responsible for most of the decrease in flows. By 1998, peak flow in the canyon had decreased to less than 160 ft³/s, but still was an order of magnitude larger than the pre-fire median annual peak flow. Peak flows at the most downstream gaging station in each canyon were about 160 times the maximum recorded peak flow prior to the fires. Increases in peak flows in response to the 1977 and 1996 fires are quite similar (fig. 5).

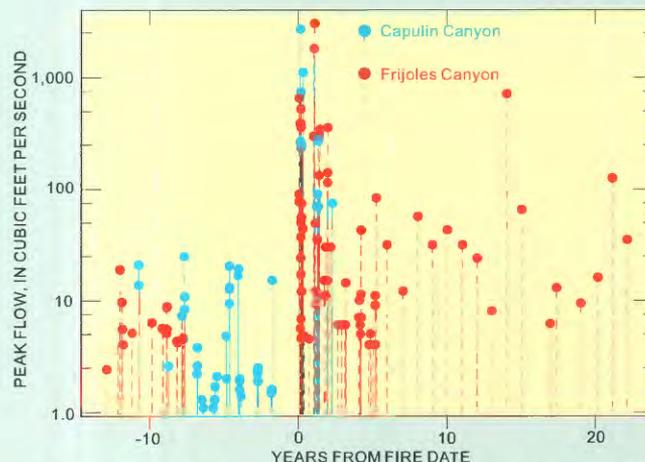


Figure 5. Peak flows in Frijoles Canyon before and after the 1977 La Mesa wildfire and in Capulin Canyon before and after the 1996 Dome wildfire.

Maximum post-fire peak flows in Frijoles and Capulin Canyons and maximum peak flows in north-central New Mexico in relation to drainage area (Waltemeyer, 1996) are shown in figure 6. Although maximum post-fire peak flows in these two canyons are orders of magnitude larger than pre-fire peak flows, they are no larger than what was measured for similar drainage areas in north-central New Mexico. When large floods occur in watersheds that lack effective vegetative cover, the peak flow in a particular drainage area is more a function of rainfall intensity.

The median suspended-sediment concentration in samples collected after the La Mesa wildfire was 1,340

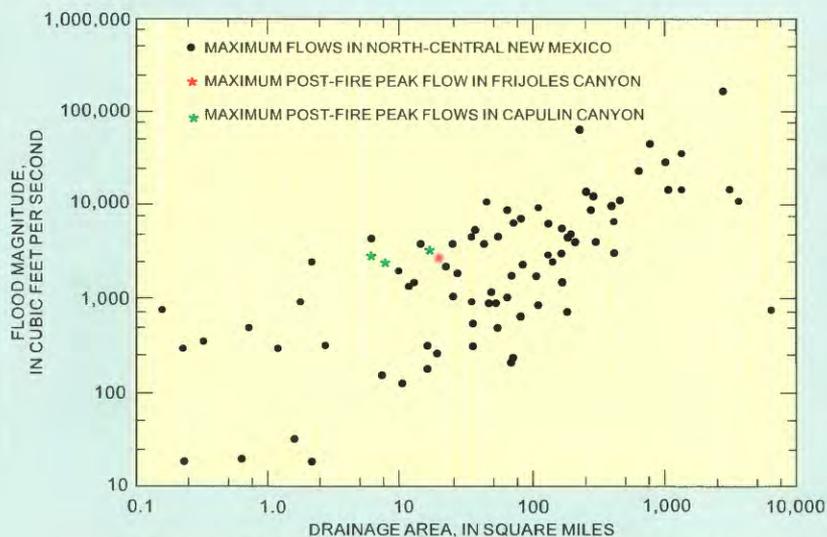


Figure 6. Maximum post-fire flood magnitudes (modified from Waltemeyer, 1996).

mg/L in 1977 in comparison with 16 mg/L in samples collected from 1993 to 1995 (fig. 3). Suspended-sediment concentration and streamflow show similar patterns after a fire: a substantial increase the first year after the fire with a gradual decrease for about 3 years thereafter.


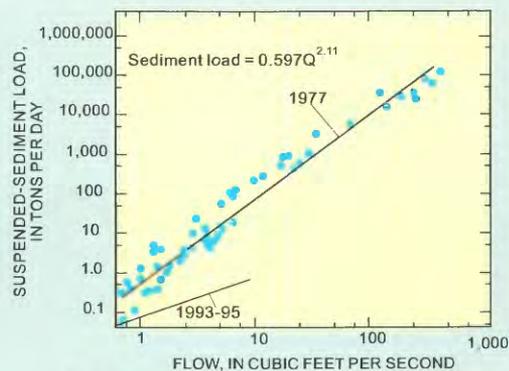


Figure 7. Instantaneous suspended-sediment load compared to flow, Rito de los Frijoles.

Suspended-sediment concentrations in relation to flow in Frijoles Canyon immediately after the 1977 fire and for 1993-95 are shown in figure 7. The relation between load and streamflow was used with mean

daily streamflow to calculate annual suspended-sediment load. About 20 tons per year of suspended sediment were transported past the Frijoles Canyon gaging station during the 1993-95

post-fire recovery period. In contrast, the first year after the fire, about 4,400 tons of suspended sediment were transported past the gaging station as a result of the increased magnitude and frequency of flows. Thus, during the first year

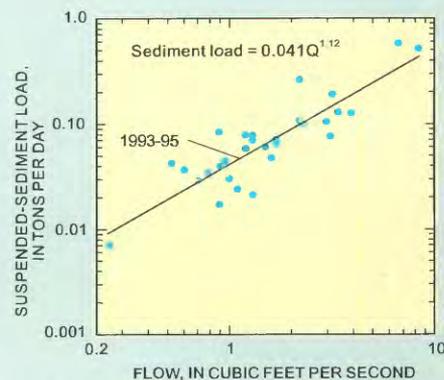

after the fire, suspended-sediment transport was about 220 times the annual suspended-sediment load in the recovering watershed.

Cross Sections and Stream Gradient

Because of the increased magnitude, frequency, and duration of flow and the resultant increase in suspended-sediment loads during the 1996 summer months, Capulin Creek in Capulin Canyon adjusted to the increase in runoff by widening and downcutting. The stream channel initially downcut in areas with steeper slope, then began to aggrade as sediment transported from upstream was deposited in channel reaches where slope and discharge decreased. The decrease in downcutting in the upper reach and the deposition in the lower reach in 1997 are indicative of a stream channel readjusting to less frequent and smaller floods. As peak flows in Capulin Canyon decreased in magnitude and frequency over time, in response to revegetation of the watershed, the stream channel has slowly started to stabilize.

References

Miller, J.F., Frederick, R.H., and Tracey, R.J., 1973, Precipitation-frequency atlas of the Western United States, volume IV--New Mexico: National Oceanic and Atmospheric Administration NOAA Atlas 2, 43 p.

Veenhuis, J.E., 2002, Effects of wildfire on the hydrology of Capulin and Rito de los Frijoles Canyons, Bandelier National Monument, New Mexico: U.S.

Geological Survey Water-Resources Investigations Report 02-4152, 39 p.

Waltemeyer, S.D., 1996, Analysis of the magnitude and frequency of peak discharge and maximum observed peak discharge in New Mexico: U.S. Geological Survey Water-Resources Investigations Report 96-4112, 79 p.

For more information contact:

District Chief

U.S. Geological Survey

5338 Montgomery Blvd. NE, Suite 400
Albuquerque, NM 87109-1311

Email:

lsweiss@usgs.gov

Internet:

<http://nm.water.usgs.gov>