

Mapped, edited, and published by the Geological Survey

Control by USGS, USCGS, and USCE

Topography by photogrammetric methods from aerial photographs taken 1952. Field checked 1954. Revised from aerial photographs taken 1970. Field checked 1971.

Polyconic projection. 1927 North American datum

10,000-foot grids based on Kentucky coordinate system, north and south zones

1000-meter Universal Transverse Mercator grid ticks, zone 17, shown in blue

To place on the predicted North American Datum 1983 move the projection lines 6 meters south and

10 meters west as shown by dashed corner ticks

UTM GRID and 1979 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

53 MILES 1°02' 18 MILES

1000 0 1000 2000 3000 4000 5000 6000 7000 FEET

1 5 0 1 KILOMETER

SCALE 1:24,000  
CONTOUR INTERVAL 40 FEET  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

1 MILE

KENTUCKY QUADRANGLE LOCATION

ROAD CLASSIFICATION

Primary highway, hard surface  
Secondary highway, hard surface  
Light-duty road, hard or improved surface  
Unimproved road  
Interstate Route  
U.S. Route  
State Route

RICHARDSON, KY.  
NW 1/4 INEZ 1/8 QUADRANGLE  
N37°52'57.5" - W82°37'57.5"

1971  
PHOTOREVISED 1979

Contours not revised

NOTE  
Information shown is intended as a general guide to ground conditions as of the date of field check. Additional landslides and rockfalls should be anticipated in all map units. The map unit depicts the dominant condition in the area delineated and variations in slope stability may occur at any point in the unit. This map is suitable for general planning purposes and as a supplement to more detailed studies for site selection. The map cannot be used as a substitute for detailed geologic and engineering investigations to establish design and construction criteria of specific sites. Some symbols may not appear on this map because the description is applicable to a series of maps.

MAN-MADE FEATURES

Strip mines (combination of letter symbols indicates complex formed of more than one type of strip mine)

sh bench with high wall

sf furrowed with high wall

sd multiple furrows and multiple benches

ss hilltop removed

srg reclaimed by grading

sru reclaimed by secondary use

sh/r regraded in part, high wall remains

Coal refuse banks

r identified on aerial photographs; not classified in field check

rb not burnt nor on fire

rbb burnt

rbd burning

rbs sludge

Quarries

q quarry site

qub spoil bank, quarry waste

Gravel pits

g site of gravel pit


Slides in man-made features

af earth flow in fill

a/s earth flow in strip castings

a/r earth flow in coal refuse

JENKINS 1°x2° SHEET

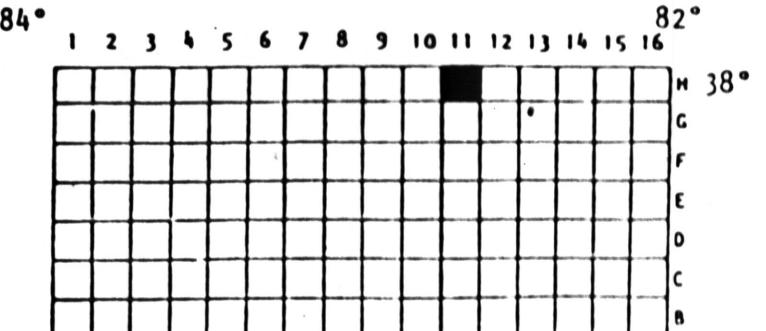

Landslides and related features interpreted from aerial photographs:

1:60,000 (black and white) 1959

1:80,000 (black and white) 1975

Photointerpretation and field check 1978, 9

This report is preliminary and has not been reviewed for conformity with U. S.

Geological Survey editorial standards.

Data on location of strip mines in part from:

Sanchez, Joseph D., Alvord, Donald C., and Hayes, Philip T., 1978, Geologic map of the Richardson

quadrangle, Lawrence and Johnson Counties, Kentucky:

U. S. Geological Survey Geologic Quadrangle Map

GQ-1460, scale 1:24,000.

**ACTIVE OR RECENTLY ACTIVE LANDSLIDE**  
Complex landslide composed of earthflow, debris slide, earth and rock slump. Identified from historical records, and from scars, debris and other field evidence. Ground extremely unstable; sliding accelerated by excavation, loading and changes in drainage conditions. May include areas with several active slides too small to be shown separately. Questioned where doubtful.

**OLD LANDSLIDE**  
Area of extensive hummocky ground caused by earthflow and earth and rock slump. Lacks clear evidence of active sliding. Relatively stable in natural, undisturbed state, generally not affected by small structures properly sited in areas away from the edge of the toe; can be reactivated by extensive, rapid excavation, loading, and changes in ground water and surface water conditions. Area of old landslide probably includes recent ones not identified from field evidence or otherwise documented.

Upslope boundary of landslide generally defined by modified scarp, but downslope (toe) may be gradational and not well defined. Questioned where doubtful.

**COMBINATION LANDSLIDE**  
Area of recent and old slides in which individual slides are not identified.

**COLLUVIAL SLOPE**  
Valley wall along major streams with slope as steep as 40° (85%); stony, clayey silt soil up to 50 ft. (15 m) thick; commonly buttressed by a terrace or bench at the toe of the slope; very susceptible to sliding by cutting of toe area, removal of terrace or bench, and overloading; slide commonly activated without apparent cause.

LANDSLIDES AND RELATED FEATURES

OF THE RICHARDSON, KY. QUADRANGLE

by

William F. Outerbridge

1982

U.S. Geological Survey

OPEN FILE MAP 82-51 (H-11)

**COLLUVIAL SLOPES WITH LANDSLIDES**  
Landslides too small or obscure to map individually.

**AREAS SUSCEPTIBLE TO DEBRIS FLOWS AND DEBRIS AVALANCHES**

Primarily shallow, narrow ravines and chutes with accumulation of stony colluvium generally 10 ft. (3 m) or less in thickness; susceptible to rapid movement during intense rainfall. Most ravines and chutes designated show evidence of former debris flows and avalanches. Symbol & designates historical debris flow or debris avalanche.

**AREAS SUSCEPTIBLE TO ROCKFALL**

Steep, locally vertical, natural and man-made slopes and cliffs, 15 ft. (4.5 m) or more high; formed dominantly of sandstone, limestone, sandy shale, mudstone and claystone. Interbedded mudstone, claystone and shale weather rapidly leaving sandstone and limestone rock faces unsupported.

**SOIL AND ROCK SUSCEPTIBLE TO LANDSLIDING**

Soil and rock similar to that involved in landslides elsewhere in map area; primarily areas underlain by claystone, mudstone and shale associated with other rock types. Rock weathers rapidly on exposure forming clayey soil highly susceptible to sliding. Includes coves (U-shaped, shallow valleys) containing thick layers of clayey soil that are very susceptible to sliding where excavation breaks continuity of slope and where overloaded by artificial fill.

**AREAS LEAST PRONE TO LANDSLIDES**

Map areas in which no patterns or symbols are shown; primarily valley floors, ridge tops and broad benches; modification by excavation and fill may lead to local landslides.

The first four digits of the open file number designate the specific 1:250,000 scale map sheet of which this quadrangle is a part. The last two digits designate the position of the quadrangle in a subdivision of the 1:250,000 scale map based on rows and tiers shown in the diagram to the right. The location of this quadrangle is shown by the black square.