


Prepared in cooperation with the State of Florida and other cooperative agencies

# Water Resources Data Florida Water Year 2004

Volume 2A  
South Florida Surface Water

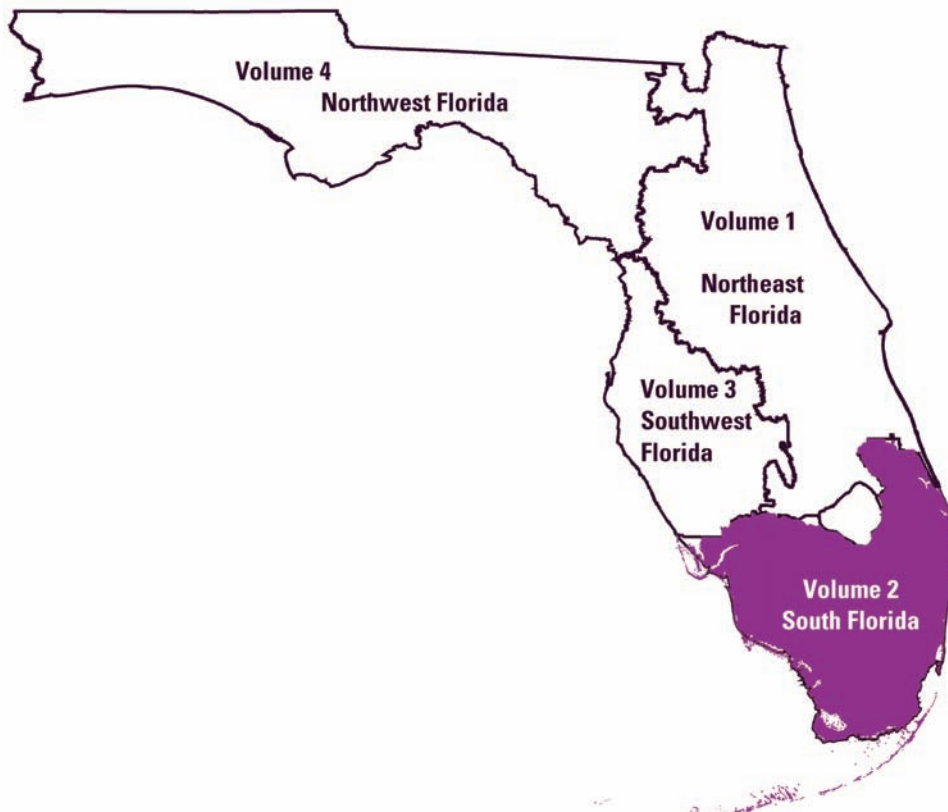

Water-Data Report FL-04-2A

# Calendar for Water Year 2004

2003

---

October							November							December						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
			1	2	3	4							1		1	2	3	4	5	6
5	6	7	8	9	10	11	2	3	4	5	6	7	8	7	8	9	10	11	12	13
12	13	14	15	16	17	18	9	10	11	12	13	14	15	14	15	16	17	18	19	20
19	20	21	22	23	24	25	16	17	18	19	20	21	22	21	22	23	24	25	26	27
26	27	28	29	30	31		23	24	25	26	27	28	29	28	29	30	31			
							30													

---

2004

---

January							February							March						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
				1	2	3	1	2	3	4	5	6	7		1	2	3	4	5	6
4	5	6	7	8	9	10	8	9	10	11	12	13	14	7	8	9	10	11	12	13
11	12	13	14	15	16	17	15	16	17	18	19	20	21	14	15	16	17	18	19	20
18	19	20	21	22	23	24	22	23	24	25	26	27	28	21	22	23	24	25	26	27
25	26	27	28	29	30	31	29							28	29	30	31			

April							May							June						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
				1	2	3							1			1	2	3	4	5
4	5	6	7	8	9	10	2	3	4	5	6	7	8	6	7	8	9	10	11	12
11	12	13	14	15	16	17	9	10	11	12	13	14	15	13	14	15	16	17	18	19
18	19	20	21	22	23	24	16	17	18	19	20	21	22	20	21	22	23	24	25	26
25	26	27	28	29	30		23	24	25	26	27	28	29	27	28	29	30			
							30	31												


July							August							September						
S	M	T	W	T	F	S	S	M	T	W	T	F	S	S	M	T	W	T	F	S
				1	2	3	1	2	3	4	5	6	7				1	2	3	4
4	5	6	7	8	9	10	8	9	10	11	12	13	14	5	6	7	8	9	10	11
11	12	13	14	15	16	17	15	16	17	18	19	20	21	12	13	14	15	16	17	18
18	19	20	21	22	23	24	22	23	24	25	26	27	28	19	20	21	22	23	24	25
25	26	27	28	29	30	31	29	30	31					26	27	28	29	30		

# Water Resources Data Florida Water Year 2004

## Volume 2A. South Florida Surface Water

By C. Price, J. Woolverton, K. Overton

Water-Data Report FL-04-2A

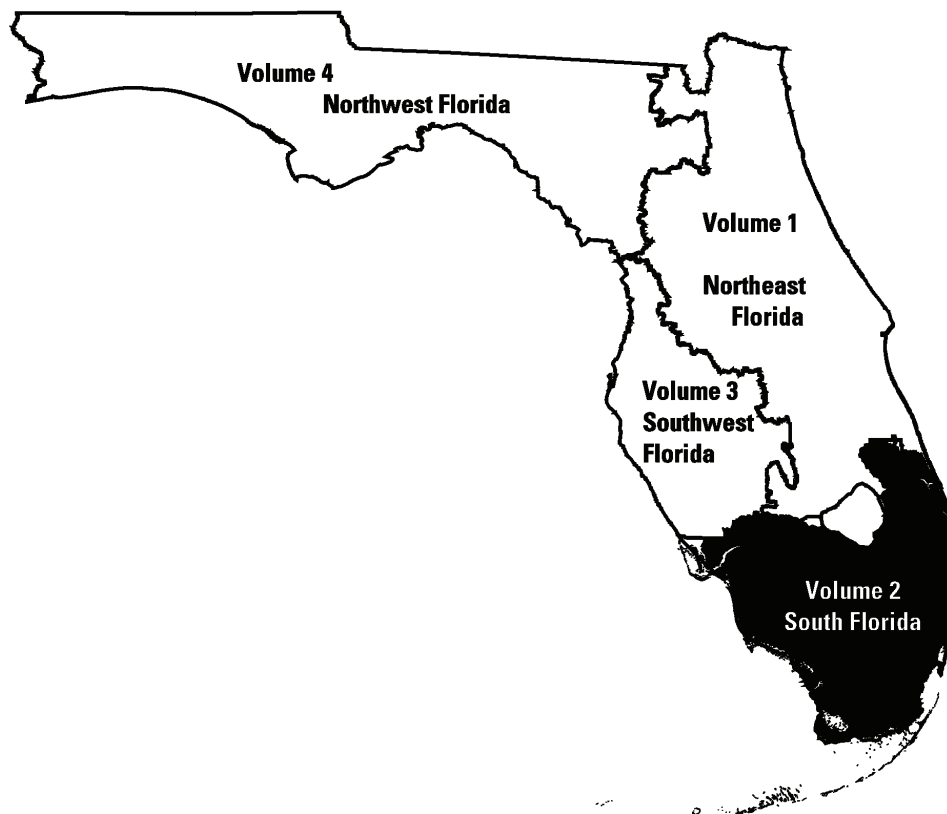

Prepared in cooperation with the State of Florida and with other agencies

U.S. Department of the Interior  
U.S. Geological Survey



**U.S. Department of the Interior**

Gale A. Norton, Secretary

**U.S. Geological Survey**

Charles G. Groat, Director

2005

U.S. Geological Survey

9100 N.W. 36 Street, Suite 107

Miami, Florida 33178

305 717-5843

Information about the USGS, Florida Integrated Science Center, is available on the Internet at <http://fl.water.usgs.gov>

Information about all USGS reports and products is available by calling 1-888-ASK-USGS or on the Internet via the World Wide Web at <http://www.usgs.gov/>

Additional earth science information is available by accessing the USGS home page at <http://www.usgs.gov/>

## VOLUME 2A: SOUTH FLORIDA

PREFACE

This volume of the annual hydrologic data report of Florida is one of a series of annual reports that document hydrologic data gathered from the U.S. Geological Survey's surface- and ground-water data-collection networks in each State, Puerto Rico, and the Trust Territories. These records of streamflow, ground-water levels, and quality of water provide the hydrologic information needed by state, local, and federal agencies, and the private sector for developing and managing our Nation's land and water resources. Hydrologic data for Florida are contained in four volumes. Figure 1 shows the area covered by Volume 2A.

Volume 1.	Northeast Florida
Volume 2.	South Florida
Volume 3.	Southwest Florida
Volume 4.	Northwest Florida

## ACKNOWLEDGEMENT

This report is the culmination of a concerted effort by dedicated personnel of the U.S. Geological Survey who collected, compiled, analyzed, verified, and organized the data. This report was prepared for publication by the Hydrologic Records Section under the supervision of M. H. Murray, K. Overton, J. Woolverton, E. C. Price, and S. Prinos; and by the Hydrologic Studies Section under the supervision of B. Howie, E. Patino, C. D. Hittle. Sheila Guevara, Carolyn Price, Eleanor Seymore, Jose Agis, and Bruce Irvin, were the primary persons responsible for the compilation of the data report. In addition to the authors, who had primary responsibility for assuring that the information contained herein is accurate, complete, and adheres to Geological Survey policy and established guidelines, the following individuals contributed significantly to the collection, processing, and tabulation of the data

**Florida Integrated Science Center - Water and Restoration Studies**

Jose Agis	Elizabeth Kozma	Scott Prinos
Andres Alegria	Gene Krupp	Michelle Regon
Stephen Bean	Bruce Irvin	Rene Rodriguez
Michael Byrne	Clint Lietz	Gail Romero
Ruth Costley	Jacqueline Lima	Eleanor Seymore
Elizabeth Debiak	Christian Lopez	Lars Soderqvist
Linda Elligott	Ernesto Mangual	Rick Solis
Eduardo Figueroa-Gibson	Lee Massey	Marc Stewart
Jessica Flanigin	Drew Milewski	Craig Thompson
Sheila Guevara	Mitch Murray	Robert Valderrama
Sara Hammermeister	Michael Oliver	Rokhshan Wali
Clinton Hittle	Keith Overton	Jeffrey Woods
Bruce Irvin	Eduardo Patino	Jon Woolverton
Neil Keppie	Shane Ploos	Mark Zucker
Dennis Kluesner	Carolyn Price	

This report was prepared in cooperation with the State of Florida and with other agencies listed under COOPERATION on page 2.

Hydrologic data for south Florida are contained in two volumes

Volume 2A: Surface Water  
Volume 2B: Ground Water

## VOLUME 2A: SOUTH FLORIDA

<b>REPORT DOCUMENTATION PAGE</b>			<i>Form Approved OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE <b>March 28, 2005</b>	3. REPORT TYPE AND DATES COVERED <b>Annual Report</b>		
4. TITLE AND SUBTITLE  <b>Water Resources Data Florida, Water Year 2004 Volume 2A: South Florida - Surface Water</b>			5. FUNDING NUMBERS	
6. AUTHOR(S) <b>C. Price, J. Woolverton, K. Overton</b>				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>U.S. Geological Survey 9100 N.W. 36th Street, Suite #107 Miami, Florida 33178</b>			8. PERFORMING ORGANIZATION REPORT NUMBER  <b>USGS-WDR-FL-04-2A</b>	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) <b>U.S. Geological Survey 9100 N.W. 36th Street, Suite #107 Miami, Florida 33178</b>			10. SPONSORING / MONITORING AGENCY REPORT NUMBER  <b>USGS-WDR-FL-04-2A</b>	
11. SUPPLEMENTARY NOTES <b>Prepared in cooperation with the State of Florida and other agencies.</b>				
12a. DISTRIBUTION / AVAILABILITY STATEMENT <b>No restrictions on distribution: This report may be purchased from: National Technical Information Center, Springfield, VA 22161</b>			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) <b>Water resources data for 2004 water year in Florida consists of continuous or daily discharge for 405 streams, periodic discharge for 12 streams, continuous or daily stage for 159 streams, periodic stage for 19 stream, peak discharge for 30 streams, and peak stage for 30 streams, continuous or daily elevations for 14 lakes, periodic elevations for 23 lakes, continuous ground-water levels for 408 wells, periodic ground-water levels for 1188 wells, quality of water data for 140 surface-water sites, and 240 wells.</b>  <b>The data for South Florida included continuous or daily discharge for 86 streams, continuous or daily stage for 54 streams, no peak stage discharge for streams, 1 continuous elevation for lake, continuous ground-water levels for 257 wells, periodic ground-water levels for 226 wells, water quality for 39 surface-water sites, and 149 wells.</b>  <b>These data represent the National Water Data System records collected by the U.S. Geological Survey and cooperating local, State, and Federal agencies in Florida.</b>				
14. SUBJECT TERMS <b>*Florida, *Hydrologic data, *Surface Water, *Ground Water, *Water Quality, Flow rate, Gaging stations, Lakes, Reservoirs, Chemical analyses, Sediments, Water temperatures, Sampling sites, Water levels, Water analyses, Elevations, Water wells.</b>			15. NUMBER OF PAGES <b>392</b>	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT <b>Unclassified</b>	18. SECURITY CLASSIFICATION OF THIS PAGE <b>Unclassified</b>	19. SECURITY CLASSIFICATION OF ABSTRACT <b>Unclassified</b>	20. LIMITATION OF ABSTRACT	

VOLUME 2A: SOUTH FLORIDA

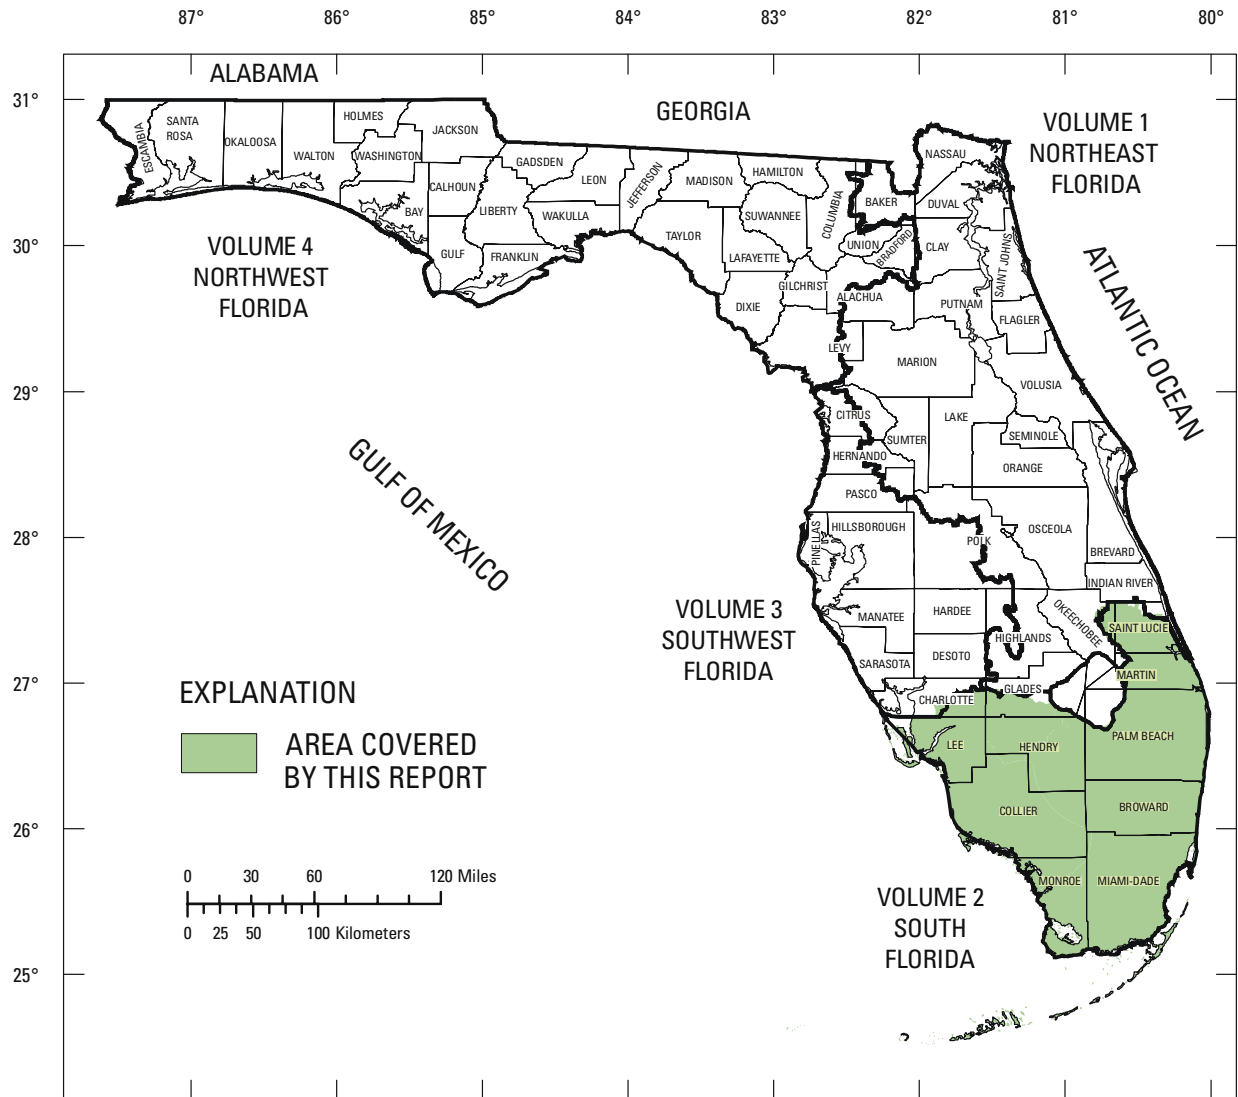


Figure 1. Geographic area covered by this report.

THIS PAGE LEFT INTENTIONALLY BLANK

## VOLUME 2A: SOUTH FLORIDA

## CONTENTS

Preface .....	III
Introduction .....	1
Cooperation .....	2
Summary of Hydrologic Conditions .....	3
Special Networks and Programs .....	24
Explanation of the Records .....	25
Station Identification Numbers .....	25
Downstream Order and Station Number .....	25
Numbering System for Wells and Miscellaneous Sites .....	25
Explanation of Stage and Water-Discharge Records .....	26
Data Collection and Computation .....	26
Data Presentation .....	26
Station Manuscript .....	27
Peak Discharge greater than Base Discharge .....	27
Daily Table of Daily Mean Values .....	27
Statistics of Monthly Mean Data .....	27
Summary Statistics .....	28
Identifying Estimated Daily Discharge .....	29
Accuracy of Field Data and Computed Results .....	29
Other Data Records Available .....	29
Explanation of Precipitation Records .....	29
Data Collection and Computation .....	29
Data Presentation .....	29
Explanation of Water-Quality Records .....	29
Collection and Examination of Data .....	29
Water Analysis .....	30
Surface-Water Quality Records .....	30
Classification of Records .....	30
Accuracy of the Records .....	30
Arrangement of Records .....	30
On-Site Measurements and Sample Collection .....	31
Water Temperature .....	31
Sediment .....	31
Laboratory Measurements .....	31
Data Presentation .....	31
Remark Codes .....	32
Water-Quality Control Data .....	32
Blank Samples .....	32
Reference Samples .....	33
Replicate Samples .....	33
Spike Samples .....	33
Explanation of Ground-Water Level Records .....	33
Site Identification Numbers .....	33
Data Collection and Computation .....	33
Accuracy of Ground-Water Level Data .....	33
Method-Independent Factors .....	34
Method-Related Factors .....	34
Data Presentation .....	34
Water-Level Tables .....	35
Hydrographs .....	35
Explanation of Records of Bulk Electrical Conductivity .....	35
Data Collection and Computation .....	35
Accuracy of Bulk Electrical Conductivity .....	36
Data Presentation .....	36
Records of Ground-Water Quality .....	36
Data Collection and Computation .....	36
Laboratory Measurements .....	36
Data Presentation .....	37
Access to USGS Water Data .....	37
Definition of Terms .....	37

## VOLUME 2A: SOUTH FLORIDA

## CONTENTS (continued)

Selected References .....	38
Stage, Discharge, and Water Quality of Streams.....	39
Surface Water Quality Records, Field Measurements .....	357
National Water-Quality Assessment (NAWQA) Data .....	359
Index to	
Introductory text.....	367
Surface-water sites .....	371

VOLUME 2A: SOUTH FLORIDA

ILLUSTRATIONS

Figure 1. Geographic area covered by this report..... V

Figure 2. South Florida Areas of Hydrologic Significance .....3

Figure 3. 02276870 St. Lucie Canal at Lake Okeechobee, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....7

Figure 4. 02277600 Loxahatchee River near Jupiter, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004.....8

Figure 5. 02286400 Miami Canal at S-354 and S-3, at Lake Harbor, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....9

Figure 6. 02286700 Miami Canal at S-8 near Lake Harbor, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....10

Figure 7. 02288600 Miami Canal at NW 36 Street, Miami, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....11

Figure 8. 02289040 Tamiami Canal Outlets, Levee 67A to 40 Mile Bend, near Miami, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....12

Figure 9. 02292900 Caloosahatchee River at S-79 near Olga, FL: (A) 2004 water year monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; and (B) monthly mean discharge for the period of 1995-2004. ....13

Figure 10. 254315080331500 Northeast Shark River Slough No. 2 near Coopertown, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....14

Figure 11. 255250080335001 Site 71 in Water Conservation Area No. 3B near Coopertown, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....15

Figure 12. 260810080222001 Site 99 near L-35A in Water Conservation Area No. 2B near Sunrise, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....16

Figure 13. 261117080315201 Site 63 in Water Conservation Area No. 3A near Andytown, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....17

## VOLUME 2A: SOUTH FLORIDA

## ILLUSTRATIONS (continued)

Figure 14. 262240080258001 Site 17 near L-38, Water Conservation Area No. 2A near Coral Springs, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....	18
Figure 15. 263180080205001 Site 7 in Water Conservation Area 1 near Shawano, FL: (A) 2004 water year monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; and (B) the monthly mean gage height for the period of 1995-2004. ....	19
Figure 16. System for numbering wells and miscellaneous sites .....	25
Figure 17. Location of gaging stations in the portion of the Everglades and the southeastern coastal area north of latitude 26 degrees.....	40
Figure 18. Typical flow patterns at Lake Okeechobee control structures.....	133
Figure 19. South Florida Water Management District, Structure 5 Complex.....	143
Figure 20. Location of gaging stations in the portion of the Everglades and southeastern coastal area south of latitude 26 degrees, Florida Bay and the Florida Keys.....	229
Figure 21. Tamiami Canal Outlets .....	230
Figure 22. Location of gaging stations in the Big Cypress Swamp and southwestern coastal area; the Caloosahatchee River; and Charlotte Harbor and the coastal area.....	303

## VOLUME 2A: SOUTH FLORIDA

STREAM AND LAKE GAGING STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

The following list shows the surface water sites where streamflow, stage, lake elevation, or daily water quality data are collected. [Letters after station names designate type of data collected: (d) discharge, (e) elevation, (g) gage heights, (s) salinity, (t) temperature]

STATION	PAGE NUMBER
<b>EVERGLADES AND SOUTHEASTERN COASTAL AREA</b>	
Five Mile Canal Above S-29-1-4 Nr Ft. Pierce, FL (d,g) .....	.272524080221800 ..... 41
<b>St Lucie River:</b>	
St. Lucie River at Midway Rd. near Port St. Lucie, FL (g,s,t) .....	.272229080203400 ..... 45
St. Lucie River at Prima Vista Rd. near Port St. Lucie, FL (g,s,t) .....	.271929080195900 ..... 52
<b>North Fork St. Lucie River</b>	
N. Fork St. Lucie River at Veterans Pk., St. Lucie, FL (g,s,t) .....	.02276575 ..... 59
<b>South Fork St Lucie River</b>	
St. Lucie Canal at Lake Okeechobee (S-308), FL (d,g) .....	.02276870 ..... 66
St. Lucie River at Speedy Point, Stuart, FL (g,s,t) .....	.02277100 ..... 69
St. Lucie Estuary at A1A (Steele Pt), Stuart, FL (g,s,t) .....	.02277110 ..... 76
Kitchings Creek near Hobe Sound, FL (d,g) .....	.270022080094600 ..... 82
Loxahatchee River at outlet of Kitchings Creek, FL (g,s,t) .....	.265929080091800 ..... 84
Loxahatchee River at Boy Scout near Hobe Sound, FL (g,s,t) .....	.265912080082900 ..... 91
Loxahatchee River at Mile 9.1 near Jupiter, FL (g,s,t) .....	.265906080093500 ..... 97
Cypress Creek Canal below Gulfstream Bridge, FL (d,g) .....	.265818080111900 ..... 103
Hobe Ditch Tributary to Loxahatchee River 0.5 mile above mouth. FL (d,g) .....	.265708080093700 ..... 107
Loxahatchee River near Jupiter, FL (d,g) .....	.02277600 ..... 111
Loxahatchee River at Coast Guard Dock near Jupiter, FL (g,s,t) .....	.265651080045500 ..... 115
Loxahatchee River at Pompano Drive near Jupiter, FL (g,s,t) .....	.265645080055900 ..... 126
West Palm Beach Canal at S352, at Canal Point, FL (d,g) .....	.02278000 ..... 134
Levee 8 Canal near Canal Point, FL (d,g) .....	.265501080364900 ..... 137
West Palm Beach Canal above S-5A, near Loxahatchee, FL (d) .....	.02278450 ..... 139
Diversions to Conservation Area No 1 at S-5A and S-5A-S, nr Loxahatchee, FL (d,g) .....	.02278500 ..... 141
Conservation Area No 1 below S-5 Complex, near Loxahatchee, FL (g) .....	.02278501 ..... 144
Levee 8 Canal at West Palm Beach Canal, near Loxahatchee, FL (d,g) .....	.02278550 ..... 145
West Palm Beach Canal below S-5A-E near Loxahatchee, FL (d,g) .....	.02278600 ..... 147
West Palm Beach Canal at West Palm Beach, FL (d,g) .....	.02279000 ..... 149
Industrial Canal at Clewiston, FL (d,g) .....	.264514080550700 ..... 157
Hillsboro Canal below S-351, near South Bay, FL (d,g) .....	.02280500 ..... 159
Hillsboro Canal at S-6 near Shawano, FL (d,g) .....	.02281200 ..... 161
Hillsboro Canal near Margate, FL (d,g) .....	.02281400 ..... 163
Middle River Canal at S-36, near Fort Lauderdale, FL (d,g) .....	.02282700 ..... 165
Plantation Road Canal at S-33, near Fort Lauderdale, FL (d,g) .....	.02283200 ..... 168
North New River Canal below S-351, near South Bay, FL (d,g) .....	.02283500 ..... 171
North Loxahatchee Conservation Area No. 1 near Boynton Beach, FL (g) .....	.263537080211400 ..... 173
Site 7 in Conservation Area No. 1 near Shawano, FL (g) .....	.263180080205001 ..... 174
Site 8T in Conservation Area No. 1 near Boynton Beach, FL (g) .....	.263050080145001 ..... 175
Site 8C near L-40 in Conservation Area No. 1 near Boynton Beach, FL (g) .....	.263000080120001 ..... 176
Site 9 in Conservation Area No. 1 near Boynton Beach, FL (g) .....	.262750080175001 ..... 177
South Loxahatchee Conservation Area No. 1 near Boynton Beach, FL (g) .....	.262528080202700 ..... 178
E-4 Canal at Clint-Moore Road, Boca Raton, FL (g) .....	.262358080055700 ..... 179
E-3 Canal at NW 51st Street, Boca Raton, FL (g) .....	.262337080074800 ..... 180
Hillsboro Canal at S-10-D near Deerfield Beach, FL (g) .....	.262300080220001 ..... 181
Hillsboro Canal at S-10-C near Deerfield Beach, FL (g) .....	.262200080210001 ..... 183
Hillsboro Canal at S-10-A near Deerfield Beach, FL (g) .....	.262100080190001 ..... 185
S-150 at Terrytown, FL (d,g) .....	.262007080321500 ..... 187
E-3 Canal, SW 18th Street, Boca Raton, FL (g) .....	.261952080074500 ..... 189
Site 19 in Conservation Area 2A near Coral Springs, FL (g) .....	.261710080190001 ..... 190
North New River Canal at S-11-C near Andytown, FL (g) .....	.261300080280001 ..... 191
Site 17 near L-38, Conservation Area 2A near Coral Springs, FL (g) .....	.262240080258001 ..... 195
North New River Canal at S-11-B near Andytown, FL (g) .....	.261200080275001 ..... 196

## VOLUME 2A: SOUTH FLORIDA

STREAM AND LAKE GAGING STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME  
continued

STATION	PAGE NUMBER
<u>EVERGLADES AND SOUTHEASTERN COASTAL AREA (continued)</u>	
Site 63 in Conservation Area No. 3A near Andytown, FL (g)	261117080315201 . . . . . 198
North New River Canal at S-11-A near Andytown, FL (g)	261150080270001 . . . . . 199
Site 62 in Conservation Area 3A near Andytown, FL (g)	261023080443001 . . . . . 201
Site 99 near L-35A in Conservation Area 2B near Sunrise, FL (g)	260810080222001 . . . . . 202
South New River Canal at S-13, near Davie, FL (d,g)	02286100 . . . . . 203
Site 76 in Conservation Area 3B near Andytown, FL (g)	260037080303401 . . . . . 206
Site 64 in Conservation Area 3A near Coopertown, FL (g)	255828080401301 . . . . . 207
Site 69 in Conservation Area 3B near Coopertown, FL (g)	255300080370001 . . . . . 208
Site 65 in Conservation Area 3A near Coopertown, FL (g)	254848080432001 . . . . . 210
Site 71 in Conservation Area 3B near Coopertown, FL (g)	255250080335001 . . . . . 211
Snake Creek Canal at NW 67th Avenue, near Hialeah, FL (d,g)	02286200 . . . . . 212
Snapper Creek Canal Extension at NW 74th Street, near Hialeah, FL (g)	255026080231300 . . . . . 214
Miami Canal at S-354 and S-3, at Lake Harbor, FL (d,g)	02286400 . . . . . 215
Miami Canal at S-8 near Lake Harbor, FL (d,g)	02286700 . . . . . 219
Miami Canal East of Levee 30, near Miami, FL (d,g)	02287395 . . . . . 221
N.W. Wellfield Canal near Dade Broward Levee near Pennsuco, FL (d,g)	02287497 . . . . . 223
Miami Canal at NW 36th Street, Miami, FL (d,g)	02288600 . . . . . 227
<u>BIG CYPRESS SWAMP AND SOUTHWESTERN COASTAL AREA</u>	
Tamiami Canal Outlets, Monroe to Carnestown, FL (d,g)	02288800 . . . . . 231
Tamiami Canal Outlets, 40-Mile Bend to Monroe, FL (d,g)	02288900 . . . . . 233
<u>EVERGLADES AND SOUTHEASTERN COASTAL AREA</u>	
Shark River Slough No 1 in Conservation Area 3B near Coopertown, FL (g)	254754080344300 . . . . . 235
L-28 Interceptor Canal below S-190 near Clewiston, FL (d,g)	261533080571600 . . . . . 236
L-28 Canal above S-140 near Clewiston, FL (d,g)	261543080495000 . . . . . 238
Drainage Canal below G-136 near Clewiston, FL (d,g)	02289027 . . . . . 240
Levee 3 Canal below G-155 near Clewiston, FL (d,g)	02289031 . . . . . 242
Levee 4 Canal below G-88 near Clewiston, FL (d,g)	02289032 . . . . . 244
Tamiami Canal at S-12-A, near Miami, FL (d,g)	254543080491101 . . . . . 246
Tamiami Canal at S-12-B, near Miami, FL (d,g)	02289019 . . . . . 249
Tamiami Canal Outlets, Levee 67A to 40 Mile Bend, near Miami, FL (d,g)	02289040 . . . . . 252
Tamiami Canal below S-12-C, near Miami, FL (d,g)	02289041 . . . . . 254
Tamiami Canal at S-12-D, near Miami, FL (d,g)	254543080405401 . . . . . 256
Tamiami Canal at S-333, near Miami, FL (d,g)	02289050 . . . . . 259
Tamiami Canal Outlets, Levee 30 to L-67A, near Miami, FL (d,g)	02289060 . . . . . 262
Tamiami Canal near Coral Gables, FL (d,g)	02289500 . . . . . 264
Northeast Shark River Slough No 2 near Coopertown, FL (g)	254315080331500 . . . . . 266
Northeast Shark River Slough No 1 near Coopertown, FL (g)	254130080380500 . . . . . 267
L-67 Extended Canal West, near Florida City, FL (g)	254100080402400 . . . . . 268
Northeast Shark River Slough East of L-67 Ext. nr Richmond Heights, FL (g)	254100080402200 . . . . . 269
Northeast Shark River Slough No 4, North of Grossman, FL (g)	253828080391100 . . . . . 270
Northeast Shark River Slough No 5, South of Grossman, FL (g)	253753080393600 . . . . . 271
Black Creek Canal at S-21, near Goulds, FL (d,g)	02290710 . . . . . 276
Levee 31 North Extension at 1 mile near West Miami, FL (d,g)	02290767 . . . . . 279
Levee 31 North Extension at 3 mile near West Miami, FL (d,g)	02290765 . . . . . 281
Levee 31 North Extension at 4 mile near West Miami, FL (d,g)	02290766 . . . . . 283
Levee 31 North Extension at 5 mile near West Miami, FL (d,g)	02290767 . . . . . 285
Levee 31 North Extension at 7 mile near West Miami, FL (d,g)	02290768 . . . . . 287
Canal 111 at S-18-C, near Florida City, FL (d,g)	02290769 . . . . . 289
Everglades 3 in C-111 Basin near Homestead, FL (g)	252043080302400 . . . . . 291
Everglades 4 in C-111 Basin near Homestead, FL (g)	252036080324300 . . . . . 292
Everglades 1 in C-111 Basin near Homestead, FL (g)	251946080254800 . . . . . 293
Everglades 2A in C-111 Basin near Homestead, FL (g)	251906080283400 . . . . . 294
Everglades 5A in C-111 Basin near Homestead, FL (g)	251716080342100 . . . . . 295
Everglades 5B in C-111 Basin near Homestead, FL (g)	251724080341400 . . . . . 296

## VOLUME 2A: SOUTH FLORIDA

STREAM AND LAKE GAGING STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME  
continued

STATION	PAGE NUMBER
<u>EVERGLADES AND SOUTHEASTERN COASTAL AREA (continued)</u>	
West Highway Creek near Homestead, FL (d,g,s,t) . . . . .	251433080265000 . . . . . 297
Stillwater Creek near Homestead, FL (d,g,s,t) . . . . .	251341080291200 . . . . . 298
Trout Creek at Mouth, FL (d,g,s,t) . . . . .	251253080320100 . . . . . 299
Mud Creek at mouth near Homestead, FL (d,g,s,t) . . . . .	251209080350100 . . . . . 300
Taylor River at mouth near Homestead, FL (d,g,s,t) . . . . .	251127080382100 . . . . . 301
Mc Cormick Creek at mouth, FL (d,g,s,t) . . . . .	251003080435500 . . . . . 302
<u>BIG CYPRESS SWAMP AND SOUTHWESTERN COASTAL AREA</u>	
North River upstream of cutoff near Flamingo, FL (d,g,s,t) . . . . .	022908205 . . . . . 304
Shark River near Gunboat Island near Flamingo, FL (d,g,s,t) . . . . .	252230081021300 . . . . . 305
Broad River near the cutoff, FL (d,g,s,t) . . . . .	02290878 . . . . . 306
Chatham River near the Watson place, FL (d,g,s,t) . . . . .	02290888 . . . . . 307
Lostman's River below Second Bay, FL (d,g,s,t) . . . . .	02290918 . . . . . 308
Barron River at Everglades City FL (g,s,t) . . . . .	02290928 . . . . . 309
Turner River near Chokoloskee Island, FL (g,s,t) . . . . .	02290930 . . . . . 310
New River at Sunday Bay, FL (g,s,t) . . . . .	02290940 . . . . . 311
Lopez River near Lopez campsite, FL (g,s,t) . . . . .	02290942 . . . . . 312
Barron River Canal near Everglades, FL (d,g) . . . . .	02291000 . . . . . 313
Lake Trafford near Immokalee, FL (e) . . . . .	02291200 . . . . . 315
Imperial River near Bonita Springs, FL (d,g) . . . . .	02291500 . . . . . 316
Spring Creek Headwater near Bonita Springs, FL (d,g) . . . . .	02291524 . . . . . 318
North Branch Estero River at Estero, FL (d,g) . . . . .	02291580 . . . . . 320
South Branch Estero River at Estero, FL (d,g) . . . . .	02291597 . . . . . 322
<u>CHARLOTTE HARBOR AND COASTAL AREA</u>	
Fish Trap Bay near Bonita Beach, FL (g,s,t) . . . . .	262043081513200 . . . . . 324
Estero River near the mouth near Estero, FL (d,g,s,t) . . . . .	02291610 . . . . . 325
Estero Bay near Horseshoe Keys, FL (g,s,t) . . . . .	262620081523700 . . . . . 326
Mullock Creek near the mouth near Estero, FL (d,g,s,t) . . . . .	02291655 . . . . . 327
Mantanzas Pass Bridge at Fort Myers Beach, FL (d,g,s,t) . . . . .	262727081571300 . . . . . 328
<u>BIG CYPRESS SWAMP AND SOUTHWESTERN COASTAL AREA</u>	
Sixmile Cypress Creek North Near Ft. Myers, FL (d,g) . . . . .	02291669 . . . . . 329
Tenmile Canal at Control Near Estero, FL (d,g) . . . . .	02291673 . . . . . 331
<u>CALOOSAHATCHEE RIVER</u>	
Caloosahatchee River at S-79 near Olga, FL (d,g) . . . . .	02292900 . . . . . 333
Meade Canal at Cape Coral, FL (d,g) . . . . .	02293214 . . . . . 336
Whiskey Creek at Ft. Myers, FL (d,g) . . . . .	02293230 . . . . . 338
<u>CHARLOTTE HARBOR AND COASTAL AREA</u>	
Aries Canal at Cape Coral, FL (d,g) . . . . .	02293240 . . . . . 340
<u>CALOOSAHATCHEE RIVER</u>	
San Carlos Canal at Cape Coral, FL (d,g) . . . . .	02293241 . . . . . 342
Courtney Canal at Cape Coral, FL (d,g) . . . . .	02293243 . . . . . 344
<u>CHARLOTTE HARBOR AND COASTAL AREA</u>	
Gator Slough at SR 765 at Cape Coral, FL (d,g) . . . . .	02293264 . . . . . 346
Shadroe Canal at Cape Coral, FL (d,g) . . . . .	02293345 . . . . . 348
Horseshoe Canal at Cape Coral, FL (d,g) . . . . .	02293346 . . . . . 350
Hermosa Canal at Cape Coral, FL (d,g) . . . . .	02293347 . . . . . 352
Gator Slough at U.S. 41 near Ft. Myers, FL (d,g) . . . . .	264437081550100 . . . . . 354

## VOLUME 2A: SOUTH FLORIDA

## DISCONTINUED SURFACE-WATER DISCHARGE OR STAGE-ONLY STATIONS

The following continuous-record surface-water stage and discharge stations in South Florida have been discontinued. Daily streamflow or stage records were collected and published for the period of record, expressed in water years, shown for each station. Discontinued project stations with less than 3 years have not been included. Information regarding these stations may be obtained from the subdistrict office at the address given on the back side of the title page of this report. Drainage area is indeterminate for all of the stations listed below. [Letters after station names designate type of data published: (d) discharge, (e) elevation or gage heights, (g) gage heights, (q) water quality]

Station name	Station number	Period of record water years published
Airplane Prairie near Monroe, FL (e)	260345081053500	1979 - 1980
Angelfish Creek near Florida City, FL (e)	.02290757	1971
Barnes Sound at Key Largo, FL (e)	.02290784	1971
Barnes Sound near Florida City, FL (e)	.02290760	1967 - 1968
Big Cypress Swamp at Everglades Parkway, near Sunniland, FL (d)	.02288830	1970 - 1971
Big Cypress Swamp at Training Airport, near Miami, FL (d)	.02288970	1970 - 1974
Big Cypress Swamp below Training Airport, near Miami, FL (e)	.02288971	1970 - 1974
Big Cypress Swamp Pinelands near Monroe, FL (e)	.255737081043200	1979 - 1980
Big Cypress Watershed at Everglades Pky, nr Big Cypress Indian Reservation, FL (d)	.02289033	1970 - 1971
Billy Creek at Ft Myers, FL (e)	.02293200	1944 - 1955
Biscayne Bay at Coconut Grove, Miami, FL (e) (formerly published under station number 02290755)	.02290540	1963 - 1981
Biscayne Bay at Elliott Key, near Homestead, FL (e)	.02290737	1967 - 1968
Biscayne Bay at Key Biscayne, near Miami Beach, FL (e) (formerly published under station number 02290753)	.02290543	1964, 1967 - 1968
Biscayne Bay at North Miami, FL (e)	.02290750	1963 - 1981
Biscayne Bay near Homestead, FL (e) (formerly published under station number 02290760)	.02290732	1963 - 1981
Biscayne Bay at Ragged Key No. 5 near Florida City, FL (e)	.02290705	1971
Biscayne Canal at Red Road, near Opa-Locka, FL (e)	.02286320	1963 - 1979
Biscayne Canal at North Miami, FL (e)	.02286330	1963
Biscayne Canal at S-28, near Miami, FL (d)	.02286340	1962 - 1985
Black Creek near Richmond Heights, FL (e)	.02290707	1971 - 1979
Black Creek Canal below S-21 near Goulds, FL (e)	.02290711	1971
Broad River near Everglades, FL (d) (period of record published in 1967 volume 2A)	.02290880	1962 - 1965
C-1 Canal near Jupiter, FL (q)	265631080132500	1989 - 1998
C-2 Canal above S-4 near Deerfield Beach, FL (e)	.02281490	1989 - 1993
C-2 Canal below S-4 near Deerfield Beach, FL (e)	.02281491	1989 - 1993
Caloosahatchee Canal at Moore Haven, FL (d,g)	.02292000	1938-2003
Caloosahatchee Canal at Ortona Lock near La Belle, FL (d,g)	.02292480	1971-2003
Camelot Canal at Control at Cape Coral, FL (e)	.02293245	1987 - 1990
Camelot Canal below Control at Cape Coral, FL (e)	.02293246	1987 - 1992
Canal 1 at Indiantown Road and 133 Way near Jupiter, FL (q)	265632080144200	1994 - 1998
Canal 60 at S-140 near Ft. Lauderdale, FL (d)	.02286962	1970 - 1981
Canal 111 above S-197 near Florida City, FL (d)	.251713080263300	1984
Canal 111 at Clv.5 between S-18C and S-197 nr Homest., FL (e)	.251823080294200	1984 - 1985
Canal 111 at U.S. Highway 1, near Florida City, FL (e)	.02290780	1967 - 1969
Canal 111 below S-18-C near Florida City, FL (e)	.02290770	1967 - 1969
C-7 Canal near Jupiter, FL (q)	265352080120400	1989 - 1998
C-18 Canal at G-92 near Jupiter, FL (q)	265437080103200	1989 - 1998
Canal C-18 near Jupiter, FL (d)	.265218080144300	1980 - 1982
Canal M near Mangonia Park, FL (d)	.02277900	1970 - 1977
Card Sound at Angelfish Creek near Florida City, FL (e)	.02290756	1971
Card Sound at Model Land Canal, near Florida City, FL (e)	.02290750	1967 - 1981
Card Sound Canal near Florida City, FL (d)	.02290739	1972 - 1974
Cape Florida Channel near Key Biscayne, FL (e)	.02290590	1970

## VOLUME 2A: SOUTH FLORIDA

## DISCONTINUED SURFACE-WATER DISCHARGE OR STAGE-ONLY STATIONS--continued

Station name	Station number	Period of record water years published
Ceasar Creek at Adam Key, near Florida City, Fl (e)	.02290738	1971
Charlotte Harbor at Bokeelia, Fl (e)	.02293340	1990 - 1993
Cocohatchee River Canal near Naples, Fl (d)	.02291400	1966
Cocohatchee River Canal near Naples Park, Fl (d)	.02291393	1969 - 1984
Comfort Canal at N.W. 29th Avenue, Miami, Fl (e) (formerly published as South Fork Miami River at N.W. 29th Avenue)	.02290520	1962 - 1970
Coral Gables Canal at Red Road, Coral Gables, Fl (e)	.02290560	1963 - 1970
Coral Gables Canal at Tamiami Canal, near Coral gables, Fl (d)	.02290550	1960 - 1963
Coral Gables Canal near South Miami, Fl (d)	.02290580	1961 - 1966
Cypress Creek Canal at S-37A, near Pompano Beach, FL (D)	.02282100	1964 - 1985
Cypress Creek near Jupiter, Fl (d)	.265816080110000	1980 - 1982
E. Tributary N. Fork Loxahatchee River nr Hobe Sound, Fl (d)	.270036080070500	1980 - 1981
El Rio Canal near Boca Raton, Fl (d) gage heights only.	.02281625	1970 - 1972 1973 - 1977
El Rio Canal, SW 18th Street, Boca Raton, Fl (e)	.261953080054900	1982 - 1985
Equalizing Canal 1 near Greenacres City, Fl (e)	.02281419	1970 - 1972
Equalizing Canal 1 near Delray Beach, Fl (e)	.02281425	1970 - 1977
Equalizing Canal 3 near Greenacres City, Fl (e)	.02281513	1970 - 1977
Equalizing Canal 3 near Delray Beach, Fl (e)	.02281532	1970 - 1972
Equalizing Canal 3 near Boca Raton, Fl (e)	.02281544	1970 - 1977
Everglades 1-128S near Boynton Beach, Fl (e)	.02281282	1974 - 1975
Everglades 1-141S near Loxahatchee, Fl (e)	.02281278	1974 - 1976
Everglades 1-142S near Delray Beach, Fl (e)	.02281291	1974 - 1976
Everglades 159 south of pump station 6 near Andytown, Fl (e)	.262300080263501	1977 - 1980
Everglades 160 south of pump station near Lake Harbor, Fl (e)	.261557080464301	1977 - 1980
Everglades 2B in C-111 Basin near Homestead, FL (g)	.251855080283400	1986 - 2001
Everglades 201-NP, near Homestead, Fl (e)	.02290861	1975 - 1980
Everglades 202-NP, near Miami, Fl (e)	.02290862	1975 - 1980
Everglades 203-NP, near Homestead, Fl (e) (formerly published as Everglades P-5S)	.02290832	1974 - 1980
Everglades 204-NP near Homestead, Fl (e) (formerly published as Everglades P-145)	.02290829	1974 - 1980
Everglades 205-NP, near Miami, Fl (e)	.02290868	1975 - 1980
Everglades 206-NP, near Miami, Fl (e)	.02290811	1975 - 1980
Everglades 207 near Homestead, Fl (e) (formerly published as "Everglades P-37 near Homestead")	.02290810	1963 - 1980
Everglades 2-111S near Andytown, Fl (e)	.02284642	1974 - 1981
Everglades 2-112S near Margate, Fl (e)	.02284644	1974 - 1976
Everglades 3-62S near Andytown, Fl (e)	.02286960	1974 - 1979
Everglades 3-63S near Andytown, Fl (e)	.02286998	1974 - 1979
Everglades 3-64S near Miramar, Fl (e)	.02286970	1974 - 1979
Everglades 3-65S near Miami, Fl (e)	.02289043	1974 - 1980
Everglades P-33 near Homestead, Fl (e)	.02290815	1963 - 1980
Everglades P-34 near Homestead, Fl (e)	.02290870	1963 - 1980
Everglades P-35 near Homestead, Fl (e)	.02290830	1963 - 1980
Everglades P-36 near Homestead, Fl (e)	.02290828	1969 - 1980
Everglades P-38 near Homestead, Fl (e)	.02290820	1963 - 1980
Everglades P-103 near Florida City, Fl (e)	.02290790	1967 - 1969
Everglades P-104 near Florida City, Fl (e)	.02290794	1967 - 1969
Fakahatchee Slough at Janes Road near Copeland, Fl (d)	.02291047	1970 - 1972
Faka Union Canal near Copeland, Fl (d)	.02291143	1970 - 1984
Faka Union Canal near Deep Lake, Fl (d)	.260342081312500	1978 - 1984
Faka Union Canal near Sunniland, Fl (e)	.261616081314400	1978 - 1984
Florida Bay at Flamingo, Fl (e)	.02290825	1963 - 1980
Florida City Canal near Florida City, Fl (e)	.02290735	1963 - 1967

## VOLUME 2A: SOUTH FLORIDA

## DISCONTINUED SURFACE-WATER DISCHARGE OR STAGE-ONLY STATIONS--continued

Station name	Station number	Period of record water years published
Garden Cove near Key Largo, Fl (e)	.02290786	1967 - 1968
Gator Hook Strand near Ochopee (e)	254724081111300	1979 - 1980
Golden Gate Canal at Naples, Fl (d)	.02291300	1965 - 1984
Golden Gate Canal near Naples, Fl (d)	261148081401700	1978 - 1984
Golden Gate Canal near Sunniland, Fl (d)	261642081334200	1978 - 1984
Gordon River at Naples, Fl (e)	.02291280	1972 - 1984
Goulds Canal near Goulds, Fl (e) (formerly published under station number 02290715)	.02290711	1963 - 1967
Grand Canal near Florida City, fl (d)	.02290734	1972 - 1974
Gum Slough near Monroe, Fl (e)	254230081022000	1979 - 1980
Harney River near Homestead, Fl (d) (gage heights only 1968 - 1969)	.02290860	1960 - 1967
Henderson Creek Canal near Naples, Fl (d)	.02291270	1968 - 1984
Henry Creek at Henry Creek Lock near Sherman, Fl. (This station was transferred to the Altamonte Springs Office)	.02275705	1993 - 1995
Hillsboro Canal at S-39, near Deerfield Beach, Fl (e)	.02281300	1957 - 1967
Hillsboro Canal in Cons. Area No. 1 at S-6 nr Shawano, Fl (e)	.02281201	1963 - 1968
Hillsboro Canal near Deerfield Beach, Fl (d)	.02281500	1940 - 1991
Hillsboro Canal below Deerfield Locks, Deerfield Beach, Fl (e)	.02281501	1963 - 1991
Hillsboro River at Deerfield Beach, Fl (e)	.02281650	1968 - 1978
Hobe Groves Ditch, near Jupiter, Fl (d)	265907080103000	1980 - 1982
Hollywood Canal at Dania, Fl (d)	.02286150	1962 - 1967
Indian River Lagoon at Sewalls Pt., Stuart, FL(g,s,t)	.02253800	1997-2003
Intracoastal Waterway at Barnes Point, near Florida City, Fl (e)	.02290762	1971
Intracoastal Waterway at Blue Heron Blvd. at Riveria, Beach, Fl (e)	.02277960	1971 - 1977
Intracoastal Waterway at Delray Beach, Fl (e)	.02279520	1971 - 1973
Intracoastal Waterway at Donald Ross Road, nr Juno Beach, Fl (e)	.02277730	1971 - 1973
Intracoastal Waterway at Golden Beach, Fl (e)	.02281670	1970 - 1979
Intracoastal Waterway at Hollywood, Fl (e)	.02286160	1968 - 1978
Intracoastal Waterway at Lauderdale-by-the Sea, Fl (e)	.02282300	1968 - 1978
Intracoastal Waterway at Port Everglades, at Hollywood, Fl (e)	.02286143	1968 - 1978
Intracoastal Waterway at Southern Blvd. at Palm Beach, Fl (e)	.02277994	1971 - 1973
Intracoastal Waterway at SR 706 at Jupiter, Fl (e)	.02277738	1980 - 1981, 1989 - 1992
Intracoastal Waterway at SR 707 at Jupiter, Fl (e)	.02277747	1980 - 1981, 1989 - 1992
L-28 Interceptor Canal South at Collier border, Fl (d,g)	260823080524100	1997 - 1999
L-67A at Conservation Area 3A near Coopertown, Fl (g)	255447080350200	1994 - 1996
L-67C at Conservation Area 3B near Coopertown, Fl (g)	255420080340500	1994 - 1996
Lateral 47 Canal at Boca Raton, Fl (e)	.02281468	1989 - 1991
Lateral Canal at Seminole Road near Loxahatchee, Fl (e)	.02278698	1973 - 1977
Lateral Canal in Acme Drainage District, near Loxahatchee, Fl (e)	.02281297	1973 - 1977
Lateral Canal in Loxahatchee Groves near Loxahatchee, Fl (e)	.02278732	1973 - 1977
Lateral Canal on 130th Ave. North, near Jupiter, Fl (e) (formerly published as Lateral Canal on Hynie Lane Road)	.02277470	1973 - 1977
Lateral Canal on Jupiter Farms Road, near Jupiter, Fl (e)	.02277480	1973 - 1977
Levee 3 Canal near Clewiston, Fl (d) Revised 1978-90 in WRD-2A-96	.02289030	1970 - 1990
Levee 28 Tieback Canal, near Andytown, Fl (e)	.02289027	1970 - 1974
Levee 30 near Miami Springs, Fl	.02289100	1960 - 1964
Levee 31W Canal at S-332, near Florida City, FL (d,g)	252523080352500	1983 - 1998
Levee 67 Extended Canal near Richmond Heights, fl (e)	.02290827	1971 - 1980
Levee 67 Extended Canal at South End near Coopertown, Fl (e)	253735080402100	1977 - 1980
Little River Canal at Palm Avenue, Hialeah, Fl (e)	.02286350	1963 - 1979
Little River Canal at S-27, at Miami, Fl (d)	.02286380	1960 - 1969
.....	.....	1973 - 1985
Lostmans River near Everglades, Fl (d) (period of record published in 1967 volume 2A)	.02290920	1962 - 1965
Loxahatchee River at Indiantown Road near Jupiter FL (q)	265613080100700	1989 - 1998

## VOLUME 2A: SOUTH FLORIDA

## DISCONTINUED SURFACE-WATER DISCHARGE OR STAGE-ONLY STATIONS--continued

Station name	Station number	Period of record water years published
Loxahatchee River at Sunshine State Pkwy., nr Jupiter, FL (d)	.265713080095600	1980 - 1982
Loxahatchee River near Hobe Sound, FL (e)	.265916080083500	1977 - 1981
M-1 Canal at Canal M near Royal Palm Beach, FL (e)	.02278760	1975 - 1977
M-2 Canal in Royal Palm Beach Colony near Loxahatchee, FL (e)	.02277750	1973 - 1977
Mackinac Canal at Cape Coral, FL (d,g)	.02293216	1987 - 1996
Manatee Bay at Canal 111, near Florida City, FL (e)	.02290782	1967 - 1969
Main Lake Outlet near Ft Myers, FL (e)	.02291736	1988 - 1989
Matlacha Pass at Indian Field Island near Matlacha, FL (e)	.02293342	1991 - 1993
Matlacha Pass at Matlacha, FL (g,q)	.02293343	1989 - 1997
Matlacha Pass at Parrots Perch near St James City, FL (g)	.02293280	1989 - 1997
Miami Canal above S-8, near Lake Harbor, FL (e)	.02286699	1962 - 1968
(formerly Miami Canal at S-8 (auxiliary) 02286700)		
Miami Canal above S354 and S-3, at Lake Harbor, FL (g)	.02286399	1958 - 1998
(Prior to October 1988, published as Miami Canal at HGS-3 and S-3 at Lake Harbor)		
Miami Canal at broken dam, near Miami, FL (d)	.02287400	1960 - 1968
		1985 - 1989
Miami Canal at N.W. 27th Avenue, Miami, FL (e)	.02290510	1963 - 1979
Miami Canal at Palmetto Bypass near Hialeah, FL (d)	.02288200	1960 - 1981
Miami Canal at Pennsuco near Miami, FL (d)	.02287500	1963 - 1979
Miami River at Brickell Ave., Miami, FL (d)	.02290530	1961 - 1966
Middle River Canal at U.S. Highway 1, near Ft. Lauderdale, FL (d)	.02282800	1964 - 1967
Mid. Tributary N. Fork Loxahatchee R. nr Hobe Sound, FL (d)	.270028080074200	1980 - 1981
Military Canal near Homestead, FL (e)	.02290720	1963 - 1969
Model Land Canal near Florida City, FL (e)	.02290740	1963 - 1969
Model Land Canal below ML-2, near Florida City, FL (e)	.02290746	1963 - 1968
(formerly Model Land Canal at control "auxillary" 02290745)		
Monreve Ranch drainage canal near Stuart FL (d)	.02276984	1959 - 1973
(formerly published under station number 02276800)		
Mowry Canal near Homestead, FL (d)	.02290725	1970 - 1989
	gage heights only published	1963 - 1970
New River at Ft. Lauderdale, FL (d)	.02286140	1963 - 1967
North Canal near Homestead, FL (e)	.02290730	1963 - 1968
North Line Canal near Miami Springs, FL (d)	.02289900	1960 - 1963
North New River Canal at S-2 and S-351, near South Bay, FL (d,g)	.02283498	1957 - 2003
North New River Canal at S-7 at Terrytown, FL (d,g)	.02284300	1960 - 2003
North New River Canal below S-34, near Ft. Lauderdale, FL (d)	.02284700	1956 - 1967
North New River Canal near Ft. Lauderdale, FL (d)	.02285000	1939 - 1992
North New River Canal below control near Ft. Lauderdale, FL (e)	.02285001	1962 - 1992
(formerly published as 02285000 North New River Canal (auxiliary))		
N.W. Wellfield Canal at Conserv. Area No. 3 nr Pennsuco, FL (d,g)	.02289096	1991 - 1996
N.W. Wellfield Canal near Pennsuco, FL (d,g)	.02288010	1991 - 1996
Okaloacoochee Slough near Sunniland, FL (e)	.261205081200000	1979 - 1980
Pine Channel near Big Pine, FL	.244123081225301	1976
Pinecrest Hammocks near Monroe, FL (e)	.254635080541500	1979 - 1980
Pompano Canal at Pompano Beach, FL (d)	.02282000	1964 - 1969
(Prior to October 1948, published as Cypress Creek Canal at Pompano)		
Pompano Canal at S-38, near Pompano Beach, FL (d)	.02281700	1962 - 1967
Roberts Lake Slough near Monroe, FL (d)	.02290950	1973 - 1980
Rogers River near Everglades, FL (d)	.02290900	1962 - 1965
(period of record published in 1967 volume 2A)		
Sanibel River at Snibel, FL (e)	.02293250	1972 - 1977
Savannahs Drainage Canal at Port St Lucie, FL (d)	.02276568	1976 - 1977
Shark River near Homestead, FL (d)	.02290850	1960 - 1966
(gage heights only 1967 - 1969)		
Site 15 nr L-39 in Conserv. Area No. 2A near Shawano, FL (g)	.262400080250001	1991 - 1997

## VOLUME 2A: SOUTH FLORIDA

## DISCONTINUED SURFACE-WATER DISCHARGE OR STAGE-ONLY STATIONS--continued

Station name	Station number	Period of record water years published
Site 34 near L-30 in Conservation Area 3B, near Miami, FL (g)	.255215080291000	1993 - 1997
Six Mile Cypress Creek South near Ft. Myers, FL (d)	.02291670	1988 - 1990
San Carlos Bay at St. James, City, FL (e)	.02293288	1990 - 1992
Snake Creek Canal at S-29, at S-29, at North Miami Beach, FL (d)	.02286300	1959 - 1985
Snake Creek Canal at S-30, near Hialeah, FL (d)	.02286180	1963 - 1967
Snapper Creek Canal at Miller Drive, near South Miami, FL (e) (formerly published under station number 02290600)	.02290610	1963 - 1981
Snapper Creek Canal near Coral Gables, FL (d) gage heights only published	.02290600	1960 - 1967 1968 - 1980
Snapper Creek Canal at S-22, near South Miami, FL (d)	.02290700	1959 - 1985
South Fork Miami River at N.W. 29th Avenue, Miami, FL (e)	See Comfort Canal at N.W. 29th Avenue	
South New River Canal in Conservation Area No. 3 at S-9 (e)	.02285399	1963 - 1970
South New River Canal at S-9 near Davie, FL (d)	.02285400	1958 - 1970
South New River Canal at U.S. Highway 27 near Davie, FL (e)	.02285410	1975
Southwest Fork Loxahatchee River at Jupiter, FL (e)	.265635080071900	1980 - 1981
Southwest Fork Loxahatchee River at S-46 (d)	.02277700	1959 - 1965
Stilt City Tidal Station at Indian Field, nr Matlacha, FL (e)	.263935082052501	1990 - 1991
St Lucie Canal at Lock, near Stuart, FL (d,g)	.02277000	1952 - 2003
Tamiami Canal at 40-mile bend, near Miami, FL (e) (formerly published as 02288900 Tamiami Canal at 40-mile bend (auxiliary) : (1960 to 1963 water years published under 02289000, Tamiami Canal Outlets, Miami to Monroe)	.02288990	1961 - 1980
Tamiami Canal at bridge 77, near Carnestown, FL (e) (formerly published as 02288800 Tamiami Canal at bridge 77 (auxiliary))	.02288780	1962 - 1980
Tamiami Canal at bridge 83, near Ochopee, FL (e)	.255327081161300	1979 - 1980
Tamiami Canal at bridge 96, at Monroe FL (e) (twice monthly) (formerly published as 02288900 Tamiami Canal at bridge 96 (auxiliary))	.02288860	1962 - 1980
Tamiami Canal at bridge 115, near Miami, FL (e) (twice monthly) (formerly published as 02288900 Tamiami Canal at bridge 115 (auxiliary))	.02288945	1962 - 1980
Tamiami Canal at Red Road, Miami, FL (e)	.02290500	1963 - 1980
Tamiami Canal at S-355A, near Miami, FL (g)	.254540080361500	2000 - 2003
Tamiami Canal at S-355B, near Miami, FL (g)	.254540080325700	1999 - 2003
Tamiami Canal east of levee 30, near Miami, FL (e) (formerly published as 02289060 Tamiami east of levee 30 (auxiliary))	.02289250	1963 - 1980
Tamiami Canal Outlets, Miami to Monroe, FL (d)	.02289000	1940 - 1963
Tamiami Canal west of levee 30, near Miami, FL (e) (twice monthly) (formerly published as 02289060 Tamiami Canal west of levee 30 (auxiliary))	.02289090	1963 - 1980
Taylor Creek at HGS-6 near Okeechobee, FL (d) (This station was transferred to the Altamonte Springs Office)	.02277503	1992 - 1995
Taylor Slough at Context Road near Homestead, FL (d)	.252948080352700	1976 - 1980
Taylor Slough at Craighead Lake near Homestead, FL (e)	.251148080410300	1979 - 1980
Taylor Slough at Royal Palm near Homestead, FL (e)	.02290803	1970 - 1980
Taylor Slough near Homestead, FL (d)	.02290800	1960 - 1985
Townsend Canal near Alva, FL (d,g)	.02292780	1975 - 1996
Turnpike Borrow Canal above S-46 near Jupiter, FL (q)	.26555208008500	1989 - 1998
U.S. Highway 441 Canal near Deerfiled Beach, FL (e)	.02281435	1968 - 1969
Warner Creek near Jensen Beach, FL (d)	.02277107	1976 - 1977
West Rolling Oaks Feeder Canal Near Davie, FL (e)	.02285420	1975

## VOLUME 2A: SOUTH FLORIDA

INTRODUCTION

The U.S. Geological Survey (USGS), in cooperation with State, County, and other Federal agencies, obtains a large amount of data pertaining to the water resources of Florida each water year. These data, accumulated during many water years, constitute a valuable data base for developing an improved understanding of the water resources of the state. To make these data readily available to interested parties outside the USGS, the data are published annually in this report series entitled "Water Resources Data - Florida, Volume 2A: South Florida Surface Water and Volume 2B: South Florida Ground Water".

This report series includes records of stage, discharge, and water quality for streams; stage, contents, and water quality for lakes; and ground-water levels, contents, and water quality of ground-water wells. The data for South Florida include continuous or daily discharge for 86 streams, continuous or daily stage for 54 streams (including stage published at discharge and stage only sites), continuous elevations for 1 lake, continuous ground-water levels for 257 wells, periodic ground-water levels for 226 wells, and quality-of-water data for 39 surface-water sites and 149 wells.

Publication of this series of annual reports for Florida began with the 1961 water year, with a report that contained only data relating to the quantities of surface water. For the 1964 water year, a similar report was introduced that contained only data relating to water quality. For the 1975 water year, the report format was modified to one volume presenting data on quantities of surface water, quality of surface and ground water, and ground-water levels. For the 1977 water year, the report format was modified to a two volume set: one volume presenting data on quantity as well as quality of surface water and one volume presenting data on water levels along with quality of ground water.

Prior to introduction of this series and for several concurrent water years, water-resources data for Florida were published in USGS Water-Supply Papers. Data on stream discharge and stage and on lake or reservoir contents and stage through September 1960 were published annually under the title "Surface-Water Supply of the United States". For the 1961 through 1970 water years, the data were published in two 5-year reports. Data on chemical quality, temperature, and suspended sediment for the 1941 through 1970 water years were published annually under the title "Quality of Surface Waters of the United States", and water levels for the 1935 through 1974 water years were published under the title "Ground-Water Levels in the United States". The aforementioned Water-Supply Papers may be consulted in the federal repository libraries of the principal cities of the United States and may be purchased from the U.S. Geological Survey, Branch of Information Services, Box 25286, Federal Center, Denver, CO 80115 (telephone: 888-ASK-USGS).

Similar reports are published annually by the USGS for all of the United States. These official USGS reports have an identification number consisting of the two-letter State abbreviation, the last two digits of the water year, and the volume number. For example, this volume is identified as "U.S. Geological Survey Water-Data Report FL-xx-2B," where xx represents the current water year. For archiving and general distribution, reports for the 1971-74 water years also are identified as water-data reports. These water-data reports are for sale in paper copy or microfiche by the National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161. Additional information, including current prices, for ordering specific reports may be obtained from the Office Chief at the address given on the back of the title page or by telephone (305) 717-5800.

## VOLUME 2A: SOUTH FLORIDA

COOPERATION

The USGS and various Federal, State, and local organizations have had cooperative agreements for the collection of water-resource records since 1930. Organizations that assisted in collecting the data presented in this report through cooperative agreement with the USGS are:

Broward County  
City of Boca Raton  
City of Cape Coral  
City of Ft. Lauderdale  
City of Hallandale Beach  
City of Hollywood  
Everglades National Park  
Florida Keys Aqueduct Authority

Lee County  
Miami-Dade County Department of Environmental  
Resource Management  
Seminole Tribe of Florida  
South Florida Water Management District  
St. Lucie County  
U.S. Army Corps of Engineers  
U.S. Fish and Wildlife Service

Organizations that provided data are acknowledged in station manuscripts.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS

This section summarizes important hydrologic events that occurred during the 2004 water year (October 1, 2003 to September 30, 2004) as well as significant natural and water-management responses to these events. Figure 2 provides a frame of reference for some of the major land areas of hydrologic significance mentioned in the summary.

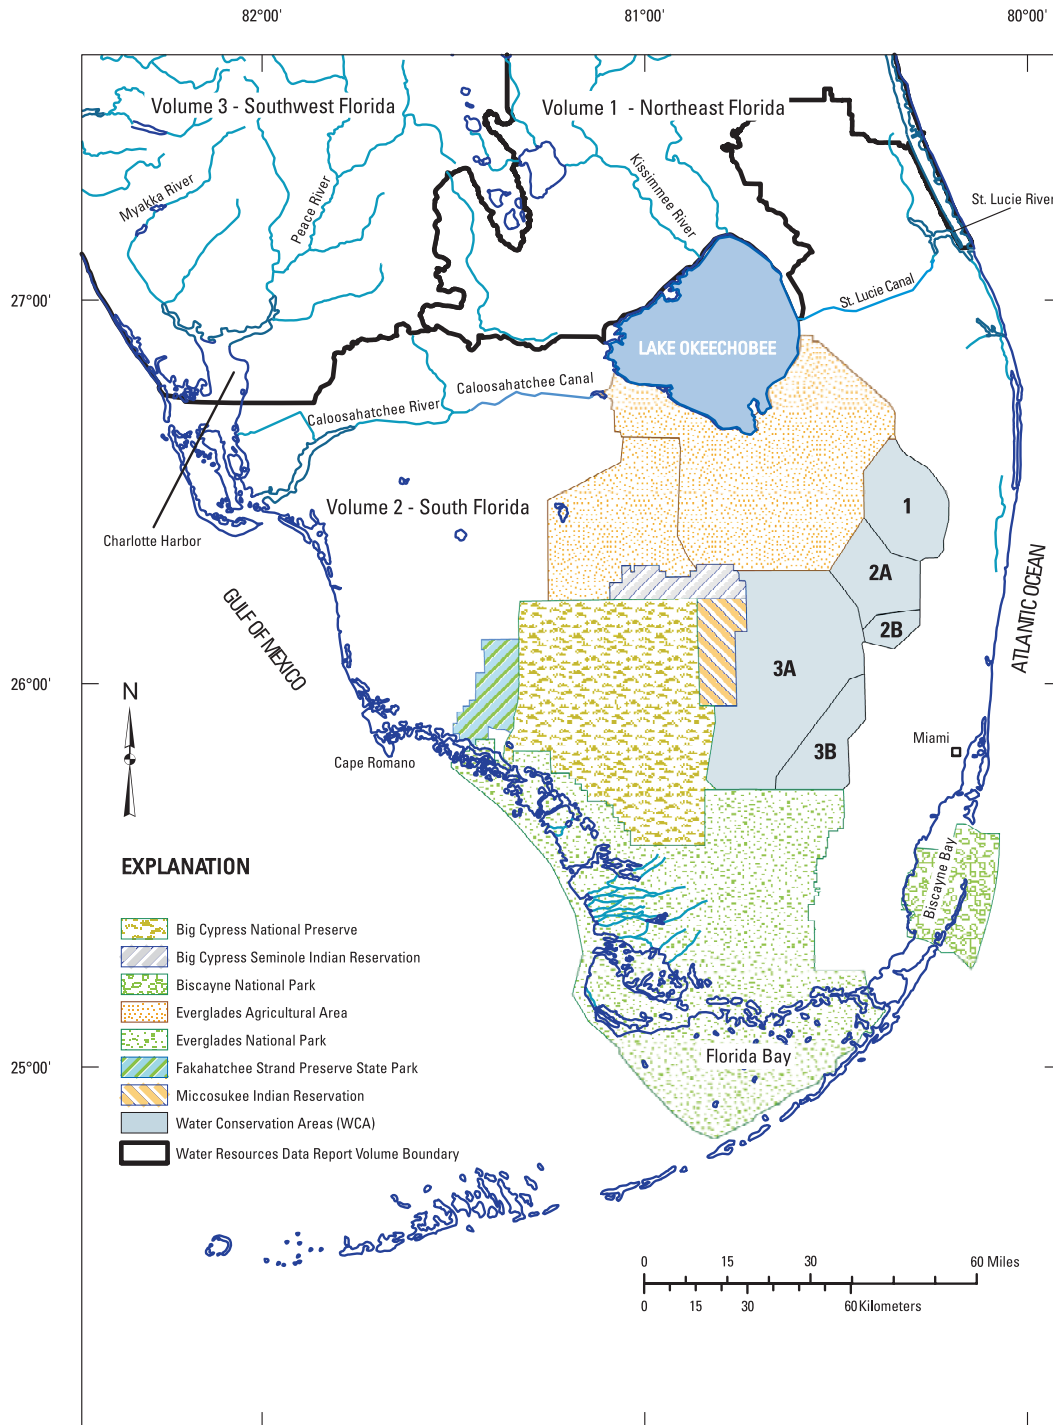


Figure 2. South Florida areas of hydrologic significance

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

During the 2004 water year, the U.S. Geological Survey (USGS) Florida Integrated Science Center — Water and Restoration Studies (FISC-WRS) monitored 86 continuous discharge stations, 54 continuous stage stations, and 1 lake, and also collected water-quality data at 39 miscellaneous sites in cooperation with various local, State, and Federal agencies.

## Data from selected surface water stations

Seven surface water discharge stations and six stage-only sites were selected to depict general surface-water conditions in selected areas for the 2004 water year. St. Lucie Canal at Lake Okeechobee (02276870) (figure 3) is located just downstream of structure S-308, which controls water releases into and from Lake Okeechobee to the St. Lucie Canal. Loxahatchee River Near Jupiter (02277600) (figure 4) monitors discharges in the Loxahatchee River near Lainhart Dam. Miami Canal at S-354 and S-3 (02286400) (figure 5) is located just downstream of structure S-354, which controls water releases into and out of Lake Okeechobee through the Miami Canal. Miami Canal at S-8 (02286700) (figure 6) is located just upstream of pump station S-8, which controls water in the Miami Canal released from the Everglades Agricultural Area (EAA) to Water Conservation Area (WCA) 3A. Miami Canal at NW 36 Street (02288600) (figure 7) is located just upstream of structure S-26 — a salinity control structure that controls water releases from the Miami Canal into the Miami River and ultimately to tide. The Tamiami Canal Outlets, Levee 67 to 40 Mile Bend (02289040) (figure 8) is a combination of flow through structures S-12 A, B, C, and D located along the Tamiami Trail. Together, these structures help control water flow from WCA 3A into Everglades National Park. Caloosahatchee River at S-79 near Olga (02292900) (figure 9) is the westernmost structure on the Caloosahatchee River before water is released to the Caloosahatchee Estuary and ultimately to tide. Northeast Shark River Slough No. 2 (254315080331500) (figure 10) is located 2.7 miles south of the Tamiami Trail and monitors water levels in this area. The last five stations monitor water levels in their respective WCAs: Site 71 in Water Conservation Area No. 3B (255250080335001) (figure 11), Site 99 near L-35A in Water Conservation Area No. 2B (260810080222001) (figure 12), Site 63 in Water Conservation Area No. 3A (261117080315201) (figure 13), Site 17 near L-38, Water Conservation Area No. 2A (262240080258001) (figure 14), and Site 7 in Water Conservation Area No. 1 (263180080205001) (figure 15). Two hydrographs are shown for each discharge site. The upper graph (A) is the 2004 water year monthly mean discharge or gage height compared to the maximum and minimum monthly mean discharge or gage height for the period of record through the 2003 water year, and monthly mean discharge or gage height for the entire period of record through the 2004 water year. The lower graph (B) is the monthly mean discharge or gage height for the 1995-2004 water years. The data tables displayed in this publication do not have monthly mean discharge and/or gage height figures available if data for one or more days in a month are missing. Monthly mean gage height or discharge are deleted in these hydrographs if five or more days of missing record in a month exist.

## Rainfall

Rainfall data collected and evaluated by the South Florida Water Management District (SFWMD) during the 2004 water year provide a framework for understanding monthly water level and discharge variations (South Florida Water Management District, 2005). The rainfall data provided by the SFWMD for southern Florida are subdivided into 16 geographic areas. Monthly rainfall totals from individual stations within each area were averaged and compared to historical total monthly rainfall averages. The percentage of average monthly rainfall is computed for each of the 16 geographic areas. This percentage is used throughout the discussion of surface-water conditions for the 2004 water year.

Weekly precipitation anomalies (percentage of 1971 to 2000 normal), are provided by the National Climatic Data Center, National Oceanic and Atmospheric Administration (NCDC-NOAA) (2005), for the years 2003 and 2004. Weekly precipitation anomalies were computed for the entire United States and include two geographic areas in southern Florida. The first geographic area is southeastern Florida from Key Largo to St. Lucie County. The second geographic area includes the rest of southern Florida, south of the northern extent of Lake Okeechobee. Unlike the percentages of average monthly rainfall provided by SFWMD, which are exact values, the weekly precipitation anomalies provided by NCDC-NOAA are divided into seven categories or ranges: very dry (less than 30 percent of average), severely dry (30 to 50 percent of average), moderately dry (50 to 70 percent of average), mid range (70 to 140 percent of average), moderately moist (140 to 200 percent of average), very moist (200 to 330 percent of average), and extremely moist (greater than 330 percent of average). Weekly and monthly precipitation anomalies were used in conjunction with water-level and discharge data to describe hydrologic conditions and management responses during the 2004 water year.

## Surface-water conditions during the 2004 Water Year

During October, rainfall was substantially lower than normal (8 to 39 percent of average) throughout southern Florida. Higher than average monthly discharges were released through S-79 on the Caloosahatchee River and the Tamiami Canal Outlets. Discharges through the Miami Canal from Lake Okeechobee to the coast ranged from about average to below average. Discharge through the Loxahatchee River was below average. All water levels in the WCAs were very close to their monthly average for October. Water levels in Northeast Shark River Slough were above average and remained so until June.

Rainfall during the first week of November was between 200 and 330 percent of average. Rainfall during the remaining 3 weeks of November was substantially lower than normal (less than 30 percent of average). Rainfall for the month was 86 to 114 percent of average in southwestern Florida, 98 to 152 percent of average in southeastern Florida, and 59 to 87 percent of average in south-central Florida. The heavy rain during the beginning of November caused the average monthly discharge for the Loxahatchee River to increase from October to November and exceed the November monthly mean for the period of record. Water levels in the WCAs began to decline and generally stayed close to the monthly average. Discharges through the Tamiami Canal Outlets also began to decline. The Miami Canal stations were mostly below their monthly averages. Discharge to the St. Lucie Canal through S-308 was about average and remained so until March.

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

During the first, second, and fourth weeks of December 2003, rainfall was generally well below normal (30 to 50 percent of average or less). Rainfall during the third week of the month was well above normal (greater than 330 percent of normal in southwestern and south-central Florida, and 200 to 330 percent of normal in southeastern Florida). Rainfall during the month varied spatially from 47 percent of average in the eastern Miami-Dade geographic area to 184 percent of average in the east Caloosahatchee geographic area. Water released to tide through the Caloosahatchee River increased from the previous month. Water was released from Lake Okeechobee through S-354 from late November through the month of December. No releases were made through S-8, and below average discharges to tide were made from the Miami Canal at S-26. Discharges in the Loxahatchee River decreased during the month, although they remained above average. S-12 discharges and WCA water levels continued to decline.

During January 2004, rainfall generally was much lower than normal (less than 30 percent of average). During the last week of the month however, rainfall exceeded 330 percent of average. This heavy, late rainfall resulted in monthly rainfall totals that were slightly above normal despite the prevailing dry conditions that existed during the first three weeks of the month. Monthly rainfall totals varied spatially from 71 percent of average in the eastern Palm Beach geographic area to an estimated 190 percent of average in the Everglades National Park geographic area.

During the first three weeks of February rainfall in southern Florida varied temporally from normal (70 to 140 percent of average) to well below normal (less than 30 percent of average). Rainfall during the last week of the month was much higher than normal (between 200 and 330 percent of average in southeastern Florida, and more than 330 percent of average in southwestern and south-central Florida). Monthly rainfall totals were about normal for southern Florida. Monthly rainfall varied spatially from 65 percent of average in the eastern Broward geographic area to 170 percent of average in the Everglades National Park geographic area. Discharges within the Loxahatchee River increased slightly from the previous month, while discharges from the Miami Canal at S-8 and to tide increased significantly. Discharges from the Caloosahatchee River remained fairly constant compared to the previous month, with minor releases from Lake Okeechobee through S-354. The WCAs in general showed slight average increases due to the wet conditions except for Site 71 in WCA 3B, which showed a significant increase in water level. Discharges through the Tamiami Canal Outlet structures continued to decrease until July.

During March, monthly rainfall ranged spatially from 3 to 37 percent of average throughout southern Florida. All stations showed a decrease in discharge except for S-354, which showed above average discharge releases from Lake Okeechobee into the EAA. All WCA water levels declined and many remained below their average monthly water levels. Discharge from the Caloosahatchee River at S-79 declined from the previous month, although the average trend increased slightly in March.

Rainfall during April was spatially about normal (71 to 124 percent of average). Rainfall was generally lowest in south-central Florida and highest in southwestern Florida. Abundant rainfall (200 to 330 percent of average) occurred during the third week of the month. However, rainfall during the remainder of the month was less than 30 percent of average. Despite late month heavy rainfall totals, monthly mean gage height averages in the WCAs continued to decline. Flow releases from Lake Okeechobee into the EAA continued. Discharges through the Caloosahatchee River, Loxahatchee River, Miami Canal and S-308 continued to decrease and were below the monthly average.

May rainfall showed substantial spatial and temporal variation. During the first week of May, rainfall was 50 to 70 percent of average in southeastern Florida, and 70 to 140 percent of average in south-central and southwestern Florida. During the remaining weeks, very dry conditions prevailed (generally less than 30 percent of average). Rainfall for the month varied spatially from 16 to 50 percent of average. Discharges were increased through S-354 to the EAA and average discharge for the month was well above the mean for May. There were no releases through S-8 and minimal releases to tide from the Miami Canal through S-26. All WCA water levels continued to decline and fell below their monthly averages. Discharges from Lake Okeechobee through S-308 continued to decline.

Rainfall was about normal (70 to 140 percent of average) during the first 2 weeks of June, except in southeastern Florida where rainfall was slightly below normal (50 to 70 percent of average). For the rest of the month, rainfall was lower than normal (30 to 50 percent of average or lower in southeastern Florida). June monthly rainfall totals were slightly below average in much of southern Florida, but substantially lower than average (30 to 55 percent) in the geographic areas of eastern Palm Beach County, eastern Broward County, WCA 1, and eastern Miami-Dade County. Due to below average rainfall, water levels in all WCAs steadily continued to decline. New monthly lows were recorded in WCAs 2A, 2B, and 3A. Dry conditions also affected discharges to the Loxahatchee River, and a new monthly minimum discharge was recorded at the Loxahatchee River station. Monthly discharge was significantly reduced from Lake Okeechobee through S-354, and smaller than average releases were made to the WCAs through S-8. Minimal releases to tide were made from the Miami Canal.

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

July monthly rainfall totals were generally about average for southern Florida. Rainfall for the month generally varied spatially from 75 to 127 percent of average. Geographic areas that received more than 90 percent of average rainfall were the east and west EAA, WCAs 1, 2A, 2B, 3A, and 3B, Big Cypress Preserve, and eastern Broward County. Rainfall in the eastern Miami-Dade geographic area was slightly above average (127 percent of average) for the period. Rainfall in southeastern Florida was lower than normal (30 to 50 percent of average) during the first week of the month. Rainfall in southwestern and south-central Florida was lower than normal (30 to 50 percent of average) during the second week of the month. Rainfall throughout southern Florida was higher than normal (140 to 200 percent of average) during the last week of the month. Within the Loxahatchee River, discharge was slightly higher than the minimum monthly discharge in July for the period of record but still significantly lower than the mean discharge. Discharge increased from Lake Okeechobee to the Miami Canal through S-354 and increased through S-8 from the previous month. Minimal water was released to tide from the Miami Canal. The S-12 structures remained closed in July, decreasing water levels in Northeast Shark River Slough. Every WCA (except for WCA 1) had new period of record low monthly mean water levels, despite levels in WCA 3B, and WCA 2A rising slightly from the previous month. Monthly mean discharge through S-308 was negative.

August monthly rainfall totals for southeastern Florida were slightly above normal (99 to 135 percent of average). Rainfall in southeastern Florida was well above normal (200 to 330 percent of average) during the first week of the month, below normal (50 to 70 percent of average) during the second and third weeks of the month, and about normal (70 to 140 percent of average) during the last week of the month. August monthly rainfall totals for parts of southwestern and south-central Florida were above average and ranged from 139 percent of normal in the East EAA geographic area to 171 percent of average in the eastern Caloosahatchee geographic area. The greatest rainfall of the month was attributed to Hurricane Charley, which brought more than 5 inches of rain to southwestern Florida on August 13-14, 2004. Discharges at S-8 increased sharply above average in August, the result of increased pumping from the EAA into WCA 3A. Discharge through S-79 increased sharply due to the rainfall from the hurricane. All WCA stages increased, although all with the exception of WCA 2A continued to be below their monthly mean averages for August. The S-12 structures were open during the month, although discharges were below average, and water levels in Northeast Shark River Slough were slightly above average. Discharges to tide from the Miami Canal and Loxahatchee River remained below average, with minimal discharge recorded through S-354. Monthly mean discharges at S-308 remained negative.

September monthly rainfall totals varied spatially from 302 percent of average in the upper Kissimmee geographic area to 60 percent of average in the Everglades National Park geographic area. Monthly rainfall totals were well above normal in the Martin (249 percent of average), eastern Palm Beach (208 percent of average) and lower Kissimmee (217 percent of average) geographic areas. This can be attributed to rainfall associated with Hurricanes Frances (September 5-6, 2004) and Jeanne (September 26-27, 2004), which produced 10 inches and 8 inches, respectively, of rainfall in eastern, central, and northern Florida. Miami-Dade and Broward counties did not receive as much rainfall from these hurricanes as counties further north. Discharge through S-8 and to the Loxahatchee River increased well above their average means and were close to the maximum average for September. Discharge through S-79 to tide continued to increase and was above the average monthly mean, while discharges to tide from the Miami Canal were slightly below average. Discharge through the S-12 structures rose above average and water levels in Northeast Shark River Slough remained constant. WCAs 2A and 3A continued to exhibit below average water levels while WCA 1, 2B and 3B rose above average. Minimal discharge was recorded through S-354 and S-308.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

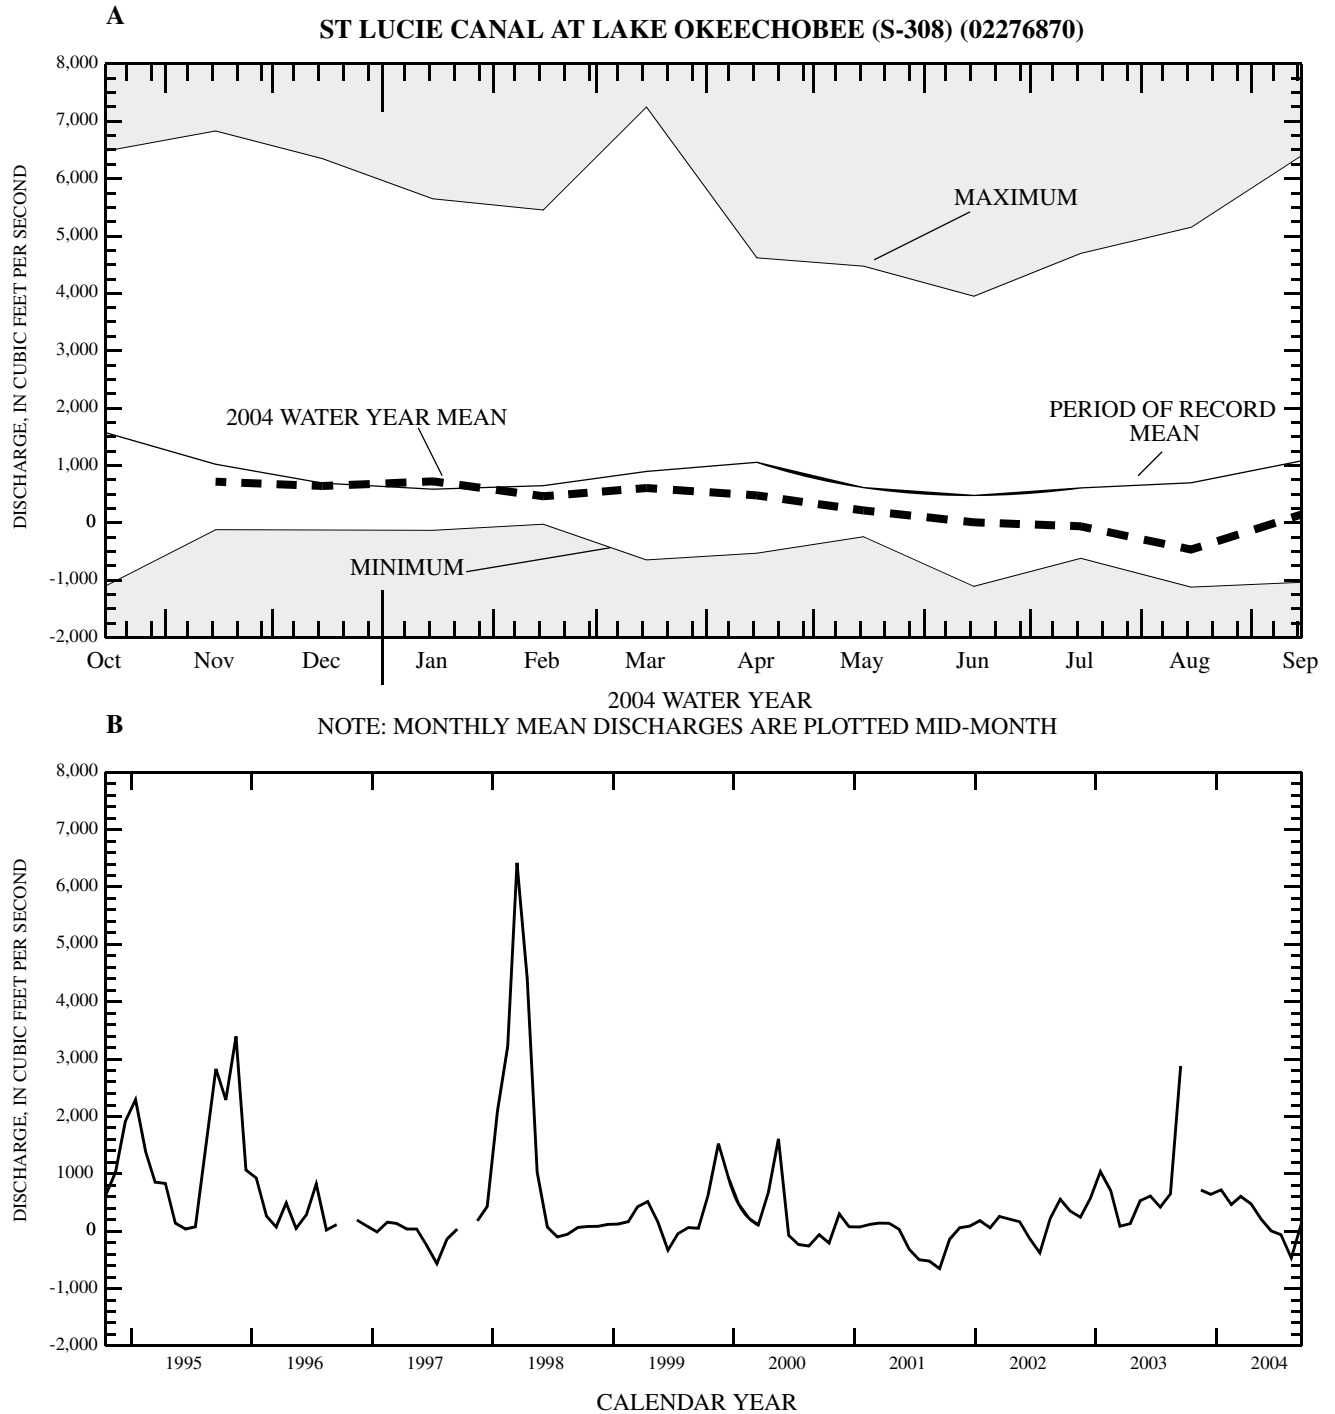


Figure 3. St. Lucie Canal at Lake Okeechobee (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

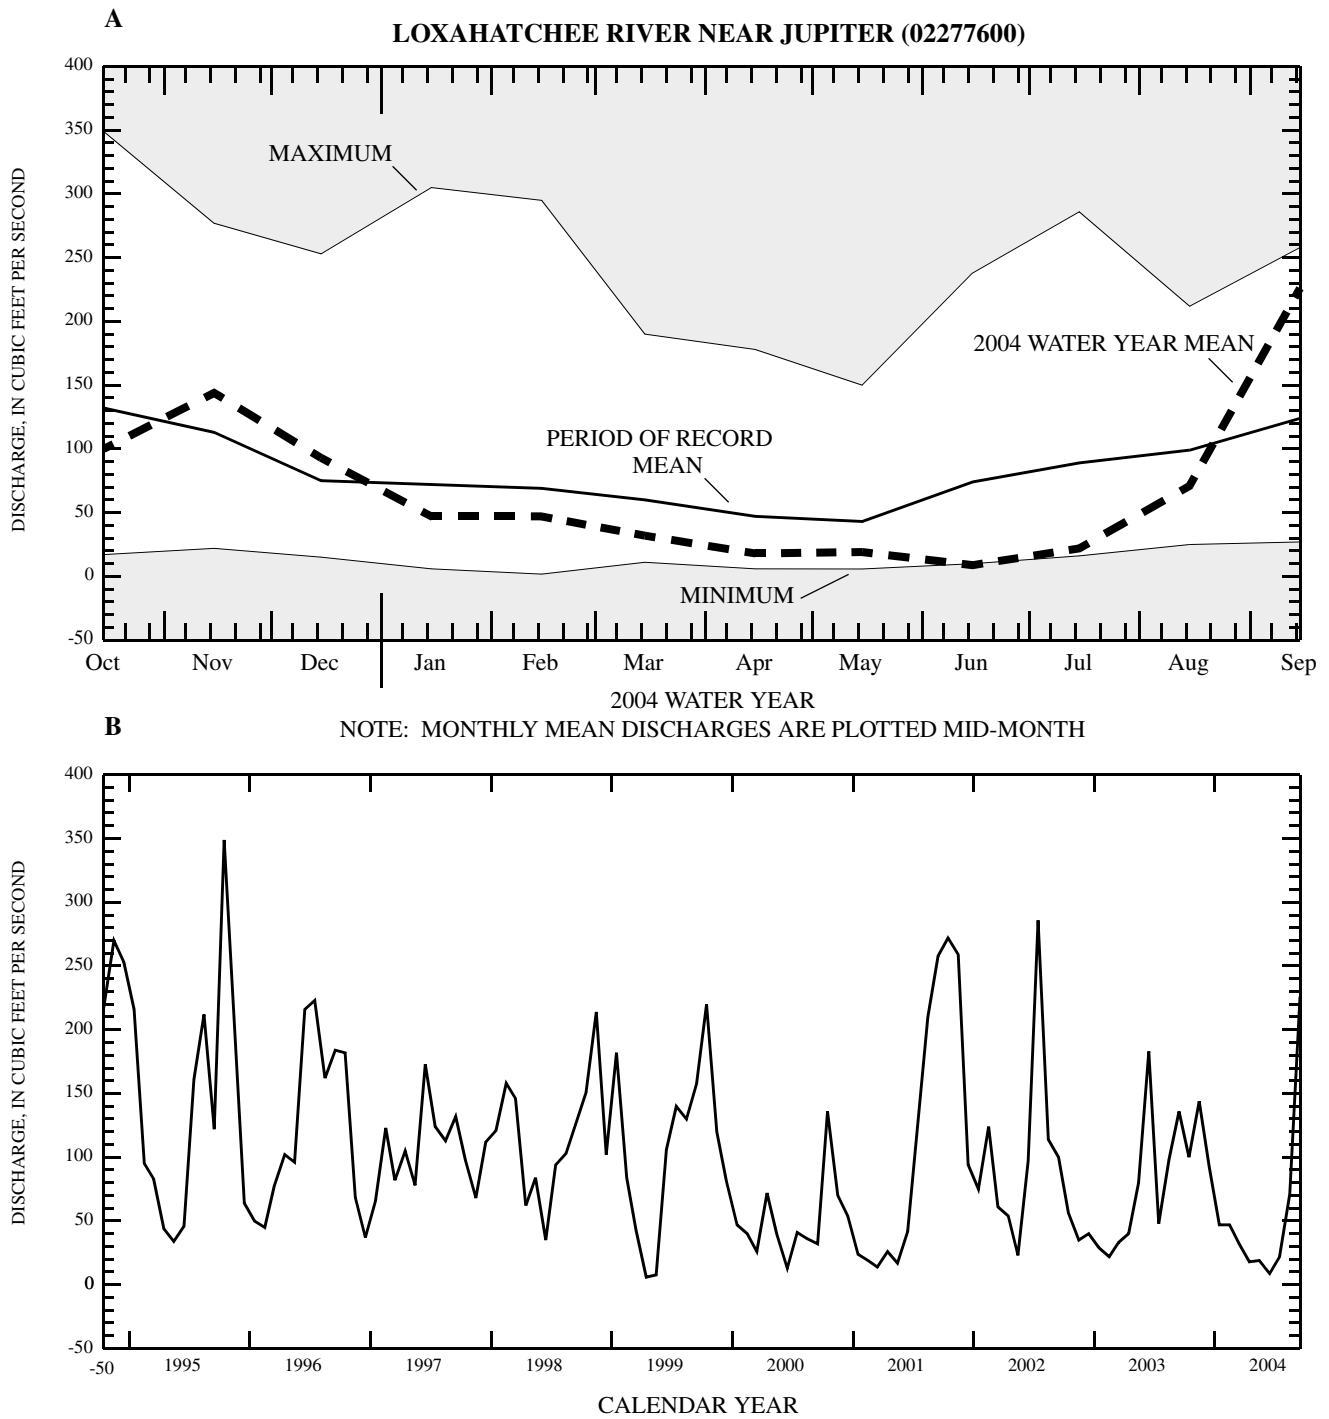


Figure 4. Loxahatchee River near Jupiter (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

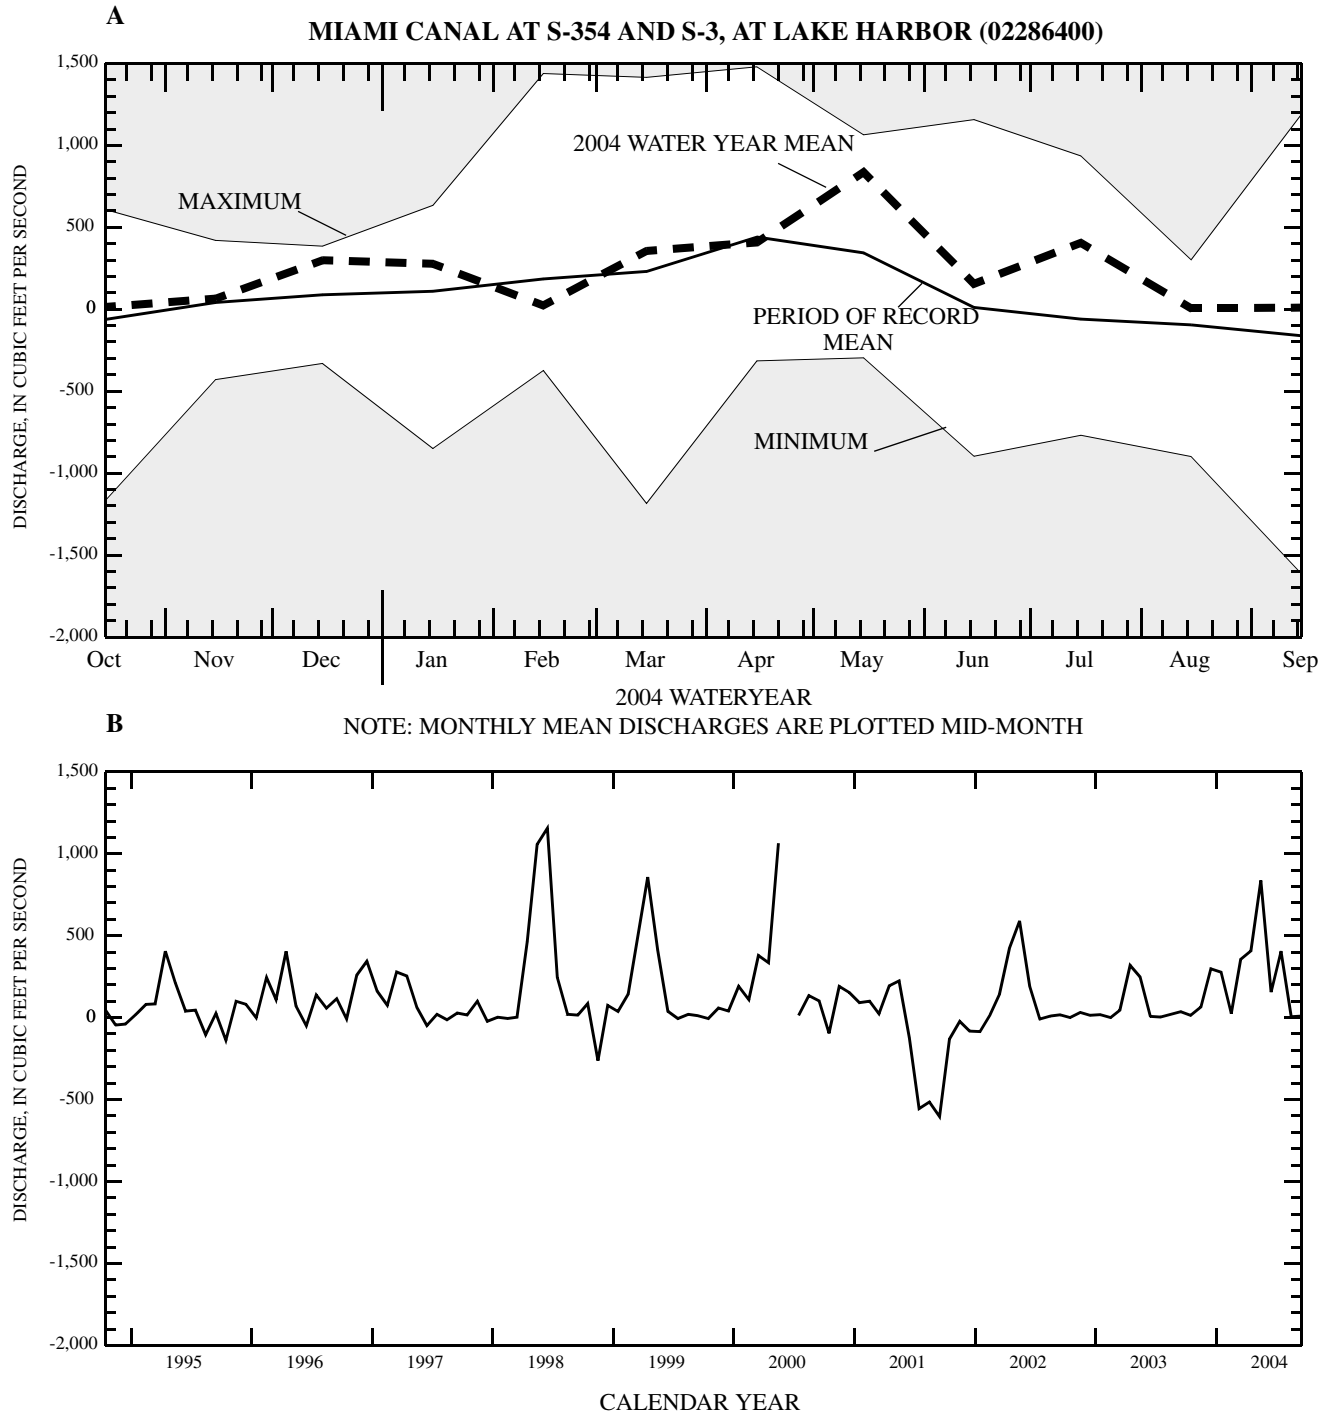
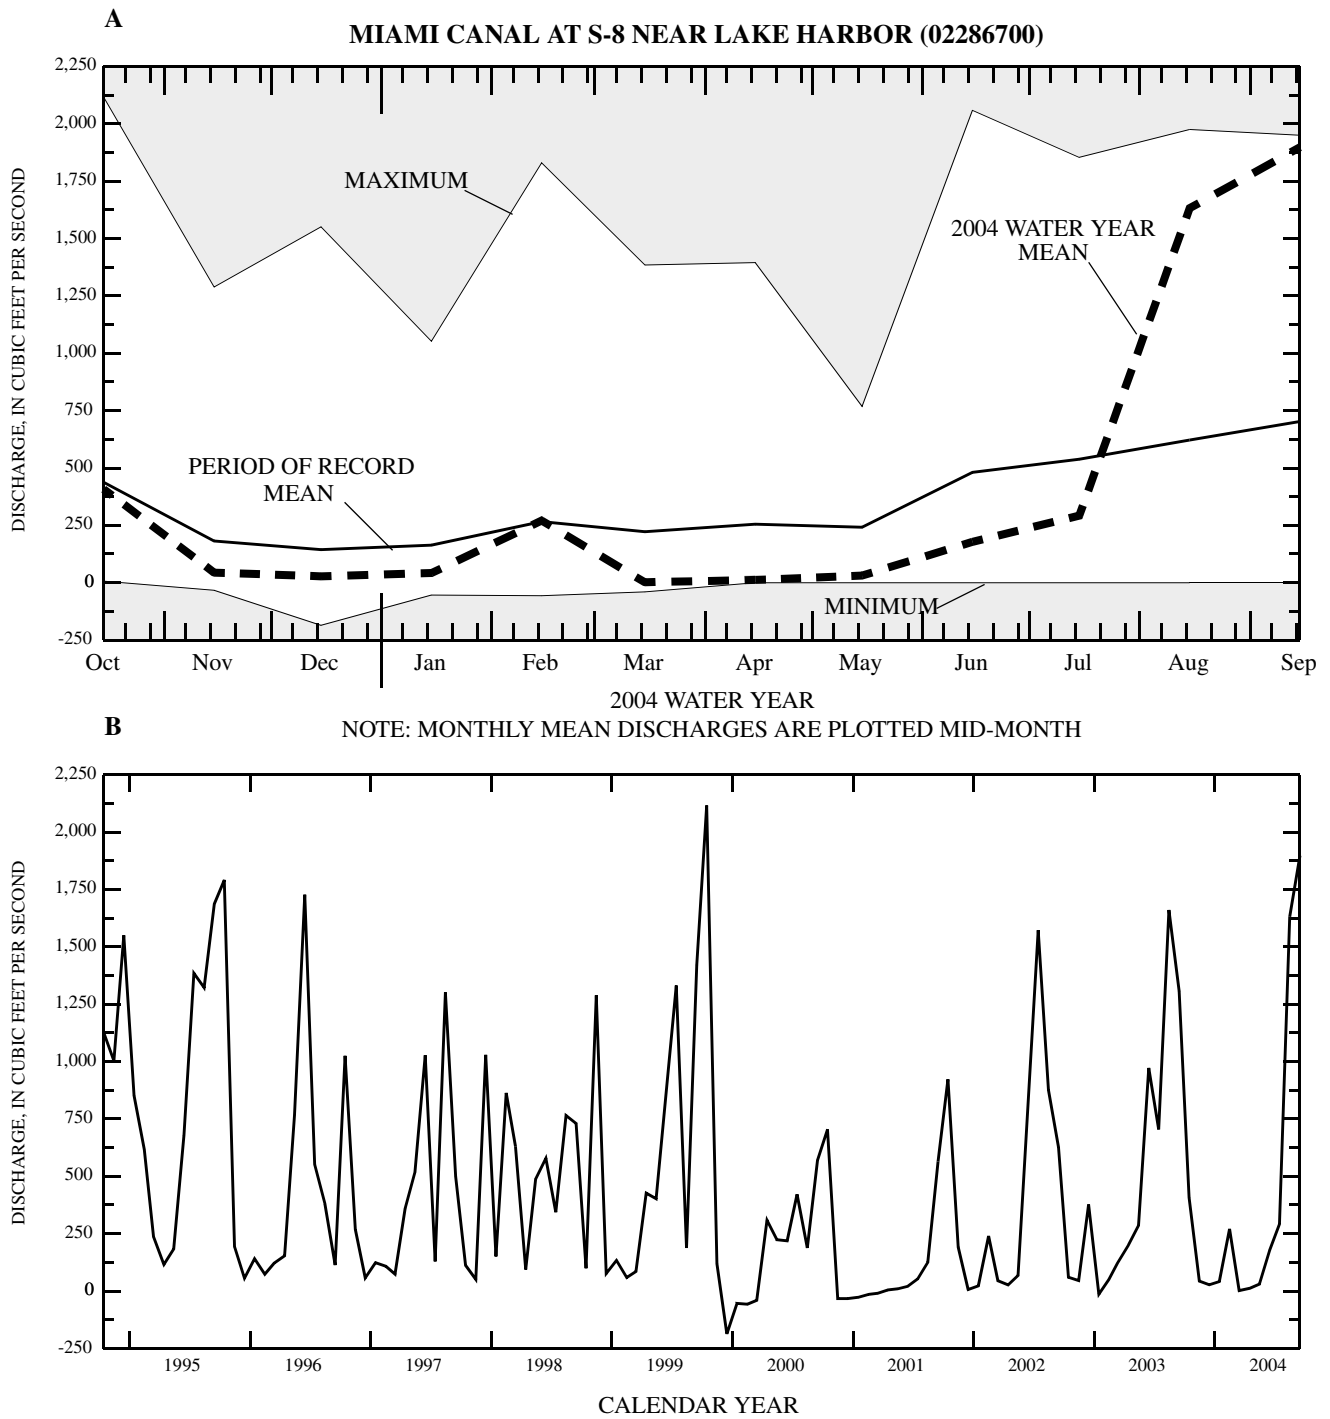


Figure 5. Miami Canal at S-354 and S-3, at Lake Harbor (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)



**Figure 6.** Miami Canal at S-8 near Lake Harbor (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record;(B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

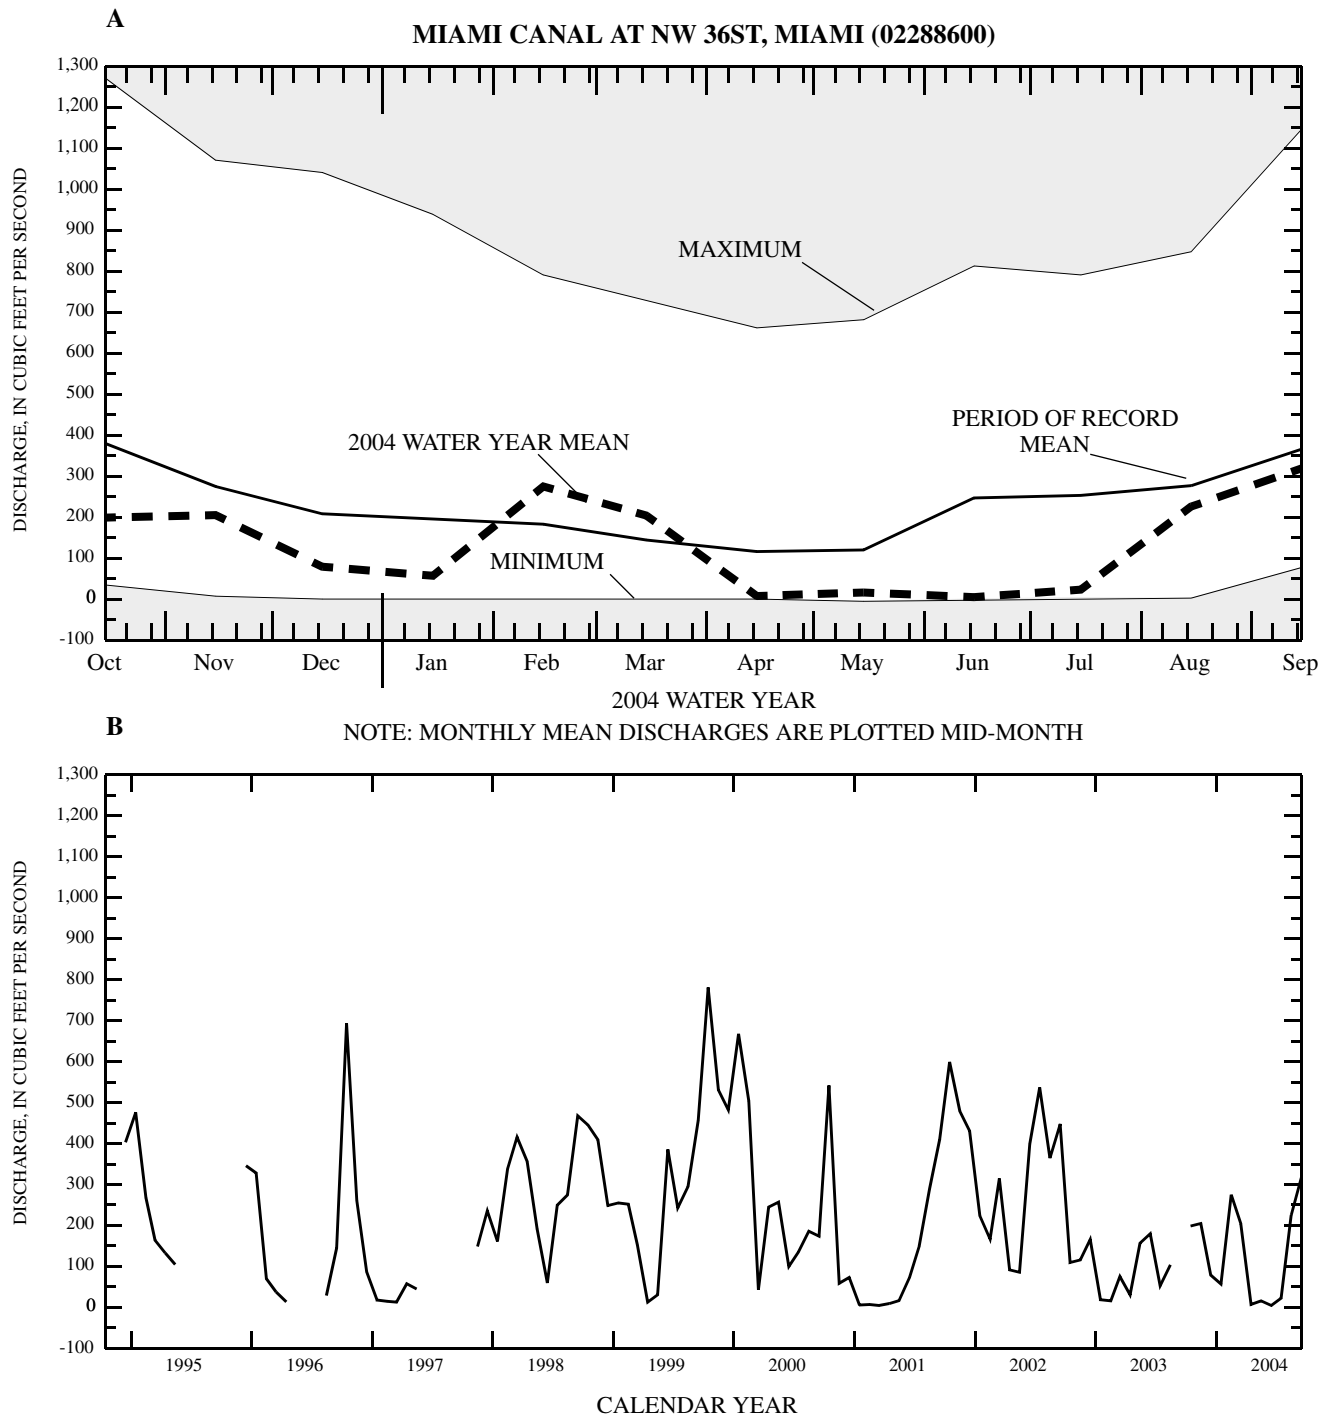


Figure 7. Miami Canal at NW 36 Street, Miami (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

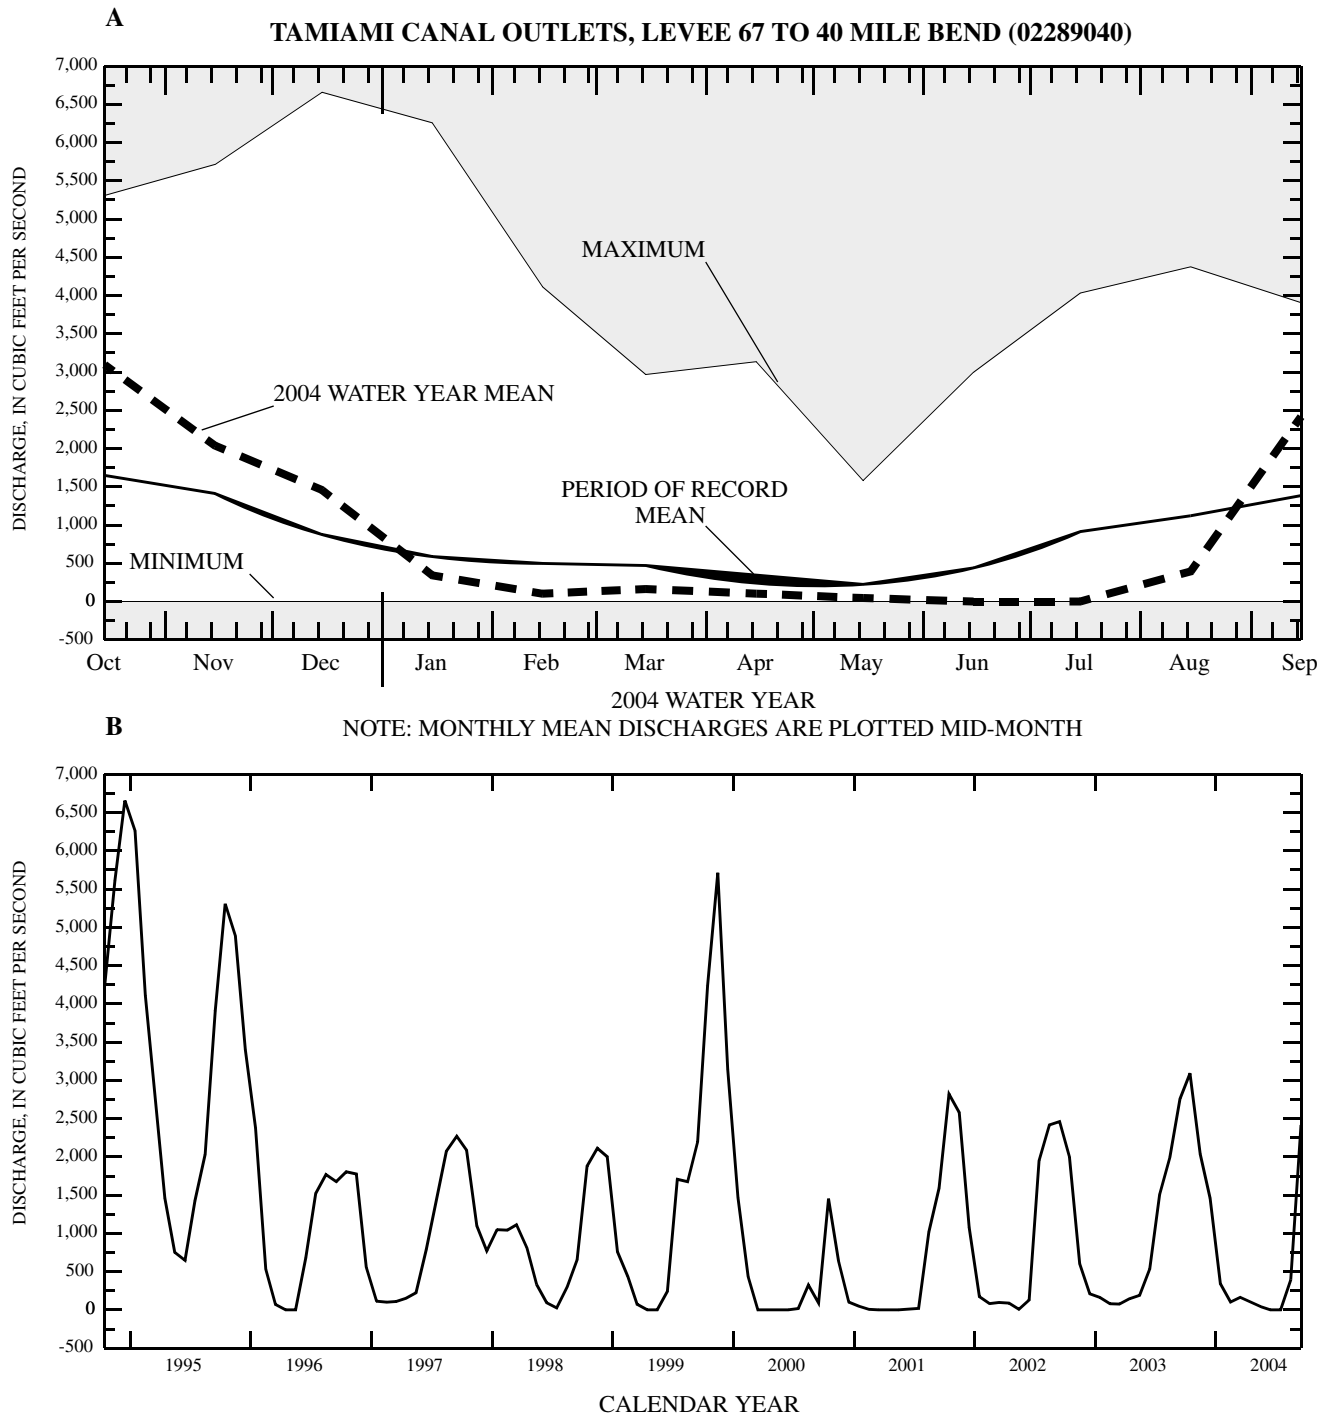
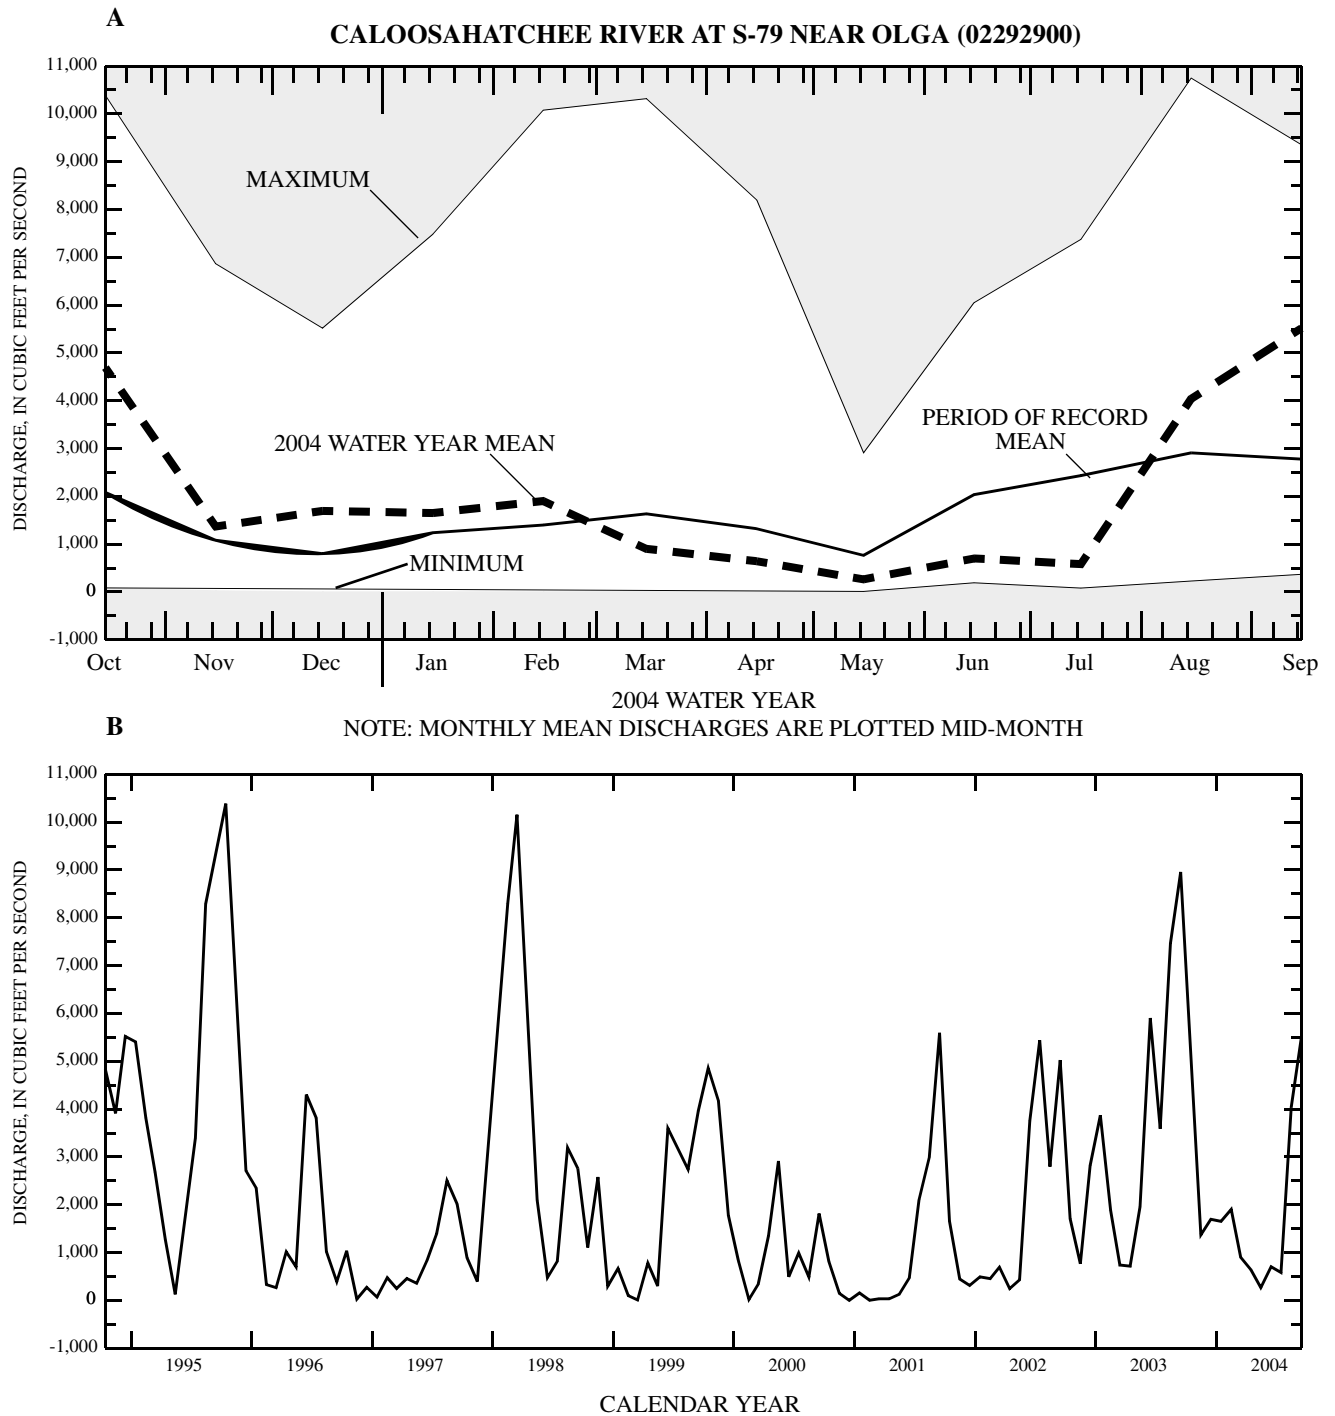


Figure 8. Tamiami Canal Outlets, Levee 67A to 40 Mile Bend (total discharge through S-12A, B, C, D) (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)



**Figure 9.** Caloosahatchee River at S-79 near Olga (A) 2004 monthly mean discharge compared to the maximum and minimum monthly mean discharge for the period of record through the 2003 water year, and monthly mean discharge for the entire period of record; (B) the monthly mean discharge for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

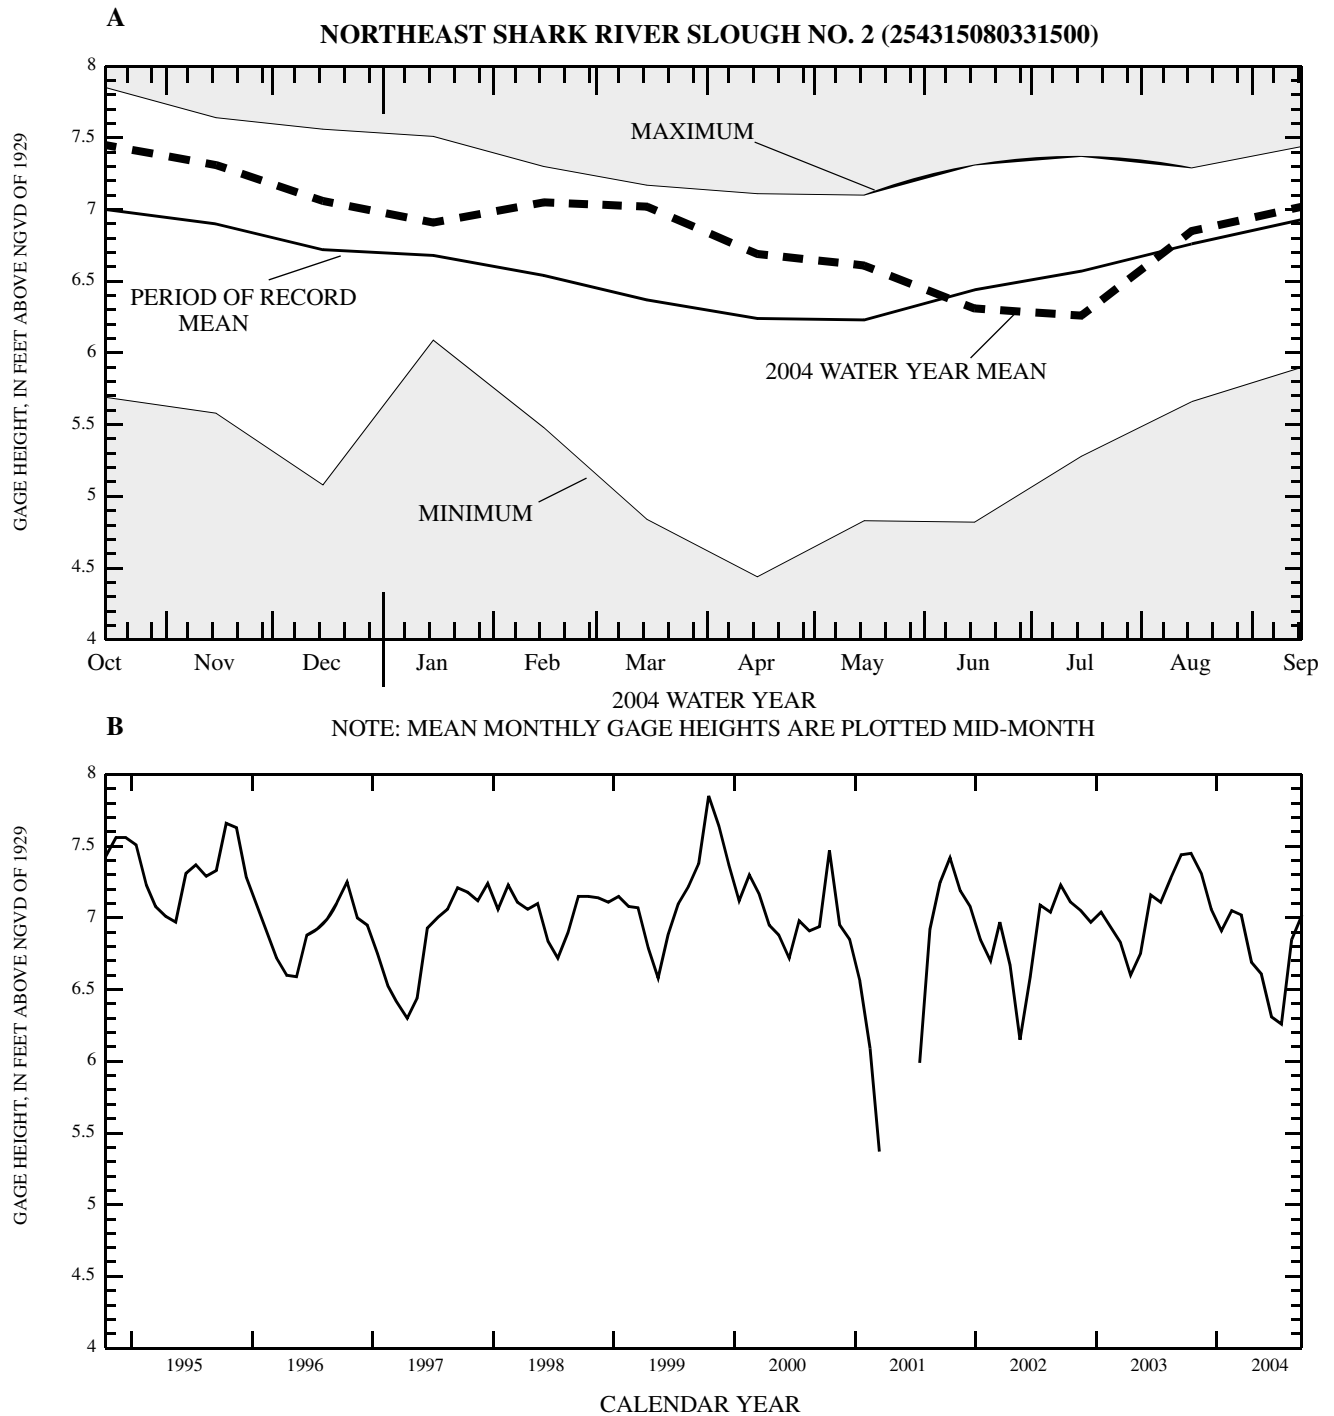


Figure 10. Northeast Shark River Slough No. 2 near Coopertown (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

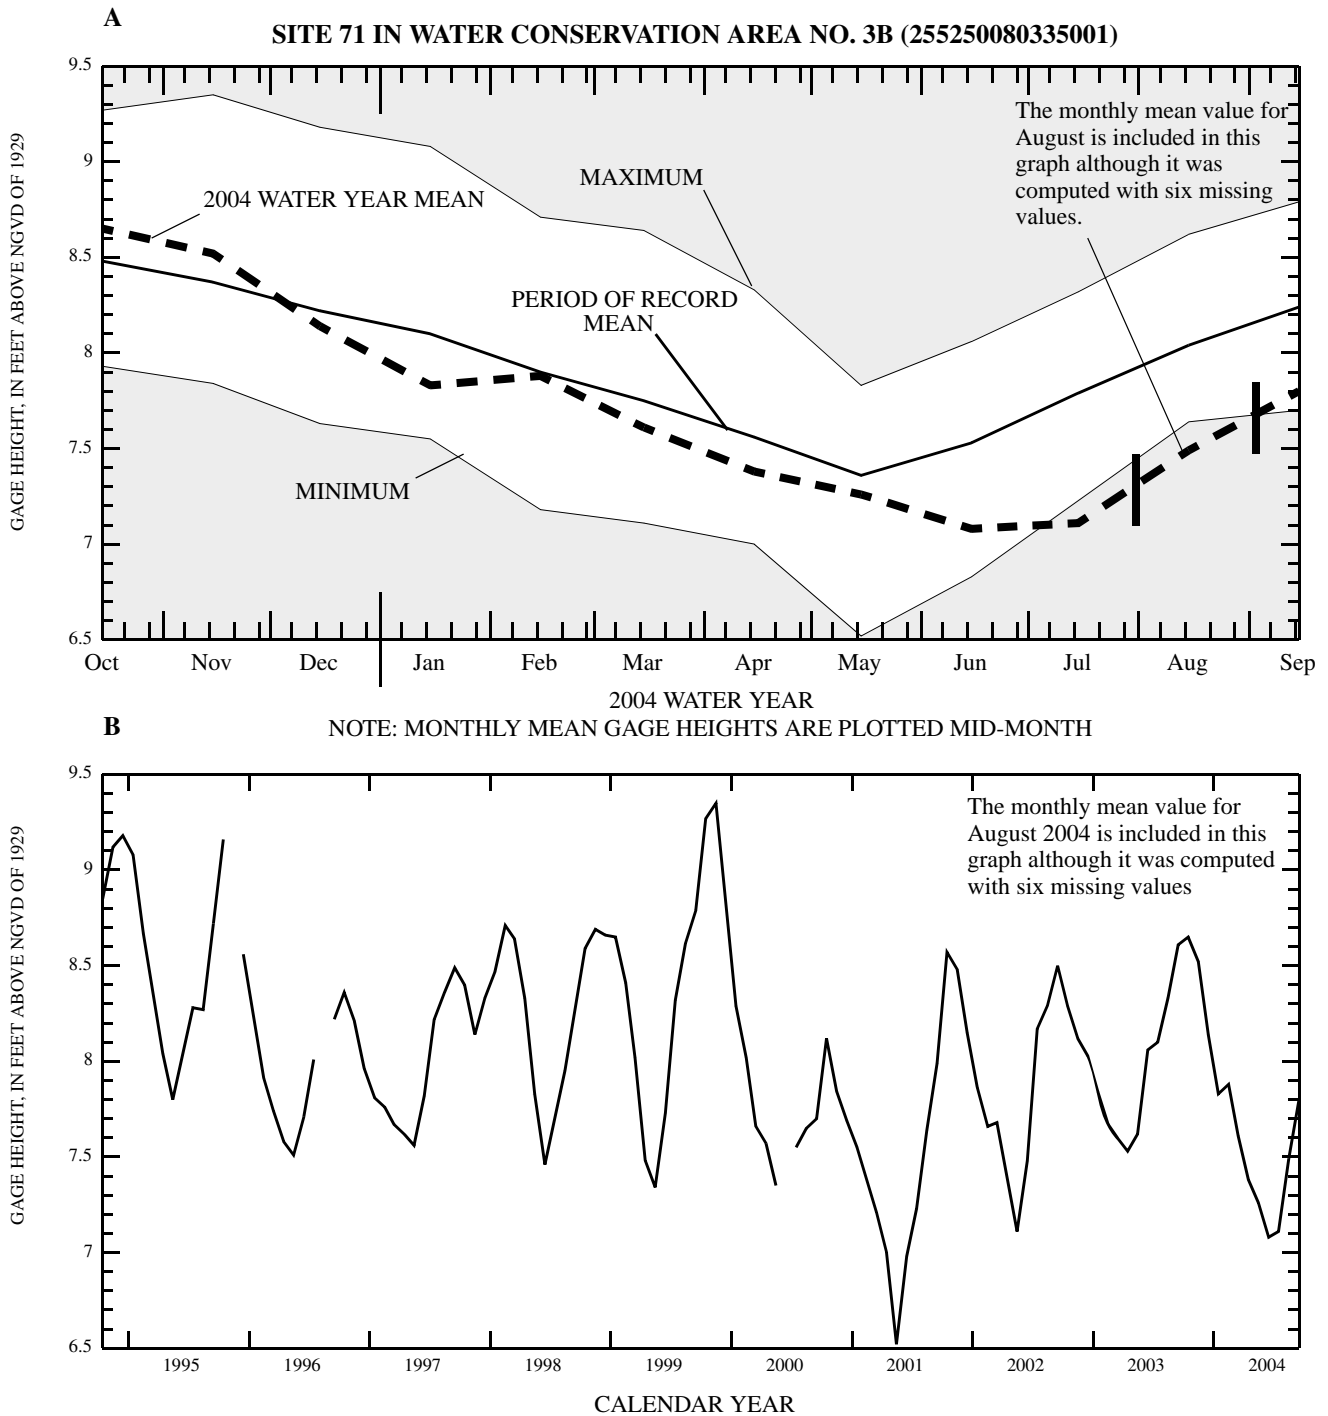


Figure 11. Site 71 in Water Conservation Area No. 3B near Coopertown (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

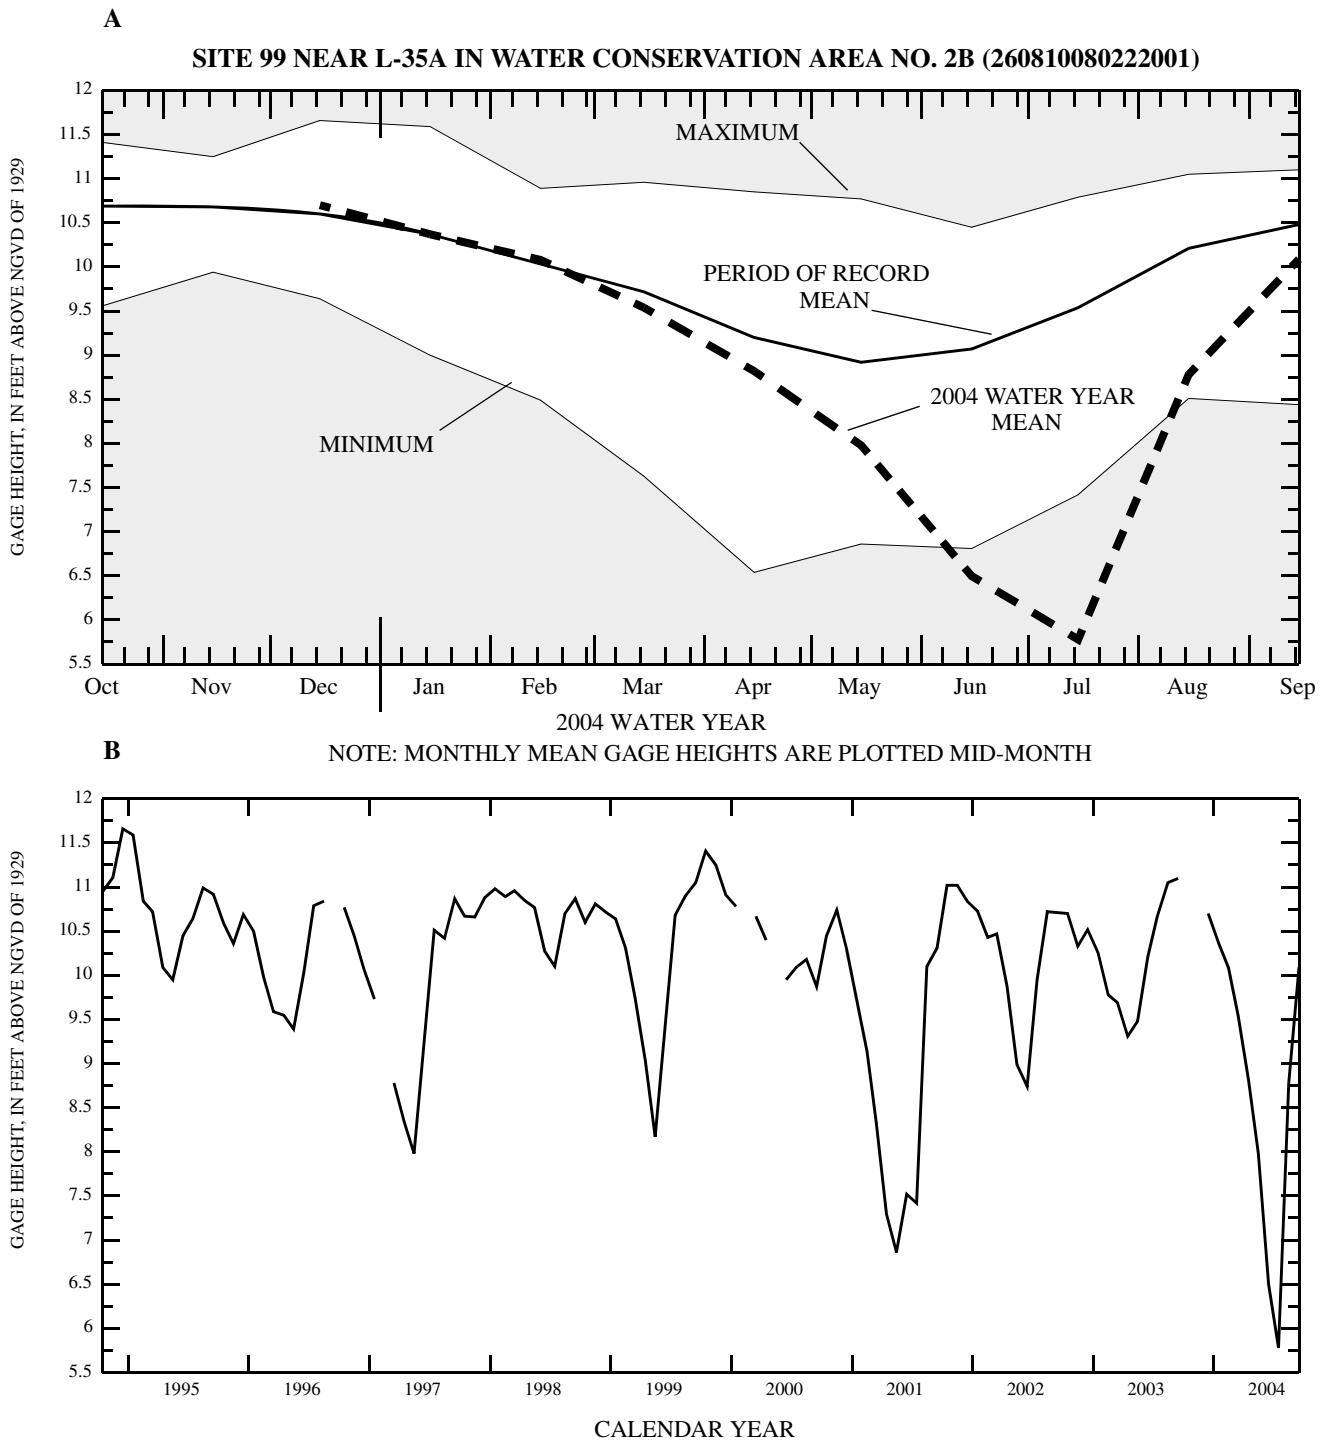


Figure 12. Site 99 near L-35A in Water Conservation Area No. 2B (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

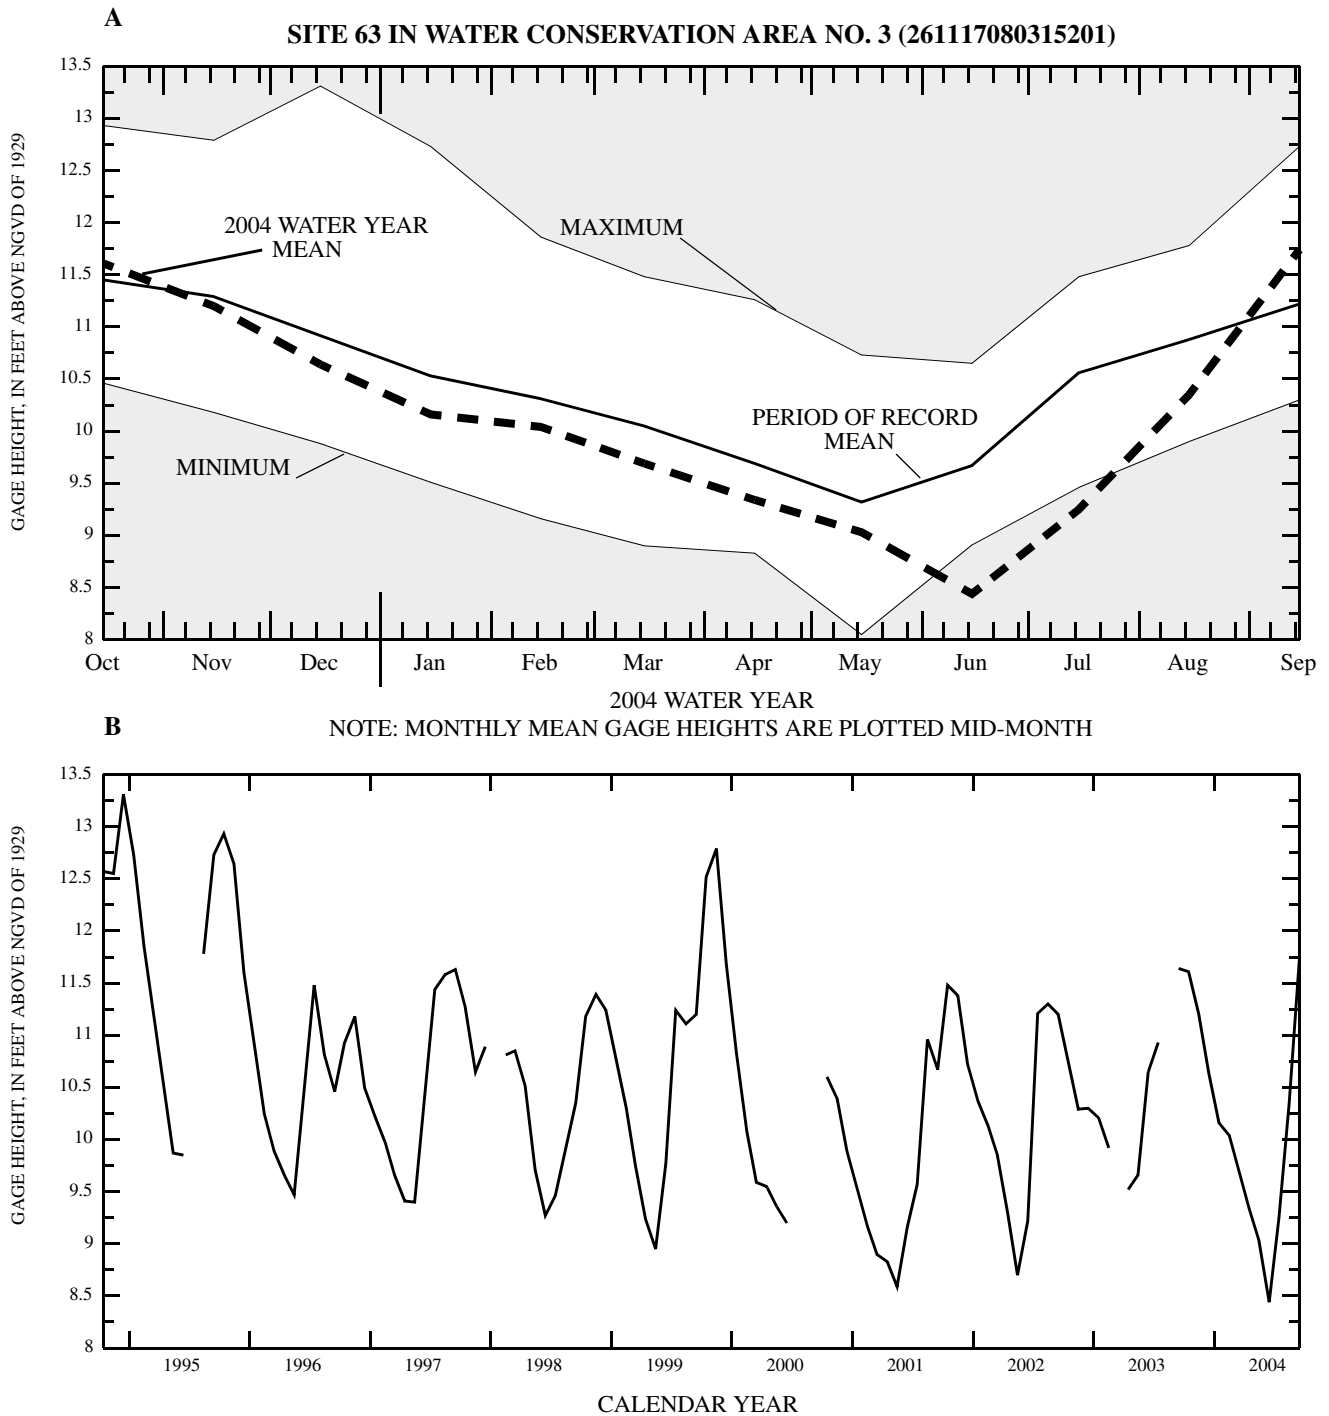


Figure 13. Site 63 in Water Conservation Area No. 3A near Andytown (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

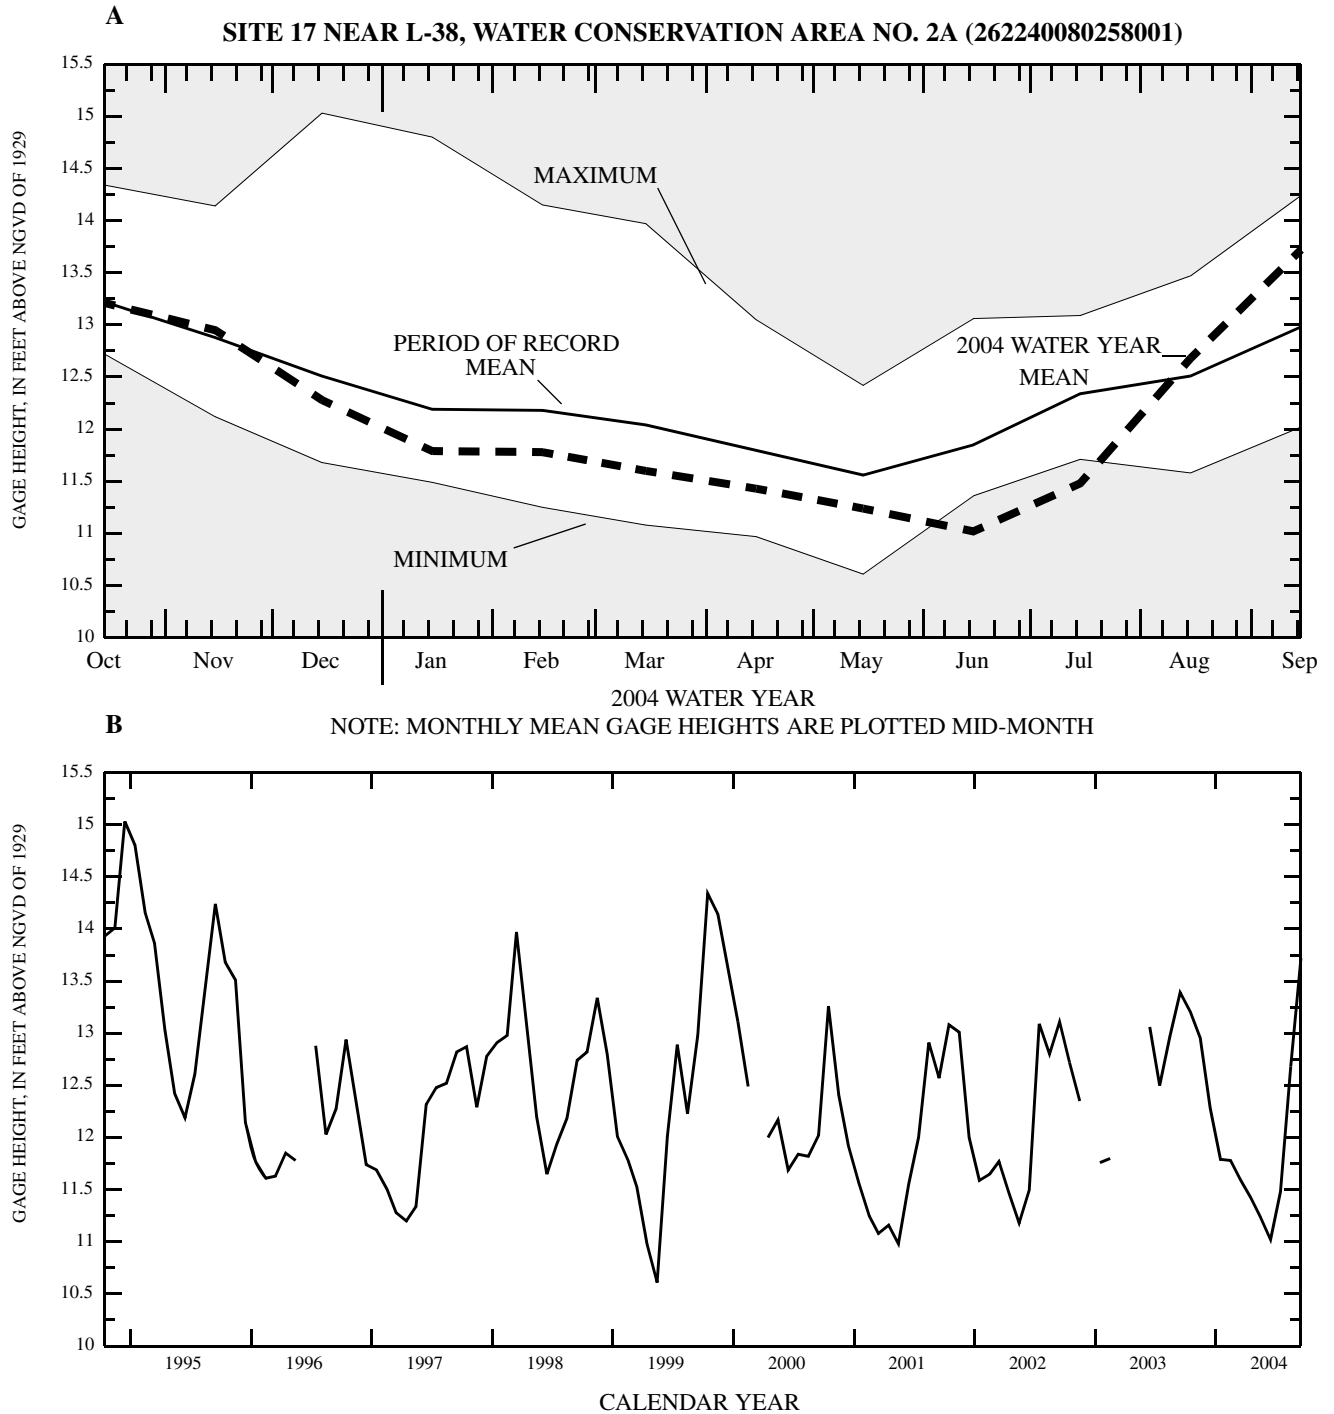


Figure 14. Site 17 near L-38, Water Conservation Area No. 2A (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted.

VOLUME 2A: SOUTH FLORIDA

SUMMARY OF HYDROLOGIC CONDITIONS (continued)

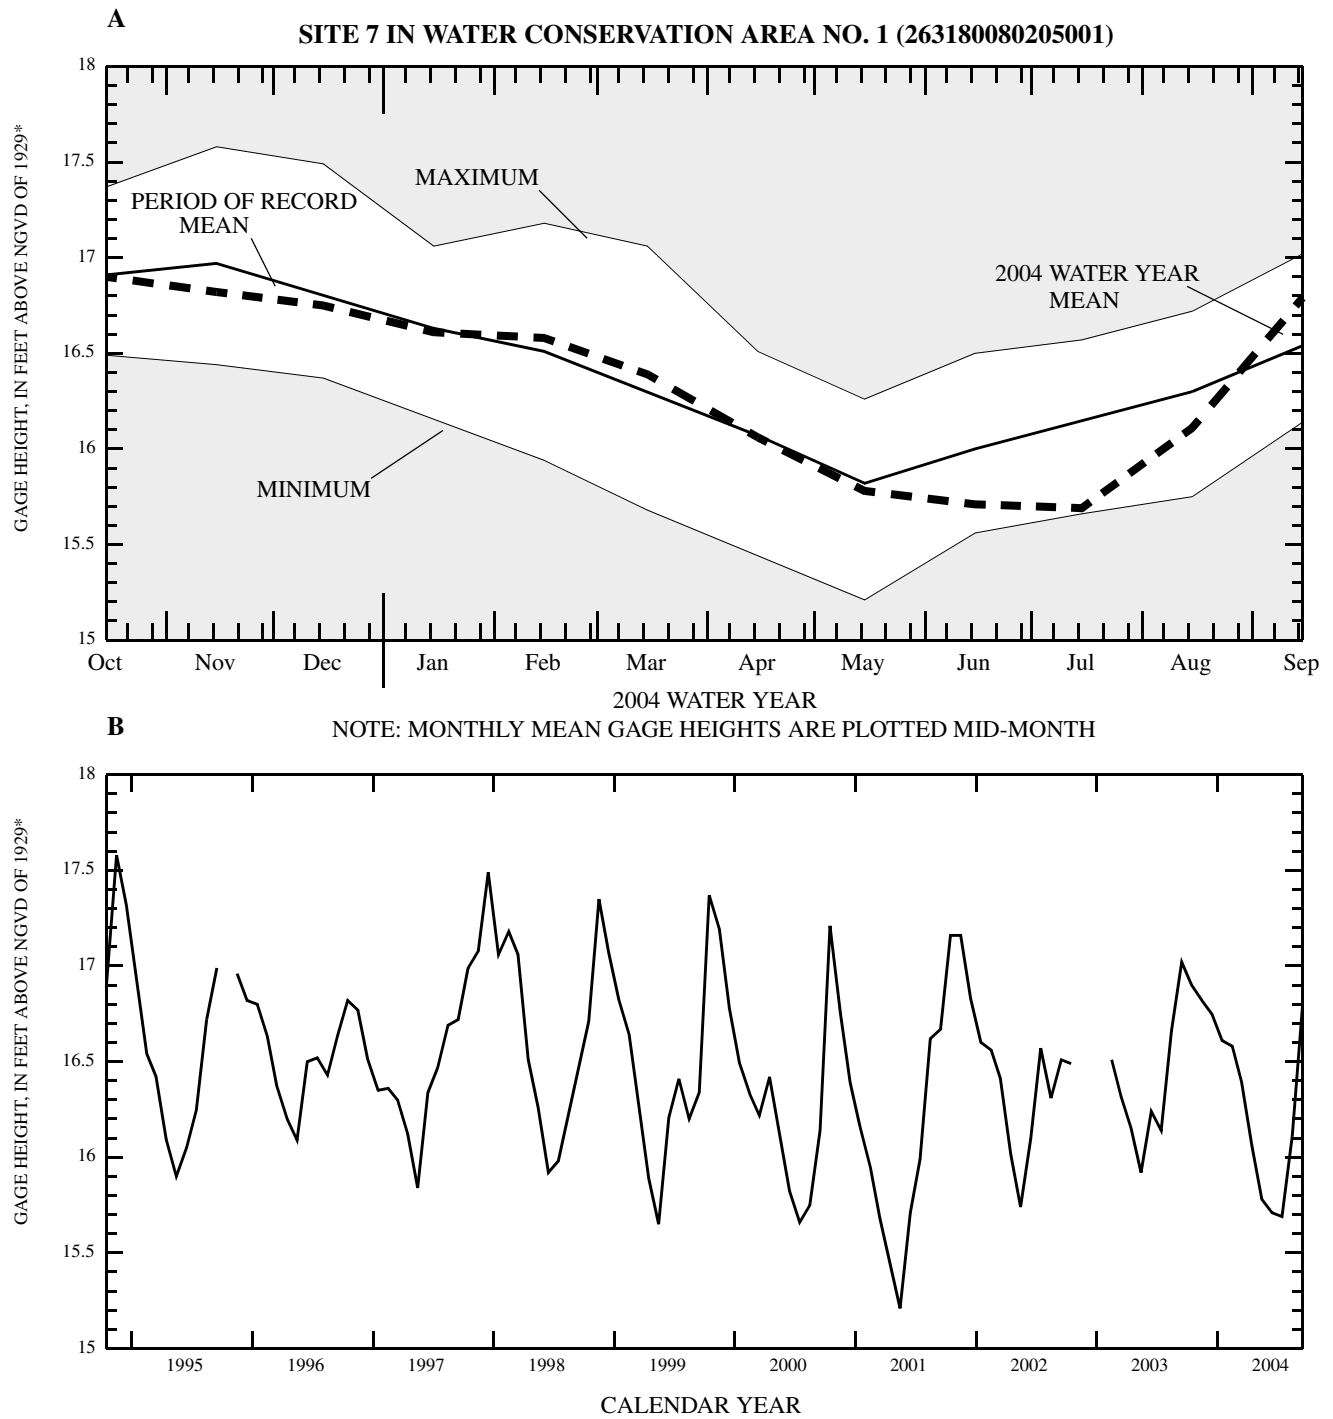


Figure 15. Site 7 in Water Conservation Area No. 1 near Shawano (A) 2004 monthly mean gage height compared to the maximum and minimum monthly mean gage height for the period of record through the 2003 water year, and monthly mean gage height for the entire period of record; (B) the monthly mean gage height for the period of 1995-2004. Any months that have more than 5 days of missing record are not included in these graphs unless otherwise noted. \*The datum of gage is NGVD 1929 converted through VERTCON using the NAVD 88 survey levels from a benchmark provided by the Department of Environmental Protection. The data before the 2004 water year is published at a datum 0.102 ft higher than the present datum. All data used for the development of these graphs were converted to the present datum.

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

## Surface-Water Station Functions

The south Florida surface-water data-collection network has various types of stations to meet the needs of water managers and others. These stations are grouped below according to major functions. These groups contain representative stations from the south Florida surface-water data-collection network.

The following USGS stations monitor the release of water into the St. Lucie Canal from Lake Okeechobee and other inflows

02276870 St. Lucie Canal at Lake Okeechobee (S-308)  
272524080221800 Five Mile Canal Above S-29-1-4 Nr Ft. Pierce, FL

The following USGS stations at the S-5A complex monitor water releases to and from Lake Okeechobee, the water conservation areas, and the coast:

02278450 West Palm Beach Canal above S-5A, near Loxahatchee (pump - west gate)  
02278500 Diversions to Water Conservation Area No. 1 at S-5A and S-5A-S (pump + south gate)  
02278550 Levee 8 Canal at West Palm Beach Canal, nr Loxahatchee (east + west + south gate)  
02278600 West Palm Beach Canal below S-5A-E near Loxahatchee (east gate only)

The following USGS stations monitor the release of water from Lake Okeechobee into the Everglades Agricultural Area:

265501080364900 Levee 8 Canal near Canal Point  
02278000 West Palm Beach Canal at S-352, at Canal Point  
02280500 Hillsboro Canal below S-351, near South Bay  
02283500 North New River Canal below S-2 and S-351, near South Bay  
02286400 Miami Canal at S-354 and S-3, at Lake Harbor  
264514080550700 Industrial Canal at Clewiston

The following USGS stations monitor the release of water from the Everglades Agricultural Area into the water-conservation areas:

02281200 Hillsboro Canal at S-6 near Shawano  
02286700 Miami Canal at S-8 near Lake Harbor  
261533080571600 L-28 Interceptor Canal below S-190 near Clewiston  
261543080495000 L-28 Canal above S-140 near Clewiston  
02289027 Drainage Canal Below G-136 nr Clewiston  
02289031 Levee 3 Canal Below G-155 nr Clewiston  
02289032 Levee 4 Canal Below G-88 nr Clewiston  
262007080321500 S-150 at Terrytown, FL

The following USGS discharge stations monitor discharges within and into the Loxahatchee River

02277600 Loxahatchee River Near Jupiter  
265708080093700 Hobe Ditch Trib To Lox River .5 Mi Above Mouth  
265818080111900 Cypress Creek Canal Below Gulfstream Bridge  
270022080094600 Kitchings Creek nr Hobe Sound

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

## Surface-Water Station Functions (continued)

The following USGS stations monitor continuous water levels in the water-conservation areas:

02278501 Water Conservation Area No. 1 below S-5 Complex, near Loxahatchee  
 263537080211400 North Loxahatchee Conservation Area No. 1 near Boynton Beach  
 262528080202700 South Loxahatchee Conservation Area No. 1 near Boynton Beach  
 263180080205001 Site 7 in Water Conservation Area No. 1 near Shawano  
 263050080145001 Site 8T in Water Conservation Area No. 1 near Boynton Beach  
 263000080120001 Site 8C near L-40 in Water Conservation Area No. 1 nr Boynton Beach  
 262750080175001 Site 9 in Water Conservation Area No. 1 near Boynton Beach  
 262400080250001 Site 15 near L-39 in Water Conservation Area No. 2A near Shawano  
 261710080190001 Site 19 in Water Conservation Area No. 2A near Coral Springs  
 262240080258001 Site 17 near L-38, Water Conservation Area No. 2A nr Coral Springs  
 261117080315201 Site 63 in Water Conservation Area No. 3A near Andytown  
 261023080443001 Site 62 in Water Conservation Area No. 3A near Andytown  
 260810080222001 Site 99 near L-35A in Water Conservation Area No. 2B near Sunrise  
 260037080303401 Site 76 in Water Conservation Area No. 3B near Andytown  
 255828080401301 Site 64 in Water Conservation Area No. 3A near Coopertown  
 255300080370001 Site 69 in Water Conservation Area No. 3B near Coopertown  
 254848080432001 Site 65 in Water Conservation Area No. 3A near Coopertown  
 255250080335001 Site 71 in Water Conservation Area No. 3B near Coopertown

The USGS monitors the following stations to determine the discharge into Big Cypress National Preserve and Everglades National Park:

02288800 Tamiami Canal Outlets, Monroe to Carnestown  
 02288900 Tamiami Canal Outlets, 40 Mile Bend to Monroe  
 02289040 Tamiami Canal Outlets, Levee 67A to 40 Mile Bend (total discharge through S-12A, B, C, D)  
 254543080491101182 Tamiami Canal below S-12A (total discharge through S-12A)  
 02289019 Tamiami Canal below S-12B (total discharge through S-12B)  
 02289041 Tamiami Canal below S-12C (total discharge through S-12C)  
 254543080405401 Tamiami Canal below S-12D (total discharge through S-12D)  
 02289050 Tamiami Canal above S-333, near Miami  
 02289060 Tamiami Canal Outlets, Levee 30 to L-67A  
 022907647 Levee 31 North Extension at 1 mile near West Miami  
 02290765 Levee 31 North Extension at 3 mile near West Miami  
 02290766 Levee 31 North Extension at 4 mile near West Miami  
 02290767 Levee 31 North Extension at 5 mile near West Miami  
 02290768 Levee 31 North Extension at 7 mile near West Miami  
 02290769 Canal 111 above S-18C, near Florida City  
 02291000 Barron River Canal near Everglades

The following stations monitor discharge from the Water Conservation Areas to the structures along the east coast.

02281400 Hillsboro Canal near Margate  
 02286200 Snake Creek Canal at NW 67th Avenue, near Hialeah  
 02287395 Miami Canal East of Levee-30, near Miami  
 02287497 N.W. Wellfield Canal near Dade Broward Levee near Pennsuco, FL  
 02289500 Tamiami Canal near Coral Gables, FL

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

## Surface-Water Station Functions (continued)

The following USGS stations are representative of continuous surface-water elevations in southern Miami-Dade County:

254315080331500 Northeast Shark River Slough No. 2 near Coopertown  
254130080380500 Northeast Shark River Slough No. 1 near Coopertown  
254100080402400 L-67 Extended Canal West, near Florida City  
254100080402200 Northeast Shark River Slough East of L-67 Extension nr Richmond Heights  
253828080391100 Northeast Shark River Slough No. 4, North of Grossman  
253753080393600 Northeast Shark River Slough No. 5, South of Grossman  
251716080342100 Everglades 5A in C-111 Basin near Homestead  
251724080341400 Everglades 5B in C-111 Basin near Homestead  
251906080283400 Everglades 2A in C-111 Basin near Homestead  
251946080254800 Everglades 1 in C-111 Basin near Homestead  
252036080324300 Everglades 4 in C-111 Basin near Homestead  
252043080302400 Everglades 3 in C-111 Basin near Homestead

The following USGS discharge monitoring sites are located along the coast in Miami-Dade, Broward, and Palm Beach Counties:

02279000 West Palm Beach Canal at West Palm Beach (S-155)  
02282700 Middle River Canal at S-36, near Fort Lauderdale  
02283200 Plantation Road Canal at S-33, near Fort Lauderdale  
02286100 South New River Canal at S-13, near Davie  
02288600 Miami Canal at NW 36th Street, Miami (S-26)  
02290710 Black Creek Canal at S-21, near Goulds

The following USGS discharge monitoring sites are located on the southwestern coast of Florida:

02291500 Imperial River near Bonita Springs  
02291524 Spring Creek Headwater near Bonita Springs  
02291580 North Branch Estero River at Estero  
02291597 South Branch Estero River at Estero  
02291673 Tenmile Canal at Control Near Estero  
02291669 Sixmile Cypress Creek North Ft. Meyers  
02292900 Caloosahatchee River at S-79 near Olga  
02293214 Meade Canal at Cape Coral  
02293230 Whiskey Creek at Ft. Meyers, FL  
02293240 Aries Canal at Cape Coral  
02293241 San Carlos Canal at Cape Coral  
02293243 Courtney Canal at Cape Coral  
02293345 Shadroe Canal at Cape Coral  
02293346 Horseshoe Canal at Cape Coral  
02293347 Hermosa Canal at Cape Coral  
264139082022100 Gator Slough at SR 765 near Ft. Myers  
264437081550100 Gator Slough at U.S. 41 near Ft. Myers

## VOLUME 2A: SOUTH FLORIDA

## SUMMARY OF HYDROLOGIC CONDITIONS (continued)

## Surface-Water Station Functions (continued)

The following USGS stations monitor continuous water level and water quality parameters in the Loxahatchee and St. Lucie Rivers

02277100 St. Lucie River at Speedy Point, Stuart, FL  
02277110 St. Lucie River at A1A (Steele Pt), Stuart, FL  
265645080055900 Loxahatchee River at Pompano Dr. nr Jupiter, FL  
265651080045500 Loxahatchee River at Coast Guard Dock nr Jupiter, FL  
265906080093500 Loxahatchee River at Mile 9.1 nr Jupiter  
265912080082900 Loxahatchee River at Boy Scout Camp near Hobe Sound, FL  
265929090091800 Loxahatchee River Outlet at Kitchings Creek  
272229080203400 St. Lucie River at Midway Rd. nr Pt. St. Lucie, FL  
271929080195900 St. Lucie River at Prima Vista Rd., Pt. St. Lucie

The following USGS stations monitor continuous canal water level only:

255026080231300 Snapper Creek Canal Extension at MW 74th Street, near Hialeah, FL  
261150080270001 North New River Canl at S-11-A near Andytown  
261200080275001 North New River Canl at S-11-B near Andytown  
261300080280001 North New River Canl at S-11-C near Andytown  
261952080074500 E-3 Canal, SW 18th Street, Boca Raton, FL  
262100080190001 Hillsboro Canal at S-10-A near Deerfield Beach, FL  
262200080210001 Hillsboro Canal at S-10-C near Deerfield Beach, FL  
262300080220001 Hillsboro Canal at S-10-D near Deerfield Beach, FL  
262337080074800 E-3 Canal at NW 51st Street, Boca Raton, FL  
262358080055700 E-4 Canal at Clint-Moore Road, Boca Raton, FL

## VOLUME 2A: SOUTH FLORIDA

SPECIAL NETWORKS AND PROGRAMS

**Hydrologic Benchmark Network** is a network of 61 sites in small drainage basins in 39 States that was established in 1963 to provide consistent streamflow data representative of undeveloped watersheds nationwide, and from which data could be analyzed on a continuing basis for use in comparison and contrast with conditions observed in basins more obviously affected by human activities. At selected sites, water-quality information is being gathered on major ions and nutrients, primarily to assess the effects of acid deposition on stream chemistry. Additional information on the Hydrologic Benchmark Program may be accessed from <http://water.usgs.gov/hbn/>.

**National Stream-Quality Accounting Network (NASQAN)** is a network of sites used to monitor the water quality of large rivers within the Nation's largest river basins. From 1995 through 1999, a network of approximately 40 stations was operated in the Mississippi, Columbia, Colorado, and Rio Grande River basins. For the period 2000 through 2004, sampling was reduced to a few index stations on the Colorado and Columbia Rivers so that a network of 5 stations could be implemented on the Yukon River. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment (NAWQA) Program; (3) to characterize processes unique to large-river systems such as storage and re-mobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals. Additional information about the NASQAN Program may be accessed from <http://water.usgs.gov/nasqan/>.

**The National Atmospheric Deposition Program/National Trends Network (NADP/NTN)** is a network of monitoring sites that provides continuous measurement and assessment of the chemical constituents in precipitation throughout the United States. As the lead Federal agency, the USGS works together with over 100 organizations to provide a long-term, spatial and temporal record of atmospheric deposition generated from this network of 250 precipitation-chemistry monitoring sites. The USGS supports 74 of these 250 sites. This long-term, nationally consistent monitoring program, coupled with ecosystem research, provides critical information toward a national scorecard to evaluate the effectiveness of ongoing and future regulations intended to reduce atmospheric emissions and subsequent impacts to the Nation's land and water resources. Reports and other information on the NADP/NTN Program, as well as data from the individual sites, may be accessed from <http://bqs.usgs.gov/acidrain/>.

**The USGS National Water-Quality Assessment (NAWQA) Program** is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; to provide an improved understanding of the primary natural and human factors affecting these observed conditions and trends; and to provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Assessment activities are being conducted in 42 study units (major watersheds and aquifer systems) that represent a wide range of environmental settings nationwide and that account for a large percentage of the Nation's water use. A wide array of chemical constituents is measured in ground water, surface water, streambed sediments, and fish tissues. The coordinated application of comparative hydrologic studies at a wide range of spatial and temporal scales will provide information for water-resources managers to use in making decisions and a foundation for aggregation and comparison of findings to address water-quality issues of regional and national interest.

Communication and coordination between USGS personnel and other local, State, and Federal interests are critical components of the NAWQA Program. Each study unit has a local liaison committee consisting of representatives from key Federal, State, and local water-resources agencies, Indian nations, and universities in the study unit. Liaison committees typically meet semiannually to discuss their information needs, monitoring plans and progress, desired information products, and opportunities to collaborate efforts among the agencies. Additional information about the NAWQA Program may be accessed from <http://water.usgs.gov/nawqa/>.

**The USGS National Streamflow Information Program (NSIP)** is a long-term program with goals to provide framework streamflow data across the Nation. Included in the program are creation of a permanent Federally funded streamflow network, research on the nature of streamflow, regional assessments of streamflow data and databases, and upgrades in the streamflow information delivery systems. Additional information about NSIP may be accessed from <http://water.usgs.gov/nsip/>.

## VOLUME 2A: SOUTH FLORIDA

EXPLANATION OF THE RECORDS

A calendar of the water year is provided on the inside of the front cover. The records contain streamflow data, stage and content data for lakes and reservoirs, water-quality data for surface and ground water, and ground-water level data. The following sections of the introductory text are presented to provide users with a more detailed explanation of how the hydrologic data published in this report were collected, analyzed, computed, and arranged for presentation.

**Station Identification Numbers**

Each data station, whether streamsite or well, in this report is assigned a unique identification number. The number usually is assigned when a station is first established and is retained for that station indefinitely. The systems used by the U.S. Geological Survey to assign identification numbers for surface-water stations and for ground-water well sites differ, but both are based on geographic location. The "downstream order" system is used for regular surface-water stations and the "latitude-longitude" system is used for wells and for surface-water stations where only miscellaneous observations are made.

**Downstream Order and Station Number**

Since October 1, 1950, hydrologic-station records in USGS reports have been listed in order of downstream direction along the main stream. All stations on a tributary entering upstream from a main-stream station are listed before that station. A station on a tributary entering between two main-stream stations is listed between those stations. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. The rank of any tributary on which a station is located with respect to the stream to which it is immediately tributary is indicated by an indentation in that list of stations in the front of this report. Each indentation represents one rank. This downstream order and system of indentation indicates which stations are on tributaries between any two stations and the rank of the tributary on which each station is located.

As an added means of identification, each hydrologic station and partial-record station has been assigned a station number. These station numbers are in the same downstream order used in this report. In assigning a station number, no distinction is made between partial-record stations and other stations; therefore, the station number for a partial-record station indicates downstream-order position in a list composed of both types of stations. Gaps are consecutive. The complete eight-digit (or 10-digit) number for each station, such as 02228500, which appears just to the left of the station name, includes the 2-digit part number "02" plus the 6- to 12-digit downstream-order number "228500." The part number designates the major river basin; for example, part "02" is the South Atlantic Slope and eastern Gulf of Mexico basins. In areas of high station density, an additional two digits may be added to the station identification number to yield a 10-digit number. The stations are numbered in downstream order as described above between stations of consecutive 8-digit numbers.

**Numbering System for Wells and Miscellaneous Sites**

The USGS well and miscellaneous site-numbering system is based on the grid system of latitude and longitude. The system provides the geographic location of the well or miscellaneous site and a unique number for each site. The number consists of 15 digits. The first 6 digits denote the degrees, minutes, and seconds of latitude, and the next 7 digits denote degrees, minutes, and seconds of longitude; the last 2 digits are a sequential number for wells within a 1-second grid. In the event that the latitude-longitude coordinates for a well and miscellaneous site are the same, a sequential number such as "01," "02," and so forth, would be assigned as one would for wells (see fig. 11). The 8-digit, downstream order station numbers are not assigned to wells and miscellaneous sites where only random water-quality samples or discharge measurements are taken.

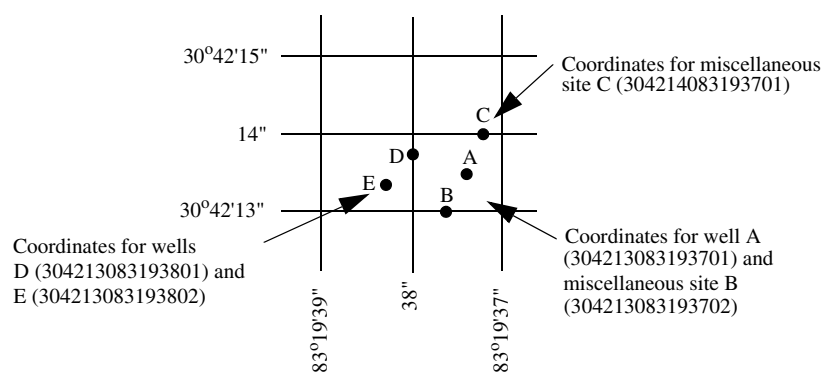


Figure 16. System for numbering wells and miscellaneous sites. (latitude and longitude)

## VOLUME 2A: SOUTH FLORIDA

## EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS

Records of stage and water discharge may be complete or partial. Complete records of discharge are those obtained using a stage-recording device through which either instantaneous or mean daily discharges may be computed for any time, or any period of time, during the period of record. Complete records of lake elevation, similarly, are those for which stage may be computed or estimated with reasonable accuracy for any time, or period of time. They may be obtained using a stage-recording device or daily or weekly observations, but need not be. Because daily mean discharges and lake elevations commonly are published for such stations, they are referred to as "daily stations."

By contrast, partial records are obtained through discrete measurements without using a continuous stage-recording device and pertain only to a few flow characteristics, or perhaps only one. The nature of the partial record is indicated by table titles such as "Crest-stage partial records," or "Low-flow partial records." Records of miscellaneous discharge measurements or of measurements from special studies, such as low-flow seepage studies, may be considered as partial records, but they are presented separately in this report.

Location of all complete-record and partial-record stations for which data are given in this report are shown in figures preceding each sub-basin.

**Data Collection and Computation**

The base data collected at gaging stations consist of records of stage and measurements of discharge of streams or canals, and stage, surface area, and volume of lakes or reservoirs. In addition, observations of factors affecting the stage-discharge relation or the stage-capacity relation, weather records, and other information are used to supplement base data in determining the daily flow or volume of water in storage. Records of stage are obtained from a water-stage recorder that is either downloaded electronically in the field to a laptop computer or similar device or is transmitted using telemetry such as GOES satellite, land-line or cellular-phone modems, or by radio transmission. Measurements of discharge are made with a current meter or acoustic Doppler current profiler, using the general methods adopted by the USGS. These methods are described in standard textbooks, USGS Water-Supply Paper 2175, and the Techniques of Water-Resources Investigations of the United States Geological Survey (TWRIs), Book 3, Chapters A1 through A19 and Book 8, Chapters A2 and B2, which may be accessed from <http://water.usgs.gov/pubs/twri/>. The methods are consistent with the American Society for Testing and Materials (ASTM) standards and generally follow the standards of the International Organization for Standards (ISO).

For stream-gaging stations, discharge-rating tables for any stage are prepared from stage-discharge curves. If extensions to the rating curves are necessary to express discharge greater than measured, the extensions are made on the basis of indirect measurements of peak discharge (such as slope-area or contracted-opening measurements, or computation of flow over dams and weirs), step-backwater techniques, velocity-area studies, and logarithmic plotting. The daily mean discharge is computed from gage heights and rating tables, then the monthly and yearly mean discharges are computed from the daily values. If the stage-discharge relation is subject to change because of frequent or continual change in the physical features of the stream channel, the daily mean discharge is computed by the shifting-control method in which correction factors based on individual discharge measurements and notes by engineers and observers are used when applying the gage heights to the rating tables. If the stage-discharge relation for a station is temporarily changed by the presence of aquatic growth or debris on the controlling section, the daily mean discharge is computed by the shifting-control method.

The stage-discharge relation at some stream-gaging stations is affected by backwater from reservoirs, tributary streams, or other sources. Such an occurrence necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in computing discharge. The slope or fall is obtained by means of an auxiliary gage at some distance from the base gage.

An index velocity is measured using ultrasonic or acoustic instruments at some stream-gaging stations and this index velocity is used to calculate an average velocity for the flow in the stream. This average velocity along with a stage-area relation is then used to calculate average discharge.

At some stations, stage-discharge relation is affected by changing stage. At these stations, the rate of change in stage is used as a factor in computing discharge.

At some stream-gaging stations in the northern United States, the stage-discharge relation is affected by ice in the winter; therefore, computation of the discharge in the usual manner is impossible. Discharge for periods of ice effect is computed on the basis of gage-height record and occasional winter-discharge measurements. Consideration is given to the available information on temperature and precipitation, notes by gage observers and hydrologists, and comparable records of discharge from other stations in the same or nearby basins.

For a lake or reservoir station, capacity tables giving the volume or contents for any stage are prepared from stage-area relation curves defined by surveys. The application of the stage to the capacity table gives the contents, from which the daily, monthly, or yearly changes are computed.

If the stage-capacity curve is subject to changes because of deposition of sediment in the reservoir, periodic resurveys of the reservoir are necessary to define new stage-capacity curves. During the period between reservoir surveys, the computed contents may be increasingly in error due to the gradual accumulation of sediment.

For some stream-gaging stations, periods of time occur when no gage-height record is obtained or the recorded gage height is faulty and cannot be used to compute daily discharge or contents. Such a situation can happen when the recorder stops or otherwise fails to operate properly, the intakes are plugged, the float is frozen in the well, or for various other reasons. For such periods, the daily discharges are estimated on the basis of recorded range in stage, prior and subsequent records, discharge measurements, weather records, and comparison with records from other stations in the same or nearby basins. Likewise, lake or reservoir volumes may be estimated on the basis of operator's log, prior and subsequent records, inflow-outflow studies, and other information.

**Data Presentation**

The records published for each continuous-record surface-water discharge station (stream-gaging station) consist of five parts: (1) the station manuscript or description; (2) the data table of daily mean values of discharge for the current water year with summary data; (3) a tabular statistical summary of monthly mean flow data for a designated period, by water year; (4) a summary statistics table that includes statistical data of annual, daily, and instantaneous flows as well as data pertaining to annual runoff, 7-day low-flow minimums, and flow duration; and (5) a hydrograph of discharge.

## VOLUME 2A: SOUTH FLORIDA

**Station Manuscript**

The manuscript provides, under various headings, descriptive information, such as station location; period of record; historical extremes outside the period of record; record accuracy; and other remarks pertinent to station operation and regulation. The following information, as appropriate, is provided with each continuous record of discharge or lake content. Comments follow that clarify information presented under the various headings of the station description.

**LOCATION.**—Location information is obtained from the most accurate maps available. The location of the gaging station with respect to the cultural and physical features in the vicinity and with respect to the reference place mentioned in the station name is given. River mileages, given for only a few stations, were determined by methods given in "River Mileage Measurement," Bulletin 14, Revision of October 1968, prepared by the Water Resources Council or were provided by the U.S. Army Corps of Engineers.

**DRAINAGE AREA.**—Drainage areas are measured using the most accurate maps available. Because the type of maps available varies from one drainage basin to another, the accuracy of drainage areas likewise varies. Drainage areas are updated as better maps become available.

**PERIOD OF RECORD.**—This term indicates the time period for which records have been published for the station or for an equivalent station. An equivalent station is one that was in operation at a time that the present station was not and whose location was such that its flow reasonably can be considered equivalent to flow at the present station.

**REVISED RECORDS.**—If a critical error in published records is discovered, a revision is included in the first report published following discovery of the error.

**GAGE.**—The type of gage in current use, the datum of the current gage referred to a standard datum, and a condensed history of the types, locations, and datums of previous gages are given under this heading.

**REMARKS.**—All periods of estimated daily discharge either will be identified by date in this paragraph of the station description for water-discharge stations or flagged in the daily discharge table. (See section titled Identifying Estimated Daily Discharge.) Information is presented relative to the accuracy of the records, to special methods of computation, and to conditions that affect natural flow at the station. In addition, information may be presented pertaining to average discharge data for the period of record; to extremes data for the period of record and the current year; and, possibly, to other pertinent items. For reservoir stations, information is given on the dam forming the reservoir, the capacity, the outlet works and spillway, and the purpose and use of the reservoir.

**COOPERATION.**—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

**EXTREMES OUTSIDE PERIOD OF RECORD.**—Information here documents major floods or unusually low flows that occurred outside the stated period of record. The information may or may not have been obtained by the USGS.

**REVISIONS.**—Records are revised if errors in published records are discovered. Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based National data system, NWISWeb (<http://water.usgs.gov/nwis/nwis>). Users are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent data updates. Updates to NWISWeb are made on an annual basis.

Although rare, occasionally the records of a discontinued gaging station may need revision. Because no current or, possibly, future station manuscript would be published for these stations to document the revision in a REVISED RECORDS entry, users of data for these stations who obtained the record from previously published data reports may wish to contact the District Office (address given on the back of the title page of this report) to determine if the published records were revised after the station was discontinued. If, however, the data for a discontinued station were obtained by computer retrieval, the data would be current. Any published revision of data is always accompanied by revision of the corresponding data in computer storage.

Manuscript information for lake or reservoir stations differs from that for stream stations in the nature of the REMARKS and in the inclusion of a stage-capacity table when daily volumes are given.

**Peak Discharge Greater than Base Discharge**

Tables of peak discharge above base discharge are included for some stations where secondary instantaneous peak discharge data are used in flood-frequency studies of highway and bridge design, flood-control structures, and other flood-related projects. The base discharge value is selected so an average of three peaks a year will be reported. This base discharge value has a recurrence interval of approximately 1.1 years or a 91-percent chance of exceedence in any 1 year.

**Data Table of Daily Mean Values**

The daily table of discharge records for stream-gaging stations gives mean discharge for each day of the water year. In the monthly summary for the table, the line headed TOTAL gives the sum of the daily figures for each month; the line headed MEAN gives the arithmetic average flow in cubic feet per second for the month; and the lines headed MAX and MIN give the maximum and minimum daily mean discharges, respectively, for each month. Discharge for the month is expressed in cubic feet per second per square mile (line headed CFSM); or in inches (line headed IN); or in acre-feet (line headed AC-FT). Values for cubic feet per second per square mile and runoff in inches or in acre-feet may be omitted if extensive regulation or diversion is in effect or if the drainage area includes large noncontributing areas. At some stations, monthly and (or) yearly observed discharges are adjusted for reservoir storage or diversion, or diversion data or reservoir volumes are given. These values are identified by a symbol and a corresponding footnote.

**Statistics of Monthly Mean Data**

A tabular summary of the mean (line headed MEAN), maximum (MAX), and minimum (MIN) of monthly mean flows for each month for a designated period is provided below the mean values table. The water years of the first occurrence of the maximum and minimum monthly flows are provided immediately below those values. The designated period will be expressed as FOR WATER YEARS \_\_-\_\_, BY WATER YEAR (WY), and will list the first and last water years of the range of years selected from the PERIOD OF RECORD paragraph in the station manuscript. The

## VOLUME 2A: SOUTH FLORIDA

designated period will consist of all of the station record within the specified water years, including complete months of record for partial water years, and may coincide with the period of record for the station. The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated in the manuscript.

**Summary Statistics**

A table titled SUMMARY STATISTICS follows the statistics of monthly mean data tabulation. This table consists of four columns with the first column containing the line headings of the statistics being reported. The table provides a statistical summary of yearly, daily, and instantaneous flows, not only for the current water year but also for the previous calendar year and for a designated period, as appropriate. The designated period selected, WATER YEARS \_\_-\_\_, will consist of all of the station records within the specified water years, including complete months of record for partial water years, and may coincide with the period of record for the station.

The water years for which the statistics are computed are consecutive, unless a break in the station record is indicated in the manuscript. All of the calculations for the statistical characteristics designated ANNUAL (see line headings below), except for the ANNUAL 7-DAY MINIMUM statistic, are calculated for the designated period using complete water years. The other statistical characteristics may be calculated using partial water years.

The date or water year, as appropriate, of the first occurrence of each statistic reporting extreme values of discharge is provided adjacent to the statistic. Repeated occurrences may be noted in the REMARKS paragraph of the manuscript or in footnotes. Because the designated period may not be the same as the station period of record published in the manuscript, occasionally the dates of occurrence listed for the daily and instantaneous extremes in the designated-period column may not be within the selected water years listed in the heading. When the dates of occurrence do not fall within the selected water years listed in the heading, it will be noted in the REMARKS paragraph or in footnotes. Selected streamflow duration-curve statistics and runoff data also are given. Runoff data may be omitted if extensive regulation or diversion of flow is in effect in the drainage basin.

The following summary statistics data are provided with each continuous record of discharge. Comments that follow clarify information presented under the various line headings of the SUMMARY STATISTICS table.

**ANNUAL TOTAL.**—The sum of the daily mean values of discharge for the year.

**ANNUAL MEAN.**—The arithmetic mean for the individual daily mean discharges for the year noted or for the designated period.

**HIGHEST ANNUAL MEAN.**—The maximum annual mean discharge occurring for the designated period.

**LOWEST ANNUAL MEAN.**—The minimum annual mean discharge occurring for the designated period.

**HIGHEST DAILY MEAN.**—The maximum daily mean discharge for the year or for the designated period.

**LOWEST DAILY MEAN.**—The minimum daily mean discharge for the year or for the designated period.

**ANNUAL 7-DAY MINIMUM.**—The lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climatic year (April 1-March 31). The date shown in the summary statistics table is the initial date of the 7-day period. This value should not be confused with the 7-day 10-year low-flow statistic.

**MAXIMUM PEAK FLOW.**—The maximum instantaneous peak discharge occurring for the water year or designated period. Occasionally the maximum flow for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak flow is given in the table and the maximum flow may be reported in a footnote or in the REMARKS paragraph in the manuscript.

**MAXIMUM PEAK STAGE.**—The maximum instantaneous peak stage occurring for the water year or designated period. Occasionally the maximum stage for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak stage is given in the table and the maximum stage may be reported in the REMARKS paragraph in the manuscript or in a footnote. If the dates of occurrence of the maximum peak stage and maximum peak flow are different, the REMARKS paragraph in the manuscript or a footnote may be used to provide further information.

**INSTANTANEOUS LOW FLOW.**—The minimum instantaneous discharge occurring for the water year or for the designated period.

**ANNUAL RUNOFF.**—Indicates the total quantity of water in runoff for a drainage area for the year. Data reports may use any of the following units of measurement in presenting annual runoff data:

Acre-foot (AC-FT) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Cubic feet per square mile (CFSM) is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

Inches (INCHES) indicate the depth to which the drainage area would be covered if all of the runoff for a given time period were uniformly distributed on it.

**10 PERCENT EXCEEDS.**—The discharge that has been exceeded 10 percent of the time for the designated period.

**50 PERCENT EXCEEDS.**—The discharge that has been exceeded 50 percent of the time for the designated period.

**90 PERCENT EXCEEDS.**—The discharge that has been exceeded 90 percent of the time for the designated period.

Data collected at partial-record stations follow the information for continuous-record sites. Data for partial-record discharge stations are presented in two tables. The first table lists annual maximum stage and discharge at crest-stage stations, and the second table lists discharge

**VOLUME 2A: SOUTH FLORIDA**

measurements at low-flow partial-record stations. The tables of partial-record stations are followed by a listing of discharge measurements made at sites other than continuous-record or partial-record stations. These measurements are often made in times of drought or flood to give better areal coverage to those events. Those measurements and others collected for a special reason are called measurements at miscellaneous sites.

**Identifying Estimated Daily Discharge**

Estimated daily-discharge values published in the water-discharge tables of annual State data reports are identified. This identification is shown either by flagging individual daily values with the letter "e" and noting in a table footnote, "e-Estimated," or by listing the dates of the estimated record in the REMARKS paragraph of the station description.

**Accuracy of Field Data and Computed Results**

The accuracy of streamflow data depends primarily on (1) the stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements, and (2) the accuracy of observations of stage, measurements of discharge, and interpretations of records.

The degree of accuracy of the records is stated in the REMARKS in the station description. "Excellent" indicates that about 95 percent of the daily discharges are within 5 percent of the true value; "good" within 10 percent; and "fair," within 15 percent. "Poor" indicates that daily discharges have less than "fair" accuracy. Different accuracies may be attributed to different parts of a given record.

Values of daily mean discharge in this report are shown to the nearest hundredth of a cubic foot per second for discharges of less than 1 ft<sup>3</sup>/s; to the nearest tenths between 1.0 and 10 ft<sup>3</sup>/s; to whole numbers between 10 and 1,000 ft<sup>3</sup>/s; and to 3 significant figures above 1,000 ft<sup>3</sup>/s. The number of significant figures used is based solely on the magnitude of the discharge value. The same rounding rules apply to discharge values listed for partial-record stations.

Discharge at many stations, as indicated by the monthly mean, may not reflect natural runoff due to the effects of diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, values of cubic feet per second per square mile and of runoff in inches are not published unless satisfactory adjustments can be made for diversions, for changes in contents of reservoirs, or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur if adjustments or losses are large in comparison with the observed discharge.

**Other Data Records Available**

Information of a more detailed nature than that published for most of the stream-gaging stations such as discharge measurements, gage-height records, and rating tables is available from the Florida Integrated Science Center - Water and Restoration Studies (FISC-WRS). Also, most stream-gaging station records are available in computer-usable form and many statistical analyses have been made.

Information on the availability of unpublished data or statistical analyses may be obtained from the FISC-WRS. (see address that is shown on the back of the title page of this report).

**EXPLANATION OF PRECIPITATION RECORDS****Data Collection and Computation**

Rainfall data generally are collected using electronic data loggers that measure the rainfall in 0.01-inch increments every 15 minutes using either a tipping-bucket rain gage or a collection well gage. Twenty-four hour rainfall totals are tabulated and presented. A 24-hour period extends from just past midnight of the previous day to midnight of the current day. Snowfall-affected data can result during cold weather when snow fills the rain-gage funnel and then melts as temperatures rise. Snowfall-affected data are subject to errors. Missing values are indicated by this symbol "---" in the table.

**Data Presentation**

Precipitation records collected at surface-water gaging stations are identified with the same station number and name as the stream-gaging station. Where a surface-water daily-record station is not available, the precipitation record is not published, but is available in the files of the U.S. Geological Survey.

Information pertinent to the history of a precipitation station is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, period of record, and general remarks.

The following information is provided with each precipitation station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—See Data Presentation in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

INSTRUMENTATION.—Information on the type of rainfall collection system is given.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of records.

**EXPLANATION OF WATER-QUALITY RECORDS****Collection and Examination of Data**

Surface-water samples for analysis usually are collected at or near stream-gaging stations. The quality-of-water records are given immediately following the discharge records at these stations.

The descriptive heading for water-quality records gives the period of record for all water-quality data; the period of daily record for parameters that are measured on a daily basis (specific conductance, water temperature, sediment discharge, and so forth); extremes for the current year; and general remarks.

## VOLUME 2A: SOUTH FLORIDA

For ground-water records, no descriptive statements are given; however, the well number, depth of well, sampling date, or other pertinent data are given in the table containing the chemical analyses of the ground water.

**Water Analysis**

Most of the methods used for collecting and analyzing water samples are described in the TWRI's, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

One sample can define adequately the water quality at a given time if the mixture of solutes throughout the stream cross-section is homogeneous. However, the concentration of solutes at different locations in the cross section may vary widely with different rates of water discharge, depending on the source of material and the turbulence and mixing of the stream. Some streams must be sampled at several verticals to obtain a representative sample needed for an accurate mean concentration and for use in calculating load.

Chemical-quality data published in this report are considered to be the most representative values available for the stations listed. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. In the rare case where an apparent inconsistency exists between a reported pH value and the relative abundance of carbon dioxide species (carbonate and bicarbonate), the inconsistency is the result of a slight uptake of carbon dioxide from the air by the sample between measurement of pH in the field and determination of carbonate and bicarbonate in the laboratory.

For chemical-quality stations equipped with digital monitors, the records consist of daily maximum and minimum values (and sometimes mean or median values) for each constituent measured, and are based on 15-minute or 1-hour intervals of recorded data beginning at 0000 hours and ending at 2400 hours for the day of record.

**SURFACE-WATER-QUALITY RECORDS**

Records of surface-water quality ordinarily are obtained at or near stream-gaging stations because discharge data are useful in the interpretation of surface-water quality. Records of surface-water quality in this report involve a variety of types of data and measurement frequencies.

**Classification of Records**

Water-quality data for surface-water sites are grouped into one of three classifications. A *continuous-record station* is a site where data are collected on a regularly scheduled basis. Frequency may be one or more times daily, weekly, monthly, or quarterly. A *partial-record station* is a site where limited water-quality data are collected systematically over a period of years. Frequency of sampling is usually less than quarterly. A *miscellaneous sampling site* is a location other than a continuous- or partial-record station, where samples are collected to give better areal coverage to define water-quality conditions in the river basin.

A careful distinction needs to be made between *continuous records* as used in this report and *continuous recordings* that refer to a continuous graph or a series of discrete values recorded at short intervals. Some records of water quality, such as temperature and specific conductance, may be obtained through continuous recordings; however, because of costs, most data are obtained only monthly or less frequently.

**Accuracy of the Records**

One of four accuracy classifications is applied for measured physical properties at continuous-record stations on a scale ranging from poor to excellent. The accuracy rating is based on data values recorded before any shifts or corrections are made. Additional consideration also is given to the amount of publishable record and to the amount of data that have been corrected or shifted.

Rating classifications for continuous water-quality records

[ $\leq$ , less than or equal to;  $\pm$ , plus or minus value shown;  $^{\circ}\text{C}$ , degree Celsius;  $>$ , greater than; %, percent; mg/L, milligram per liter; pH unit, standard pH unit]

Measured physical property	Rating			
	Excellent	Good	Fair	Poor
Water temperature	$\leq \pm 0.2^{\circ}\text{C}$	$> \pm 0.2$ to $0.5^{\circ}\text{C}$	$> \pm 0.5$ to $0.8^{\circ}\text{C}$	$> \pm 0.8^{\circ}\text{C}$
Specific conductance	$\leq \pm 3\%$	$> \pm 3$ to $10\%$	$> \pm 10$ to $15\%$	$> \pm 15\%$
Dissolved oxygen	$\leq \pm 0.3$ mg/L	$> \pm 0.3$ to $0.5$ mg/L	$> \pm 0.5$ to $0.8$ mg/L	$> \pm 0.8$ mg/L
pH	$\leq \pm 0.2$ unit	$> \pm 0.2$ to $0.5$ unit	$> \pm 0.5$ to $0.8$ unit	$> \pm 0.8$ unit
Turbidity	$\leq \pm 5\%$	$> \pm 5$ to $10\%$	$> \pm 10$ to $15\%$	$> \pm 15\%$

**Arrangement of Records**

Water-quality records collected at a surface-water daily record station are published immediately following that record, regardless of the frequency of sample collection. Station number and name are the same for both records. Where a surface-water daily record station is not available or where the water quality differs significantly from that at the nearby surface-water station, the continuing water-quality record is published with its own station number and name in the regular downstream-order sequence. Water-quality data for partial-record stations and for miscellaneous sampling sites appear in separate tables following the table of discharge measurements at miscellaneous sites.

## VOLUME 2A: SOUTH FLORIDA

**On-Site Measurements and Sample Collection**

In obtaining water-quality data, a major concern is assuring that the data obtained represent the naturally occurring quality of the water. To ensure this, certain measurements, such as water temperature, pH, and dissolved oxygen, must be made on site when the samples are taken. To assure that measurements made in the laboratory also represent the naturally occurring water, carefully prescribed procedures must be followed in collecting the samples, in treating the samples to prevent changes in quality pending analysis, and in shipping the samples to the laboratory.

Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRI's Book 1, Chapter D2; Book 3, Chapters A1, A3, and A4; and Book 9, Chapters A1-A9. Most of the methods used for collecting and analyzing water samples are described in the TWRI's, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Also, detailed information on collecting, treating, and shipping samples can be obtained from the FISC-WRS (see address that is shown on the back of title page in this report).

**Water Temperature**

Water temperatures are measured at most of the water-quality stations. In addition, water temperatures are taken at the time of discharge measurements for water-discharge stations. For stations where water temperatures are taken manually once or twice daily, the water temperatures are taken at about the same time each day. Large streams have a small diurnal temperature change; shallow streams may have a daily range of several degrees and may follow closely the changes in air temperature. Some streams may be affected by waste-heat discharges.

At stations where recording instruments are used, either mean temperatures or maximum and minimum temperatures for each day are published. Water temperatures measured at the time of water-discharge measurements are on file in the FISC-WRS office. (see address that is shown on the back of title page in this report).

**Sediment**

Suspended-sediment concentrations are determined from samples collected by using depth-integrating samplers. Samples usually are obtained at several verticals in the cross section, or a single sample may be obtained at a fixed point and a coefficient applied to determine the mean concentration in the cross section.

During periods of rapidly changing flow or rapidly changing concentration, samples may be collected more frequently (twice daily or, in some instances, hourly). The published sediment discharges for days of rapidly changing flow or concentration were computed by the subdivided-day method (time-discharge weighted average). Therefore, for those days when the published sediment discharge value differs from the value computed as the product of discharge times mean concentration times 0.0027, the reader can assume that the sediment discharge for that day was computed by the subdivided-day method. For periods when no samples were collected, daily discharges of suspended sediment were estimated on the basis of water discharge, sediment concentrations observed immediately before and after the periods, and suspended-sediment loads for other periods of similar discharge.

At other stations, suspended-sediment samples are collected periodically at many verticals in the stream cross section. Although data collected periodically may represent conditions only at the time of observation, such data are useful in establishing seasonal relations between quality and streamflow and in predicting long-term sediment-discharge characteristics of the stream.

In addition to the records of suspended-sediment discharge, records of the periodic measurements of the particle-size distribution of the suspended sediment and bed material are included for some stations.

**Laboratory Measurements**

Samples for biochemical oxygen demand (BOD) and indicator bacteria are analyzed locally. All other samples are analyzed in the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used in analyzing sediment samples and computing sediment records are given in TWRI, Book 5, Chapter C1. Methods used by the USGS laboratories are given in the TWRI's, Book 1, Chapter D2; Book 3, Chapter C2; and Book 5, Chapters A1, A3, and A4. The TWRI publications may be accessed from <http://water.usgs.gov/pubs/twri/>. These methods are consistent with ASTM standards and generally follow ISO standards.

**Data Presentation**

For continuing-record stations, information pertinent to the history of station operation is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, drainage area, period of record, type of data available, instrumentation, general remarks, cooperation, and extremes for parameters currently measured daily. Tables of chemical, physical, biological, radiochemical data, and so forth, obtained at a frequency less than daily are presented first. Tables of "daily values" of specific conductance, pH, water temperature, dissolved oxygen, and suspended sediment then follow in sequence.

In the descriptive headings, if the location is identical to that of the discharge gaging station, neither the LOCATION nor the DRAINAGE AREA statements are repeated. The following information is provided with each continuous-record station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

DRAINAGE AREA.—See Data Presentation information in the EXPLANATION OF STAGE- AND WATER-DISCHARGE RECORDS section of this report (same comments apply).

PERIOD OF RECORD.—This indicates the time periods for which published water-quality records for the station are available. The periods are shown separately for records of parameters measured daily or continuously and those measured less than daily. For those measured daily or continuously, periods of record are given for the parameters individually.

INSTRUMENTATION.—Information on instrumentation is given only if a water-quality monitor temperature record, sediment pumping sampler, or other sampling device is in operation at a station.

REMARKS.—Remarks provide added information pertinent to the collection, analysis, or computation of the records.

COOPERATION.—Records provided by a cooperating organization or obtained for the USGS by a cooperating organization are identified here.

## VOLUME 2A: SOUTH FLORIDA

**EXTREMES.**—Maximums and minimums are given only for parameters measured daily or more frequently. For parameters measured weekly or less frequently, true maximums or minimums may not have been obtained. Extremes, when given, are provided for both the period of record and for the current water year.

**REVISIONS.**—Records are revised if errors in published water-quality records are discovered. Appropriate updates are made in the USGS distributed data system, NWIS, and subsequently to its Web-based National data system, NWISWeb (<http://waterdata.usgs.gov/nwis>). Users of USGS water-quality data are encouraged to obtain all required data from NWIS or NWISWeb to ensure that they have the most recent updates. Updates to the NWISWeb are made on an annual basis.

The surface-water-quality records for partial-record stations and miscellaneous sampling sites are published in separate tables following the table of discharge measurements at miscellaneous sites. No descriptive statements are given for these records. Each station is published with its own station number and name in the regular downstream-order sequence.

**Remark Codes**

The following remark codes may appear with the water-quality data in this section:

Printed Output	Remark
E	Value is estimated.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
M	Presence of material verified, but not quantified.
N	Presumptive evidence of presence of material.
U	Material specifically analyzed for, but not detected.
A	Value is an average.

**Water-Quality Control Data**

The USGS National Water Quality Laboratory collects quality-control data on a continuing basis to evaluate selected analytical methods to determine long-term method detection levels (LT-MDLs) and laboratory reporting levels (LRLs). These values are re-evaluated each year on the basis of the most recent quality-control data and, consequently, may change from year to year.

This reporting procedure limits the occurrence of false positive error. Falsely reporting a concentration greater than the LT-MDL for a sample in which the analyte is not present is 1 percent or less. Application of the LRL limits the occurrence of false negative error. The chance of falsely reporting a non-detection for a sample in which the analyte is present at a concentration equal to or greater than the LRL is 1 percent or less.

Accordingly, concentrations are reported as less than LRL for samples in which the analyte was either not detected or did not pass identification. Analytes detected at concentrations between the LT-MDL and the LRL and that pass identification criteria are estimated. Estimated concentrations will be noted with a remark code of "E." These data should be used with the understanding that their uncertainty is greater than that of data reported without the E remark code.

Data generated from quality-control (QC) samples are a requisite for evaluating the quality of the sampling and processing techniques as well as data from the actual samples themselves. Without QC data, environmental sample data cannot be adequately interpreted because the errors associated with the sample data are unknown. The various types of QC samples collected by this office are described in the following section. Procedures have been established for the storage of water-quality-control data within the USGS. These procedures allow for storage of all derived QC data and are identified so that they can be related to corresponding environmental samples. These data are not presented in this report but are available from the FISC-WRS. (see address that is shown on the back of the title page of this report).

**Blank Samples**

Blank samples are collected and analyzed to ensure that environmental samples have not been contaminated in the overall data-collection process. The blank solution used to develop specific types of blank samples is a solution that is free of the analytes of interest. Any measured value signal in a blank sample for an analyte (a specific component measured in a chemical analysis) that was absent in the blank solution is believed to be due to contamination. Many types of blank samples are possible; each is designed to segregate a different part of the overall data-collection process. The types of blank samples collected in this area are:

**Field blank**—A blank solution that is subjected to all aspects of sample collection, field processing preservation, transportation, and laboratory handling as an environmental sample.

**Trip blank**—A blank solution that is put in the same type of bottle used for an environmental sample and kept with the set of sample bottles before and after sample collection.

**Equipment blank**—A blank solution that is processed through all equipment used for collecting and processing an environmental sample (similar to a field blank but normally done in the more controlled conditions of the office).

**Sampler blank**—A blank solution that is poured or pumped through the same field sampler used for collecting an environmental sample.

**Filter blank**—A blank solution that is filtered in the same manner and through the same filter apparatus used for an environmental sample.

**VOLUME 2A: SOUTH FLORIDA**

**Splitter blank**—A blank solution that is mixed and separated using a field splitter in the same manner and through the same apparatus used for an environmental sample.

**Preservation blank**—A blank solution that is treated with the sampler preservatives used for an environmental sample.

**Reference Samples**

Reference material is a solution or material prepared by a laboratory. The reference material composition is certified for one or more properties so that it can be used to assess a measurement method. Samples of reference material are submitted for analysis to ensure that an analytical method is accurate for the known properties of the reference material. Generally, the selected reference material properties are similar to the environmental sample properties.

**Replicate Samples**

Replicate samples are a set of environmental samples collected in a manner such that the samples are thought to be essentially identical in composition. Replicate is the general case for which a duplicate is the special case consisting of two samples. Replicate samples are collected and analyzed to establish the amount of variability in the data contributed by some part of the collection and analytical process. Many types of replicate samples are possible, each of which may yield slightly different results in a dynamic hydrologic setting, such as a flowing stream. The types of replicate samples collected in this district are:

**Concurrent samples**—A type of replicate sample in which the samples are collected simultaneously with two or more samplers or by using one sampler and alternating the collection of samples into two or more compositing containers.

**Sequential samples**—A type of replicate sample in which the samples are collected one after the other, typically over a short time.

**Split sample**—A type of replicate sample in which a sample is split into subsamples, each subsample contemporaneous in time and space.

**Spike Samples**

Spike samples are samples to which known quantities of a solution with one or more well-established analyte concentrations have been added. These samples are analyzed to determine the extent of matrix interference or degradation on the analyte concentration during sample processing and analysis.

**EXPLANATION OF GROUND-WATER LEVEL RECORDS**

Generally, only ground-water level data from selected wells with continuous record from a basic network of observation wells are published in this report. This basic network contains observation wells located so that the most significant data are obtained from the fewest wells in the most important aquifers.

**Site Identification Numbers**

Each well is identified by means of (1) a 15-digit number that is based on latitude and longitude and (2) a local number that is produced for local needs. (See NUMBERING SYSTEM FOR WELLS AND MISCELLANEOUS SITES in this report for a detailed explanation).

**Data Collection and Computation**

Measurements are made in many types of wells, under varying conditions of access and at different temperatures; hence, neither the method of measurement nor the equipment can be standardized. At each observation well, however, the equipment and techniques used are those that will ensure that measurements at each well are consistent.

Most methods for collecting and analyzing water samples are described in the TWRI's referred to in the On-site Measurements and Sample Collection and the Laboratory Measurements sections in this report. In addition, TWRI Book 1, Chapter D2, describes guidelines for the collection and field analysis of ground-water samples for selected unstable constituents. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRI's Book 1, Chapter D2; Book 3, Chapters A1, A3, and A4; and Book 9, Chapters A1 through A9. The TWRI publications may be accessed from <http://water.usgs.gov/pubs/twri/>. The values in this report represent water-quality conditions at the time of sampling, as much as possible, and that are consistent with available sampling techniques and methods of analysis. These methods are consistent with ASTM standards and generally follow ISO standards. Trained personnel collected all samples. Most of the wells sampled were pumped long enough to ensure that the water collected came directly from the aquifer and had not stood for a long time in the well casing where it would have been exposed to the atmosphere and to the material, possibly metal, comprising the casings. Wells that have very long open intervals (generally 20 ft or greater), were sampled using a down hole sampling device that collects a water sample from the bottom of the well.

Water-level measurements in this report are given in feet with reference to land-surface datum, elevation described in feet above or below National Geodetic Vertical Datum of 1929 (NGVD 29), unless otherwise noted. The elevation of the land-surface datum (lsd) above sea level is also given in the well description. Land-surface datum is a datum plane that is approximately at land surface at each well. The height of the measuring point (MP) above or below land-surface datum is given in each well description. Water levels in wells equipped with recording gages are reported for every fifth day and the end of each month (EOM).

Water levels are reported to as many significant figures as can be justified by the local conditions. For example, in a measurement of a depth of water of several hundred feet, the error in determining the absolute value of the total depth to water may be a few tenths of a foot, whereas the error in determining the net change of water level between successive measurements may be only a hundredth or a few hundredths of a foot. For lesser depths to water the accuracy is greater. Accordingly, most measurements are reported to a hundredth of a foot, but some are given only to a tenth of a foot or a larger unit.

**Accuracy of Ground-Water Level Data**

A number of factors affect the accuracy of the ground-water level data published in this report. These factors can be logically separated into those that are related to ground-water level measurement methods (Method-Related Factors) and those that are independent of the methods.

## VOLUME 2A: SOUTH FLORIDA

**Method-Independent Factors**

Water levels are determined using a specific measuring point (MP) at each well. The elevation of this point for most wells published in this report was determined relative to the National Geodetic Vertical Datum of 1929 (NGVD 1929). Scientific advances in determining vertical elevations have caused the development of the North American Vertical Datum of 1988 (NAVD 1988). The National Geodetic Survey (NGS) has completed an extensive releveling effort that provides elevations referenced to NAVD 1988. The U.S. Geological Survey is currently considering how best to utilize the newer NAVD 1988 and yet maintain the continuity of data in south Florida.

Some stations in this report have been surveyed using a benchmark elevation surveyed in NAVD 1988. In an attempt to publish the elevation of each station within the hydrologic monitoring network in the same datum plane, the elevation of the NAVD 1988 benchmark was converted using the VERTCON or CORPSCON software of the National Geodetic Survey to provide a reference elevation in NGVD 1929. The NGVD 1929 datum determined using VERTCON or CORPSCON is known to differ from the historic NGVD 1929 elevation datum (historic NGVD). Hydrologic model development for some sites has required publication of data in the NAVD 1988 datum. The datum of each station is clearly defined in the DATUM or GAGE section of each station manuscript.

Water levels in wells open to highly transmissive aquifers may be affected by barometric pressure. The water-level data in this publication have not been adjusted for barometric pressure effects. Water levels may also be affected by density differences. For example highly saline water has a greater density than fresh water. Water levels have not been adjusted for density effects.

**Method-Related Factors**

Water-level data are collected using a number of different methods. Each method has inherent factors that affect the accuracy of measured water levels.

**STEEL TAPE AND CHALK** -- This generally is the most accurate method of measuring the elevation difference between a reference point and the water level in a ground-water well. When the water level is measured using this method, at least two separate measurements are performed. These measurements must agree to within 0.02 ft before the average value is recorded. The precision of this method, is  $\pm 0.02$  ft.

**PRESSURE GAGE** -- Wells under artesian pressure are monitored using a mechanical pressure gage. These pressure gages are graduated to 0.2 ft. Gages are periodically checked using a pressure manifold to compare gage readings over a range of known pressures. Corrections are applied to the gage readings based on these checks. The reported value is estimated to the nearest tenth of a foot. The precision of this method should be considered to be about  $\pm 0.1$  ft.

**FLOAT AND RECORDER** -- The accuracy of data recorded using this method is affected by friction within the recorder system as well as friction between the float and the well casing. In large-diameter wells (6 in. or greater), where large floats are used, these effects are minimal; however in small-diameter wells (2 to 6 in.) these effects can be substantial. Friction might significantly affect the data where water-surface fluctuations are very small. Every effort has been made to reduce frictional effects to a minimum.

The accuracy of this method may also be affected by slippage of the float tape or wire, leaks in the float, or biological factors (for example, amphibians crawling on the float). The accuracy of the recorder reading is periodically verified using steel tape and chalk measurements. When the difference between these tape measurements and the recorded value is 0.05 ft or greater, the recorder is reset and a gage-height correction is applied to the data. Uncertainty in water levels for wells verified by steel tape measurements is generally no greater than  $\pm 0.05$  ft.

**PRESSURE TRANSDUCER AND RECORDER** -- In wells where artesian pressure, frictional effects, or an extensive range in water levels have made float and recorder systems infeasible, pressure transducers have been installed. Transducers are selected that meet or exceed the float and recorder system accuracy. Water levels may be verified using either steel tape or pressure gage measurements. Uncertainty in those verified by steel-tape measurements is generally considered to be no greater than  $\pm 0.05$  ft and uncertainty for those verified using pressure gage readings is generally considered to be about  $\pm 0.1$  ft.

The type of method used to collect water-level data is identified in the INSTRUMENTATION section of each station manuscript.

**Data Presentation**

Water-level data are presented in alphabetical order by county. The primary identification number for a given well is the 15-digit site identification number that appears in the upper left corner of the table. The secondary identification number is the local or county well number. Well locations are shown in figures for each county, each well is identified on the map by an index number that is cross-referenced to its identification number in a location key preceding the map.

Each well record consists of three parts: the well description, the data table of water levels observed during the water year, and, for most wells, a hydrograph following the data table. Well descriptions are presented in the headings preceding the tabular data.

The following comments clarify information presented in these various headings.

**LOCATION.**—This paragraph follows the well-identification number and reports the hydrologic-unit number and a geographic point of reference. Latitudes and longitudes used in this report are reported as North American Datum of 1927 unless otherwise specified.

**AQUIFER.**—This entry designates by name and geologic age the aquifer that the well taps.

**WELL CHARACTERISTICS.**—This entry describes the well in terms of depth, casing diameter and depth or screened interval, method of construction, use, and changes since construction.

**INSTRUMENTATION.**—This paragraph provides information on both the frequency of measurement and the collection method used, allowing the user to better evaluate the reported water-level extremes by knowing whether they are based on continuous, monthly, or some other frequency of measurement.

**DATUM.**—This entry describes the measuring point. The measuring point is described physically (such as top of casing, top of instrument shelf, and so forth).

**LAND-SURFACE DATUM.**—This is a new section started for water year 2003, to document land-surface datum. The elevation of the land-surface datum is described in feet above National Geodetic Vertical Datum of 1929 (NGVD 29), unless otherwise noted; it is reported with a precision depending on the method of determination.

**VOLUME 2A: SOUTH FLORIDA**

**REMARKS.**—This entry describes factors that may influence the water level in a well or the measurement of the water level, when various methods of measurement were begun, and the network (climatic, terrane, local, or areal effects) or the special project to which the well belongs.

**PERIOD OF RECORD.**—This entry indicates the time period for which records are published for the well, the month and year at the start of publication of water-level records by the USGS, and the words “to current year” if the records are to be continued into the following year. Time periods for which water-level records are available, but are not published by the USGS, may be noted.

**EXTREMES FOR PERIOD OF RECORD.**—This entry contains the highest and lowest instantaneously recorded or measured water levels of the period of published record, with respect to land-surface datum or sea level, and the dates of occurrence.

**Water-Level Tables**

A table of water levels follows the well description for each well. Water-level measurements in this report are given in feet with reference to either sea level or land-surface datum (ltd). Missing records are indicated by dashes in place of the water-level value.

For wells not equipped with recorders, water-level measurements were obtained periodically by steel or electric tape or pressure gage. Tables of periodic water-level measurements in these wells show the date of measurement and the measured water-level value.

**Hydrographs**

Hydrographs are a graphic display of water-level fluctuations over a period of time. In this report, current water year and, when appropriate, period-of-record hydrographs are shown. Hydrographs that display periodic water-level measurements show points that may be connected with a dashed line from one measurement to the next. Hydrographs that display recorder data show a solid line representing the mean water level recorded for each day. Missing data are indicated by a blank space or break in a hydrograph. Missing data may occur as a result of recorder malfunctions, battery failures, or mechanical problems related to the response of the recorder's float mechanism to water-level fluctuations in a well.

**RECORDS OF BULK ELECTRICAL CONDUCTIVITY**

Bulk electrical conductivity is the combined electrical conductivity of all material (including pore water) within an approximately 8- to 40-inch doughnut-shaped area surrounding an electromagnetic induction probe (McNeill and others, 1990). Bulk electrical conductivity is affected by different physical and chemical properties of the material including the dissolved-solids concentration of the pore water, and the lithology and porosity of the rock. Polyvinyl chloride (PVC) casings do not interfere with these measurements; however, for those wells where a steel or galvanized iron casing extends part way down the well, the probe cannot sense the materials outside of the casing. As the probe is lowered down the well and out of the influence of a metallic casing, a spike is usually created in the data. Metal well centralizers can also affect the data collected and can cause very large spikes in the data at the depths where the centralizers are installed. These spikes are much different than the changes in bulk electromagnetic conductivity caused by natural lithologic or pore water variations and as such are readily recognizable. As the probe passes through different layers of rock, the different physical properties will cause variation in the recorded conductivity values. A clean sand or sandstone will generally produce lower conductivity values than clay or mudstone. Although the properties of the rocks or well construction will remain constant from year to year, those of the pore water may change due to saltwater intrusion. Conductivity values from freshwater-saturated rocks typically are less than 25 mS/m, whereas conductivity values from saltwater-saturated rocks are typically greater than 67 mS/m (Hittle, 1999). Therefore, electromagnetic induction logging can be used to assess increases or decreases in the conductivity of pore waters caused by movement of the saltwater interface.

**Data Collection and Computation**

Measurements generally are made during the period of lowest aquifer water levels, in April of each year. However, some wells may have additional logs. During periods of decreased water levels, saltwater intrusion into a freshwater aquifer is likely to be at a maximum. In wells where saltwater is detectable, the graphic representation of data from successive years will show any vertical movement of the saltwater-freshwater interface. Measuring this vertical movement of the interface is the primary use of the bulk electrical conductivity logs published in this report. Upward movement of the interface between freshwater and saltwater in a monitoring well indicates that saltwater intrusion is increasing in that area. Downward movement of the interface indicates recession of the saltwater front near the monitoring well.

In the bulk electrical conductivity graphs of some of the wells logged for this report, the interface position can be seen as the point where low values of conductivity increase suddenly to values generally above 67 mS/m (usually near the bottom of the well). However, the interface position is not as apparent in other wells, and in some, there is no interface. Some locations have been identified where saltwater contamination of the aquifer is occurring above the base of the aquifer as a result of seepage of saline from canals. The bulk electrical conductivity logs detect the changes in fluid conductivity that occur as a result of this seepage.

In wells selected for electromagnetic induction logging, a water sample may be collected and analyzed as a check of the level of salinity. Because bulk electrical conductivity is a function of fluid conductivity, lithology, and porosity, the relationship between the electromagnetic induction logs and the chloride samples may not be as obvious as is the general relationship between fluid conductivity and chloride concentrations. If the rock is not very porous, then the change in bulk electrical conductivity caused by changes in the salinity of the pore water may be smaller than might be expected. Nonetheless, the long-term changes in the bulk electrical conductivity logs are sufficient to assess upward or downward movement of the interface. To aid in interpretation of the bulk electrical conductivity logs, the chloride concentration is shown on the graph of bulk electrical conductivity if water samples have been collected.

The instrument used to collect data for this report is calibrated prior to each field session. The calibration procedure establishes a mathematical constant (calibration factor) that is used to convert raw instrument readings in counts per second (cps) into values of bulk electrical conductivity in millisiemens per meter (mS/m). When data were graphed for the 2000 annual water resources data report, offsets and amplitude differentials occurred in the calibrated values of bulk electrical conductivity for each well between successive years. Investigation revealed that some of the observed offsets and amplitude differentials were caused by differing calibration factors between years. Most calibration factors differed because of temperature and humidity differences during calibration. The calibration procedures adopted during the 2000 water year were designed to minimize the influence of variable temperature and humidity. Before calibrating, the electromagnetic induction probe was lowered into a well and allowed to equilibrate in the water column. The probe was then removed from the well and the instrument immediately calibrated.

## VOLUME 2A: SOUTH FLORIDA

Factors other than variable temperature and humidity also have caused offsets and amplitude differentials. One such example occurred with data collected for the 2000 water year. Prior to logging for the 2000 water year, the instrument firmware and software was updated. After logging, it was found that the data had been truncated at the decimal point. Errors in calibration have also been identified and corrected (see Accuracy of Bulk Electrical Conductivity).

**Accuracy of Bulk Electrical Conductivity**

There are two components that affect the quality of the electromagnetic induction logs published in this report: (1) vertical or depth accuracy, and (2) accuracy and precision of measured bulk electrical conductivity. Vertical accuracy, which affects the determined interface position, is the most critical factor in this monitoring effort. A quality control program sets the velocity of the probe at 12 ft/min (feet per minute) while logging. Before logging begins, a spot on the probe, 3.32 feet above the sensing head, is aligned with the measuring point of the well. Where possible, the data recorded as the probe was moved up the well were used to produce the graphs for this report. Depth values from successive water years were adjusted, if needed, to coincide at one or more specific conductivity peak recorded from an upper part of the well. Depth values were interpolated to the nearest tenth of a foot. The precision of depth determinations using this reporting method should be considered to be about  $\pm 0.1$  foot.

The accuracy and precision of measured bulk electrical conductivity are a function of both the inherent accuracy of the electromagnetic induction probe and its calibration. The inherent precision of the probe is considered by the manufacturer to be  $\pm 5$  percent of the full scale. For the logs collected, the electromagnetic induction probe was set to a full scale of 1,000 mS/m. This translates into a precision of  $\pm 50$  mS/m at full scale. Analysis indicated that the offsets caused by the effects of temperature and humidity on calibration were generally within this range.

In the 1998 water year and for all water years after 2001, the electromagnetic induction probe was calibrated using standards of 0 and 345 mS/m. There are a number of monitoring wells where the measured bulk electrical conductivity exceeds 345 mS/m. For these wells, a calibration standard of 345 mS/m was still used. This is because the probe would have to be set to a full scale of 10,000 mS/m in order to be calibrated using the next available standard (1,301 mS/m). This value would greatly exceed the normal range in bulk electrical conductivity expected. The 345 mS/m calibration constant was also considered to be acceptable because within the range 0 to 1,000 mS/m, the response of the probe is considered to be linear; therefore calibrating the probe to this standard should not significantly reduce accuracy.

In the water years prior to 2002 (excluding 1998), the electromagnetic induction probe generally was calibrated using a 1,301 mS/m standard even though the full scale of the probe was 1,000 mS/m. This caused a calibration error in the data collected. To correct this error, a multiplier of 0.7686 was applied to all of the affected data.

Accuracy of data collected during the 2000 water year may have been affected by the firmware or software update in December 1999. The data collected using this new software and firmware was considerably offset relative to previous electromagnetic induction logs. In addition, the final values were truncated at the decimal point, whereas those collected prior to the update were recorded to the thousandths decimal place. These final values are the result of a multiplication of the raw data from the instrument and a calibration factor. It is unknown whether or not the raw values were truncated at the decimal point. If so, the resulting error could be on the order of 5 mS/m too low. Because the offset data from the 2000 water year are often 5 mS/m lower than the data from other years, truncation of the raw data probably is the explanation.

**Data Presentation**

Records of conductivity are published individually on the page immediately following the well manuscript. Data for conductivity are identified by well number. Each record consists of a single graph representing conductivity, a lithologic log, and a brief explanation.

**RECORDS OF GROUND-WATER QUALITY**

Records of ground-water quality in this report differ from other types of records in that, for the salinity network sites, they consist of a limited set of measurements for the water year. The quality of ground water ordinarily changes slowly; therefore, for most general purposes, a small number of samples except for a few samples taken seasonally during the year, is sufficient. Frequent measurement of the same constituents is not necessary unless one is concerned with a particular problem, such as monitoring for saltwater intrusion. In the special cases where the quality of ground water may change more rapidly, more frequent measurements are made to identify the nature of the changes.

**Data Collection and Computation**

The ground-water-quality data in this report were obtained mostly as a part of the Florida Integrated Science Center, Center for Water and Restoration Studies salinity network or as a part of special studies in specific areas. Consequently, a number of chemical analyses are presented for some wells within a county but not for others. As a result, the records for this year, by themselves, do not provide a balanced view of ground-water quality in the report area. Such a view can be attained only by considering records for this year in context with similar records obtained for these and other counties in earlier years.

Most methods for collecting and analyzing water samples are described in the U.S. Geological Survey National Field Manual for the collection of Water-Quality Data and the "Laboratory Measurements" sections in this data report and are also described in the TWRI, which may be accessed from <http://water.usgs.gov/pubs/twri/>. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in TWRI, Book 1, Chapter D2; Book 5, Chapters A1, A3, and A4 and Book 9, Chapters A1-A6. Also, detailed information on collecting, treating, and shipping samples may be obtained from the FISC-WRS office. (See address that is shown on the back of the title page of this report.)

The values reported in this report represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. These methods are consistent with ASTM standards and generally follow ISO standards. All samples were obtained by trained personnel. The wells sampled were pumped long enough to assure that the water collected came directly from the aquifer and had not stood for a long time in the well casing where it would have been exposed to the atmosphere and to the material, possibly metal, comprising the casings.

**Laboratory Measurements**

Analysis for sulfide and measurement of alkalinity, pH, water temperature, specific conductance, and dissolved oxygen are performed on site. All other sample analyses are performed at the USGS laboratory in Lakewood, Colorado, unless otherwise noted. Methods used by the USGS laboratory are given in TWRI, Book 1, Chapter D2; and Book 5, Chapters A1, A3, and A4, which may be accessed from <http://water.usgs.gov/pubs/twri/>.

**VOLUME 2A: SOUTH FLORIDA****Data Presentation**

The records of ground-water quality are published immediately following the ground-water level records of each county. Data for quality of ground water are identified by well number. The prime identification number for wells sampled is the 15-digit number derived from the latitude-longitude locations. The Remark Codes listed for surface-water-quality records are also applicable to ground-water-quality records.

**ACCESS TO USGS WATER DATA**

The USGS provides near real-time stage and discharge data for many of the gaging stations equipped with the necessary telemetry and historic daily mean and peak-flow discharge data for most current or discontinued gaging stations through the World Wide Web (WWW). These data may be accessed from <http://water.usgs.gov>.

Water-quality data and ground-water data also are available through the WWW. In addition, data can be provided in various machine-readable formats on various media. Information about the availability of specific types of data or products, and user charges, can be obtained locally from each Water Discipline Office (See address that is shown on the back of the title page of this report.)

**DEFINITION OF TERMS**

Specialized technical terms related to streamflow, water-quality, and other hydrologic data, as used in this report, may be accessed from [http://water.usgs.gov/ADR\\_Defs\\_2004.pdf](http://water.usgs.gov/ADR_Defs_2004.pdf). Terms such as algae, water level, and precipitation are used in their common everyday meanings, definitions of which are given in standard dictionaries. Not all terms defined in this alphabetical list apply to every State. See also table for converting English units to International System (SI) Units. Other glossaries that also define water-related terms are accessible from <http://water.usgs.gov/glossaries.html>.

## VOLUME 2A: SOUTH FLORIDA

SELECTED REFERENCES

- American Public Health Association, and others, 1965, Standard methods for the examination of water and waste-water, 12th edition: American Public Health Association, New York, 769 p.
- California State Water Quality Control Board, 1963, Water quality criteria; Pub. 3-A, 226 p.
- Conover, C.S., and Leach, S.D., 1975, River basin and hydrologic unit map of Florida: Florida Bureau of Geology Map Series 72.
- Ellis, M.M., Westfall, B.A., and Ellis, M.D., 1946, Determination of water quality, U.S. Fish and Wildlife Reserve Report 9, 122 p.
- Florida Department of Environmental Regulation, 1983, Water quality standards: Chapter 17-3 in Florida Administrative Code.
- 1984, Public drinking water systems: Chapter 17-22 in Florida Administrative Code.
- Hem, J.D., 1970, Study and interpretations of the chemical characteristics of natural water: U.S. Geological Survey Water-Supply Paper 1473, second edition, 363 p.
- Hittle, Clinton, D., 1999, Delineation of saltwater intrusion in the Surficial Aquifer System in eastern Palm Beach, Martin, and St. Lucie counties, Florida, 1997-1998: U.S. Geological Survey Water-Resources Investigations Report 99-4214, Sheet in pocket.
- Kirkor, Teodor, 1951, Protecting public waters from pollution in the USSR: Sewage Works Journal, v. 23, p. 938.
- Langbein, W.B., and Iseri, K.T., 1960, General introduction and hydrologic definitions: U.S. Geological Survey Water-Supply Paper 1541-A, 29 p.
- Maier, F.J., 1950, Fluoridation of public water supplies: Journal of the American Water Works Association, v. 42, pt. 1, p. 1120-1132.
- Maxcy, K.F., 1950, Report on the relation of nitrite concentrations in well waters to the occurrence of methemoglobinemia: National Research Council, Sanitary Engineering and Environment Bulletin, Appendix D, 271 p.
- McNeill, J.D., Bosnar, M., and Snelgrove, F.B., 1990, Resolution of an electronic borehole conductivity logger for geotechnical and ground water applications, Technical note TN-25: Geonics Limited, Mississauga, Ontario, Canada, 28 p.
- National Climatic Data Center, National Oceanic and Atmospheric Administration, 2005, U.S. Weekly climate monitoring, weekly products: Available from World Wide Web <<http://www.ncdc.noaa.gov/oa/climate/severeweather/rainfall.html>> (accessed February 16, 2005).
- Paynter, O.E., 1960, The chronic toxicity of dodecylbenzene sodium sulfonate: U.S. Public Health Conference on Physiological Aspects of Water Quality Proc., Washington, D.C., Sept. 8-9, 1960, 175-179 p.
- Prinos, S.T., Lietz, A.C., and Irvin, R.B., 2002, Design of a Real-Time Ground-Water Level Monitoring Network and Portrayal of Hydrologic Data in Southern Florida. U.S. Geological Survey Water-Resources Investigations Report 01-4275, 108 p.
- Rose, Arthur and Elizabeth, 1966, The condensed chemical dictionary: Reinhold Publishing Corporation, New York, 7th ed., 285 p.
- South Florida Water Management District, 2004, District wide rainfall maps: Available from the World Wide Web <<http://www.sfwmd.gov/curre/rainmaps/rainfall.html>> (accessed February 16, 2005).
- Swenson, H.A., and Baldwin, H.L., 1965, A primer on water quality: Washington, U.S. Government Printing Office, 27 p.
- U.S. Environmental Protection Agency, 1975, National interim primary drinking water regulations: Federal Register, v. 40, no. 51, March 14, p. 11990-11998.
- 1976 (1977), Quality criteria for water: U.S. Government Printing Office, 256 p.
- 1977, National secondary drinking water regulations: Federal Register, v. 42, no. 62, March 31, 1977, p. 17143-17146.
- Public Health Service, 1962, Drinking water standards: U.S. Department of Health, Education, and Welfare, Public Health Service: Pub. no. 956.
- Wayman, C.H., Robertson, J.B., and Page, H.G., 1962, Foaming characteristics of synthetic detergent solutions: U.S. Geological Survey Professional Paper 450D, art. 178, D198 p.