UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

EVAPOTRANSPIRATION AND MICROCLIMATE AT A LOW-LEVEL RADIOACTIVE-WASTE DISPOSAL SITE IN NORTHWESTERN ILLINOIS

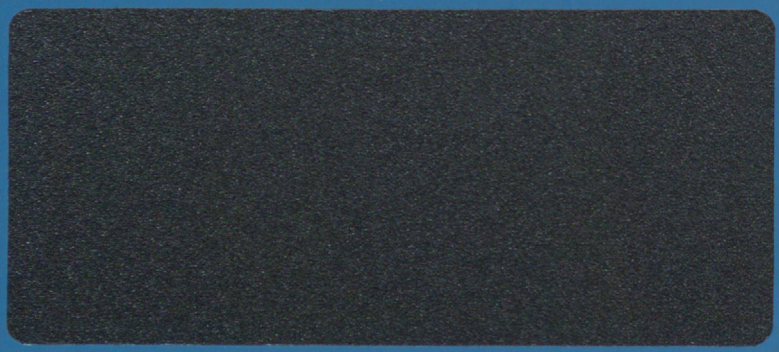

EVAPOTRANSPIRATION AND MICROCLIMATE AT A LOW-LEVEL RADIOACTIVE-WASTE DISPOSAL SITE IN NORTHWESTERN ILLINOIS

By R. W. Healy, M. P. deVries, and A. M. Sturrock, Jr.

U.S. GEOLOGICAL SURVEY

Open-File Report 86-301

Urbana, Illinois

1987

UNITED STATE DEPARTMENT OF THE INTERIOR

DONALD PAUL HODEL, Secretary

GEOLOGICAL SURVEY

Dallas L. Peck, Director

For additional information
write to:

District Chief
U.S. Geological Survey
Water Resources Division
102 E. Main Street, 4th Floor
Urbana, IL 61801

Copies of this report can be
purchased from:

U.S. Geological Survey
Books and Open-File Reports Section
Federal Center, Building 41
Box 25425
Denver, CO 80225
[Phone: (303) 236-7476]

CONTENTS

	Page
Abstract	1
Introduction	2
Background	2
Purpose and scope	3
The Sheffield site	4
Location and history	4
Climate	4
Soils	11
Vegetation	11
Techniques for estimating evapotranspiration	11
Aerodynamic profile	15
Energy budget	19
Water budget	20
Potential evapotranspiration	21
Instrumentation	23
Precipitation	23
Radiation	23
Wind	24
Air temperature and water-vapor pressure	24
Soil-heat flux and temperature	25
Soil-water content and tension	26
Surface runoff	26
Microclimate of the trench covers	26
Precipitation	33
Radiation	33
Wind	40
Air temperature and water-vapor pressure	47
Soil-heat flux and temperature	47
Soil-water content	52
Evapotranspiration estimates	56
Energy-budget method	56
Aerodynamic-profile method	65
Water-budget method	66
Potential evapotranspiration	66
Error analysis	70
Summary	76
References cited	78

ILLUSTRATIONS

Page

Figure 1. Map showing location of Sheffield low-level radioactive-waste disposal site..... 5
2. Map showing waste-trench location, instrument location, topography, and line of section..... 6
3-7. Graphs showing:
3. Average monthly precipitation from nearby National Weather Service stations..... 7
4. Average monthly temperature from nearby National Weather Service stations..... 8
5. Frequency of occurrence, in percentage of time, of winds from various directions at Moline, Illinois, for June 1981 through December 1983..... 9
6. Mean monthly windspeeds at Moline, Illinois, for June 1981 through December 1983..... 10
7. Average monthly pan evaporation for April through October at Hennepin, Illinois..... 12
8. Schematic section D-D' of trench cover and locations of moisture-probe access tubes and tensiometers..... 13
9. Photograph showing vegetation at the Sheffield site..... 14
10-37. Graphs showing:
10. Selected microclimatological parameters at the Sheffield site:
(a) April 10-12, 1984..... 27
(b) May 31 through June 2, 1984..... 28
(c) July 1-3, 1982..... 29
(d) August 15-17, 1983..... 30
(e) September 13-15, 1982..... 31
(f) October 30 through November 1, 1983..... 32
11. Monthly precipitation at the Sheffield site..... 34
12. (a) Monthly solar radiation at the Sheffield site..... 35
(b) Monthly reflected solar radiation at the Sheffield site..... 36
13. Monthly ratios of solar radiation to clear-sky radiation at the Sheffield site..... 37
14. Monthly surface albedos at the Sheffield site..... 38
15. (a) Monthly longwave radiation emitted from the earth at the Sheffield site..... 41
(b) Monthly longwave radiation incoming from the atmosphere at the Sheffield site..... 42
16. Monthly net radiation at the Sheffield site..... 43
17. Frequency of occurrence, in percentage of time, of winds from various directions at the Sheffield site..... 44
18. Mean monthly windspeeds at the Sheffield site..... 45
19. Vertical gradients in horizontal windspeed for 4 hours on June 2, 1984..... 46
20. Hourly variations in z/L' for June 2, 1984..... 48
21. Monthly air temperatures at the Sheffield site..... 49
22. Monthly water-vapor pressures at the Sheffield site... 50

ILLUSTRATIONS

Page

Figures

10-37. Graphs showing:--Continued

23. Monthly soil-heat fluxes at the Sheffield site..... 51
24. Soil temperatures at the Sheffield site (a) August 15-17, 1983; and (b) October 30 through November 1, 1983..... 53
25. Change in the amount of water stored within the top 1.75 meters of land surface at the Sheffield site... 54
26. Change in volumetric soil-moisture content with respect to depth for 4 days at the Sheffield site... 55
27. Monthly evapotranspiration at the Sheffield site as estimated by the:
    (a) Energy-budget method..... 57
    (b) Aerodynamic-profile method..... 58
    (c) Water-budget method..... 59
28. Monthly energy budget for the Sheffield site with evapotranspiration estimated by the energy-budget method..... 60
29. Monthly ratios of sensible- to latent-heat fluxes as estimated by the energy-budget, aerodynamic-profile, and water-budget methods for the Sheffield site..... 62
30. Energy budget as estimated by the energy-budget method:
    (a) April 10-12, 1984; (b) May 31 through June 2, 1984; and (c) July 1-3, 1982..... 63
    (d) August 15-17, 1983; (e) September 13-15, 1982; and (f) October 30 through November 1, 1983..... 64
31. Monthly energy budget for the Sheffield site with evapotranspiration estimated by the aerodynamic-profile method..... 67
32. Energy budget as estimated by the aerodynamic-profile method (a) April 10-12, 1984; (b) May 31 through June 2, 1984; (c) July 1-3, 1982; (d) September 13-15, 1982; and (e) October 30 through November 1, 1983..... 68
33. Monthly potential evapotranspiration at the Sheffield site..... 69
34. Monthly ratios of evapotranspiration, as estimated by the energy-budget, aerodynamic-profile, and water-budget methods, to potential evapotranspiration at the Sheffield site..... 71
35. Effects of temperature-gradient errors on hourly evapotranspiration estimates on May 31 through June 2, 1984, (a) aerodynamic-profile method and (b) energy-budget method..... 72
36. Effects of vapor-pressure gradient errors on hourly evapotranspiration estimates by the energy-budget method on May 31 through June 2, 1984..... 73

Page

Figures
10-37. Graphs showing:--Continued
37. Effects of errors in horizontal windspeed gradient on hourly evapotranspiration estimates by the aerodynamic-profile method on May 31 through June 2, 1984..... 75

TABLES

Page

Table 1. Properties of surficial deposits..... 15
2. Daily albedos for 6 days in January and February 1984..... 39
3. Hourly albedos for 2 days..... 39
4. Hourly values of the ratio of sensible- to latent-heat flux.. 65
5. Changes in computed daily evapotranspiration, when assuming systematic measurement errors..... 74
6. Daily estimates of evapotranspiration..... 84

CONVERSION FACTORS AND ABBREVIATIONS

For the convenience of readers who prefer the inch-pound system of units rather than the metric (International System) units used in this report, the following conversion factors may be used:

Multiply metric unit	By	To obtain inch-pound or cgs units
Area		
square centimeter (cm^2)	0.1550	square inch (in^2)
square meter (m^2)	10.76	square foot (ft^2)
Energy		
joule (J)	0.0009478	British thermal units (mean) (Btu)
	0.2388	calorie (cal)
Energy/Area Time		
watt per square meter (W/m^2)	0.005290	British thermal unit per square foot per minute ($Btu/ft^2 \cdot min$)
	0.001424	calorie per square centimeter per minute ($cal/cm^2 \cdot min$)
Heat		
watt per square meter per degree kelvin ($W/m^2 \cdot °K$)	0.1761	British thermal unit per square foot per hour per degree Fahrenheit ($Btu/ft^2 \cdot h \cdot °F$)
Length		
nanometer (nm)	0.00003937	mil
micrometer (μm)	0.03937	mil
millimeter (mm)	0.03937	inch (in.)
meter (m)	3.281	foot (ft)
kilometer (km)	0.6214	mile (mi)
Mass		
kilogram (kg)	2.205	pound mass (lbm)

CONVERSION FACTORS AND ABBREVIATIONS

Multiply metric unit	By	To obtain inch-pound or cgs units
Mass/Volume (Density)		
kilogram per cubic meter (kg/m^3)	0.06243	pound per cubic foot (lb/ft^3)
Power		
watt (W)	3.412	British thermal unit per hour (Btu/h)
	0.2388	calories per second (cal/s)
Pressure		
kilopascal (kPa)	0.2953	inch of mercury (in Hg)
	10.00	millibar (mb)
Temperature		
degree Celsius (°C)	F = 1.8°C + 32	degree Fahrenheit (°F)
kelvin (K)	(K-273.15) 1.8 + 32	degree Fahrenheit (°F)
Velocity		
meter per second (m/s)	2.237	mile per hour (mi/h)
Volume		
cubic meter (m^3)	0.0008107	acre-foot (acre-ft)

EVAPOTRANSPIRATION AND MICROCLIMATE AT A LOW-LEVEL RADIOACTIVE-WASTE DISPOSAL SITE IN NORTHWESTERN ILLINOIS

By R. W. Healy, M. P. deVries, and A. M. Sturrock, Jr.

ABSTRACT

From July 1982 through June 1984, a study was made of the microclimate and evapotranspiration at a low-level radioactive-waste disposal site near Sheffield, Bureau County, Illinois. Vegetation at the site consists of mixed pasture grasses, primarily brome (Bromus inermis) and red clover (Trifoleum pratense). Three methods were used to estimate evapotranspiration: (1) an energy-budget with the Bowen ratio, (2) an aerodynamic-profile, and (3) a soil-based water-budget. For the aerodynamic-profile method, sensible-heat flux was estimated by a profile equation and evapotranspiration was then calculated as the residual in the energy-balance equation. Estimates by the energy-budget and aerodynamic-profile methods were computed from hourly data, then summed by days and months. Yearly estimates for March through November, by these methods, were quite close--648 and 626 millimeters, respectively. Daily estimates range up to a maximum of about 6 millimeters. The water-budget method produced only monthly estimates based on weekly or biweekly soil-moisture content measurements. The yearly evapotranspiration estimated by this method (which actually included only the months of April through October) was 655 millimeters. The March-through-November average for the three methods of 657 millimeters was equivalent to 70 percent of precipitation.

Continuous measurements were made of incoming and reflected shortwave radiation, incoming and emitted longwave radiation, net radiation, soil-heat flux, soil temperature, horizontal windspeed, and wet- and dry-bulb air temperature. Windspeed and air temperature were measured at heights of 0.5 and 2.0 meters (and also at 1.0 meter after September 1983). Soil-moisture content of the soil zone was measured with a gamma-attenuation gage.

Annual precipitation (938 millimeters) and average temperature (10.8 degrees Celsius) were virtually identical to long-term averages from nearby National Weather Service stations. Solar radiation averaged 65 percent of that normally expected under clear skies. Net radiation averaged 70.1 watts per square meter and was highest in July and negative during some winter months. Wind direction varied but was predominately out of the south-southeast. Wind speed at the 2-meter height averaged 3.5 meters per second and was slightly higher in winter months than the rest of the year. The amount of water stored within the soil zone was greatest in early spring and least in late summer.

Seasonal and diurnal trends in evapotranspiration rates mirrored those in net radiation; July was usually the month with the highest rate. The ratio of sensible- to latent-heat fluxes (commonly called the Bowen ratio) for the 2-year period was 0.38, as averaged from the three methods. Monthly Bowen

ratios fluctuated somewhat but averaged about 0.35 for late spring through summer. In fall, the ratio declined to zero or to slightly negative values. When the ratio was negative, the latent-heat flux was slightly greater than the net radiation because of additional energy supplied by the cooling soil and air.

Evapotranspiration calculated by the three methods averaged 75 percent of potential evapotranspiration, as estimated by the Penman equation. There was no apparent seasonal trend in the relation between actual and potential evapotranspiration rates.

INTRODUCTION

Background

The Low-Level Radioactive-Waste Policy Act, enacted by Congress in 1980, states that, by 1986, each State will be responsible for the disposal of low-level waste generated within its borders. To comply with the Act, most States are joining in compacts with neighbor States to develop regional disposal sites. Because only three of the six existing commercial disposal sites located in the United States were active in 1985, several new locations must be selected in the near future. According to the U.S. Nuclear Regulatory Commission, in 10 CFR[1] Part 61, these new disposal sites must be designed to minimize contact of water and burial waste. Such designs will require detailed knowledge of the rate of water percolation through the geologic material in which the wastes are buried. This, in turn, will require knowledge of the entire hydrologic budget at proposed site locations.

Although a great deal of research has been conducted on phenomena related to water and radionuclide movement within porous media, a relatively small amount of this work has actually been performed at existing commercial disposal sites in the United States. The work that has been done at these sites has been directed primarily towards studying water and radionuclide movement within the saturated zones (see, for example, Fischer, 1983, p. 51). In light of the above-mentioned requirements, surprisingly few studies have focused on the hydrologic cycle at or near existing sites. Gee and Kirkham (1984) have investigated the water balance in the arid region close to Richland, Washington; and Schultz (1984) has studied the water balance in Maxey Flats in Kentucky. There is an urgent need, therefore, for further research into quantification of the hydrologic budget in different parts of the country.

Next to precipitation, evapotranspiration is the largest component in the hydrologic budget in the midwestern part of the country. Most precipitation that infiltrates the soil remains in the soil zone and eventually returns to the atmosphere through the process of evapotranspiration. Jones (1966, p. 12) estimated that, in northern Illinois, annual evapotranspiration averages about

---

[1] Code of Federal Regulations.

635 to 760 mm (millimeters). This is 71 to 85 percent of the long-term average annual precipitation of 890 mm for the Sheffield area. Hence, quantification of the entire hydrologic budget in this area requires an accurate estimate of evapotranspiration.

The U.S. Geological Survey, although not a regulatory agency, has been directed by Congress to conduct investigations and research aimed at establishing a technical basis upon which earth-science criteria for the selection and operation of low-level disposal sites can be developed, tested, and enforced by other agencies (Robertson, 1981, p. 22). As a part of that effort, a comprehensive study of evapotranspiration and the microclimate of vegetated trench covers was conducted, from July 1982 through June 1984, at the low-level radioactive-waste disposal site near Sheffield, Bureau County, Illinois. Precipitation, incoming and reflected shortwave radiation, incoming and outgoing longwave radiation, and soil-surface temperature were continuously recorded, as were wet- and dry-bulb air temperatures and windspeeds at three heights, soil temperatures at seven depths, and soil-heat flux at three depths. Soil-moisture content within the top 1.75 m (meters) was measured at 1- to 2-week intervals with a gamma-attenuation density gage.

This study was actually part of a larger study of water and radionuclide movement through the unsaturated zone at the Sheffield site that was conducted by the U.S. Geological Survey. Other aspects of that study included studies of water movement through a waste-trench cover, water movement through the entire thickness of the unsaturated zone, and hydrogeochemistry of the unsaturated zone. Concepts and techniques used in these studies can be found in Healy and others (1986). Other studies done by the U.S. Geological Survey at the site include hydrogeology (Foster and Erickson, 1980; Foster, Erickson, and Healy, 1984; Foster, Garklavs, and Mackey, 1984; and Garklavs and Healy, 1986), surface runoff and sediment transport (Gray, 1984), and transport of gaseous radionuclides within the unsaturated zone (Striegl, 1984).

Purpose and Scope

The purpose of this report is to present theory, methods, and results of a 2-year study of microclimate and evapotranspiration conducted at the low-level radioactive-waste disposal site near Sheffield, Illinois. Included is a description of the microclimate and estimates of evapotranspiration at the waste-disposal site for the period of data collection. Details on the microclimate are provided so that assumptions inherent in each method used to estimate evapotranspiration may be fully understood. Three different methods were used to estimate evapotranspiration: the energy-budget/Bowen ratio, the aerodynamic-profile, and the water-budget. Evapotranspiration rates are given on a daily basis and, for a select number of days, on an hourly basis.

THE SHEFFIELD SITE

Location and History

The study area is the low-level radioactive-waste disposal site located near Sheffield, Bureau County, Illinois (fig. 1). The 8-hectare site, situated on gently rolling terrain, was operated from 1967 through 1978. During that time, 21 trenches (fig. 2) were constructed and filled with approximately 300,000 m^3 (cubic meters) of waste (Foster, Erickson, and Healy, 1984). Total activity of the waste at the time of burial was estimated at 60,000 curies (K. Dragonette, U.S. Nuclear Regulatory Commission, written commun., 1979). More details on the history of the site, trench construction, and geology are given by Foster, Erickson, and Healy (1984).

Climate

The climate at the project site is continental. Long-term annual, monthly, and daily variations in precipitation and temperature are available from the National Weather Service for the following stations: Kewanee, 16 km (kilometers) to the south; Walnut, 31 km to the north; and Tiskilwa, 23 km to the east (U.S. Department of Commerce, 1939-84). Pan-evaporation data are available at the National Weather Service station at the Hennepin powerplant, located on the Illinois River near Hennepin, 39 km east of the site.

Annual precipitation at these weather stations ranged from a minimum of 646 mm to a maximum of 1,330 mm, and averaged 890 mm. Monthly distribution of precipitation is shown in figure 3. June is the wettest month, averaging 116 mm, whereas February is the dryest month, averaging 33 mm. Most precipitation falls in the months of May through September--a period dominated by convective thunderstorms (Huff, 1979). Most storms move from the southwest to the northeast (J. L. Vogel, Illinois State Water Survey, written commun., 1985). Much of the precipitation falling during the winter months (December through February) is in the form of snow. Average annual snowfall for the three weather stations is 850 mm. Snow is on the ground for an average of 53 days each year.

The mean annual temperature is 10.3°C (Celsius). January is typically the coldest (-6.5°C) month of the year, whereas July is the warmest (23.7°C) (fig. 4).

Windspeed and direction are measured at the Moline airport, approximately 68 km west of the site. The percentage of time during which the wind was coming from each of 36 sectors is shown in figure 5 for the period June 1, 1981, through December 31, 1983. During that time, the direction was rather variable but predominantly out of the south-southwest and west-northwest. Daily windspeed averaged 4.7 m/s (meters per second). There was no apparent correlation between windspeed and direction. Mean monthly windspeeds are shown in figure 6. There appears to be a good correlation between windspeed and time of year, in that summer months have the lowest windspeeds.

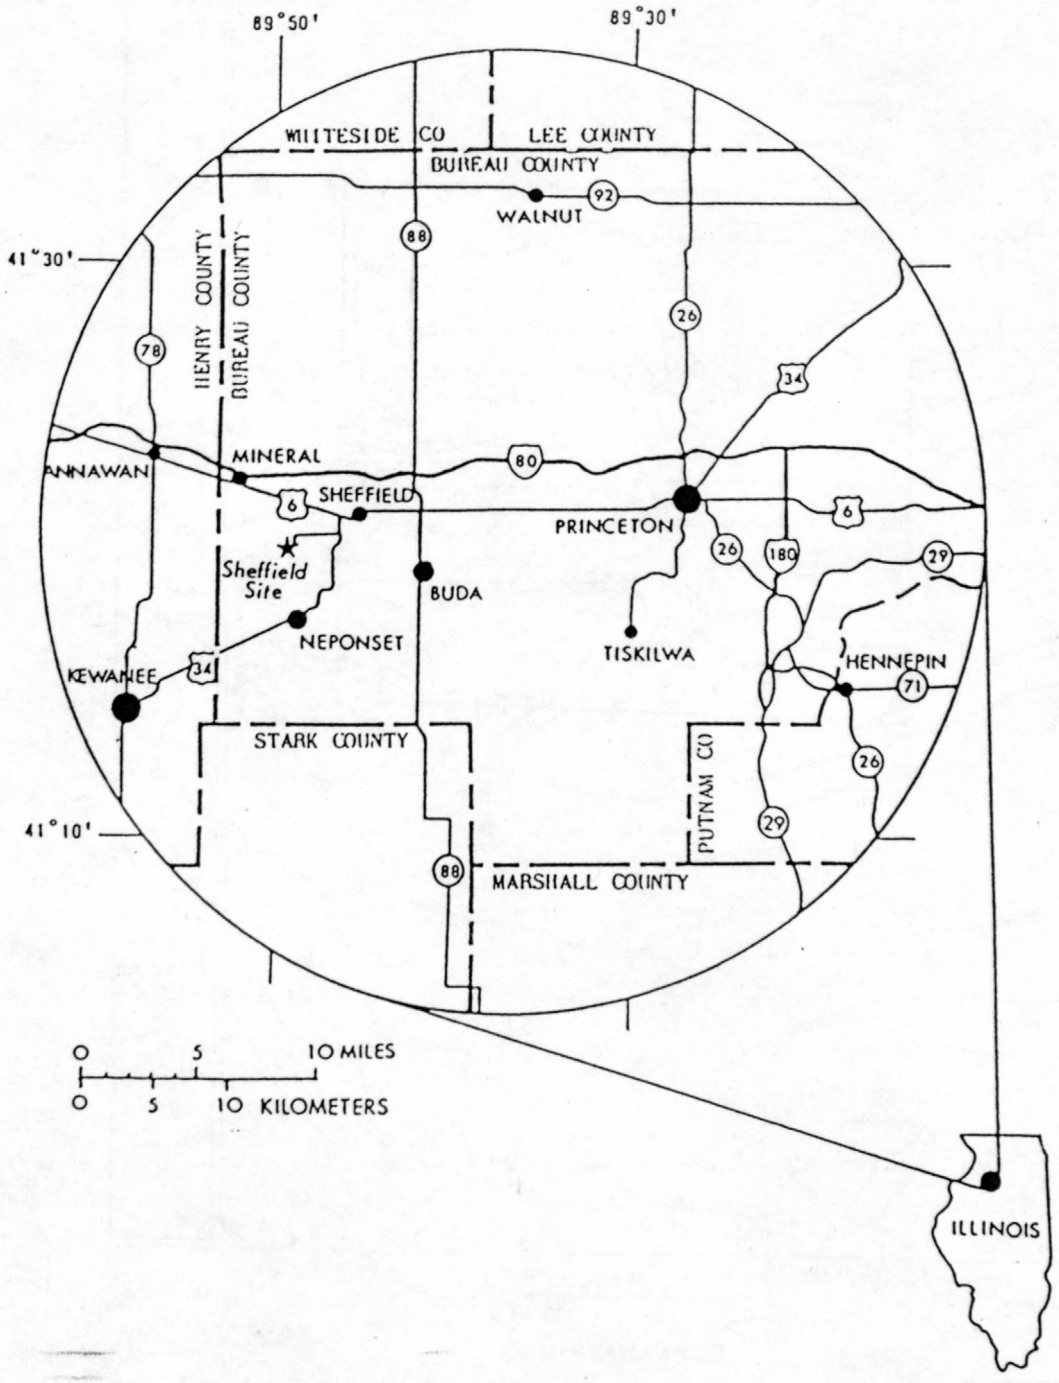

Figure 1.--Location of Sheffield low-level radioactive-waste disposal site.

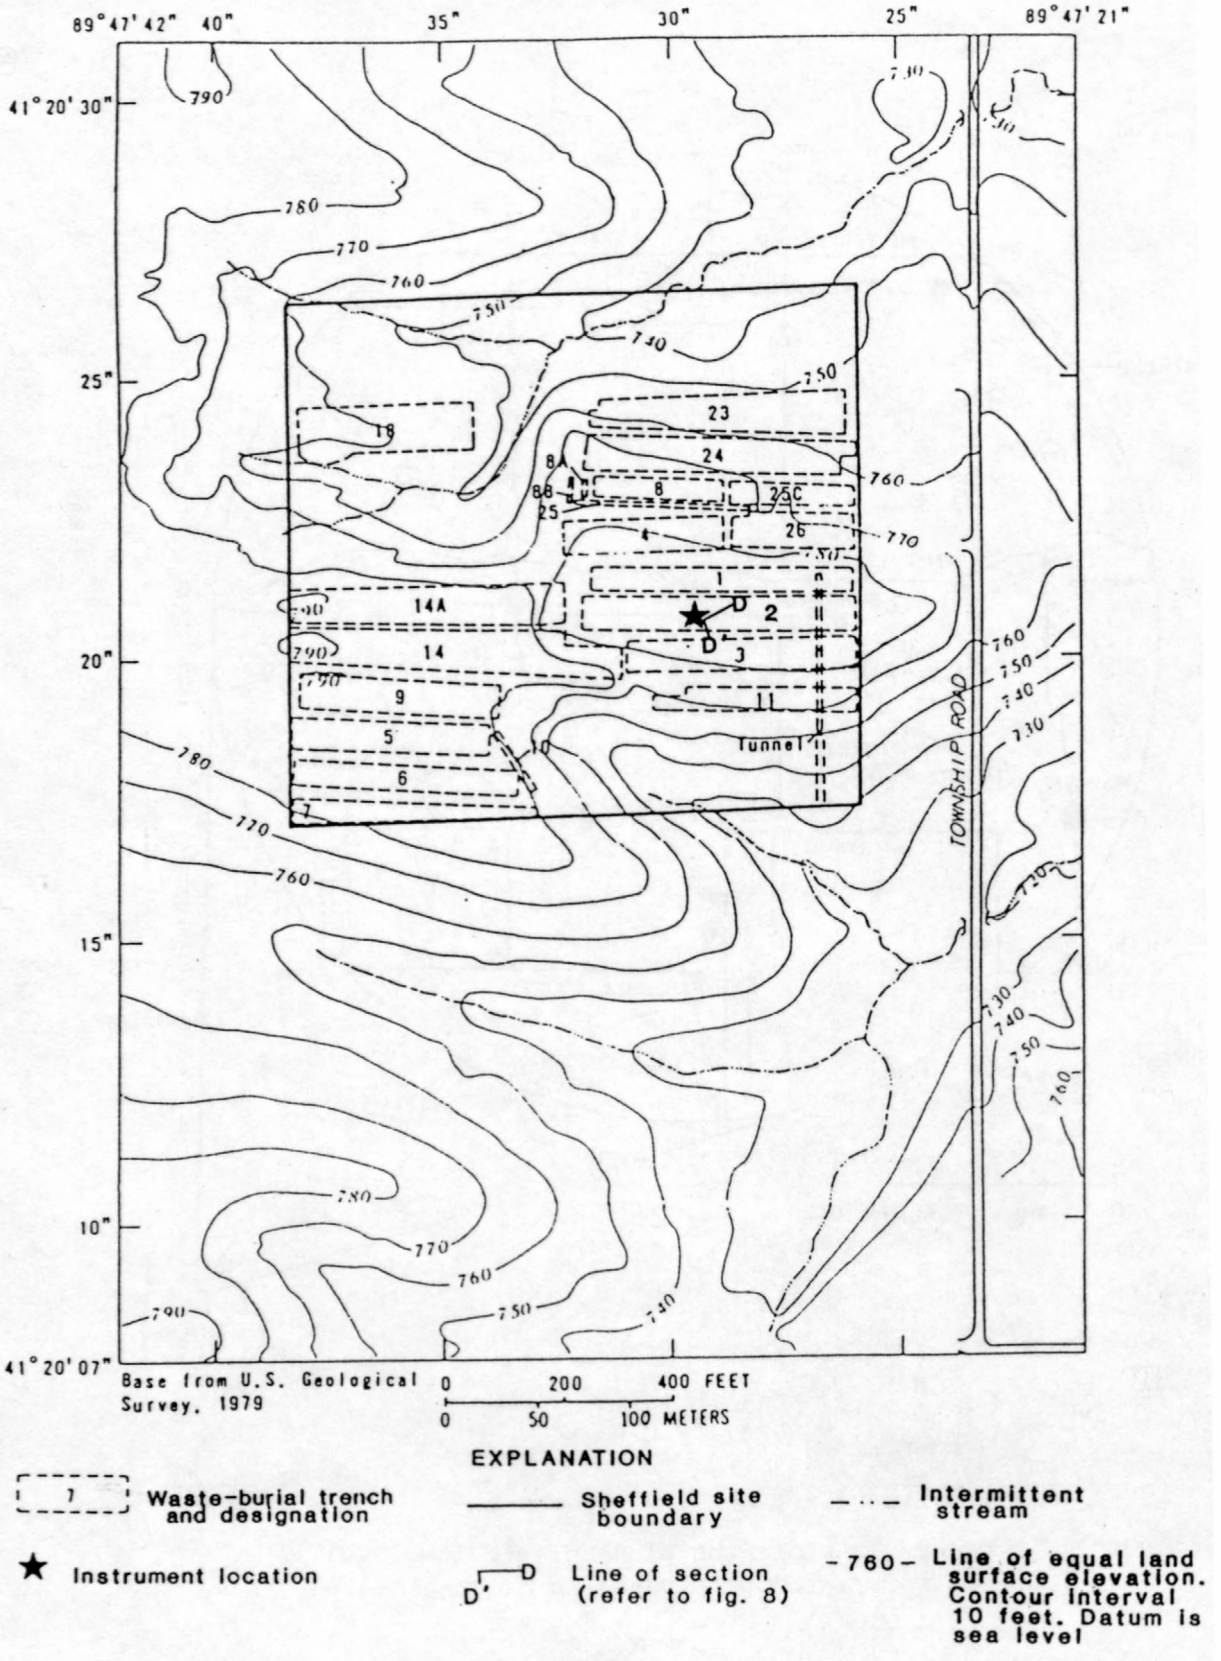

Figure 2.--Waste-trench location, instrument location, topography, and line of section.

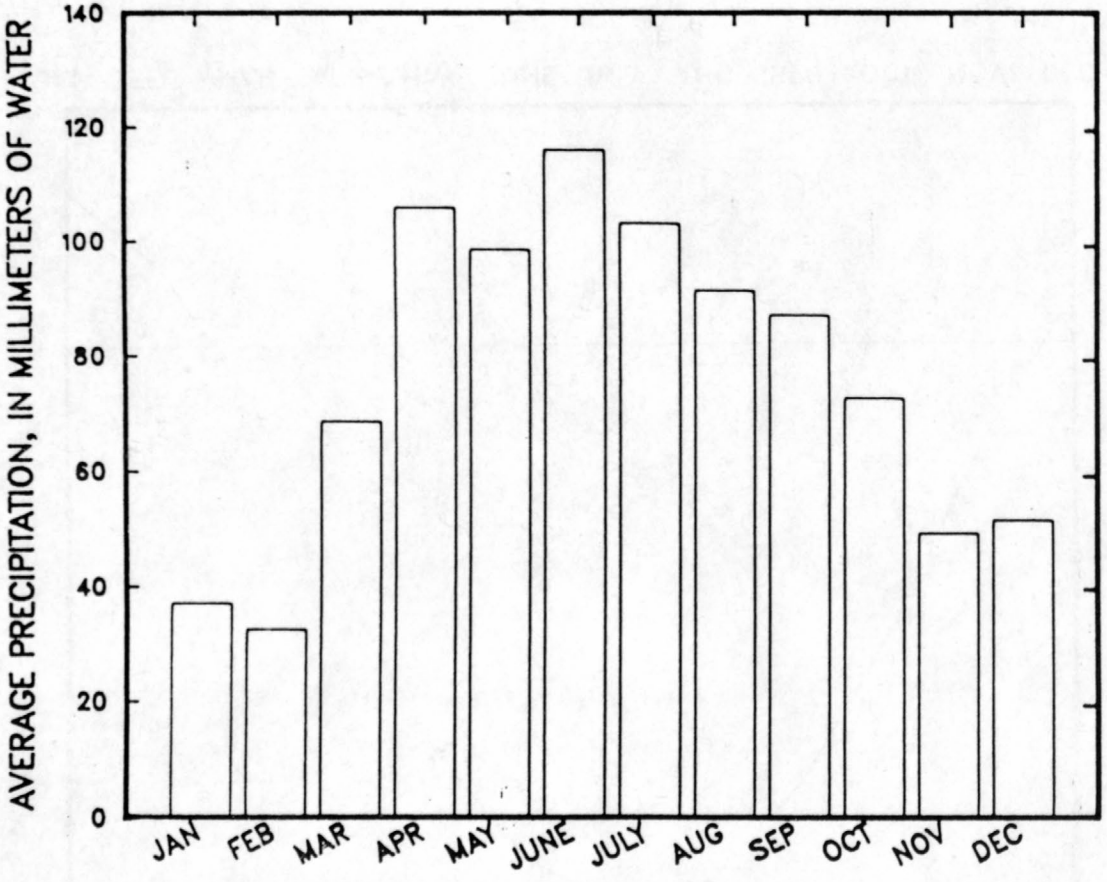

Figure 3.--Average monthly precipitation from nearby National Weather Service stations.

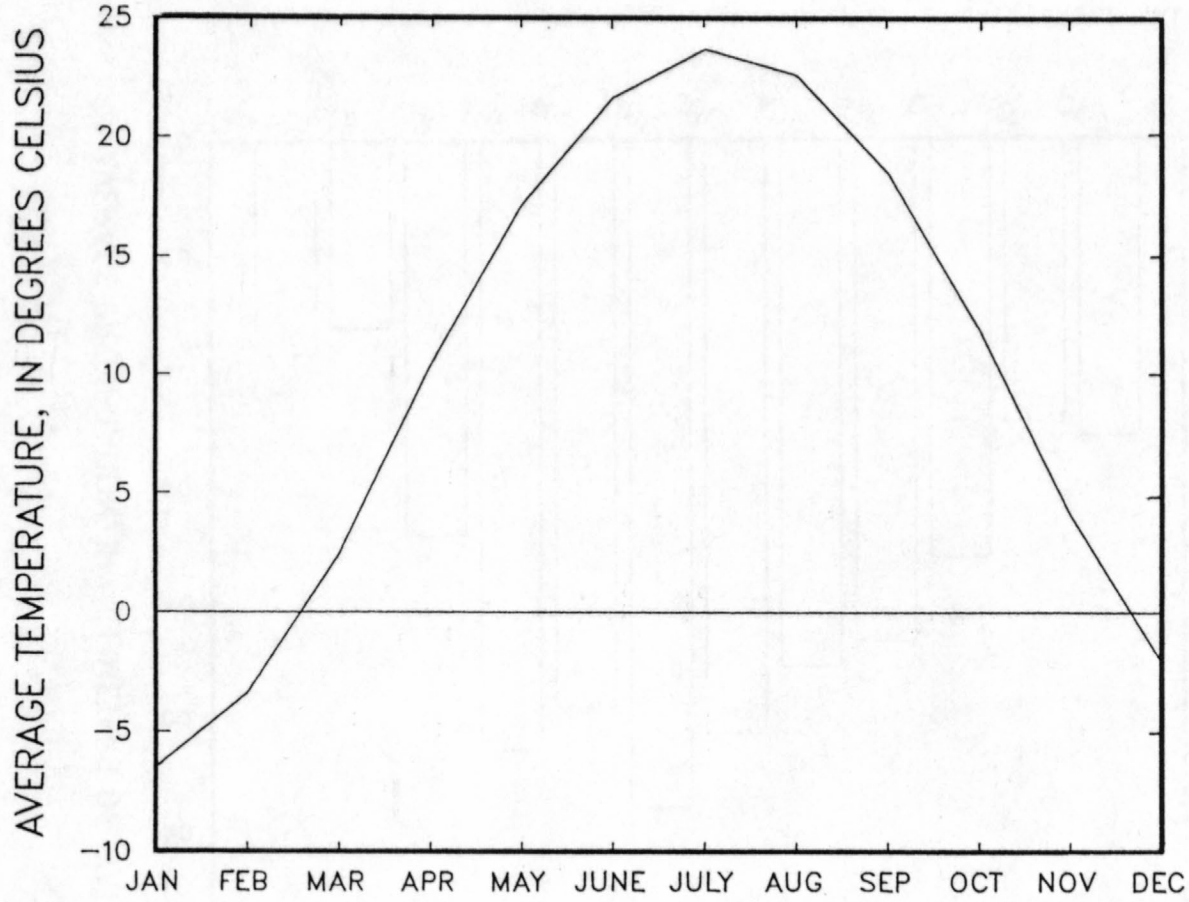

Figure 4.--Average monthly temperature from nearby National Weather Service stations.

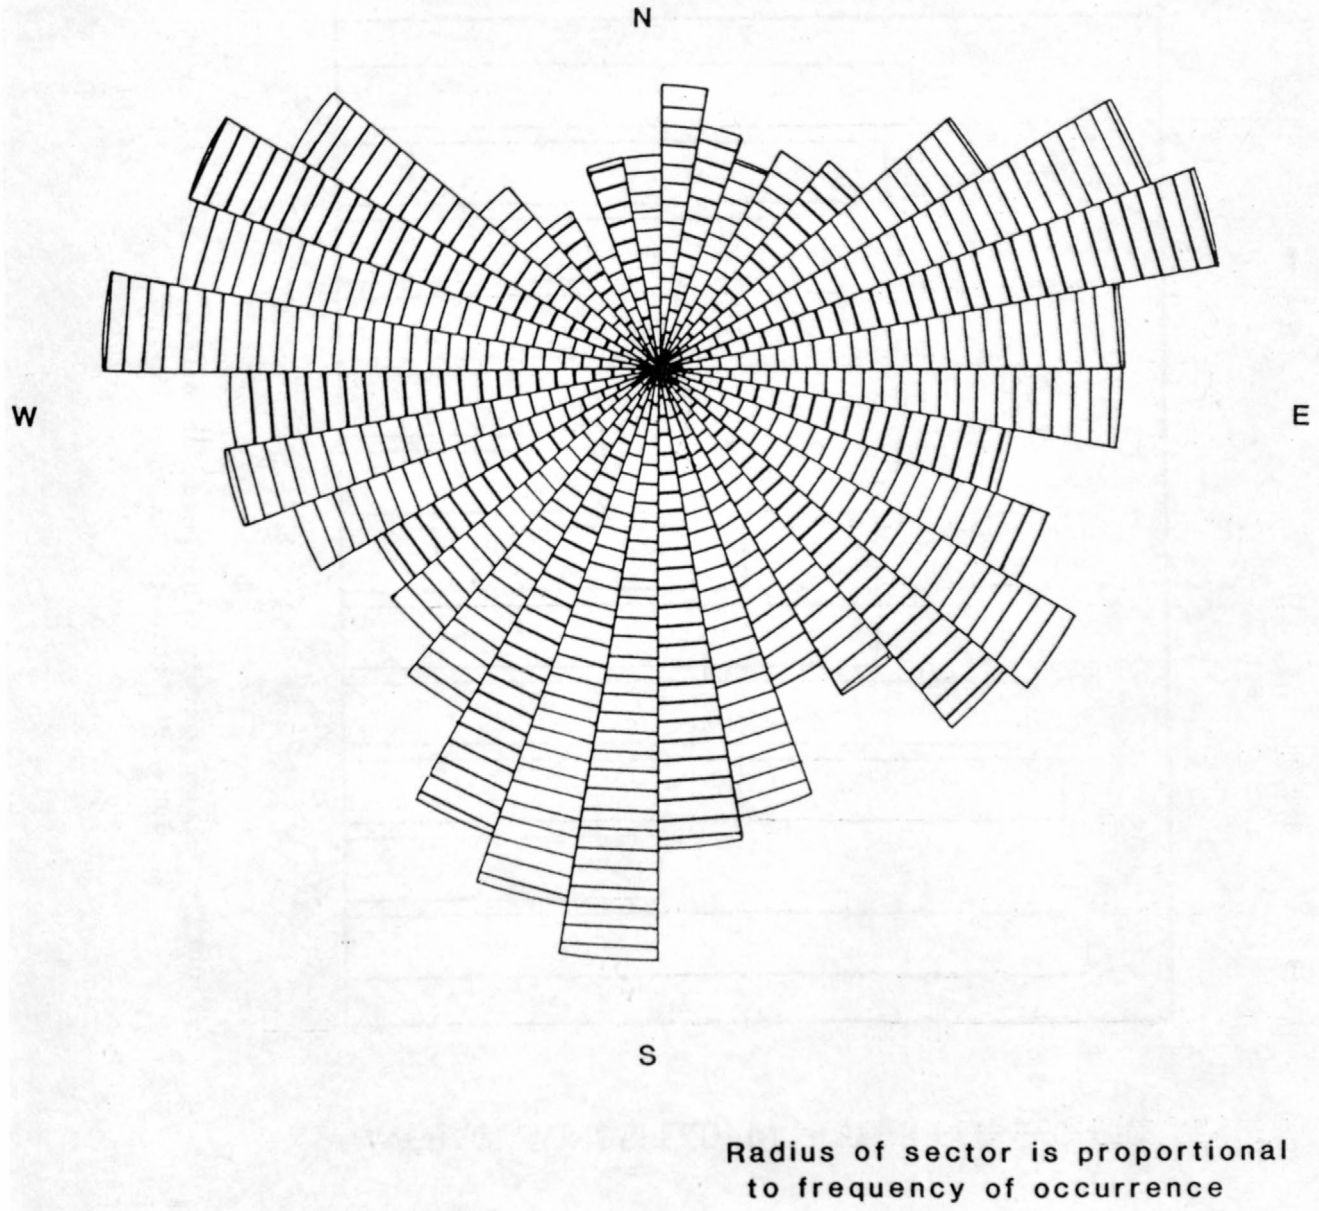

Figure 5.--Frequency of occurrence, in percentage of time, of winds from various directions at Moline, Illinois, for June 1981 through December 1983.

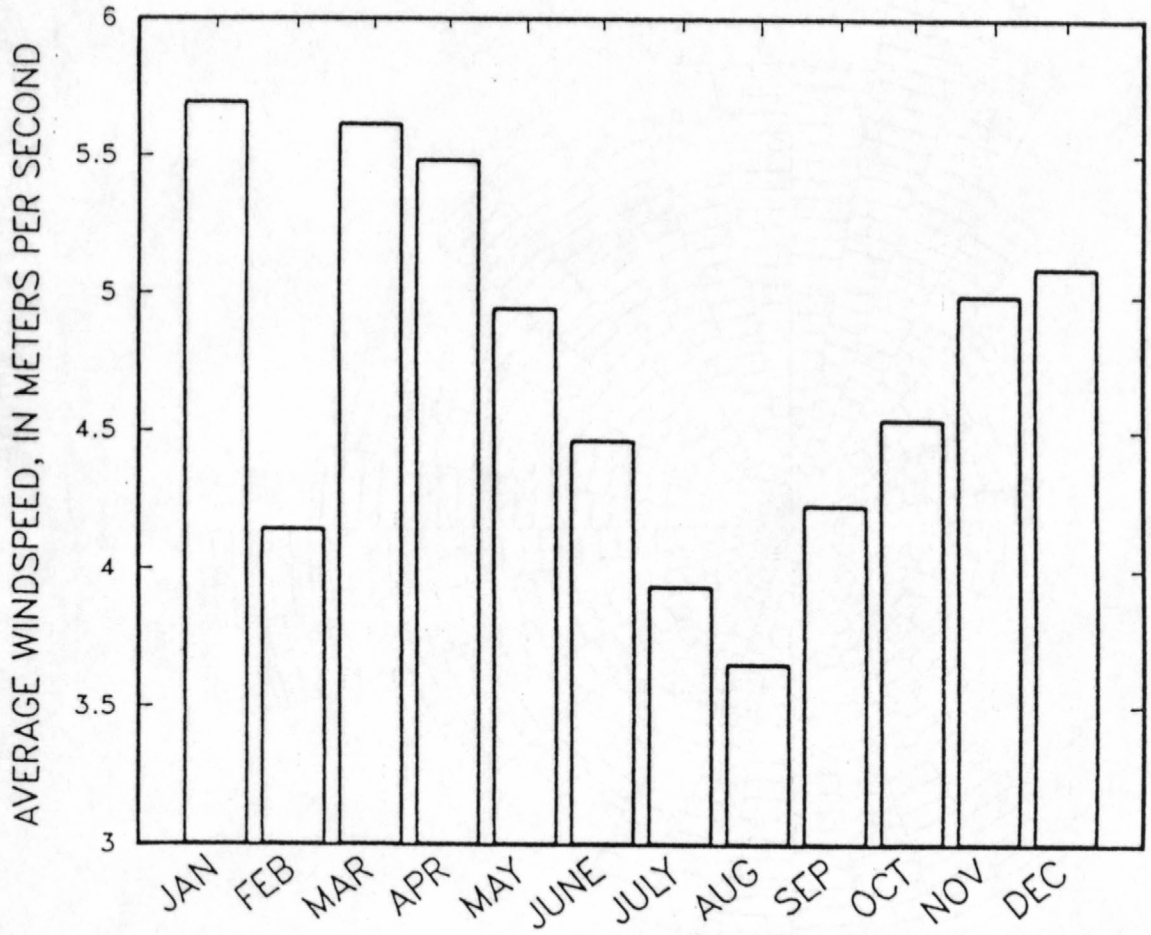

Figure 6.--Mean monthly windspeeds at Moline, Illinois, for June 1981 through December 1983.

The average relative humidity at Moline for the above-mentioned period was 70.6 percent. Average monthly relative humidity varied little throughout the year. The average station-barometric pressure was 99.49 kPa (kilopascals) (altitude of 181.0 m).

Average pan evaporation for April through October at Hennepin is shown in figure 7. Averages are based on data from 1963 through 1983. July has the highest average. The yearly average for the 7-month period is 1,140 mm.

Soils

The soil at the study site is a clayey-silt type that has developed in the upper part of the Peoria Loess (a Wisconsinan eolian deposit). The soil has been reworked over much of the site as a result of trench construction. Figure 8 shows a schematic diagram of a typical trench cover. Four types of material are shown. These have been divided on the basis of lithology and bulk density; table 1 lists a brief description of each type.

Vegetation

The entire 8-hectare site is vegetated with pasture grass. Brome grass (Bromus inermis) and red clover (Trifoleum pratense) are the most common species, with alfalfa (Medicago sativa) and timothy (Phleum pratense) present to a lesser degree. Figure 9 is a photograph of the vegetation in June 1983. The average height of the vegetation was about 0.2 m. It was mowed three or four times a year to a height of about 0.1 m. Roots have been found as deep as 1.5 m.

TECHNIQUES FOR ESTIMATING EVAPOTRANSPIRATION

There are many methods for estimating evapotranspiration. Detailed theory on the most commonly used methods can be found in textbooks related to evapotranspiration and microclimatology (see, for example, Sellers, 1965; Monteith, 1973; and Brutsaert, 1982). The latter author presents an interesting sketch of the history of evaporation theory--even the ancient Greeks studied water movement from the earth to the atmosphere. Jensen (1973) presents a survey and comparison of several different techniques.

Evapotranspiration rates during this study were estimated using three techniques: energy-budget, aerodynamic-profile, and water-budget. It is advantageous to use more than one technique because of inherent inaccuracies in each.

Estimates of potential evapotranspiration are included in this study for comparison with estimated evapotranspiration rates. The ratio of actual to potential evapotranspiration is an indication of how well the vegetation and soil moisture are filling the atmosphere's demand for water. This has important ramifications in several areas. In agriculture, the ratio (sometimes referred to as the crop coefficient) is an important indicator of crop stress.

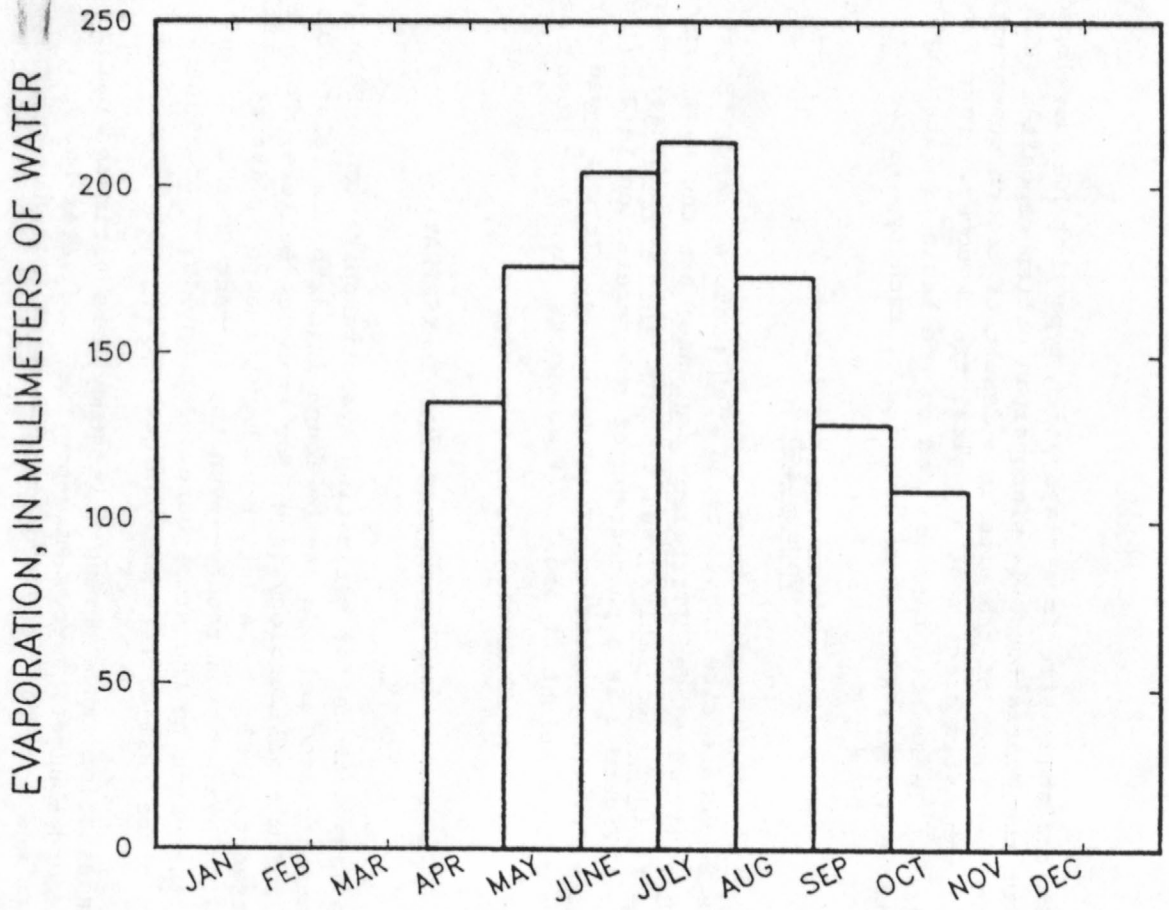

Figure 7.--Average monthly pan evaporation for April through October at Hennepin, Illinois.

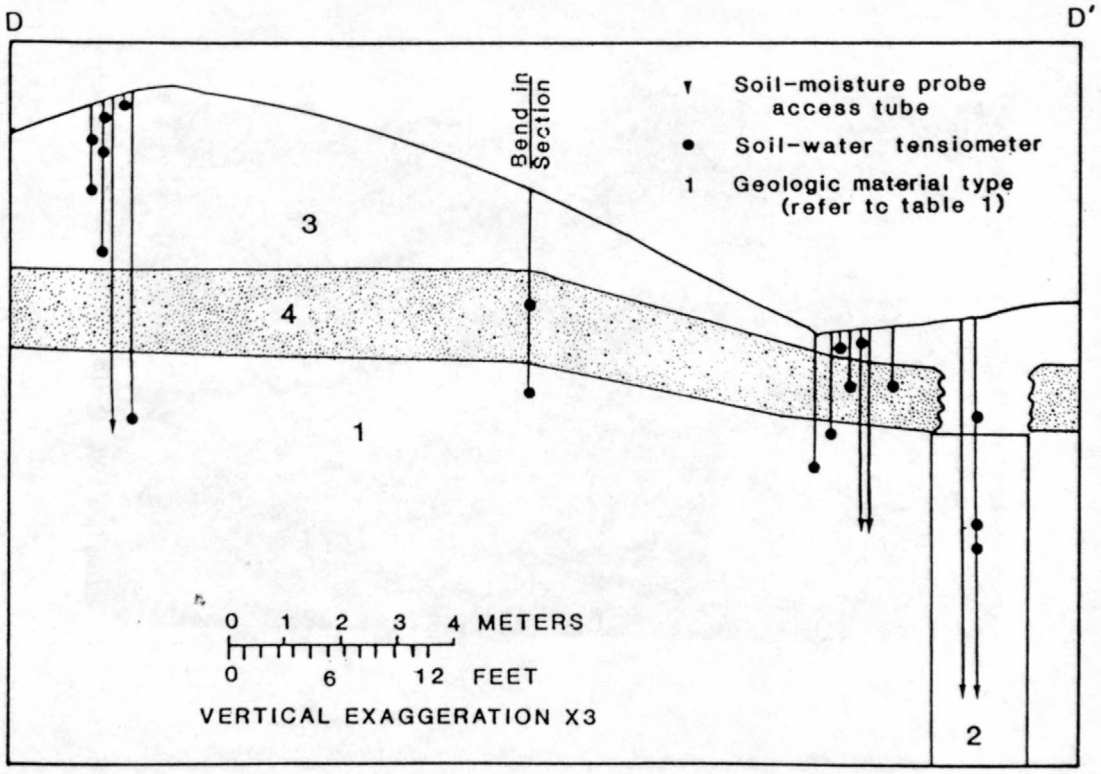

Figure 8.--Section D-D' of trench cover and locations of moisture-probe access tubes and tensiometers.

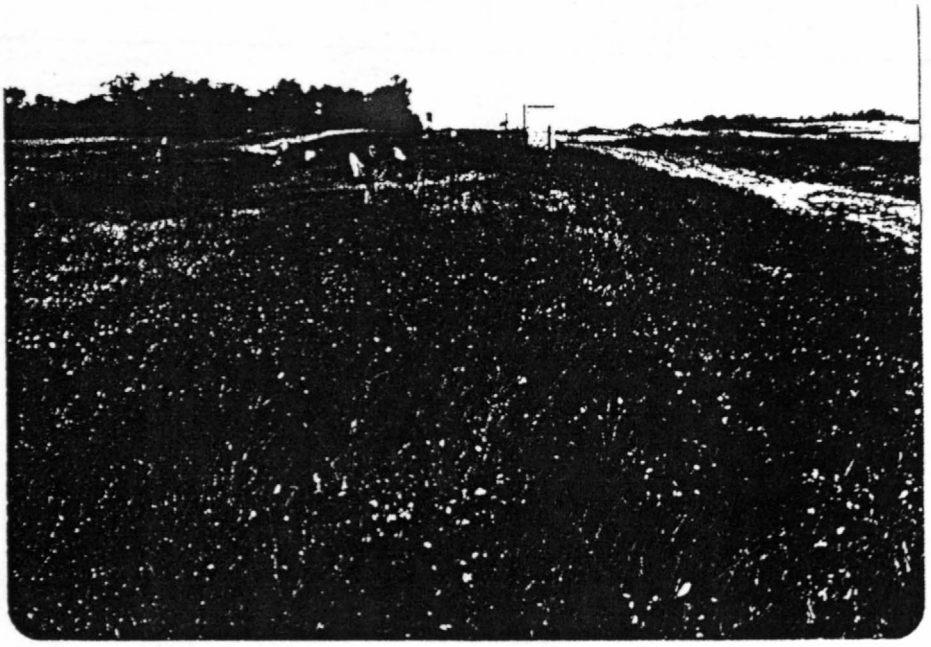

Figure 9.--Vegetation at the Sheffield site.

Table 1.--Properties of surficial deposits

[Locations of material types are shown in figure 8; g/cm^3, grams per cubic centimeter]

Type	Lithology	Bulk density (g/cm^3)	Description
1	Silt	1.25	Trench backfill similar to type 2, but waste containers are present in some locations
2	Silt	1.45	Undisturbed-lower part of Peoria Loess
3	Clayey-silt	1.65	Soil developed in upper part of Peoria Loess; other sediments may be mixed in
4	Clayey-silt	1.85	Same as type 3 only more compacted

If the ratio is too low, there may not be enough available soil moisture for growth. With respect to radioactive- or hazardous-waste disposal, it is desirable to maximize evapotranspiration to inhibit the downward movement of water into the waste trenches. The ratio of actual to potential evapotranspiration gives an indication of the adequacy with which the vegetation and soil-water storage capability are obtaining this goal. The effect of any future site modifications designed to increase evapotranspiration, may be gaged by the resulting ratio of actual to potential evapotranspiration. It should be noted that there are several other important considerations in selection of site vegetation, such as rooting depth and control of erosion.

Aerodynamic Profile

Within the laminar boundary layer, heat, water vapor, and momentum are transferred vertically only by molecular processes. However, this layer is at most a few millimeters thick (Sellers, 1965, p. 141). Because the laminar boundary layer is so thin, it is virtually impossible to measure fluxes across it. Beyond this layer, transfer is by turbulent processes. The aerodynamic-profile method is based on the assumption that turbulent transfer is described by the same equations that govern molecular transfer. Hence, the vertical fluxes of sensible-heat (H), latent-heat (LE), and momentum (τ) are described by the following equations (Sellers, 1965, p. 144):

$$H = -\rho_a \, c_p \, K_h \frac{\partial T}{\partial z} \tag{1}$$

$$LE = -\rho_a \, L \, K_w \frac{\partial q}{\partial z} \tag{2}$$

$$\tau = \rho_a \, K_m \frac{\partial u}{\partial z} \tag{3}$$

where ρ_a = density of air, in kilograms per cubic meter;
c_p = specific heat of dry air at constant pressure, in joules per kilogram per degree Celsius;
K_h = eddy diffusivity of heat, in square meters per second;
T = temperature, in degrees Celsius;
K_w = eddy diffusivity of water vapor, in square meters per second;
L = latent heat of vaporization for water, in joules per kilogram;
q = specific humidity, dimensionless;
K_m = eddy diffusivity of momentum, in square meters per second;
u = horizontal windspeed, in meters per second; and
z = height, in meters.

If $K_h = K_w = K_m$, usually a reasonable assumption (Dyer, 1974; Brutsaert, 1982, p. 61), then these equations can be rearranged to give:

$$LE = -\tau \, L \frac{\partial q}{\partial u} \tag{4}$$

$$H = -\tau \, c_p \frac{\partial T}{\partial u} \tag{5}$$

To make practical use of these formulas, more insight is needed on the variation of horizontal windspeed with height. If u increases linearly with the logarithm of height, then:

$$\frac{\partial u}{\partial \ln z} = C \tag{6}$$

where C is a constant equal to the slope of the plot of windspeed versus the logarithm of height. According to Sellers (1965, p. 148):

$$C = \frac{1}{k} (\tau/\rho_a)^{1/2} = u^*/k \tag{7}$$

where u^* = friction velocity, in meters per second; and

k = von Karmann constant, usually taken to be about 0.40 (Brutsaert, 1982, p. 58), dimensionless.

The windspeed at any height z can then be defined by:

$$u = \frac{u^*}{k} \ln [(z-d)/Z_o] \quad (8)$$

where Z_o = height at which u = 0 (called the roughness length), in meters; and

d = zero-plane displacement, assumed to be equal to 0.6 times the height of the vegetation (Monteith, 1973), in meters.

The momentum flux can then be written as

$$\tau = \rho_a k^2 \left(\frac{\partial u}{\partial \ln z}\right)^2 = \rho_a u^{*2} \quad (9)$$

so that equations 4 and 5 become

$$E = -\rho_a k^2 \frac{\partial q \partial u}{(\partial \ln z)^2} = -\rho_a \frac{\varepsilon}{P} u^{*2} \frac{\partial e}{\partial u} \quad (10)$$

$$H = \rho_a k^2 \frac{\partial T \partial u}{(\partial \ln z)^2} = -\rho_a c_p u^{*2} \frac{\partial T}{\partial u} \quad (11)$$

where e = water-vapor pressure, in kilopascals;

ε = ratio of molecular weights of water and air, dimensionless; and

P = barometric pressure, in kilopascals.

The forms of equations 10 and 11 to the right of the first equal signs were first proposed by Thornthwaite and Holzman (1942).

As mentioned earlier, the development of these equations requires that the wind profile be a logarithmic function of height. Under neutral conditions, this would usually be expected (Sellers, 1965, p. 148). However, under stable or unstable conditions, buoyancy effects can either inhibit or enhance the change in windspeed with height.

The term "stable" implies that there is an increase in temperature with height; hence, the colder, heavier air has no tendency to rise. Unstable conditions occur when temperature decreases with height at a rate greater than the adiabatic lapse rate (about 0.01°C/m) (Brutsaert, 1982, p. 44). Under

these conditions, the warmer, lighter air near land surface will tend to rise because of buoyancy. Neutral conditions imply that the temperature decreases with height at a rate less than or equal the adiabatic lapse rate. There are no buoyancy effects under neutral conditions.

To account for buoyancy effects in equations 10 and 11, several authors have proposed the use of so-called stability functions Ω_h, Ω_w, and Ω_m (where the subscripts refer to heat, water vapor, and momentum, respectively). Sellers (1965, p. 153) cites eight different formulations of these functions in the literature. Most of these relate Ω to either the Richardson number, R_i (Richardson, 1920), or the Monin-Obukov length, L' (Monin and Obukov, 1954), the two most common stability indexes. For this study, the following formulations of Grant (1975) were used:

$$\Omega_h = \Omega_w = \Omega_m^2 = \{1-15(z-d)/L'\}^{-0.5} \text{ under unstable conditions;} \quad (12)$$

$$\Omega_h = \Omega_w = \Omega_m = 1+4.7(z-d)/L' \text{ under stable conditions.} \quad (13)$$

The Monin-Obukov length was determined according to Campbell (1977, p. 41) as

$$L' = u^{*3}\rho_a c_p T/(kgH) \quad (14)$$

where g = acceleration due to gravity, in meters per square second; and
T = temperature, in degrees kelvin.

L' is negative for unstable conditions and positive for stable conditions. Under neutral conditions, L' approaches infinity. Incorporating the stability functions into equations 10 and 11 gives:

$$E = -\rho_a \frac{\varepsilon}{p} u^{*2} \frac{\partial e}{\partial u} \Omega_m \Omega_w^{-1} \quad (15)$$

$$H = -\rho_a c_p u^{*2} \frac{\partial T}{\partial u} \Omega_m \Omega_n^{-1} \quad (16)$$

Equations 15 and 16 are the forms of the aerodynamic-profile equations that were used in this study. Note that equation 16 must be used with the energy-balance equation to estimate E. As will be discussed later, equation 16 gave much more satisfactory results than equation 15. Use of this method, then, requires determination of vertical profiles of horizontal windspeed, vapor pressure, and temperature.

Energy Budget

The energy-budget method for estimating evapotranspiration (ET) is based on the principle of conservation of energy. The primary source of available energy at the earth's surface is solar radiation. This available energy is used to heat the soil surface, heat the air, and to evapotranspire available water. The energy budget can be written as:

$$R_n - (H + L*E + G) = 0; \quad (17)$$

where R_n = net radiation, in watts per square meter;
H = sensible heat flux, in watts per square meter;
$L*E$ = latent heat flux, in watts per square meter;
L = latent heat of vaporization, in joules per kilogram;
E = evapotranspiration rate, in kilograms per square meter per second (or millimeters per second); and
G = soil heat flux, in watts per square meter.

In applying equation 17 to an actual test site, a few assumptions need to be made. Energy absorbed by photosynthesis and energy stored within the plant canopy are ignored. Energy absorbed by snowmelt also is ignored. Only vertical fluxes are measured; horizontal fluxes are considered to be negligible. Measurements are made at only one location, so extrapolation of results over the entire study area requires that uniform conditions exist throughout. All fluxes appearing in equation 17 are assumed to occur at the soil or plant-canopy surfaces. However, in practice, these fluxes can only be measured at some finite distance from these surfaces.

Rn and G in the energy-budget equation can be measured relatively easily. Measurements of H and LE, on the other hand, are not as straightforward because of difficulties in estimating eddy diffusivities for heat and water vapor.

Bowen (1926) proposed solving the energy-balance equation by using the ratio of sensible- to latent-heat fluxes:

$$\beta = \frac{H}{LE} = \frac{\rho_a \, c_p \, K_h \, \partial T/\partial z}{\rho_a \, L \, \varepsilon/P \, K_w \, \partial e/\partial z} \quad (18)$$

where β = Bowen ratio, dimensionless;
ρ_a = density of air, in kilograms per cubic meter;
c_p = specific heat of dry air at constant pressure, in joules per kilogram per degree Celsius;
$\frac{\partial T}{\partial z}$ = vertical gradient of air-temperature, in degrees Celsius per meter;
$\frac{\partial e}{\partial z}$ = vertical gradient of water-vapor pressure, in kilopascals per meter;

ε = ratio of mole weights of water vapor and dry air, dimensionless, assumed to be 0.622;

K_h = eddy diffusivity for heat, in square meters per second;

K_w = eddy diffusivity for water vapor, in square meters per second; and

P = absolute barometric pressure, in kilopascals.

In computing β, it is again usually assumed that $K_h = K_w$ (Denmead and McIlroy, 1970; Swinbank and Dyer, 1967). Campbell (1973) showed that only under very stable conditions (such as at night) or extremely unstable conditions (such as during the day in an arid region) does K_h differ from K_w by more than 10 percent.

Substituting equation 18 into 17 gives:

$$\frac{R_n - G}{(1+\beta)L} \tag{19}$$

Use of this method, therefore, requires measurement of net radiation, soil-heat flux, barometric pressure, and vertical gradients of air temperature and water vapor pressure.

Water Budget

The water-budget method for estimating evapotranspiration is based on the principle of conservation of water. For a soil column of thickness D and unit horizontal area, the water-budget equation can be written as:

$$E = -\int_0^D \frac{\partial \theta}{\partial t}\, dz + PR - R - q_D \tag{20}$$

where E = evapotranspiration rate, in millimeters per day;

$\frac{\partial \theta}{\partial t}$ = change in volumetric soil-moisture content with respect to time, per day;

z = depth, in millimeters;

PR = precipitation, in millimeters per day;

R = runoff, in millimeters per day; and

q_D = rate of drainage downward from the column at z=D, in millimeters per day.

Derivation of equation 20 assumes that all terms are averaged over the length of the sampling period. Lateral flow into the soil column is assumed to be negligible.

Soil-moisture content can be measured either in place or by soil sampling and gravimetric determination. The latter method generally is limited to studies of bare-soil evaporation because of the difficulty in sampling the entire depth of rooting for a vegetated cover. The most common in place methods are the use of a weighing lysimeter and a soil-moisture probe or soil-water tensiometers. Of these, the weighing lysimeter is the most accurate; readings can be recorded automatically to provide detailed information on changes in evapotranspiration rates over time. Construction and operation of weighing lysimeters, though, is costly and time consuming (van Hylckama, 1974). The moisture-probe method was used for this study. This method is most useful when q_D is negligible (Brutsaert, 1982, p. 232). Although not negligible, the term is small when compared to evapotranspiration rates at the Sheffield site. Foster, Erickson, and Healy (1984) estimated that q_D ranges from 25 to 50 mm per year. In addition, virtually all of the drainage from the soil zone occurs in late winter or early spring (Healy and others, 1984)--times of low rates of evapotranspiration. Values for q_D can be estimated using Darcy's equations, if pressure heads are known at different depths within the soil zone. These pressure heads were measured with soil-water tensiometers.

The water-budget method has limited accuracy over short time periods; however, reliable estimates can be obtained over periods of several days (van Hylckama, 1980, p. 4). Several investigators have used this method with success (Jensen, 1967; van Bavel and Ehrler, 1968; and Wallace and others, 1981).

Potential Evapotranspiration

According to Penman (1956), potential evapotranspiration (PET) is "the amount of water transpired in a unit time by a short green crop, completely shading the ground, of uniform height, and never short of water." It is a measure of the capacity of the atmosphere to absorb water from a vegetated surface. There are many different techniques for estimating PET. A good review of the standard methods can be found in Deacon and others (1958). McGuinness and Bordine (1972) compared 14 different methods with lysimeter-derived data and showed that, although there existed substantial differences in the magnitudes of the different estimates, there existed high correlations among all methods. All methods showed similar trends throughout the year. Probably the most widely used methods are those of Penman (1948), Thornthwaite (1948), and Blaney and Criddle (1962).

The Penman (1948) method for estimating PET was used in this study because of its rather sound physical basis. It is also one of the more popular methods and, as such, may serve as a good index for comparisons with other locations. The Penman equation can be stated as:

$$PET = \frac{1}{L}\,\frac{(R_n - G)\Delta}{\Delta + \gamma} + \frac{\gamma L E_a}{\Delta + \gamma} \qquad (21)$$

where PET = potential evapotranspiration, in millimeters of water per second;

R_n = net radiation, in watts per square meter;

G = soil-heat flux, in watts per square meter;

Δ = slope of vapor saturation curve, in kilopascals per degree Celsius;

γ = psychrometric constant, in kilopascals per degree Celsius;

E_a = a measure of the drying power of the wind, in millimeters of water per second;

= $f(u) * (e_s - e)$; $f(u)$ is an empirical wind function; e_s and e are saturated and actual vapor pressures, respectively, in kilopascals.

Penman (1948) used the following wind function:

$$f(u) = 3.01 \times 10^{-5} \ (0.5+0.54 \ U_{2m}) \qquad (22)$$

where U_{2m} = windspeed at 2 m height, in meters per second.

Penman (1948) originally derived equation 20 for estimating potential evaporation of open water. Penman and Schofield (1951) modified it to account for the difference between evaporation and evapotranspiration by adding correction factors to account for stomatal resistance to vapor flow and the opening and closing of the stomata during the diurnal cycle. Tanner and Pelton (1960), however, found little basis for general application of these factors. They suggested that the wind function be modified to account for surface roughness. Several authors, including Monteith (1973) and Thom and Oliver (1977), have proposed alternative formulations for f(u). van Bavel (1966) proposed use of the following wind function:

$$f(u) = \frac{\rho_a \ \varepsilon \ k^2}{P} \ \frac{u}{[\ln \ (z-d)/z_o]^2} \qquad (23)$$

where ρ_a = density of air, in grams per cubic meter;

ε = ratio of molecular weight of water to air, dimensionless;

k = van Karmann constant, dimensionless;

P = barometric pressure, in kilopascals;

u = windspeed at height Z_a, in meters per second;

z = height of windspeed measurement, in meters;

z_o = roughness length, in meters; and

d = zero-plane displacement, in meters.

Equation 23 is the formulation of f(u) that was used in this study. Daily values of PET were computed for the entire period of record. In calculating these values, a daytime-nighttime weighting scheme was employed as recommended by Tanner and Pelton (1960).

INSTRUMENTATION

Instruments used in this study were monitored with microprocessor-based data loggers (Campbell Scientific models CR-21[1] and CR-7[1]), which are capable of accepting analog, electrical-resistance, and electric pulses. Most sensors were read at 10-second intervals. Readings were then averaged or totaled over each hour and day. The hourly and daily values were then stored on magnetic-tape cassettes and routinely transferred to computer storage. Sensors were located close to the center of the site (fig. 2), which provided a wind fetch of at least 100 m in all directions.

Precipitation

Precipitation was measured with tipping-bucket and weighing rain gages. The tipping bucket measured precipitation in increments of 0.25 mm. The data logger then accumulated precipitation in both 1-minute and 1-hour intervals. The weighing rain gage was used to obtain daily precipitation totals during the winter.

Radiation

Net radiation was measured directly using a Fritschen-type (Fritschen and Gay, 1979) net radiometer. It was also computed as the sum of its individual components (incoming and outgoing shortwave solar and longwave terrestrial radiation). Each of these individual components was measured by a radiometer consisting of a temperature-compensated thermopile located between an exposed and shielded surface. The exposed surface is coated with a nonwavelength-selective, radiation-absorbing black lacquer, whereas the other surface is shielded from external radiation. Wavelength specificity is achieved with hemispherical filters of known optical transmission (0.3 to 3.0 micrometers for shortwave radiation and 4.0 to 50.0 micrometers for longwave radiation). Radiant energy is converted to heat at the lacquer surface. The amount of heat and, therefore, radiant energy, is determined from the difference in temperature between the two surfaces. Longwave radiometers require an additional temperature-dependent correction to compensate for radiation emitted by the detector. The net radiometer operates on the same principle as individual component types; however, it differs in its broadened width of wavelength receptance and simultaneous acceptance of incoming and outgoing radiation. Calibration is factory-determined using International Pyrheliometric Scale (IPS) standards for shortwave and a low-temperature blackbody for longwave radiometers. Incoming radiometers were mounted at a height of 2 m, whereas outgoing and net radiometers were mounted at a height of 1 m.

---

[1] Use of trade names and trade marks in this report is for identification purposes only, and does not constitute endorsement by the U.S. Geological Survey.

Wind

Horizontal windspeed was measured at two heights (0.5 and 2.0 m) prior to October 1983; after that time, it was measured at three heights (0.5, 1.0, and 2.0 m). Three-cup electro-optical anemometers were used. These instruments contain a small infrared light source which is separated by an opaque disk, containing a single window, from a photo-Darlington sensor. For each rotation of the cup wheel, the window passes between the light source and detector causing a short electric pulse to be sent to the data logger. The logger calculated windspeed by counting these pulses over a 10-second interval.

A potentiometric wind vane, mounted at a height of 2 m, was used to determine wind direction. This device transforms direction into an electrical resistance. The data logger measured this resistance and computed a vectorized wind direction and speed.

Air Temperature and Water-Vapor Pressure

Dry- and wet-bulb air temperatures were measured with linearized thermistors installed at heights of 0.5 and 2.0 m (and also at 1.0 m after September 1983). The wet-bulb thermistors were kept wet with cotton wicks that drew from water reservoirs. The thermistors were contained in a shelter consisting of a radiation shield and tetraskelion-design air-passage systems to allow natural wind (as opposed to forced draft) to ventilate the thermistors. The design of these psychrometers is more fully explained by Bellaire and Anderson (1951). Those authors found that accurate water-vapor pressures could be obtained if the windspeed was at least 0.44 m/s. The design has been used in previous studies (for example, Anderson, 1954, p. 35; and van Hylckama, 1980).

The Rankin-Dupré formula (Sutton, 1953, p. 5) and the psychrometric equation (Chemical Rubber Co., 1972, p. e-39) were used to compute the saturated and actual vapor pressures:

$$e_s = 0.1 \exp\left(54.721 - 6788/(T_w + 273.16) - 5.0016 \cdot \ln(T_w + 273.16)\right) \quad (24)$$

$$e = e_s - [P \cdot 0.00066 \cdot (T_a - T_w) \cdot (1 + 0.00115 T_w)] \quad (25)$$

where e_s = saturation vapor pressure, in kilopascals;
e = vapor pressure of overlying atmosphere, in kilopascals;
T_a = dry-bulb temperature, in degrees Celsius;
T_w = wet-bulb temperature, in degrees Celsius; and
P = barometric pressure, in kilopascals.

The thermistors used (Yellow Springs Instruments Model 44212) were listed by the manufacturer to have an accuracy of ± 0.15°C. This accuracy was improved to at least ± 0.10°C by calibration in a stirred alcohol bath for the range of

possible temperatures encountered at the site. New thermistors were placed in the psychrometers at approximately 60-day intervals. In addition, the individual psychrometers were rotated between different heights periodically to reduce instrument bias.

Soil-Heat Flux and Temperature

Conductive soil-heat flux was measured with heat-flux disks, which are thin ceramic plates that contain a thermopile. The thermopile determines the difference in temperature between the top and the bottom of the plates. If the thermal conductivity of the plates is known, soil-heat flux can be determined using Fourier's first law of heat conduction:

$$Q = -K\frac{\partial T}{\partial z} \tag{26}$$

where Q = the soil-heat flow, in watts per square meter;

K = the thermal conductivity, in watts per meter per degree Celsius; and

$\frac{\partial T}{\partial z}$ = the change in temperature with respect to depth, in degrees Celsius per meter.

The heat-flux disks used in this study were 3 mm thick and 28 mm in diameter. They were factory calibrated and had a thermal conductivity of approximately 0.33 W/m°C (watts per meter per degree Celsius). They were installed at three different depths (20, 50, and 100 mm) to define the soil-heat flux gradient.

Soil temperatures were measured at seven depths, ranging from 0.02 to 1.00 m, using copper-constantan thermocouples that were used as a backup for the heat-flux disks in computing conductive heat transfer.

Surface temperature was measured with an infrared thermometer. This device actually measures infrared radiation being emitted by the object at which it is aimed. The temperature of that object is then determined internally within the thermometer according to the Steffan-Boltzmann Law:

$$Q' = \varepsilon\sigma T_k^4 \tag{27}$$

where Q' = flux of infrared radiation, in watts per square meter;

ε = emissivity, dimensionless;

σ = Stephen-Boltzmann constant, in watts per square meter per degree Kelvin to the fourth power (5.66×10^{-8} $W/m^2{\circ}K^4$); and

T_k = temperature, in degrees Kelvin.

Equation 27 does not account for any radiation reflected by the object. This should have little effect upon surface temperature measurements because of the high emissivity of both bare soil and vegetated surfaces.

The thermometer was mounted at a height of 1.5 m and was aimed directly downward. Emissivity, which can be adjusted by a dial on the thermometer, was usually set at 0.98, which according to Brutsaert (1982, p. 137) should be typical for grassy vegetation.

Soil-Water Content and Tension

A gamma-attenuation soil-density gage was used to determine soil-water content. Use of this device requires two parallel access tubes. A gamma-emitting radioactive source (Cesium-137) is lowered down one tube, while a detector is maintained at the same depth as the source in the other tube. The number of gamma photons arriving at the detector is a function of the total density of the material between the tubes. Therefore, the dry bulk density of the soil must be known in order to obtain the water content. Additional details on the operation of this type of gage are contained in Healy and others (1986). Weekly or biweekly measurements were made during the study period at three locations (figs. 2 and 8) in depth increments of 51 mm below land surface to the bottom of the access tubes. Depths to the bottom of the tubes ranged from 1.5 to 2.5 m.

A series of 32 soil-water tensiometers were installed adjacent to the moisture-probe measurement sites (figs. 2 and 8) at depths ranging from 0.05 to 2.20 m. Readings from the tensiometers were automatically recorded using pressure transducers and data loggers.

Surface Runoff

Three stations were used to gage runoff from the site. The average drainage area of these stations was about 1.79 hectares. Although each station was located on an ephemeral streambed, they were all equipped with a continuous stage recorder to insure that runoff occurring immediately following precipitation was measured.

More detail on the measurement of surface runoff at the site can be found in Gray (1984). In addition, small runoff-collection plots, which are described in Gray and deVries (1984), were located near the moisture-probe access tubes. The average drainage area of these plots was 11 m^2 (square meters).

MICROCLIMATE OF THE TRENCH COVERS

Discussion of certain aspects of the microclimate of the trench-cover vegetation is warranted to illustrate the effects of assumptions made in estimating evapotranspiration. Weather patterns are examined for both seasonal and diurnal trends. To aid in this discussion, figure 10 shows hourly values of several microclimatological parameters for six 3-day periods. All times shown in figure 10, and all subsequent figures and tables, refer to local time (either Central Standard or Central Daylight).

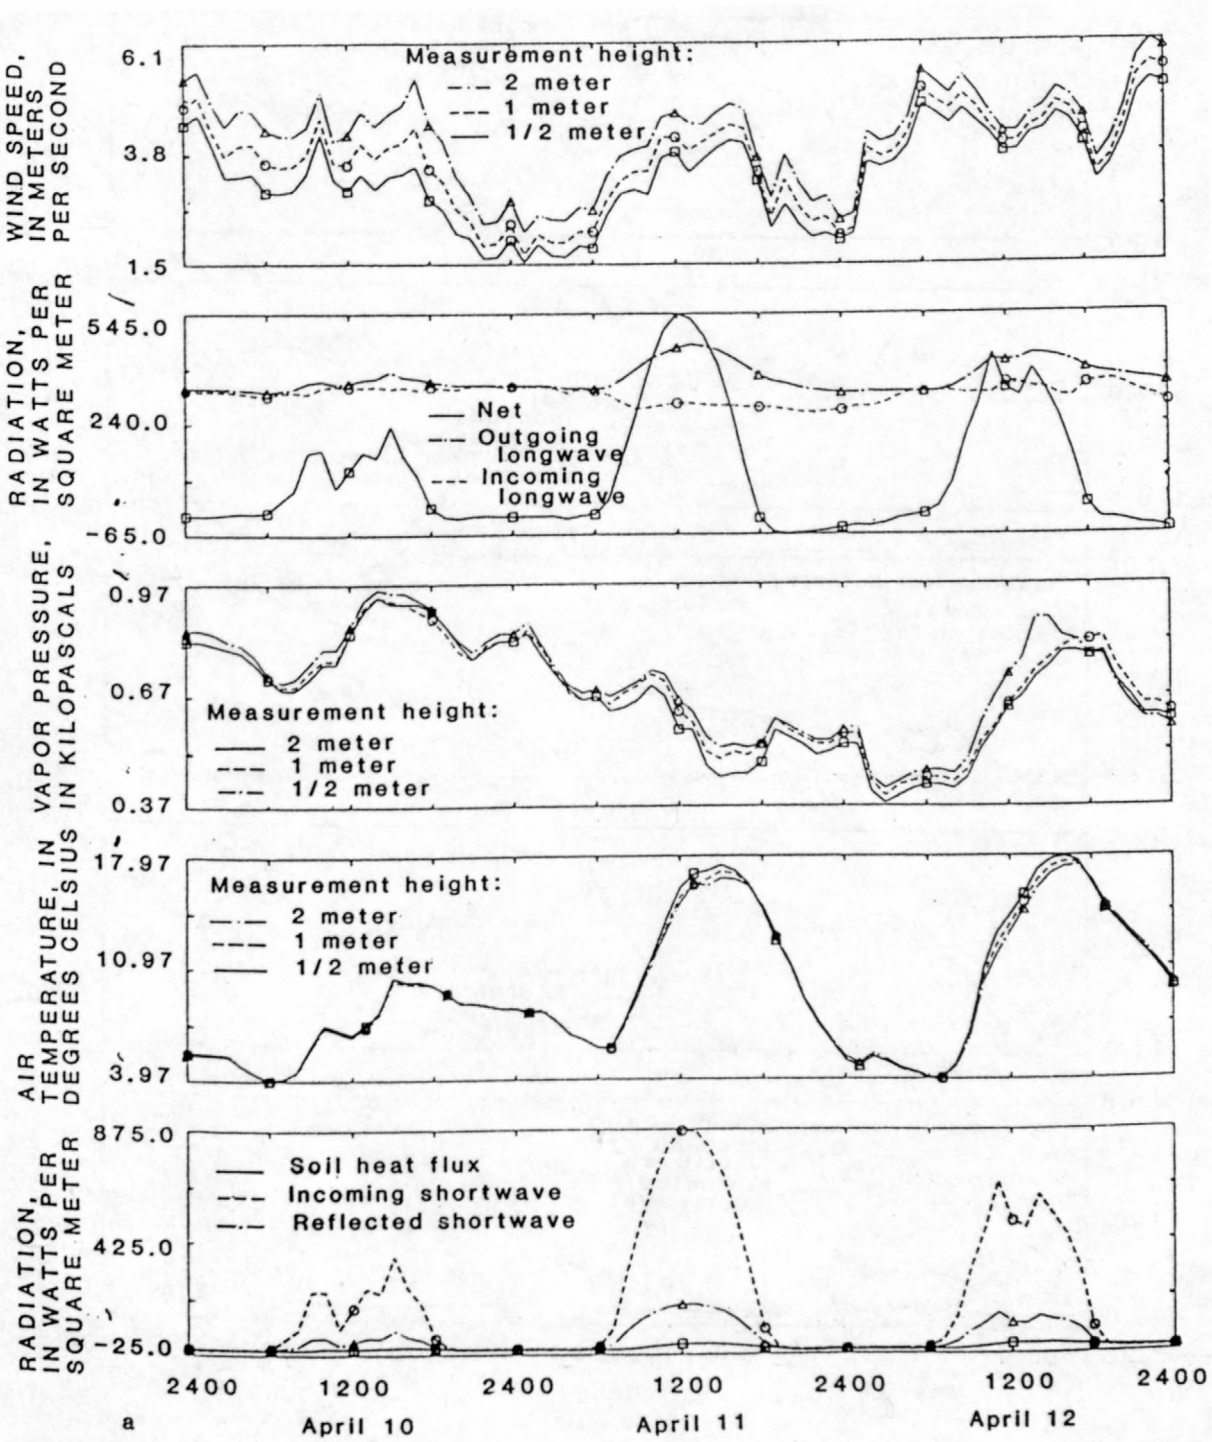

Figure 10.--Selected microclimatological parameters at the Sheffield site (a) April 10-12, 1984.

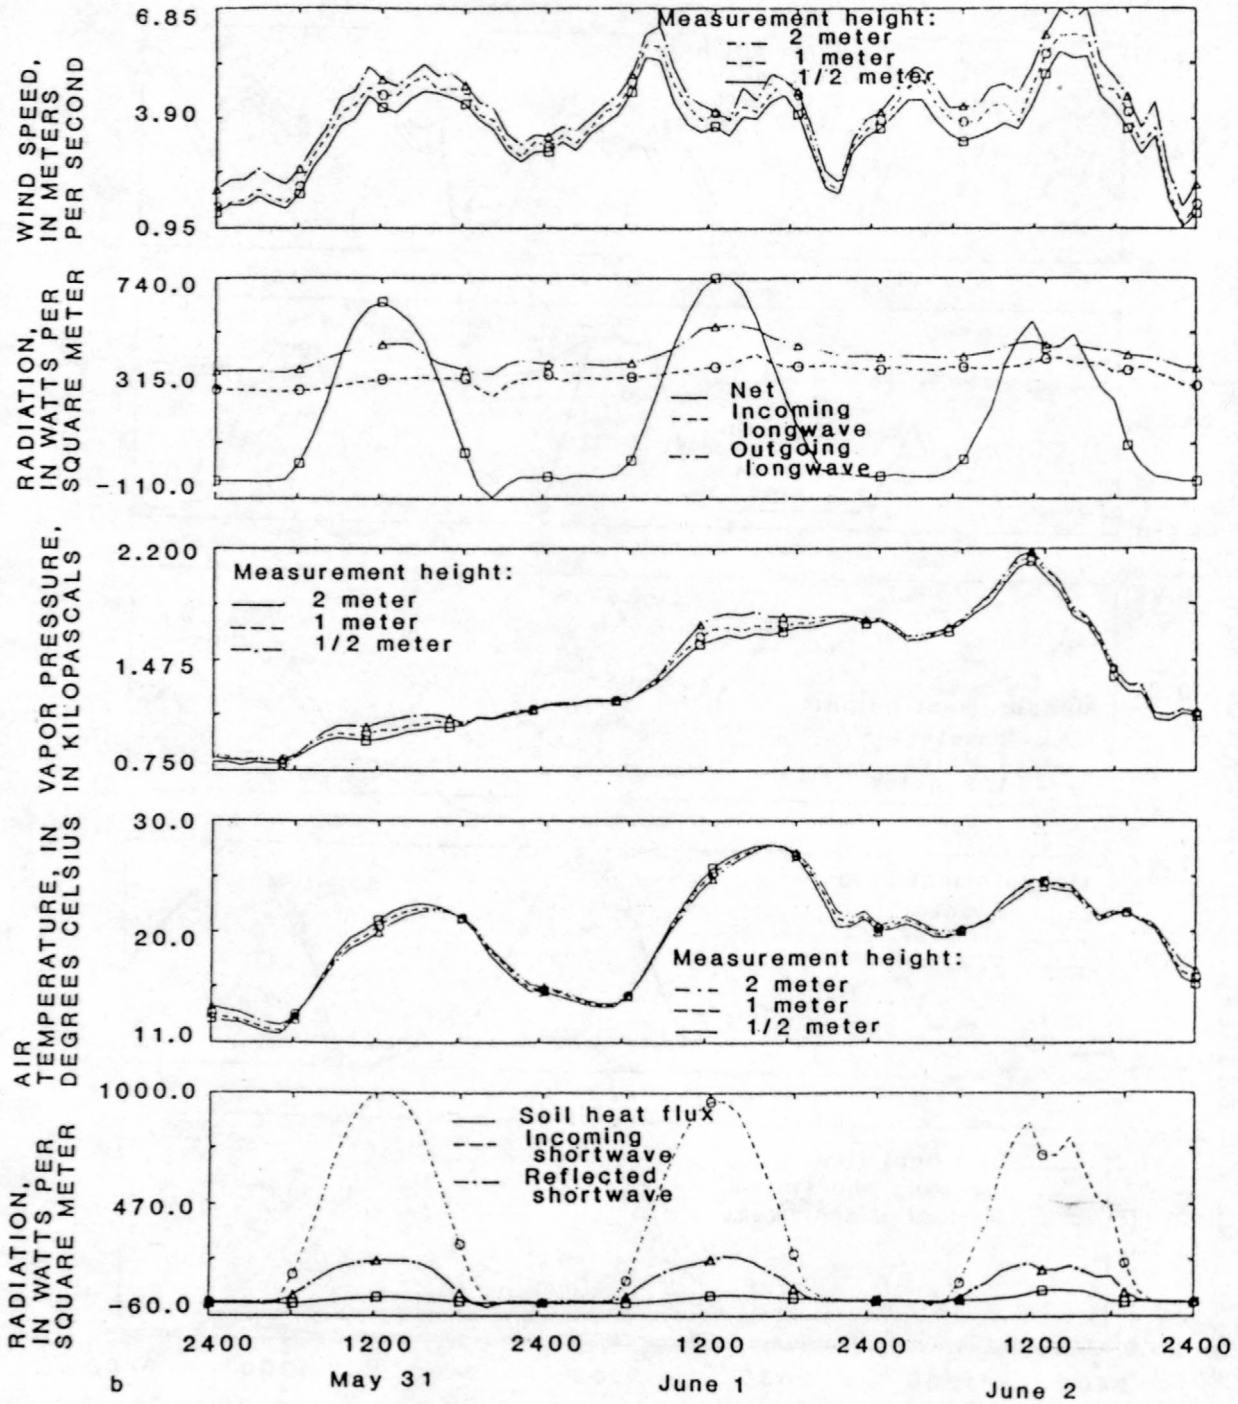

Figure 10 (Continued).--Selected microclimatological parameters at the Sheffield site (b) May 31 through June 2, 1984.

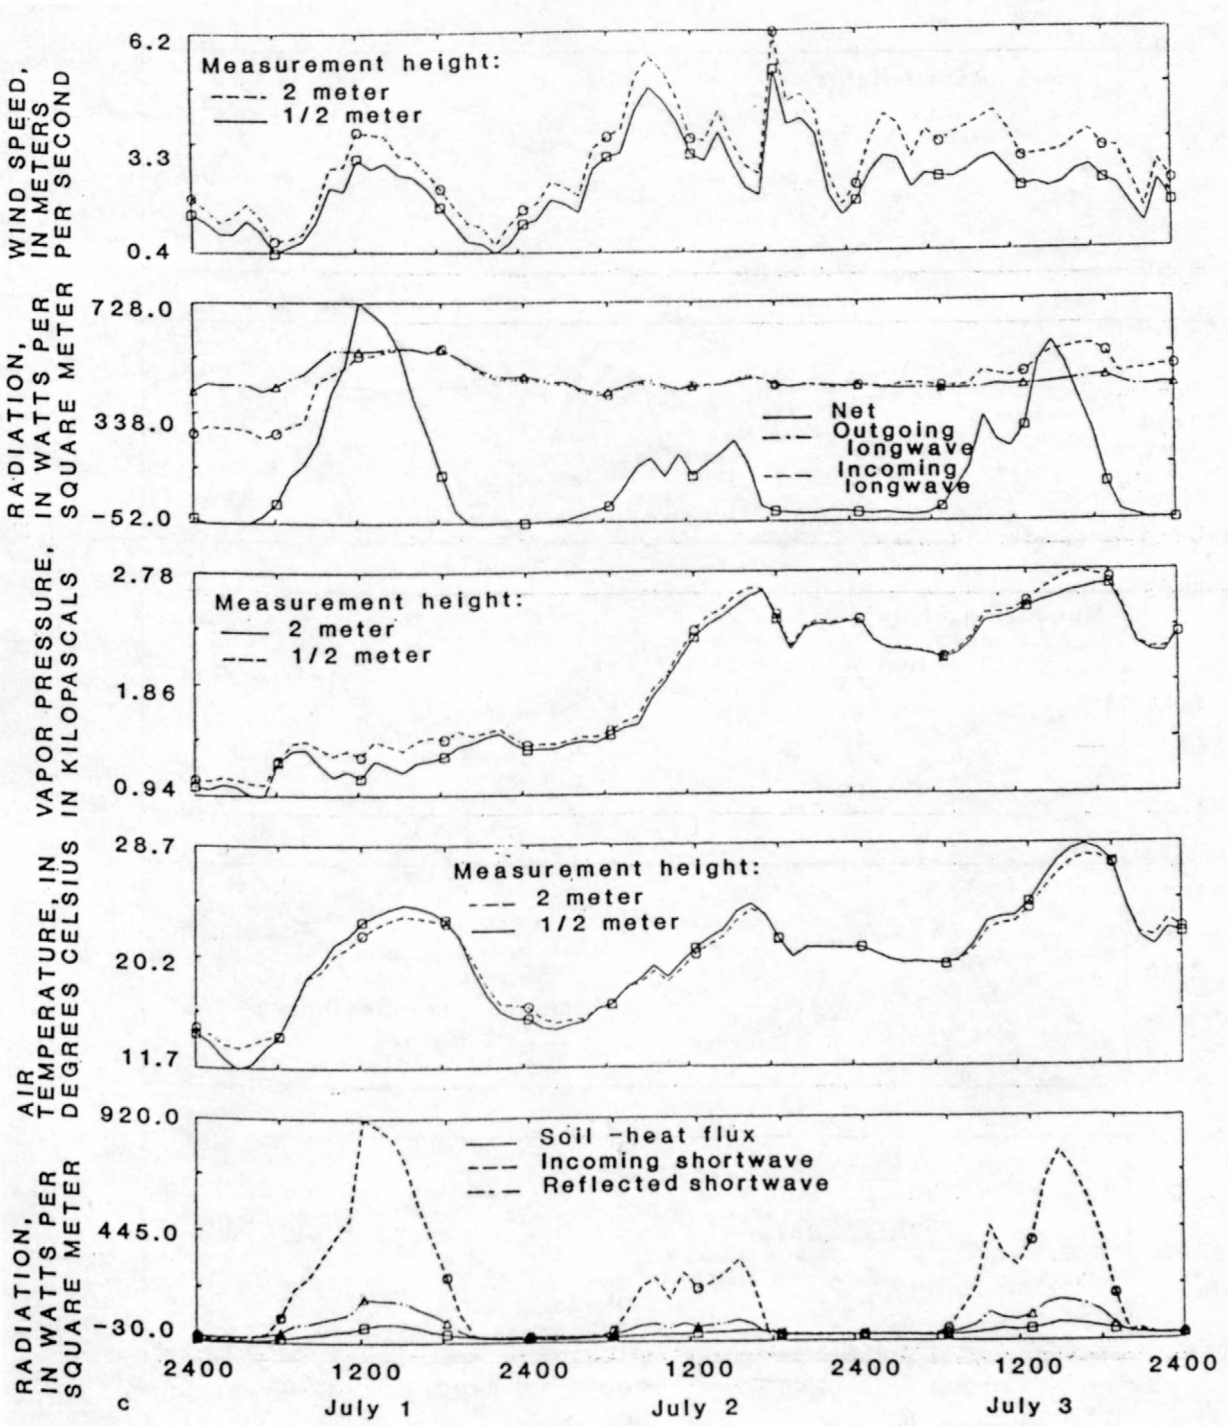

Figure 10 (Continued).--Selected microclimatological parameters at the Sheffield site (c) July 1-3, 1982.

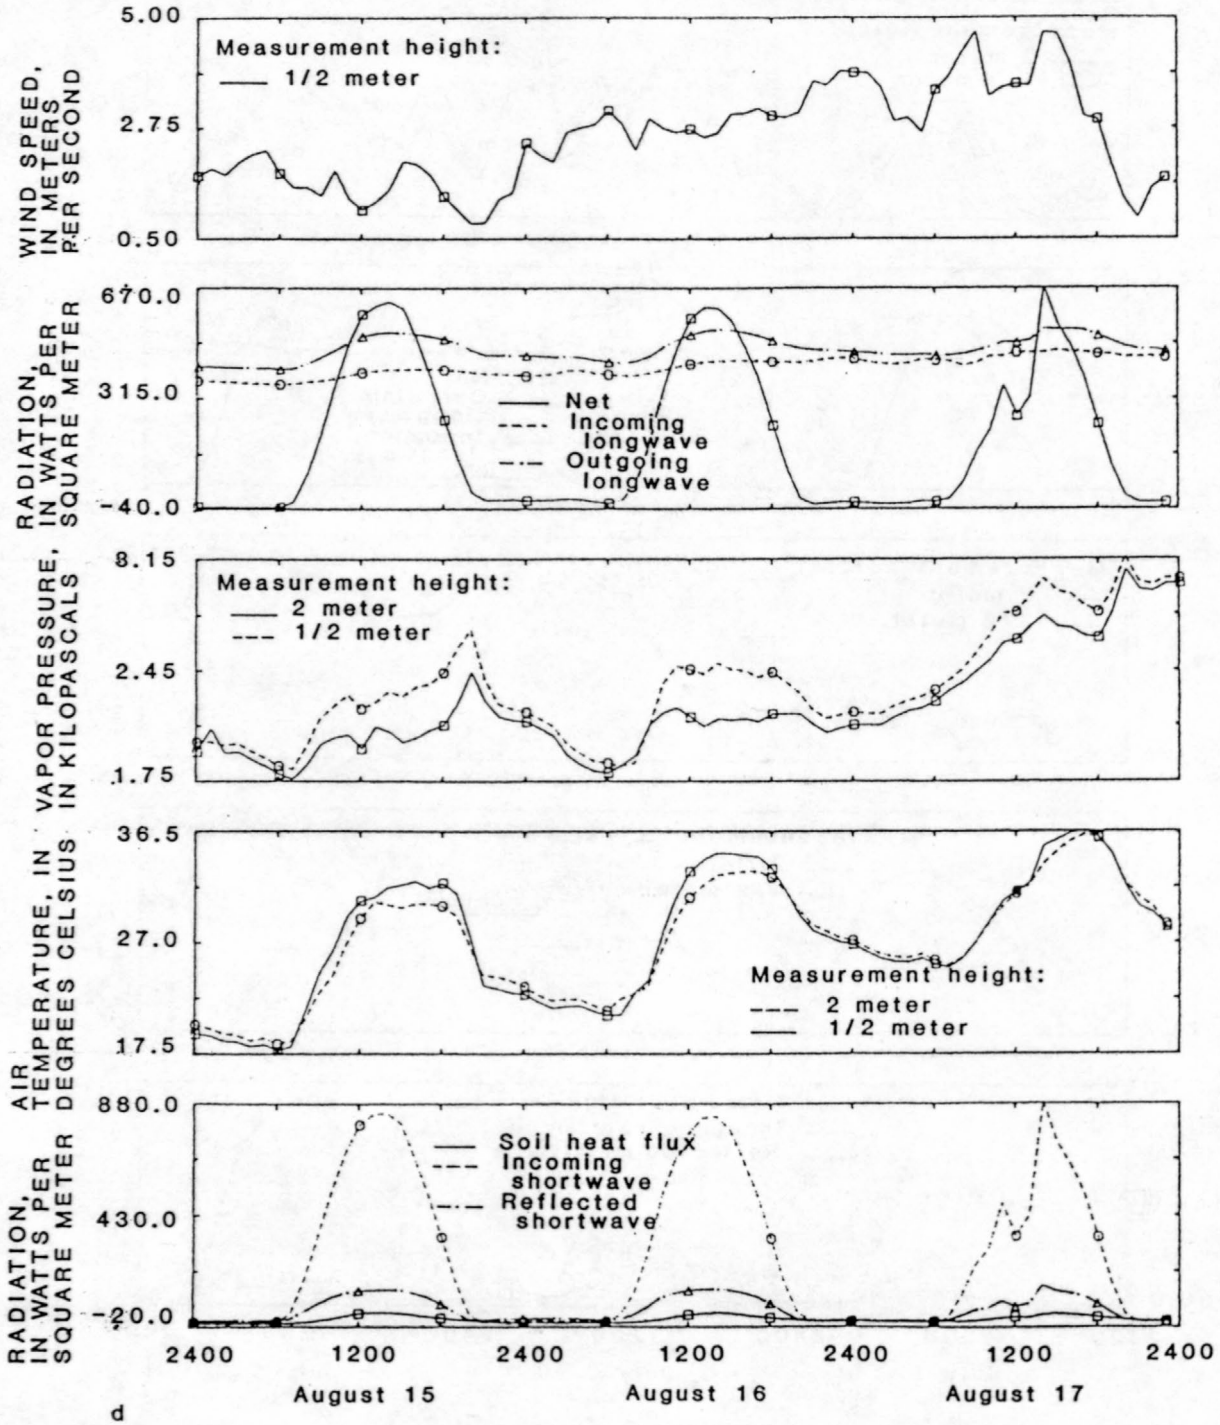

Figure 10 (Continued).--Selected microclimatological parameters at the Sheffield site (d) August 15-17, 1983.

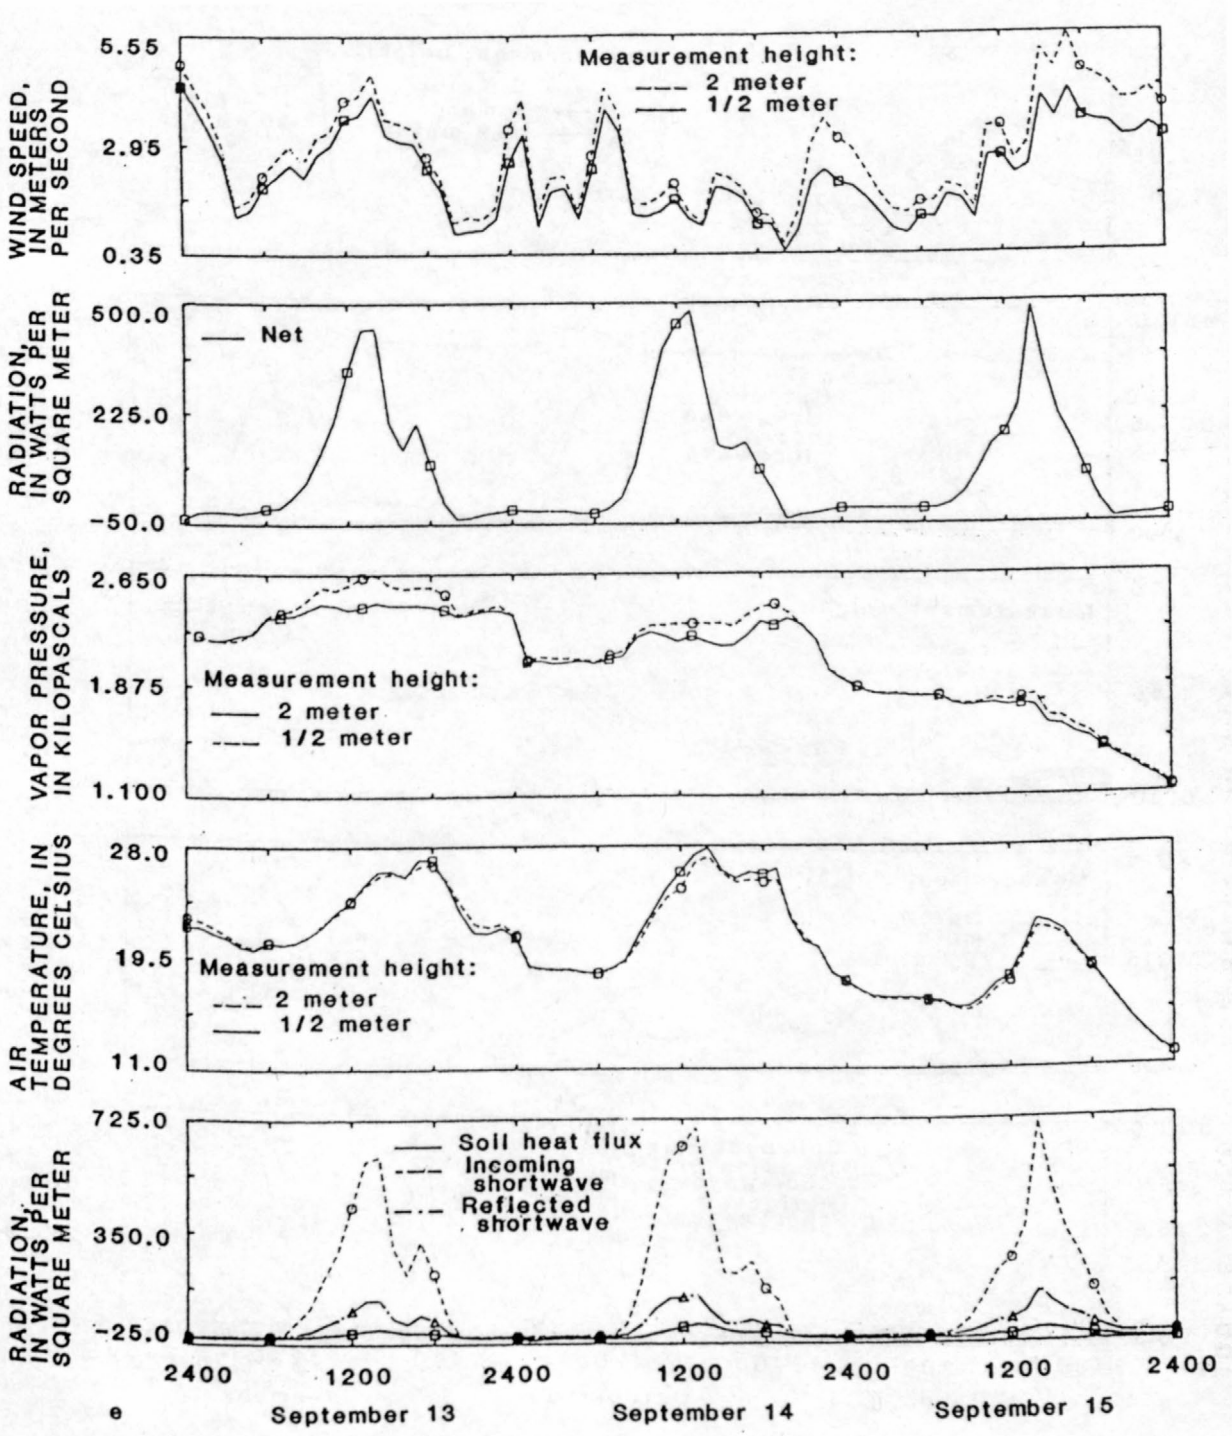

Figure 10 (Continued).--Selected microclimatological parameters at the Sheffield site (e) September 13-15, 1982.

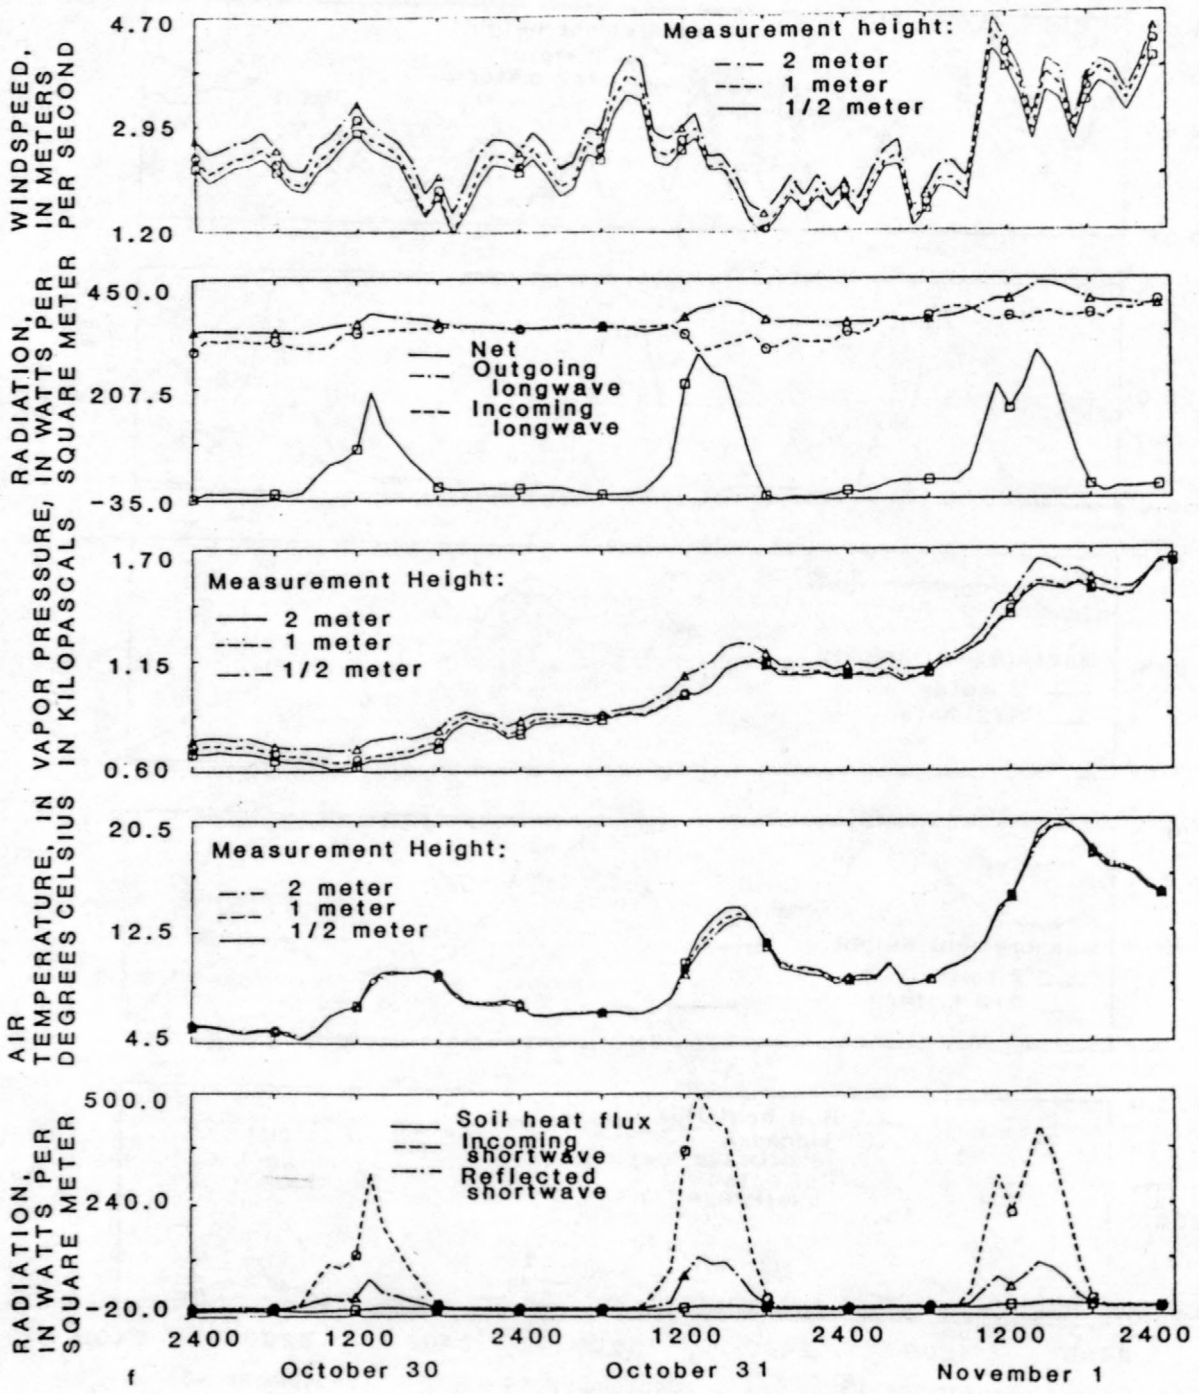

Figure 10 (Continued).--Selected microclimatological parameters at the Sheffield site (f) October 30 through November 1, 1983.

Precipitation

Monthly precipitation totals for the 2-year period of study are shown in figure 11. Although the temporal distribution of precipitation varied during the 2-year study period, annual totals were very similar. From July 1, 1982, through June 30, 1983, a total of 927 mm of precipitation fell, whereas from July 1, 1983, through June 30, 1984, the total was 949 mm. As mentioned previously, the long-term average for the area is about 890 mm. Precipitation was recorded on 112 days over the 2 years. Much of the precipitation was in the form of heavy thunderstorms. A storm is defined as a precipitation period separated from preceding and succeeding precipitation by 6 or more hours (Huff, 1979, p. 6). Of the 1,876-mm total precipitation, 889 mm fell during 20 storms, each of which produced more than 25 mm. This is slightly different from long-term trends. Changnon and Huff (1980, p. 35) indicate that, on the average, 60 percent of the annual precipitation in this part of Illinois falls in storms totaling 3 to 25 mm.

During the winter of 1982-83, 406 mm of snowfall (equivalent to 40 mm of water) was measured at the nearby National Weather Service stations, and snow was on the ground for a total of 18 days. The winter of 1983-84 was much more severe; a total of 726 mm of snow (equivalent to 69 mm of water) fell, and snow was on the ground for 65 days.

Radiation

Figure 12 shows mean monthly incoming and reflected solar radiation for the 2-year study period. On the average, incoming solar radiation was 156 W/m^2 (watts per square meter). This is approximately 65 percent of clear-sky solar radiation, as computed by a formula given by the U.S. Department of Energy (1978). There were a total of 117 clear-sky days (measured solar radiation was 90 percent or more of clear-sky solar radiation). For the same time period, Moline airport reported 160 clear-sky days. Monthly ratios of actual to clear-sky solar radiation are shown in figure 13. These give a good indication of the amount of daytime cloud cover during the year.

The ratio of reflected to incoming solar radiation is termed the surface albedo. Values for albedo at the site ranged from about 0.20 during summer up to about 0.95 following a fresh snow in winter. Figure 14 shows monthly values for albedo for the period of record. In viewing figure 14, it should be kept in mind that albedos can change drastically from day to day in cold weather depending on whether snow is falling or melting. For example, table 2 shows daily albedo values for January 29 through February 3, 1984. Snow fell on January 30 and 31 and melted on February 1-3. On days when there was no change in surface conditions, there was a diurnal trend in albedo values. Table 3 shows hourly albedo values for 2 days. June 2, 1984, was a day of 83 percent clear-sky radiation, whereas November 1, 1983, was a day of 57 percent clear-sky radiation. A similar trend in albedo is apparent for both; lowest values occurred around solar noon and values increased towards dawn and dusk. Similar trends have been measured elsewhere (Geiger, 1961; Rouse, 1984). Budyko (1956) cites the higher zenith angle of the sun near dusk and dawn as the primary reason for this.

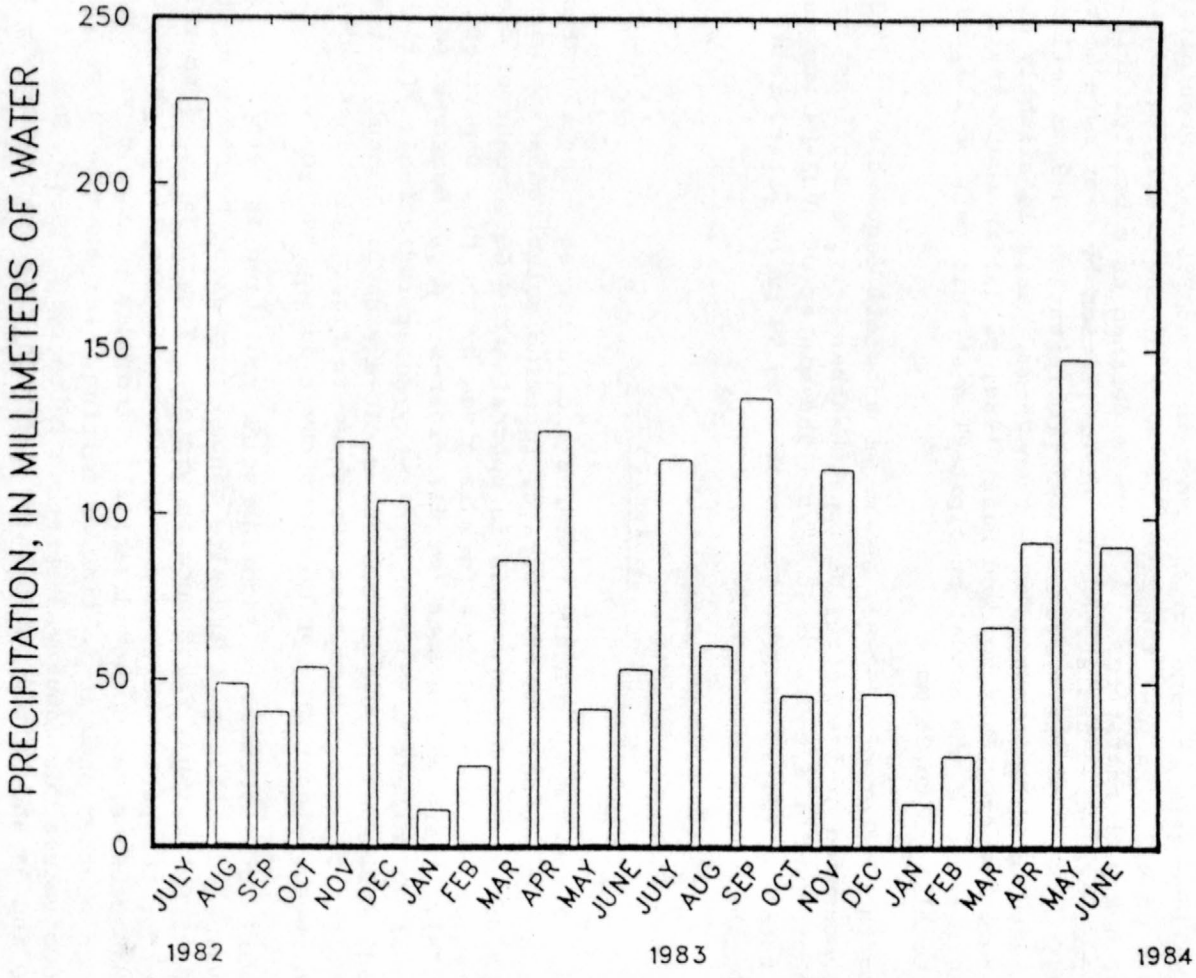

Figure 11.--Monthly precipitation at the Sheffield site.

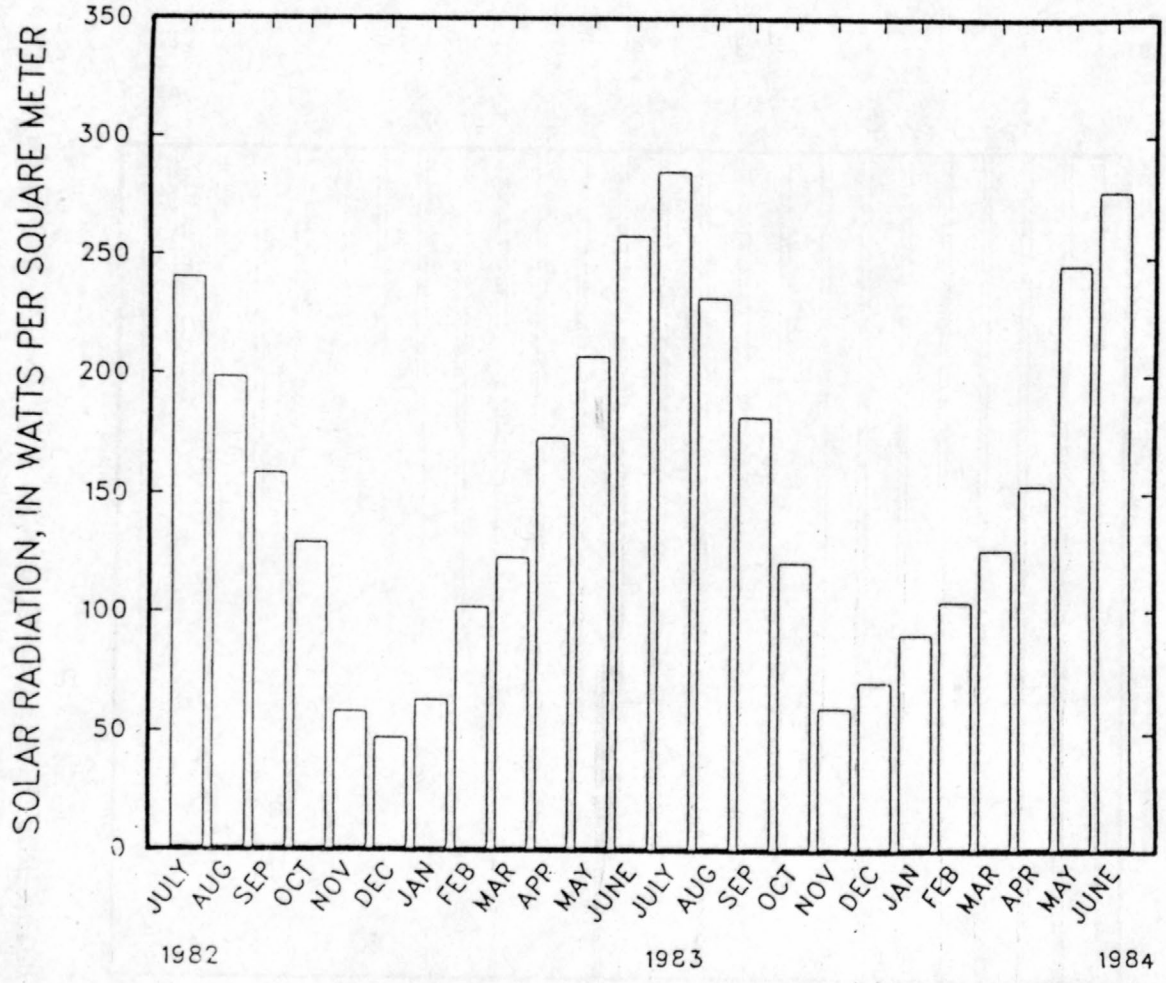

Figure 12.--(a) Monthly solar radioation at the Sheffield site.

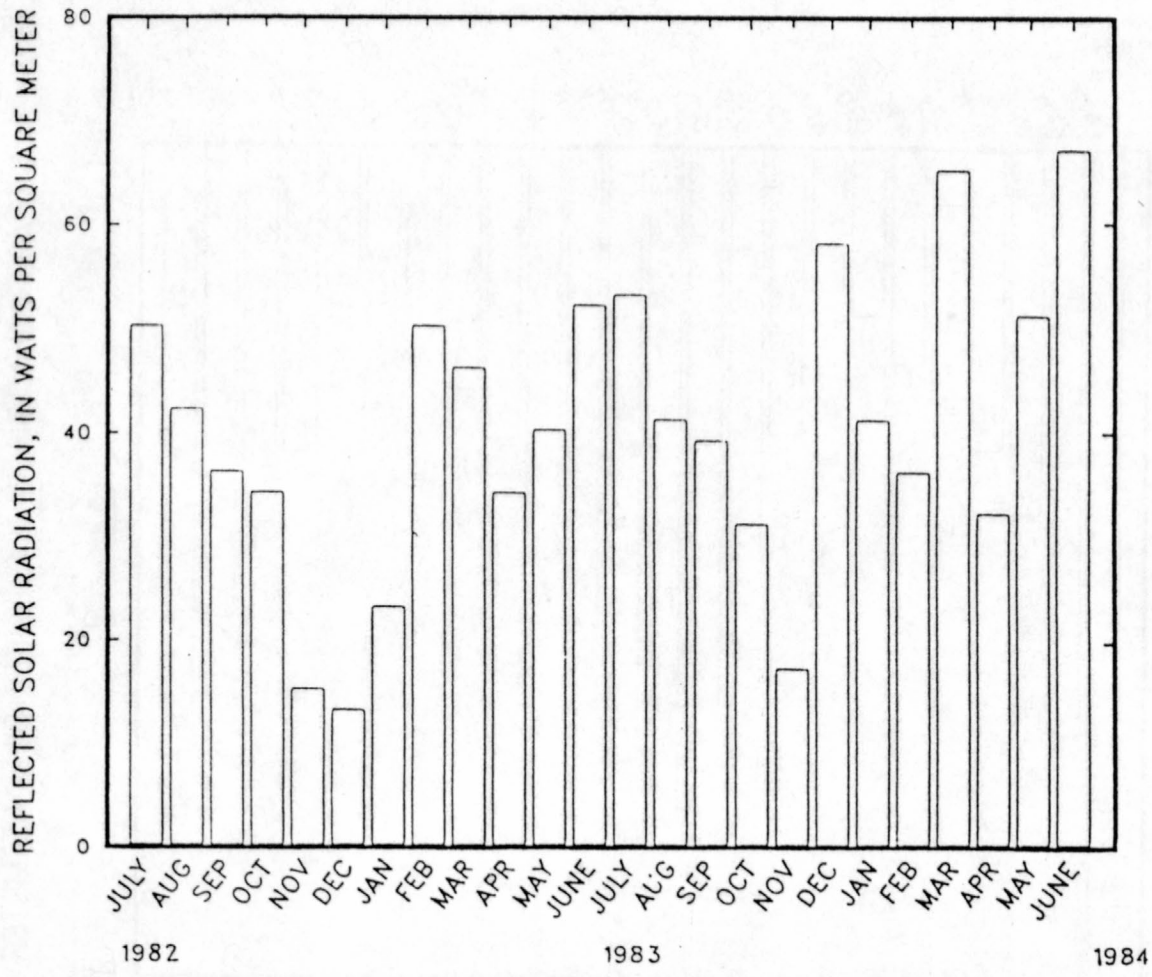

Figure 12 (Continued).--(b) Monthly reflected solar radiation at the Sheffield site.

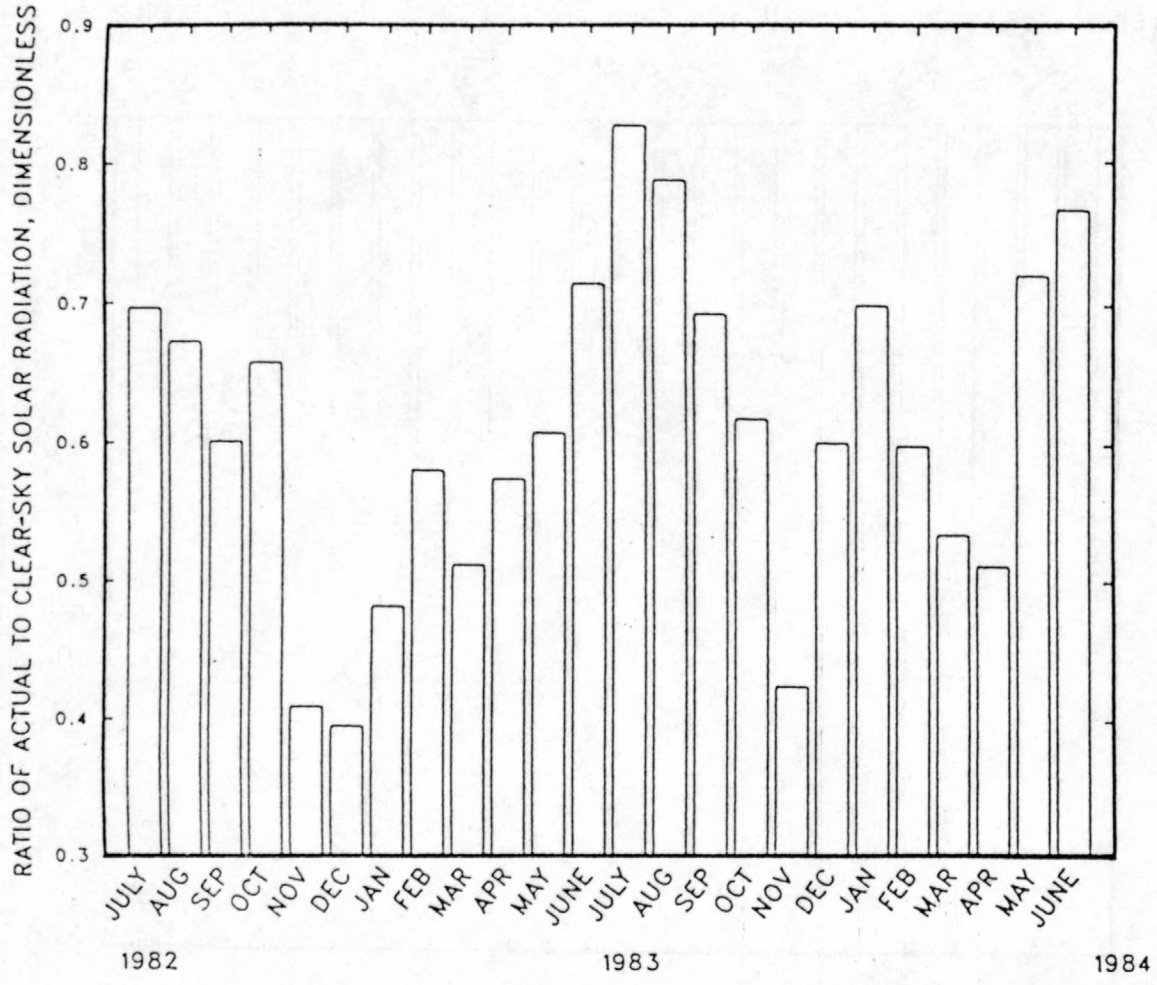

Figure 13.--Monthly ratios of solar radiation to clear-sky radiation at the Sheffield site.

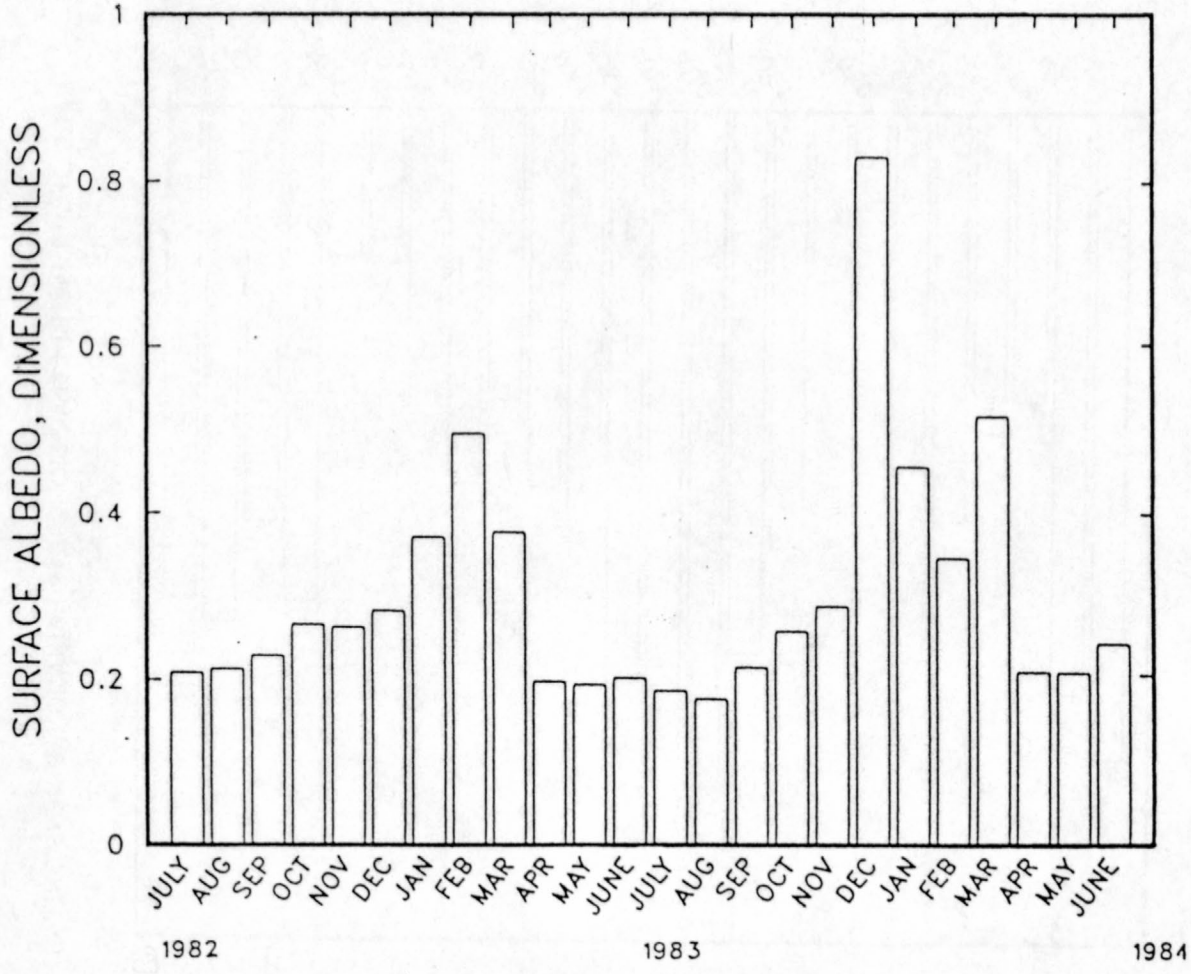

Figure 14.--Monthly surface albedos at the Sheffield site.

Table 2.--Daily albedoes for 6 days in January and February 1984

Day	Albedo
Jan. 29	0.25
Jan. 30	.95
Jan. 31	.91
Feb. 1	.87
Feb. 2	.50
Feb. 3	.37

Table 3.--Hourly albedos for 2 days

[Dashes indicate an hour of no solar radiation]

Time[1]	ALBEDO	
	June 2, 1984 (Average solar radiation = 293 W/m^2)	November 1, 1983 (Average solar radiation = 32 W/m^2)
7:00	0.28	--
8:00	.27	0.19
9:00	.26	.18
10:00	.24	.18
11:00	.23	.18
12:00	.22	.18
13:00	.22	.19
14:00	.22	.19
15:00	.22	.19
16:00	.22	.22
17:00	.24	--
18:00	.25	--
19:00	.27	--
20:00	.27	--
21:00	.29	--

[1] Central Standard or Central Daylight

Monthly values of longwave radiation outgoing from the earth and incoming from the atmosphere are shown in figure 15. Because longwave radiation is directly proportional to the fourth power of the absolute temperature (from the Stefan-Boltzmann law--equation 27), seasonal trends in both outgoing and incoming should parallel those of air and soil-surface temperatures. This trend is indeed apparent. Highest values of longwave radiation occurred in the warmest months and the lowest values occurred in the coldest months. The ratio of incoming to outgoing longwave radiation is dependent primarily upon cloud cover. Clouds absorb most longwave radiation and then re-emit it back to earth, so that the rate increases with increased cloud-cover density. On clear-sky days, the ratio is at its lowest values.

Net radiation is the total of incoming solar and longwave radiation minus reflected solar and outgoing longwave radiation. Its magnitude is usually larger than all other elements in the energy-balance equation. Figure 16 shows monthly values for the period of record. Daily averages ranged from -90 to 350 W/m^2. Diurnal trends are illustrated in figure 10. During daylight hours, net radiation is usually positive and follows the same trend as incoming solar radiation; values increase after dawn, reaching a maximum around solar noon, after which they decrease until dusk. After sunset, net radiation is equal to the difference in incoming and outgoing longwave radiation. Because the amount of outgoing radiation is greater than the incoming, net radiation is negative at night. The magnitude of nighttime net radiation was generally much less than daytime net radiation.

Wind

As shown in figure 17, the surface winds were predominantly out of the south-southeast for the 2-year study period. This direction is slightly different from the prevailing winds out of the south-southwest and west-northwest at the Moline Airport. The difference may be related to the fact that the weather vane at the site was mounted at a much lower height (2 m) than at Moline. At the lower height, wind direction is more influenced by small, localized wind eddies. Also, the direction at Moline was based on a 1-minute reading taken each hour, whereas readings at the site were taken every 10 seconds.

Figure 18 illustrates mean monthly windspeeds. Some months are missing because of instrument malfunction. The average windspeed for the 2-year study period at the 2-m height was 3.5 m/s. Daily average windspeed ranged from less than 1 m/s up to 10.2 m/s, whereas hourly averages ranged up to 15.0 m/s. As seen in figure 18, the winter months had significantly higher windspeeds than the others.

As discussed earlier, strict use of the aerodynamic-profile equations requires that the plot of windspeed as a function of the logarithm of height is a straight line. Typical variations of windspeed with height and time of day are shown in figure 19. The data for 0600 and 1800 hours appear to lie on a straight line. However, there is a significant change in slope on the 1500- and 2400-hour curves. The shapes of these curves are related to the stability

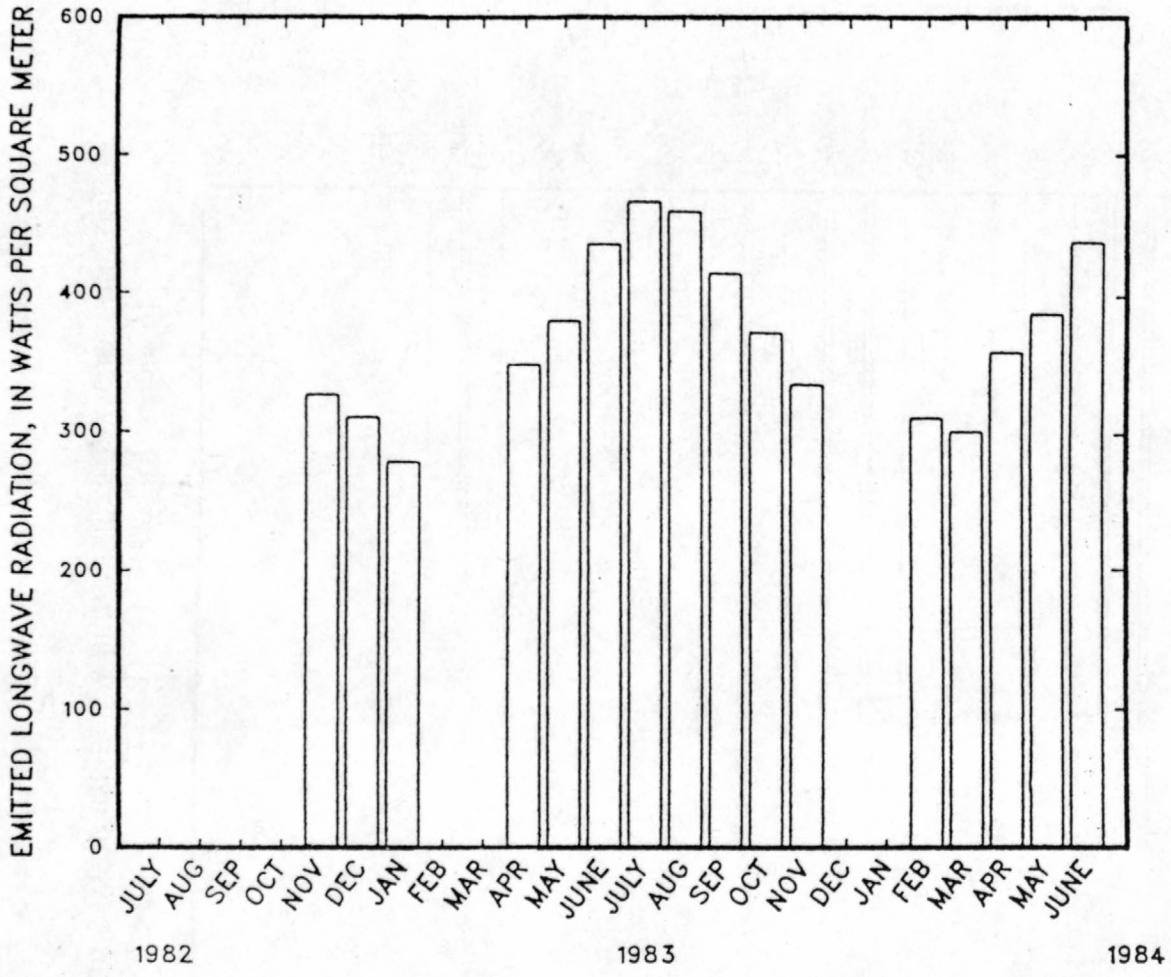

Figure 15.--(a) Monthly longwave radiation emitted from the earth at the Sheffield site.

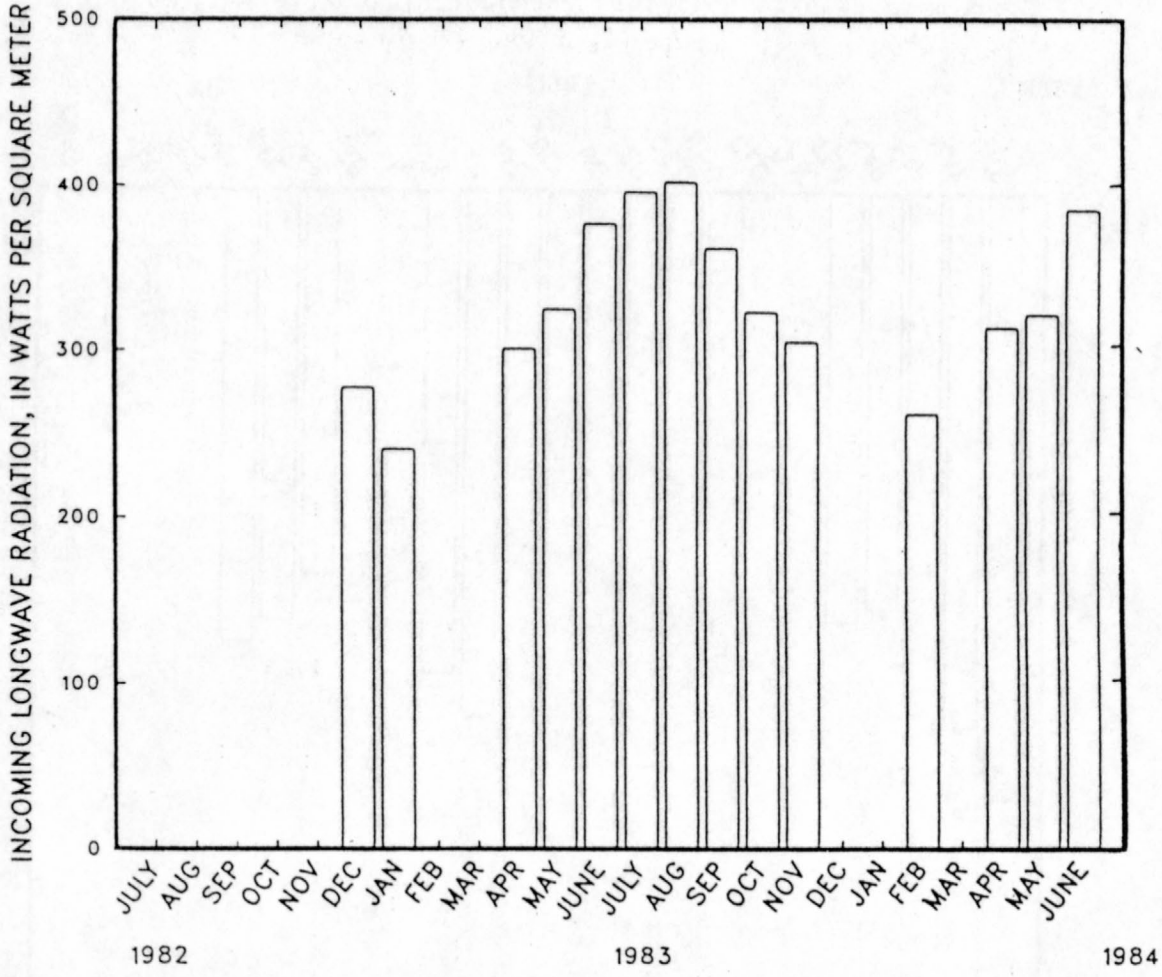

Figure 15 (Continued).--(b) Monthly longwave radiation incoming from the atmosphere at the Sheffield site.

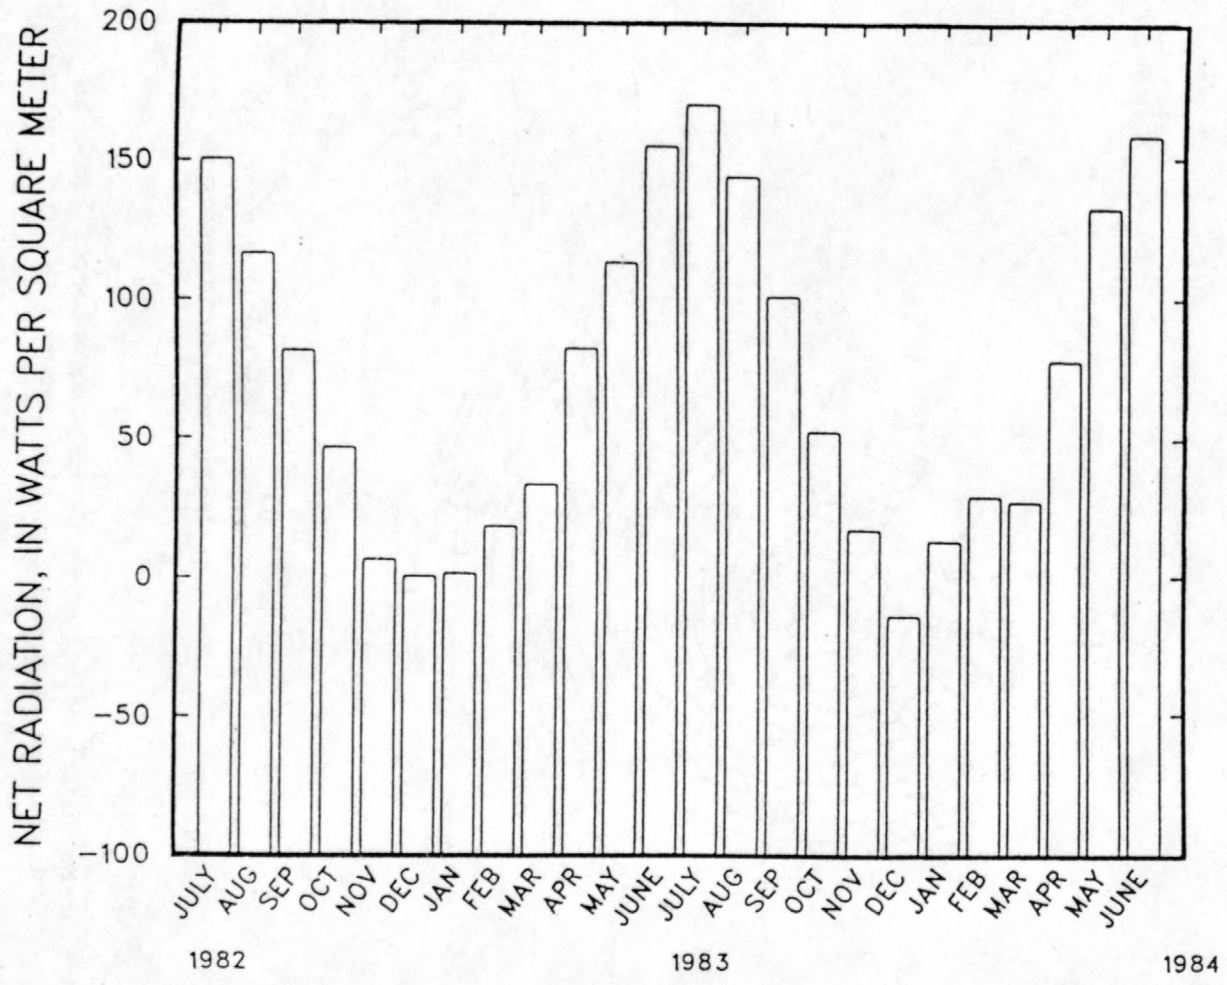

Figure 16.--Monthly net radiation at the Sheffield site.

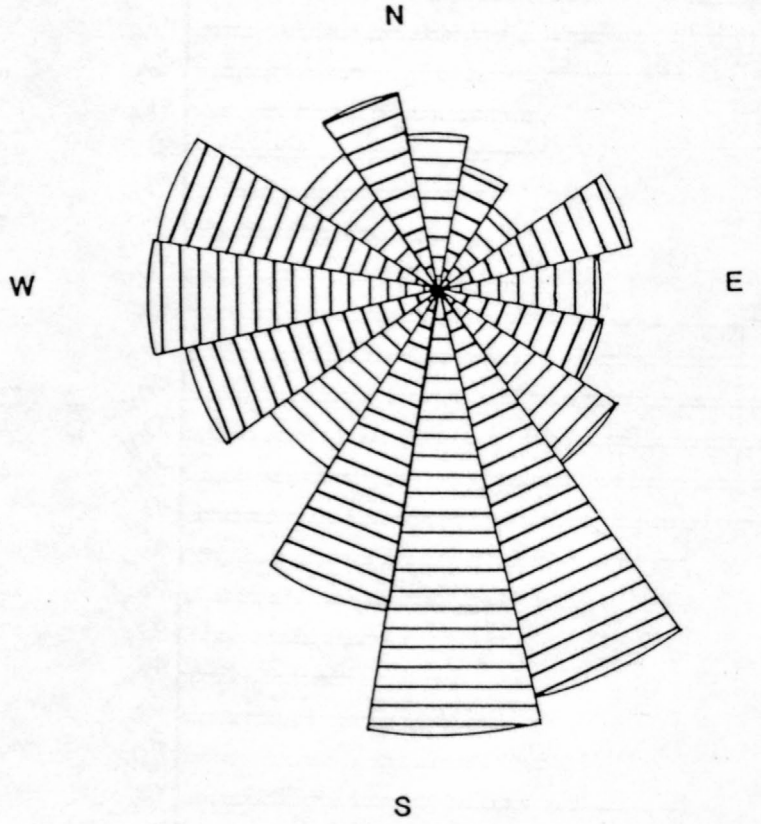

Figure 17.--Frequency of occurrence, in percentage of time, of winds from various directions at the Sheffield site.

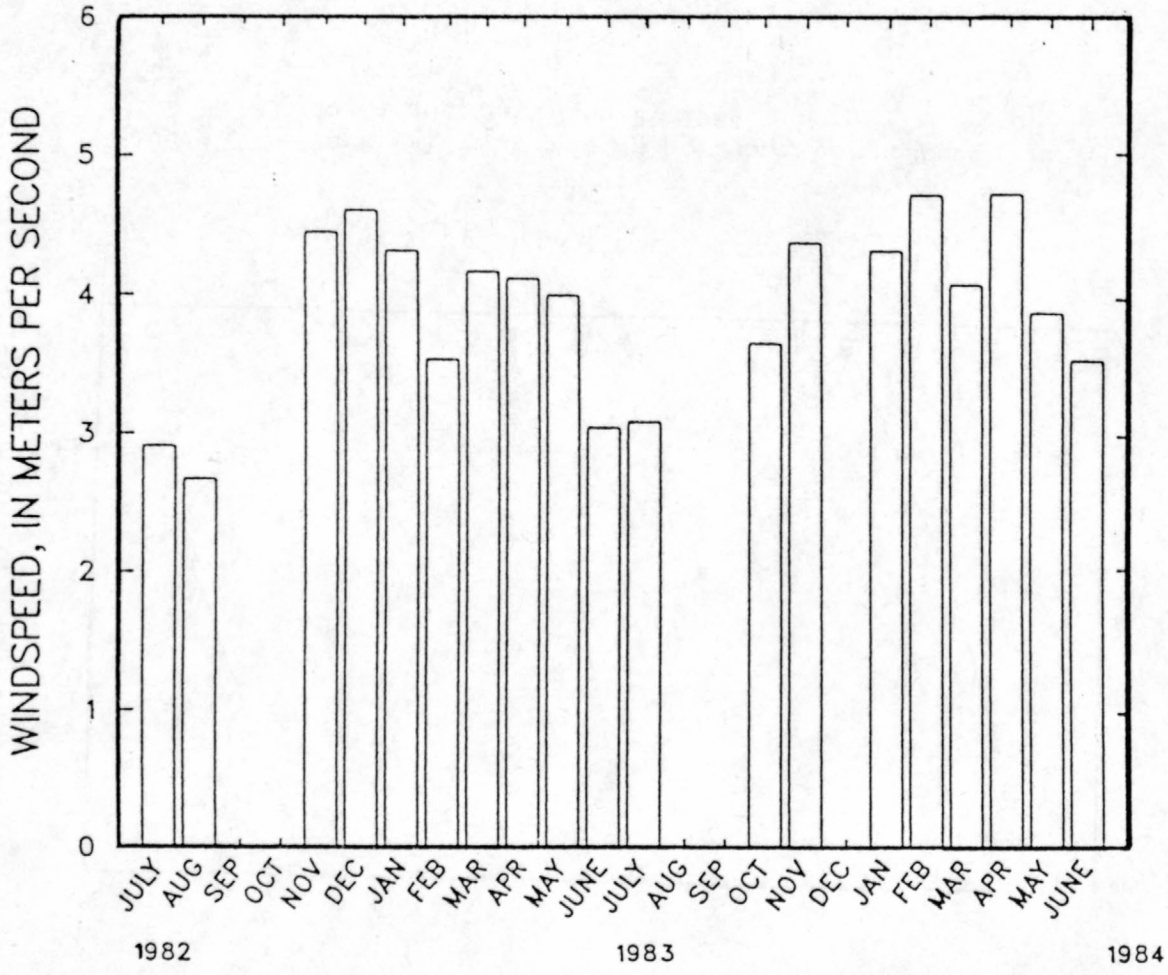

Figure 18.--Mean monthly windspeeds at the Sheffield site.

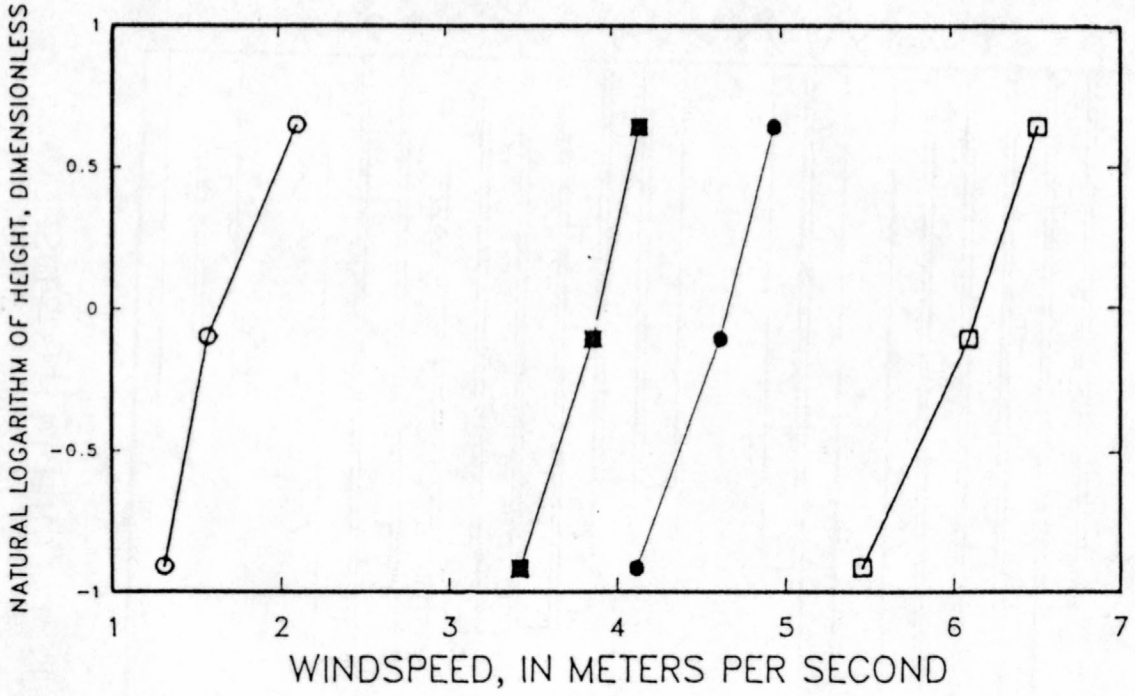

Figure 19.--Vertical gradients in horizontal windspeed for 4 hours on June 2, 1984.

of the overlying atmosphere. The degree of stability is indicated by figure 20, which shows hourly values of z/L' (where z is the measurement height, and L' is the Monin-Obukov length) for the same day. Values of z/L' at about 0700 and 1900 hours were very close to zero, indicating nearly neutral conditions. Between these hours, unstable conditions prevailed (z/L' was less than zero). Before dawn and after dusk, z/L' was greater than zero, indicating that stable conditions prevailed. These changing stability conditions necessitated the use of stability functions (eqs. 12 and 13) to modify the aerodynamic-profile equations for estimating evapotranspiration.

Air Temperature and Water-Vapor Pressure

The average recorded temperature at the Sheffield site over the 2-year study period was about 10.8°C. Daily averages ranged from a low of -26°C on December 25, 1983, to a high of 32°C on July 22, 1983. Figure 21 shows average monthly temperatures for the study period. July was the warmest month and December and January were the coldest.

The daily trend for the vertical gradient in air temperature is shown in figure 10. From early morning (usually about 2 hours after dawn) until late afternoon (usually about 4 hours before dusk), the gradient was negative; temperatures decreased with height. This represents a positive sensible-heat flux. The magnitude of the gradient was greatest during hours of peak solar radiation. In late afternoon, the gradient reversed, which produced a temperature inversion. This condition usually lasted through the night. On infrequent occasions, temperature inversions occurred during daylight hours. Such an inversion represents a negative sensible-heat flux, implying that energy is being advected into the area in the form of a warm wind. This generally only occurred during days of low solar radiation.

Average monthly water-vapor pressures at the 0.5 m height for March through November are shown in figure 22. Values for some months are not presented because of freezing of the wet bulbs. Vapor pressure followed the same monthly pattern as air temperature, reaching maximum values in July and August.

Water-vapor pressure also followed a diurnal trend similar to that of temperature. During daylight hours, a negative gradient prevailed, indicating that water vapor was moving away from land surface; evapotranspiration was occurring. Again, the magnitude of the gradient corresponded to the magnitude of the net radiation. Either positive or negative gradients could occur during nighttime hours. Condensation occurred when a sudden drop in temperature occurred and dropped the air temperature below the ambient dew point. Whether the gradient was positive or negative at night, its magnitude was much less than it was during daylight hours.

Soil-Heat Flux and Temperature

Monthly soil-heat fluxes are presented in figure 23. Monthly values reached a maximum in June and July and a minimum in November and December. During the 2-year study period, the maximum monthly heat flux was 23.4 W/m^2 in July 1983, and the minimum monthly flux was -13.0 W/m^2 in November 1982.

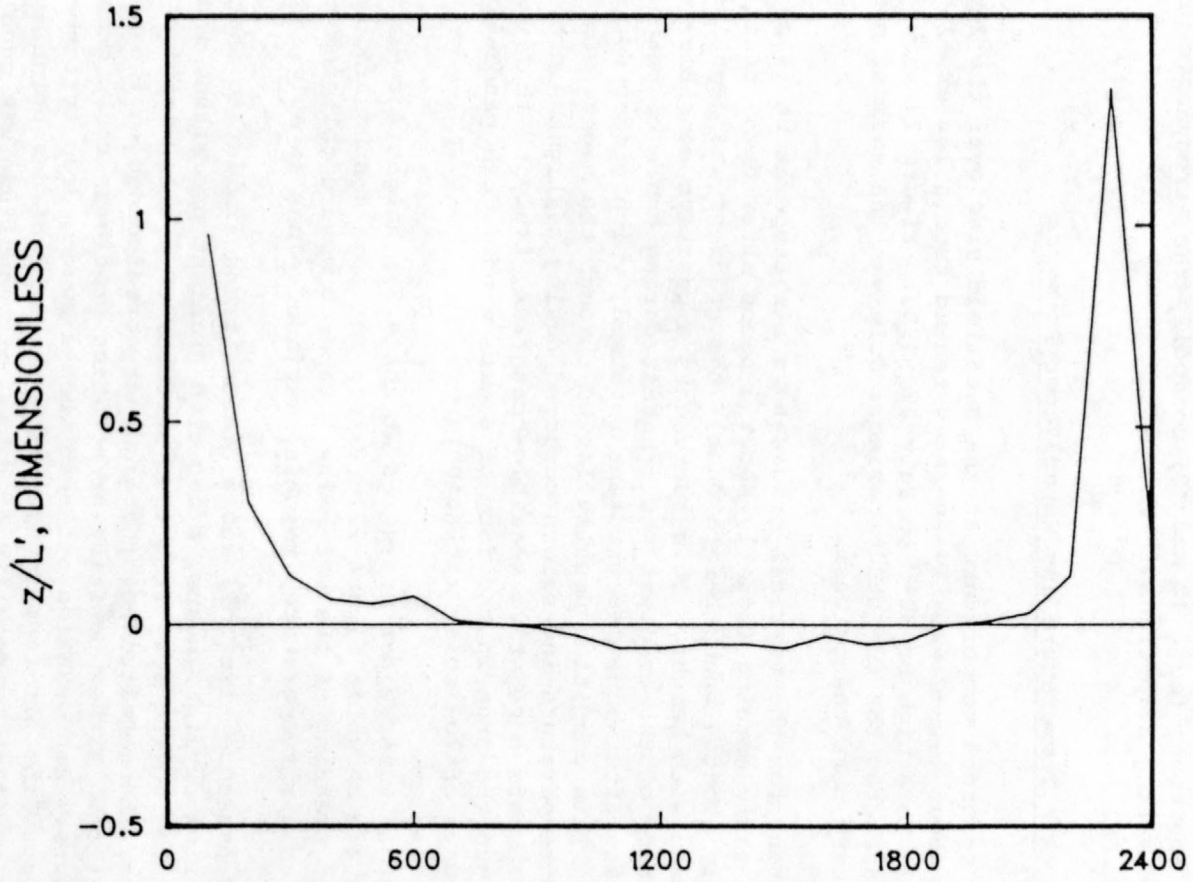

Figure 20.--Hourly variations in z/L' for June 2, 1984.

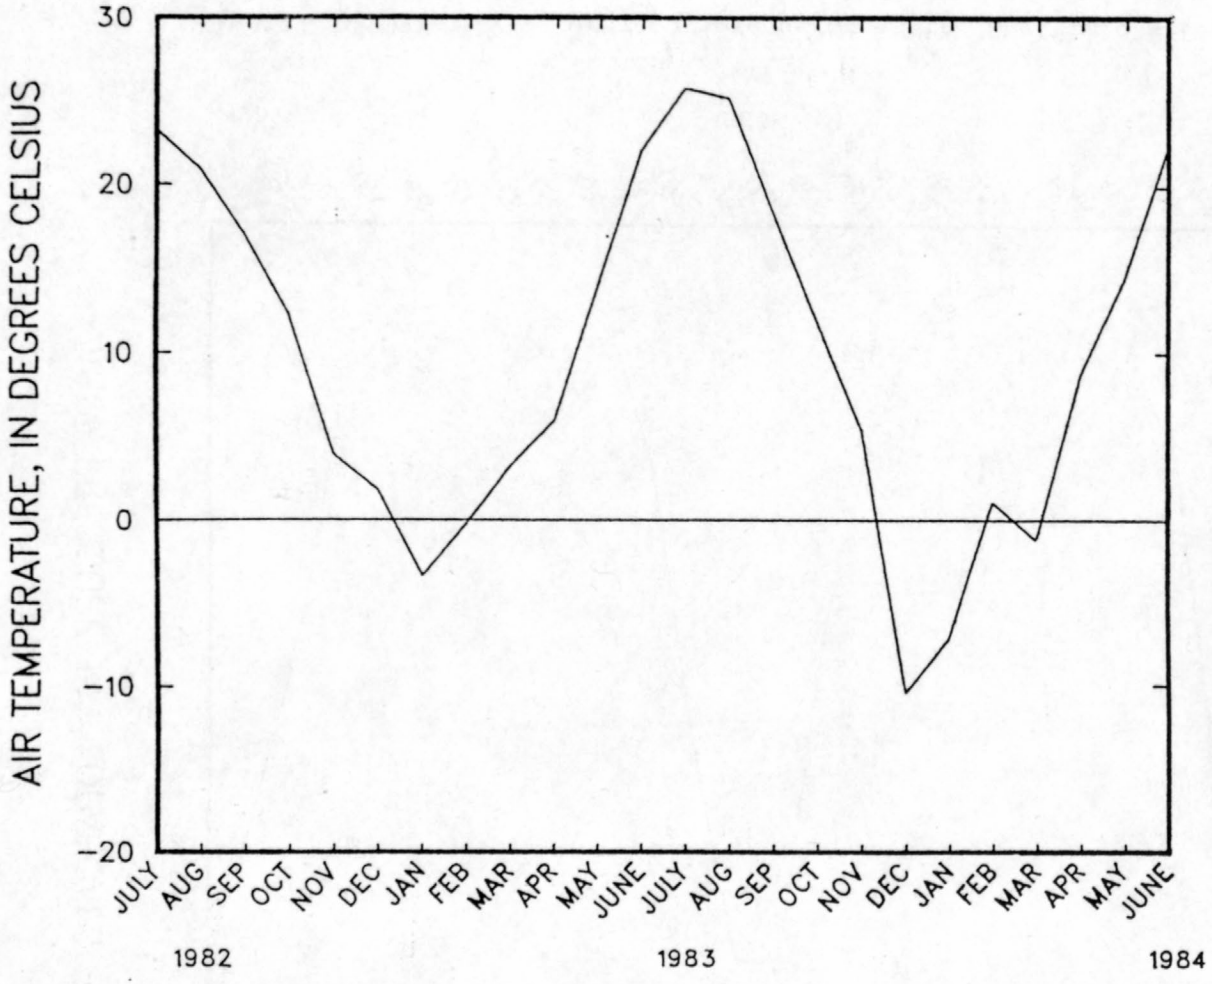

Figure 21.--Monthly air temperatures at the Sheffield site.

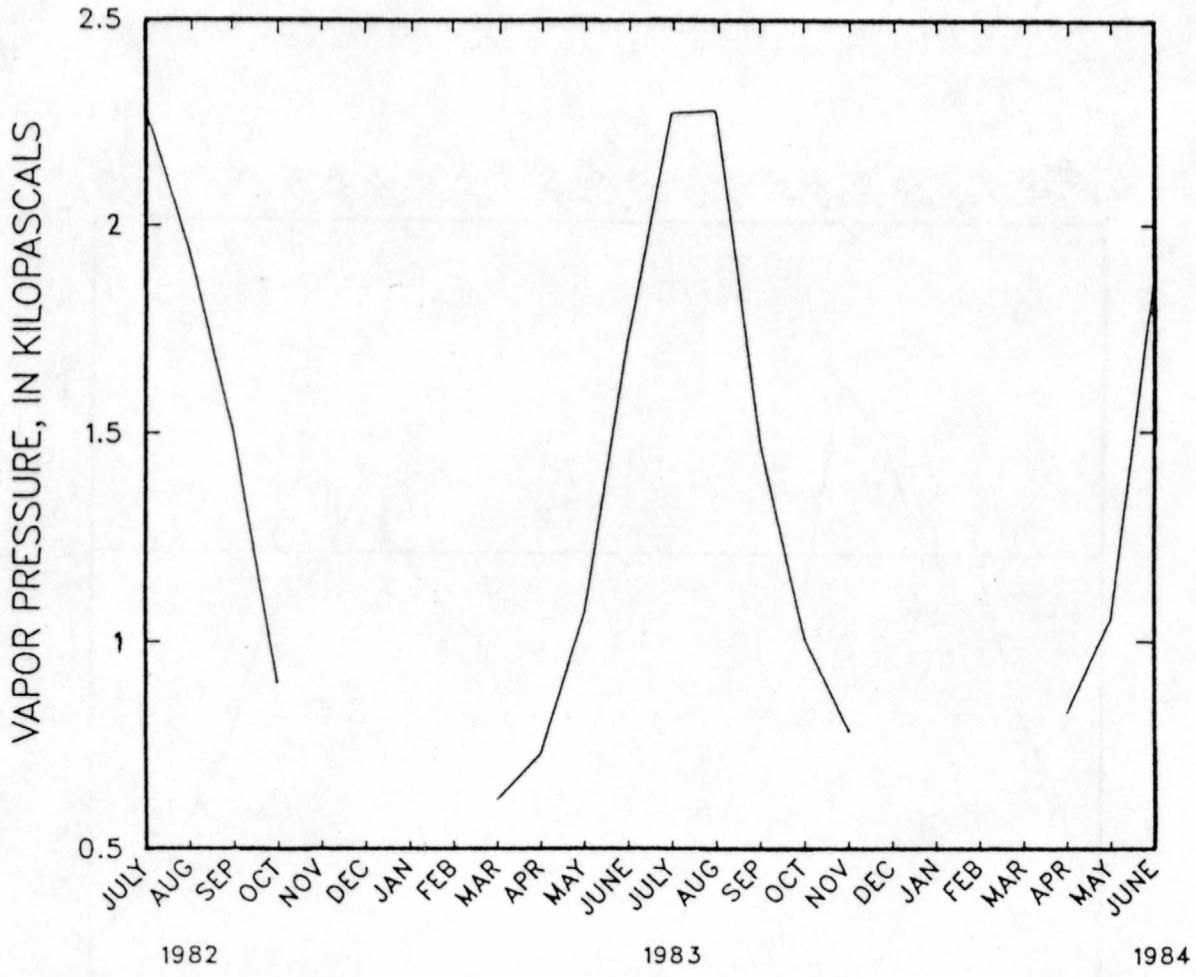

Figure 22.--Monthly water-vapor pressures at the Sheffield site.

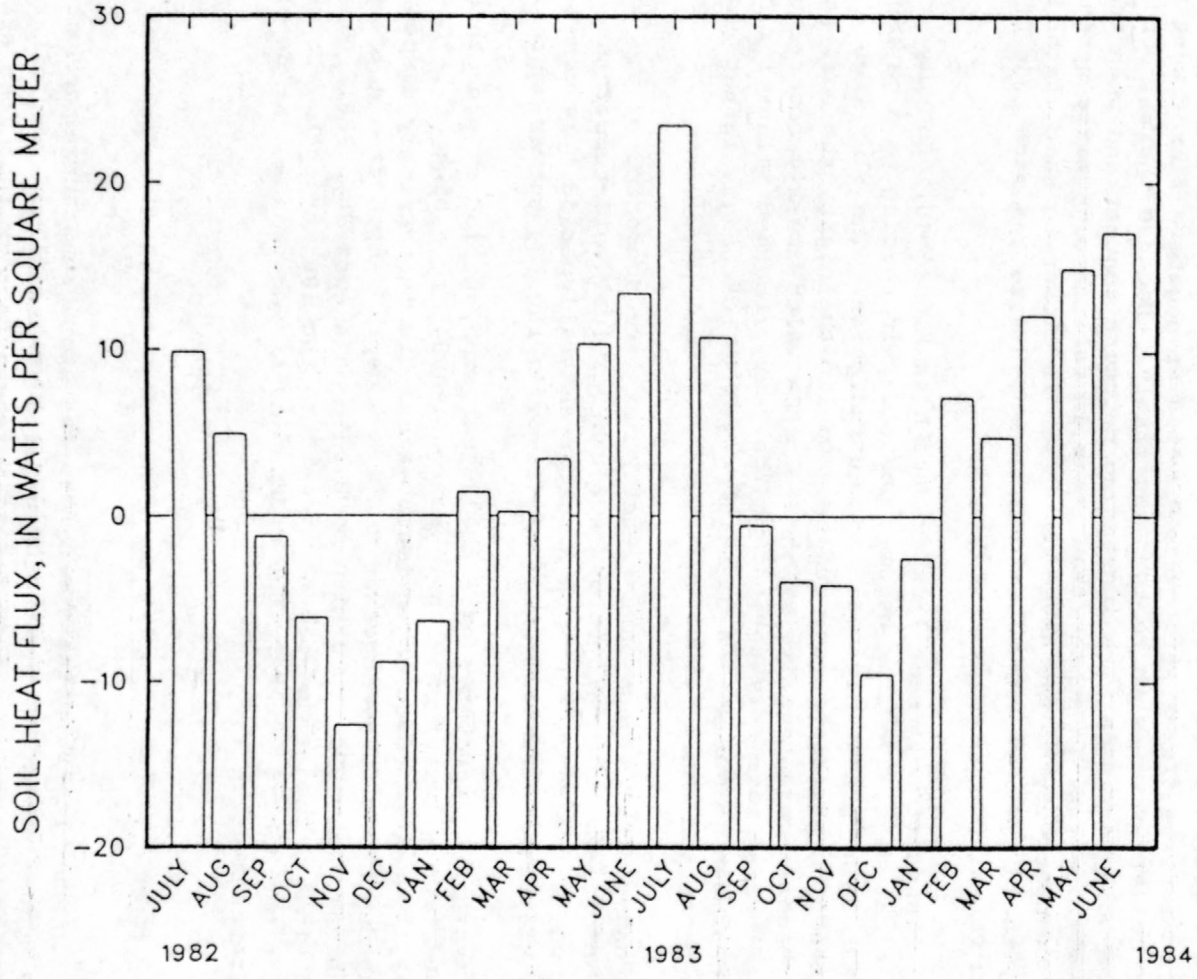

Figure 23.--Monthly soil-heat fluxes at the Sheffield site.

From February through August, values were positive, indicating that the soil was gaining heat. Soil-heat flux was negative from September through January, indicating the release of heat.

Annual averages indicate a net gain of 0.5 and 5.7 W/m^2 for the first and second year of record, respectively. Soil temperatures did increase slightly over the second year but not enough to account for that rather large gain. Apparently, summertime fluxes were overestimated or negative fluxes were underestimated. The latter seems to be the more likely. Because thermal conductivity of the soil increases with increasing moisture content and when the soil freezes, it will be less in summer than it is in fall through early spring. The thermal conductivity of the heat-flux disks is closer to that of the drier soil; hence, the disks were more likely to underestimate the magnitude of the heat flux in wet or frozen soil.

Diurnal trends of soil-heat flux are shown in figure 10. Shortly after sunrise, on clear days, the flux becomes positive, increasing to a maximum value just after the peak daily value of net radiation. The flux then decreases, becoming negative after sunset. During the night, the soil-heat flux slowly becomes more negative, with a minimum value usually occurring just before dawn. During warm, dry periods of the year, recorded values for heat flux show an almost immediate and parallel response to changes in net radiation caused by variations in cloud cover.

Annual and diurnal trends in soil-heat flux were supported by the soil-temperature profiles. The daily trend for the vertical soil-temperature gradient is shown in figure 24 for both a summer and fall period. In general, temperature gradients were largest in magnitude during the summer months.

Daily average temperatures over the 2-year study period at a depth of 100 mm ranged from a low of -5°C on February 6, 1984, to a high of 28°C on July 22, 1983. Because temperature fluctuations are increasingly damped and delayed with depth, daily averages at the 1.0-m depth ranged from a low of 1.7°C on February 22, 1984, to a high of 21.9°C on August 30, 1983. During the 1982-83 winter, the ground did not freeze to the 300-mm depth. In contrast, during the 1983-84 winter, the ground was frozen at a 300-mm depth from January 14 through March 23.

Soil-Water Content

The soils that comprise the trench cap can store substantial amounts of water. The actual amount that was stored varied seasonally. Precipitation, evapotranspiration rates, and temperature were the factors that most affected changes in soil-moisture content. Figure 25 shows the amount of water stored within the top 1.75 m of the trench cap for the period November 1982 through June 1984. The amount of water within the trench cap was greatest in early spring, when evapotranspiration rates were low and the ground had thawed. The driest time was in September. Figure 26 shows the change in volumetric moisture content with respect to depth for several days throughout the year. When evapotranspiration was beginning in midspring, water was readily drawn close to land surface. As the season progressed, more water was drawn from

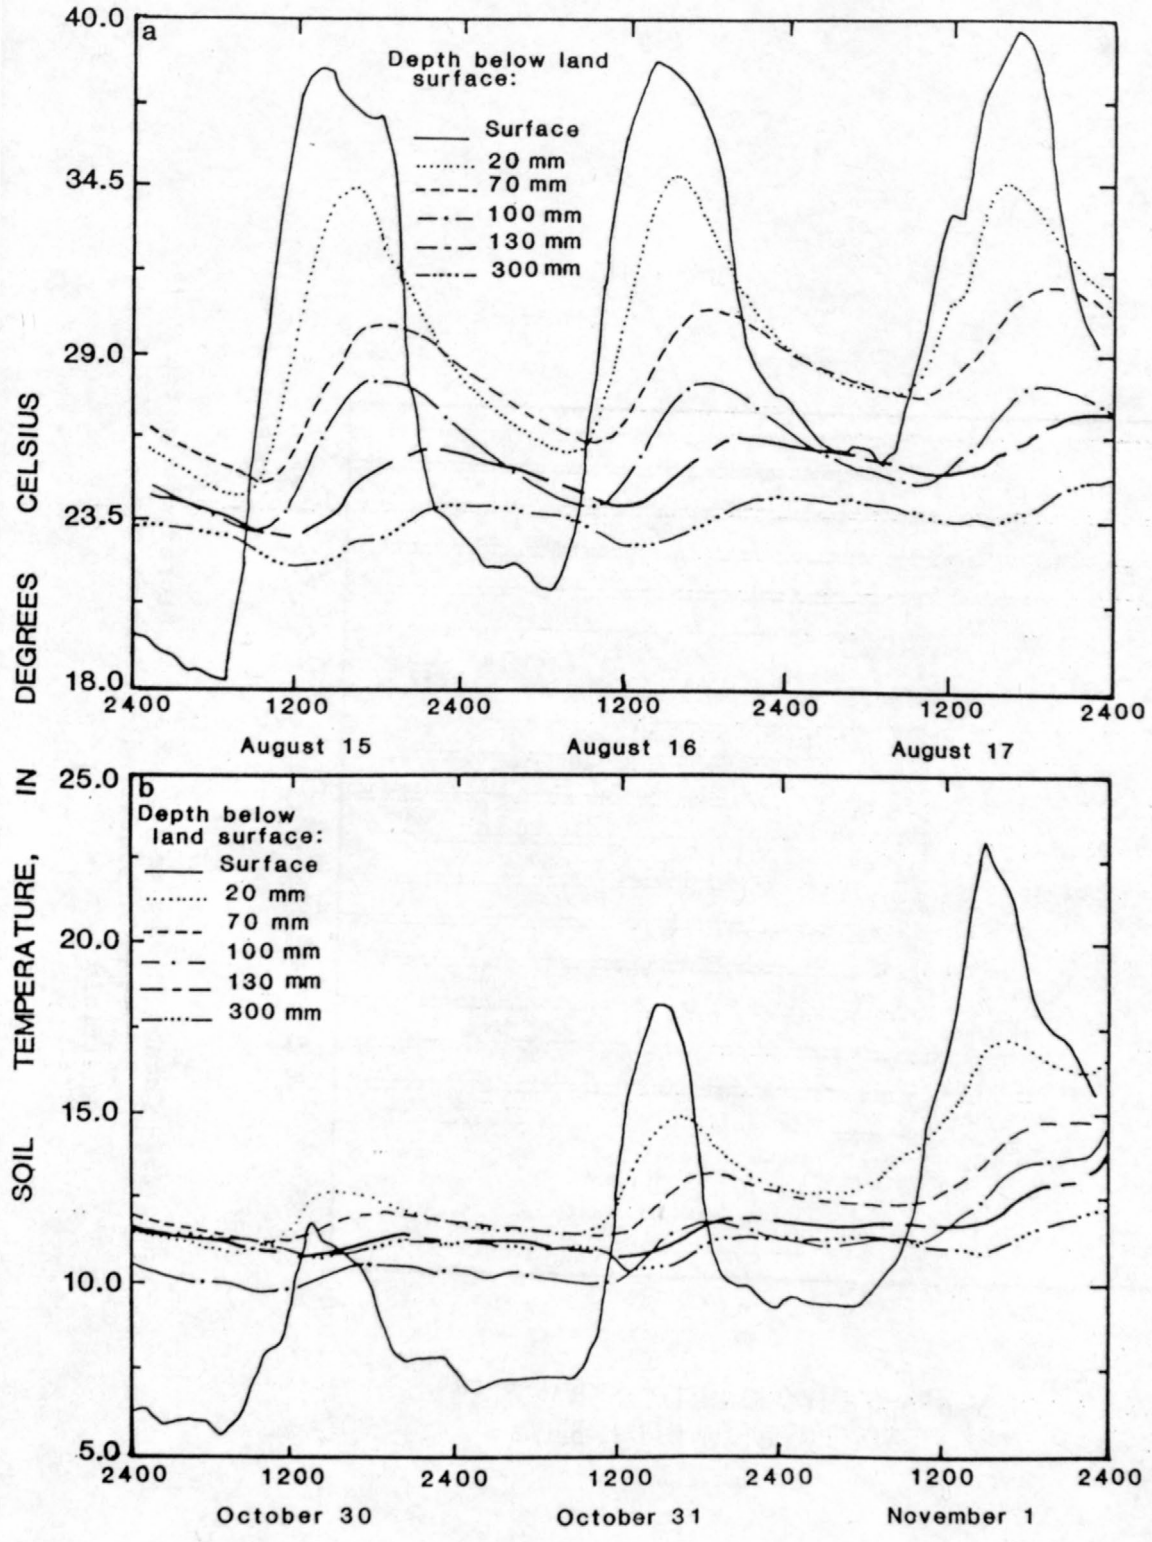

Figure 24.--Soil temperatures at the Sheffield site (a) August 15-17, 1983; and (b) October 30 through November 1, 1983.

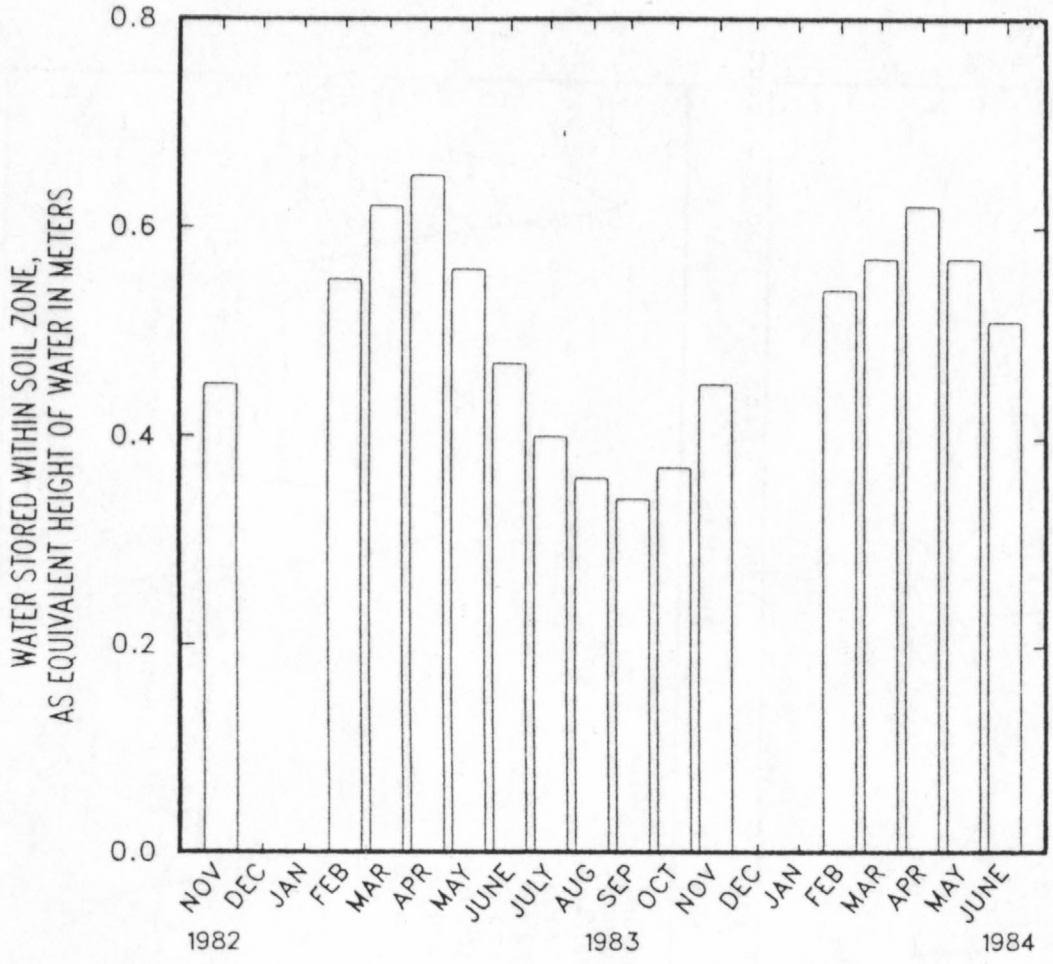

Figure 25.--Change in the amount of water stored within the top 1.75 meters of land surface at the Sheffield site.

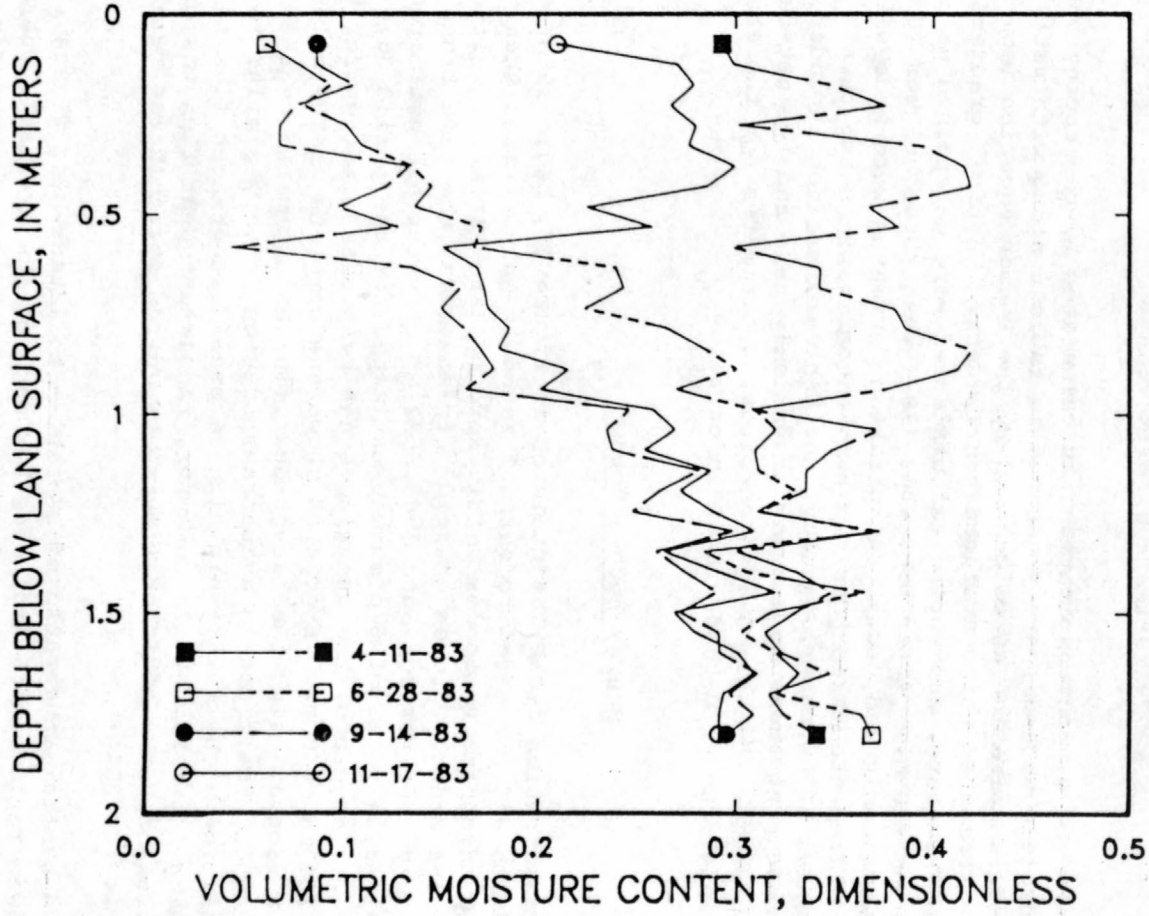

Figure 26.--Change in volumetric soil-moisture content with respect to depth for 4 days at the Sheffield site.

deeper depths. This trend was reversed in the fall when the rate of evapotranspiration was decreasing; then, the moisture content of the soils increased from land surface downwards. The range of moisture-content fluctuation was greatest near land surface and decreased with depth. At a depth of 50 mm, moisture content ranged from 0.03 to 0.42 (full saturation). At a depth of 1.5 m, the range was much smaller--about 0.30 to 0.42.

EVAPOTRANSPIRATION ESTIMATES

Daily estimates of evapotranspiration, as calculated by the energy-budget and aerodynamic-profile methods, are presented in table 6 along with estimates of potential evapotranspiration as calculated by the Penman equation (eq. 21). All estimates were computed using averaged hourly data. Vertical gradients in temperature, vapor pressure, and horizontal windspeed were determined using two heights (0.5 and 2.0 m). After September 1983, when three heights (0.5, 1.0, and 2.0 m) were monitored, evapotranspiration estimates were made with gradients computed from the three possible height combinations and then averaged. The months of December, January, and February are not included, as evapotranspiration during these months was essentially zero and the wet-bulb thermistors often froze. Monthly evapotranspiration estimates for the above methods and the water-budget method are included below.

Energy-Budget Method

The evapotranspiration cycle, as depicted in figure 27, began with low rates in early March and increased to maximum rates in July. Rates then declined steadily, dropping to approximately zero by late November. Although the magnitude of the monthly fluxes changed between years, the same trend is apparent. From July 1982 through June 1983, 622 mm of water are estimated to have evapotranspired; a total of 674 mm was estimated for the period July 1983 through June 1984. Therefore, the annual average evapotranspiration for the 2-year study period was 648 mm. Figure 28 shows the complete energy balance for the period of record, using the latent-heat flux as estimated by the energy-budget method. The trend in evapotranspiration is very similar to the trend in net radiation. The relatively high rates of latent-heat flux in the late fall are quite interesting. In November, the latent-heat flux was greater than the net radiation. The additional energy required for this was released by the cooling air and soil.

As discussed earlier, the ratio of sensible- to latent-heat fluxes (H/LE) is called the Bowen ratio, which indicates how much of the available energy is being used to evaporate water and how much is being used to warm the air. An H/LE ratio of zero implies that all available energy is being used to evaporate water. A ratio of 1 implies that H is equal to LE. Campbell (1977, p. 136) gives a typical value for H/LE of 0.2 for well-watered short grass. A negative value indicates the occurrence of advection (horizontal heat transport from surrounding areas) and a temperature inversion.

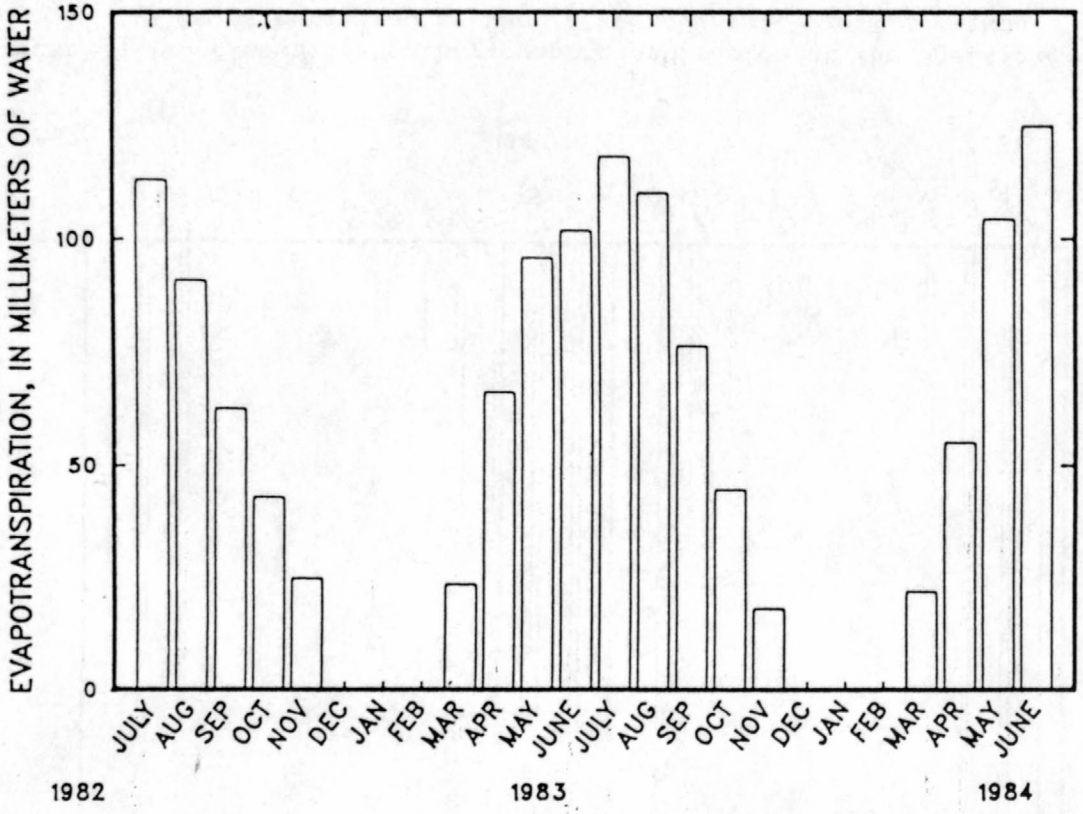

Figure 27.--Monthly evapotranspiration at the Sheffield site as estimated by the (a) energy-budget method.

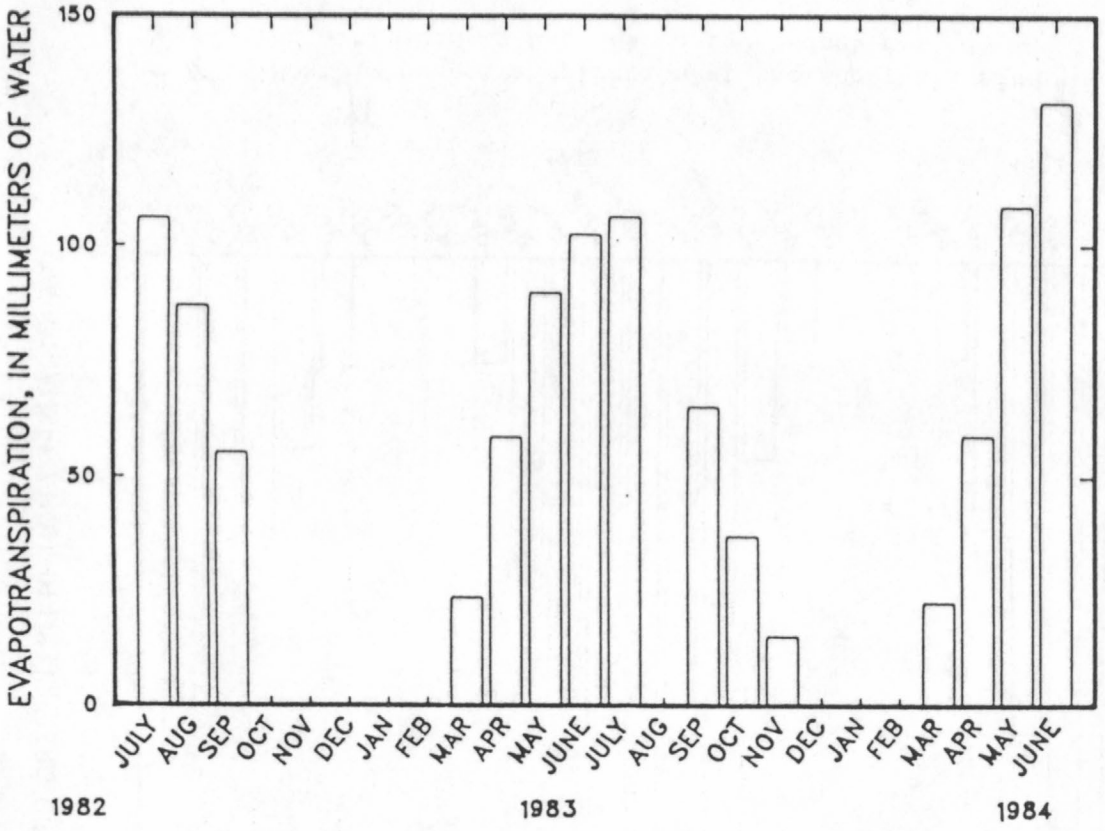

Figure 27 (Continued).--Monthly evapotranspiration at the Sheffield site as estimated by the (b) aerodynamic-profile method.

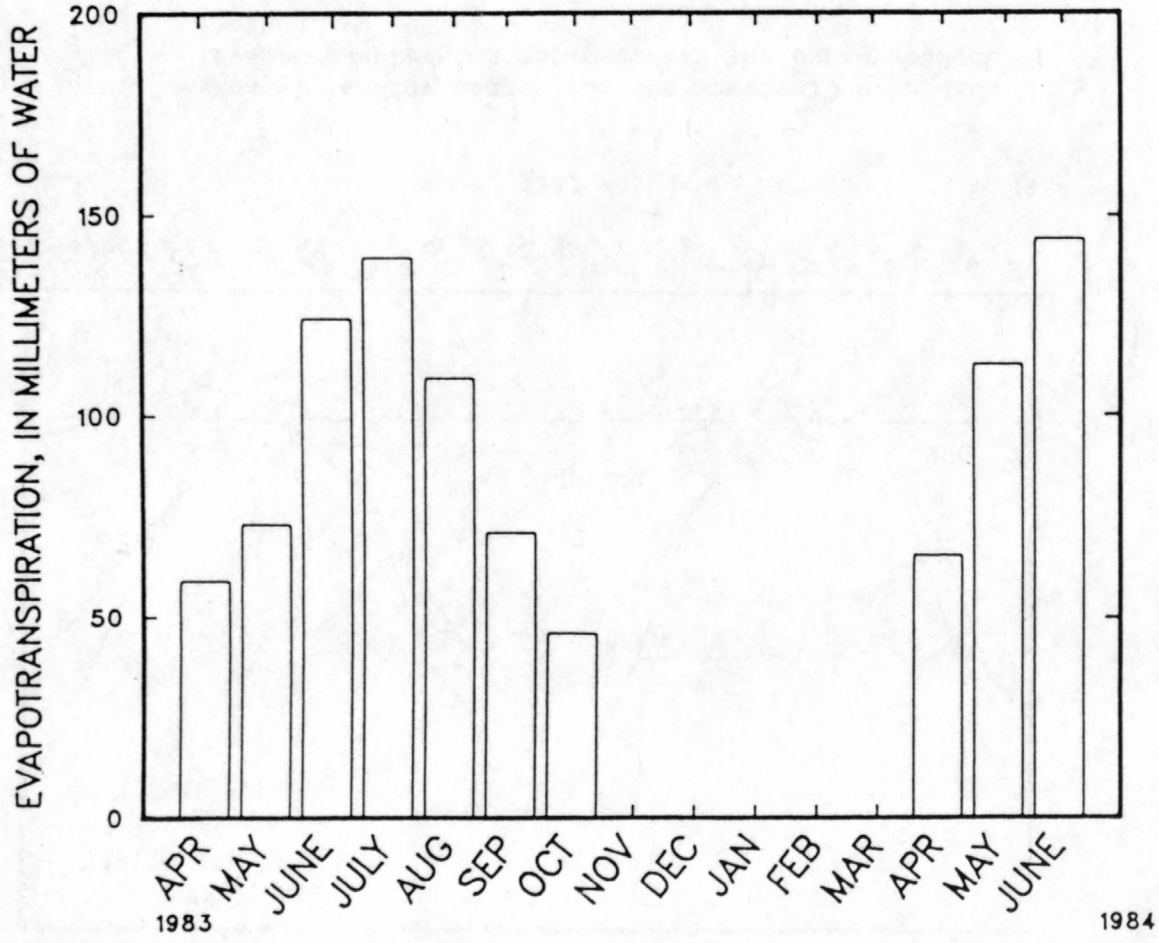

Figure 27 (Continued).--Monthly evapotranspiration at the Sheffield site as estimated by the (c) water-budget method.

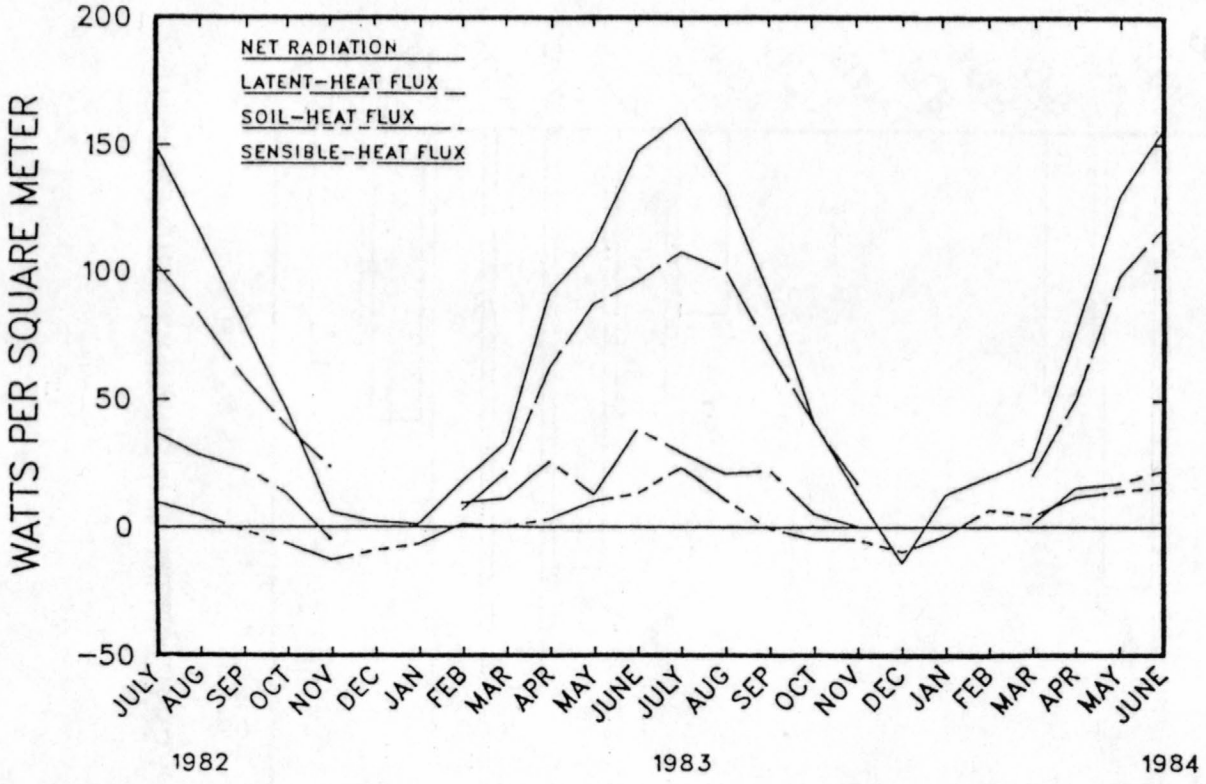

Figure 28.--Monthly energy budget for the Sheffield site with evapotranspiration estimated by the energy-budget method.

Monthly values of the Bowen ratios are presented in figure 29. The ratio was variable in the late spring and summer months. There was a noticeable trend in the fall, when the ratios decreased.

Daily estimates of evapotranspiration by the energy budget ranged from a low of essentially zero during winter months to a maximum of approximately 6.0 mm for a few summer days. Daily Bowen ratios showed more scatter than monthly values. Negative values occurred for a few days, usually as a result of low net radiation and high winds. However, seasonal trends that were noted for monthly values were also apparent for daily estimates.

Figure 30 shows hourly estimates of the energy budget for the periods of intense study. There is a clear diurnal pattern in all values. This pattern is quite similar to that of the annual energy budget.

The trend of evapotranspiration was very similar to that of net radiation; both increase from near zero at dawn, reach a peak at solar noon, and decrease during late afternoon and evening to a value near zero at nighttime. Nighttime rates were all very close to zero, but could be either negative or positive. Negative rates correspond to condensation (dew). A significant amount of nighttime evaporation would be expected only with a wet surface, such as following precipitation or condensation.

Ratios of sensible- to latent-heat fluxes varied markedly throughout the day but did follow a pattern (table 4). Values immediately after dawn were generally slightly greater than zero. The ratio increased rather quickly (in 2 or 3 hours) and remained relatively constant until the late afternoon when it began to decline. By early evening, the ratio became negative (usually very small in magnitude). This change in sign occurred simultaneously with a temperature inversion and is related to the decrease in net radiation. There was no longer enough incoming radiation to raise the soil-surface temperature above that of the overlying air. The surface was cooling and, therefore, drawing heat from the warmer air. The warmer air provided additional energy for evapotranspiration to occur. Immediately following sunset, the ratio could vary considerably in both sign and magnitude.

There are numerical instabilities inherent in using this method at night. Bowen ratios may be quite close to -1.0, implying that the latent-heat flux is equal in magnitude, but opposite in sign to the sensible-heat flux. Because $(1 + \beta)$ appears in the denominator of equation 19, the computed evapotranspiration rate approaches positive or negative infinity as β approaches -1. To circumvent this problem, hourly energy-budget evapotranspiration estimates were rejected if the Bowen ratio was in the range of -0.3 to -1.7. For these rejected hours, evapotranspiration was assumed to be equal to potential evapotranspiration (eq. 21). This should have little effect on overall results, because nighttime fluxes are relatively unimportant under most conditions (Fritschen, 1965).

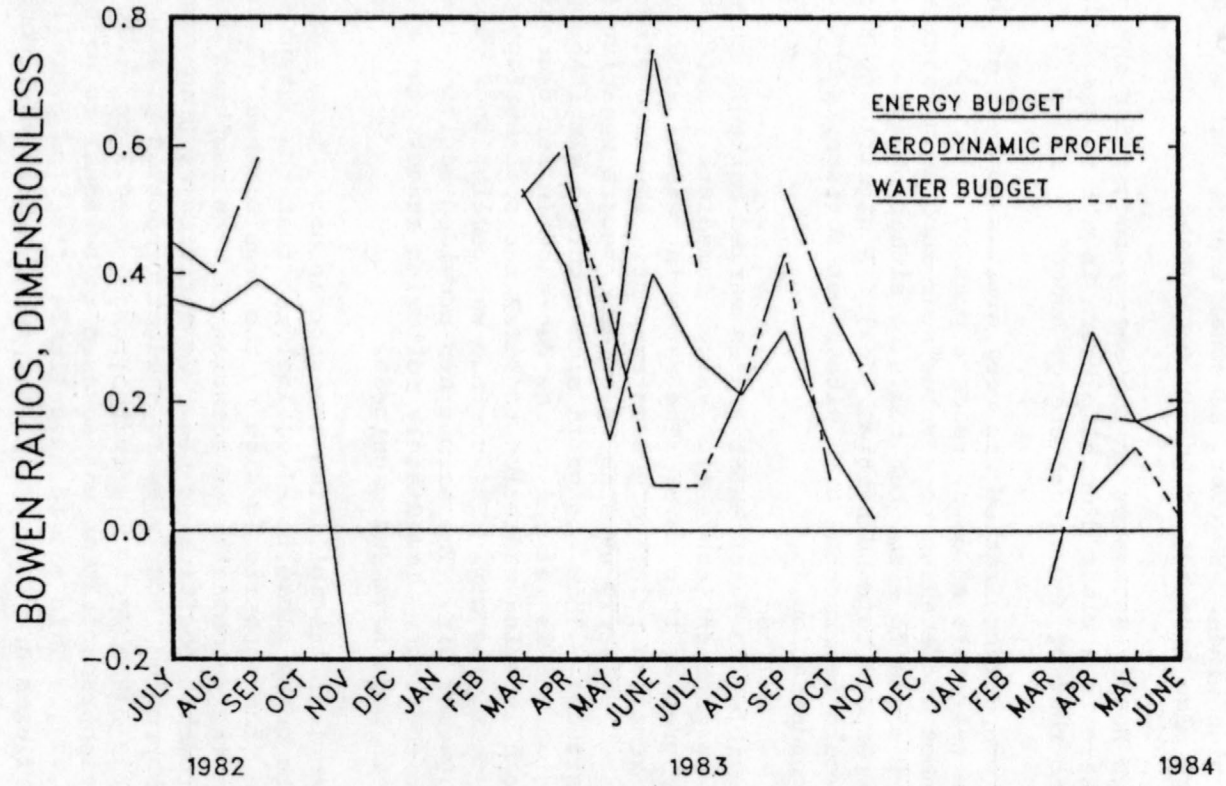

Figure 29.--Monthly ratios of sensible- to latent-heat fluxes as estimated by the energy-budget, aerodynamic-profile, and water-budget methods for the Sheffield site.

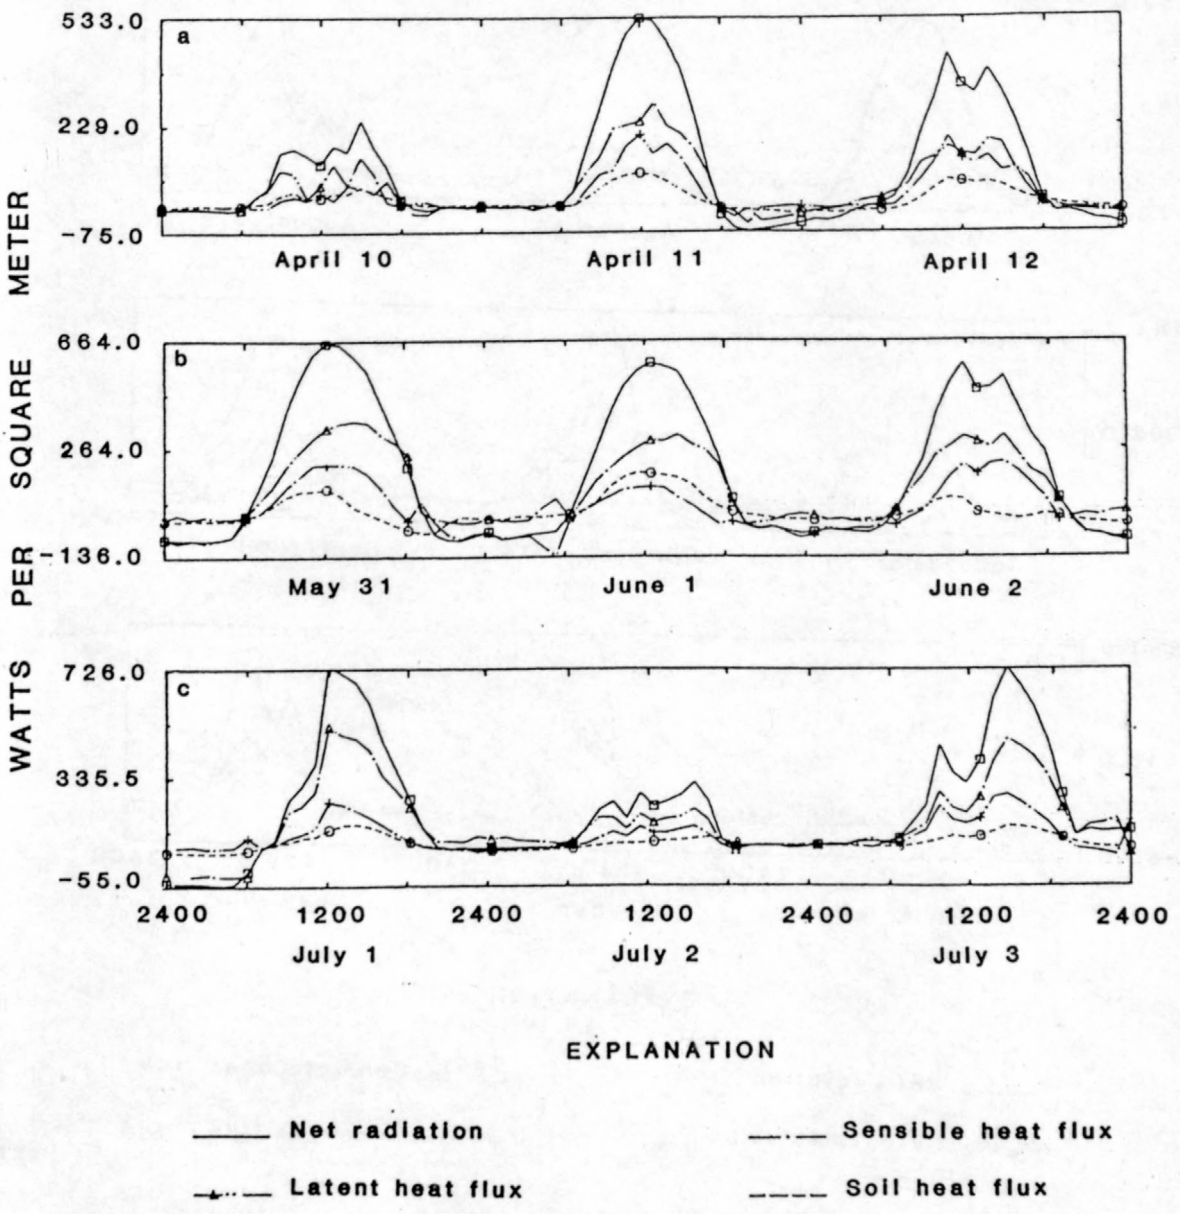

Figure 30.--Energy budget as estimated by the energy-budget method (a) April 10-12, 1984; (b) May 31 through June 2, 1984; and (c) July 1-3, 1982.

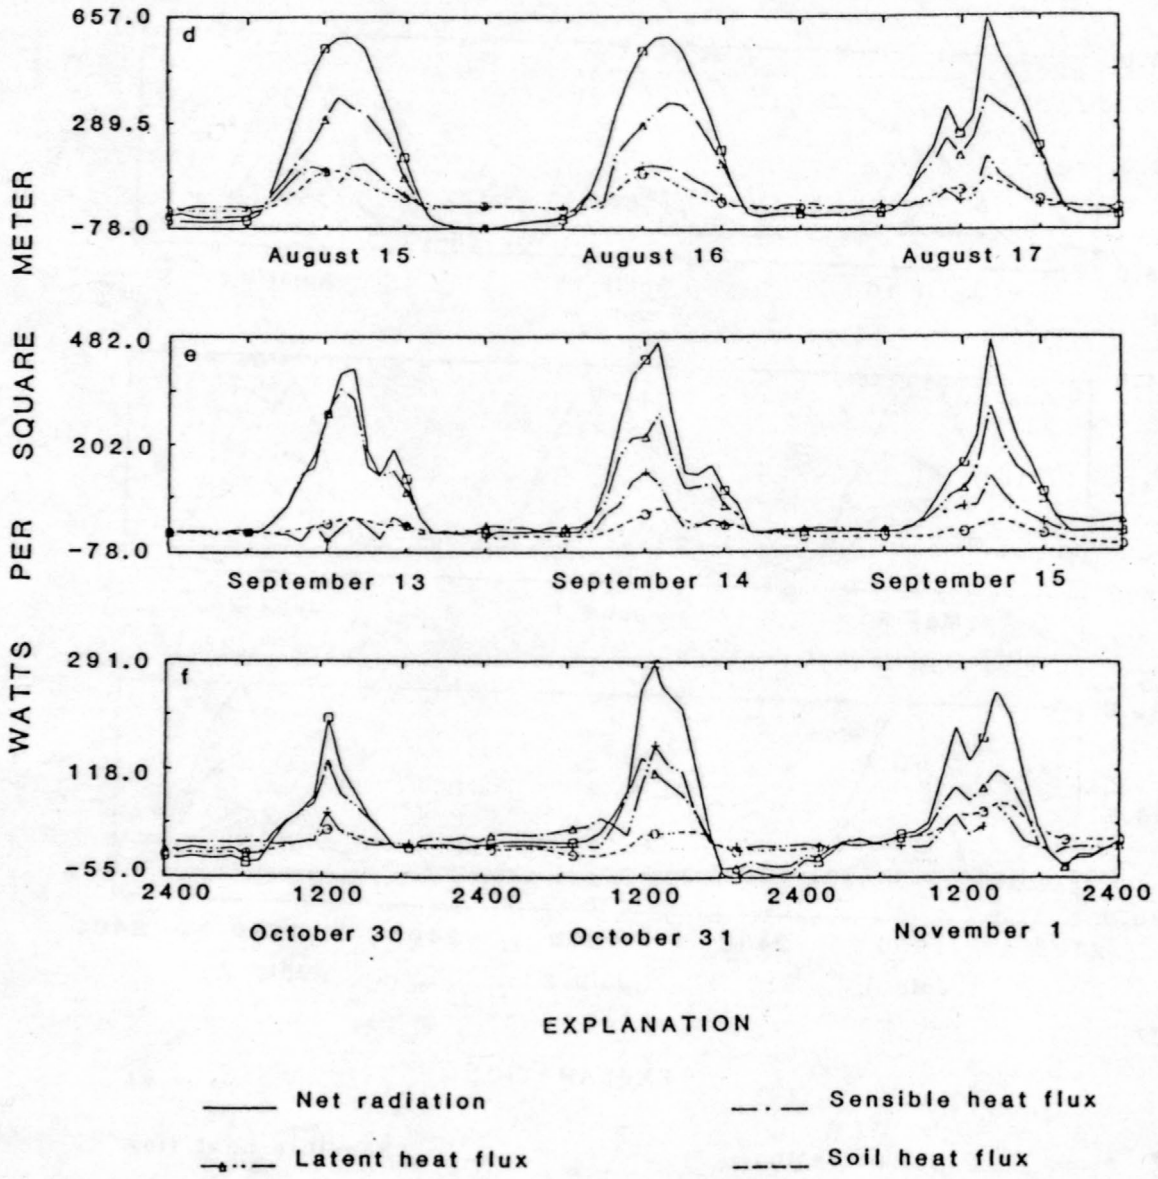

Figure 30 (Continued).--Energy budget as estimated by the energy-budget method (d) August 15-17, 1983; (e) September 13-15, 1982; and (f) October 30 through November 1, 1983.

Table 4.--Hourly values of the ratio of sensible- to latent-heat flux

Hour[1]	Ratio of sensible- to latent-heat flux		
	July 2, 1982	Oct. 31, 1983	June 1, 1984
0100	0.25	-0.16	-14.42
0200	.53	-.16	12.45
0300	.87	-.18	8.10
0400	.85	-.17	18.17
0500	-6.10	-.19	-2.41
0600	-.14	-.15	-1.79
0700	-.08	-.24	-1.44
0800	.12	-.10	.40
0900	.28	.00	.41
1000	.49	.04	.45
1100	.54	.10	.47
1200	.60	.39	.43
1300	.55	.23	.41
1400	.47	.12	.40
1500	.57	-.04	.25
1600	.53	-.11	.19
1700	.42	-.22	.06
1800	.06	-.15	-.10
1900	-.17	-.25	-.17
2000	-.24	-.36	1.21
2100	-.21	-.31	2.61
2200	.03	-.74	4.09
2300	.09	-.27	-4.26
2400	.26	-.40	-3.67

[1] Central daylight.

Aerodynamic-Profile Method

The estimates of evapotranspiration by the aerodynamic-profile method, listed in table 6, were determined by estimating the sensible-heat flux using equation 16, then using the energy-balance equation 17 to determine the latent-heat flux. Use of equation 15--the more common aerodynamic-profile equation--presented several problems so results from it are not included. The method using equation 15 was more susceptible to problems of missing data (the method required both wet- and dry-bulb temperature and windspeeds). Using equation 15, only 5 months out of the 2-year study period had acceptable evapotranspiration values for at least 50 percent of the days. In general, estimates made by use of equation 15 were much greater than estimates made using all other methods (including the Penman equation--eq. 21). In fact, hourly estimates

were sometimes as much as 100 percent higher than net radiation! The reason for this discrepancy is not clear. The remainder of this section discusses only estimates made using equation 16.

For July 1982 through June 1983, evapotranspiration was estimated to be 591 mm. Because of instrument malfunction, evapotranspiration for October and November 1982 and August 1983, was assumed to be equal to that estimated by the energy-balance method. For July 1983 through June 1984, 660 mm of water was estimated to have evapotranspired. The estimated annual average for the 2-year period was 626 mm; this is about 3 percent lower than that estimated by the energy-budget method. There was good qualitative agreement between the two methods, on a monthly basis, as shown in figures 27 and 29. Seasonal trends discussed previously were clearly apparent with this method. Figures 31 and 32 show that monthly and hourly energy budgets used in the aerodynamic-profile method also were quite similar to those of the energy-budget method (figs. 28 and 30). Because of the similarities, detailed discussions of trends are not repeated here.

Water-Budget Method

Figure 27 shows monthly evapotranspiration totals for April 1983 through June 1984. Because of instrument problems, the moisture probe was not operated in 1982. Because of the limited accuracy of each measurement and the limited number of measurements that were made, it is not possible to estimate evapotranspiration on a daily basis.

A total of 688 mm is estimated to have evapotranspired during the period July 1983 through June 1984. The months of November through March are not included in this total because the rates of evapotranspiration for these months were too low to estimate accurately. By including estimates for March and November, as averaged from the energy-budget and aerodynamic-profile methods, the yearly total was 728 mm. This total is only 7 and 9 percent higher than the totals estimated by the energy-budget and aerodynamic-profile methods for the same period, respectively; however, some monthly totals were significantly different. Estimates for June, July, and August were, on the average, 20 percent higher by the water-budget method, but all methods matched well for the other months. When average values for April, May, and June 1983 and 1984 are used, the annual total is 655 mm for April through October.

Potential Evapotranspiration

Daily values of potential evapotranspiration as estimated by equation 21 are included in table 6. The total potential evapotranspiration for July 1982 through June 1983 was 864 mm. For July 1983 through June 1984, the total was 888 mm. The annual average of 876 mm is equivalent to 97 percent of the net radiation and 93 percent of the precipitation. Figure 33 shows monthly averages for the period of record. Actual evapotranspiration, as estimated by all three methods, was always less than potential on a monthly basis. However, on any one day, estimates of actual could be greater than potential evapotranspiration. There appears to be a seasonal trend in the monthly ratios of actual

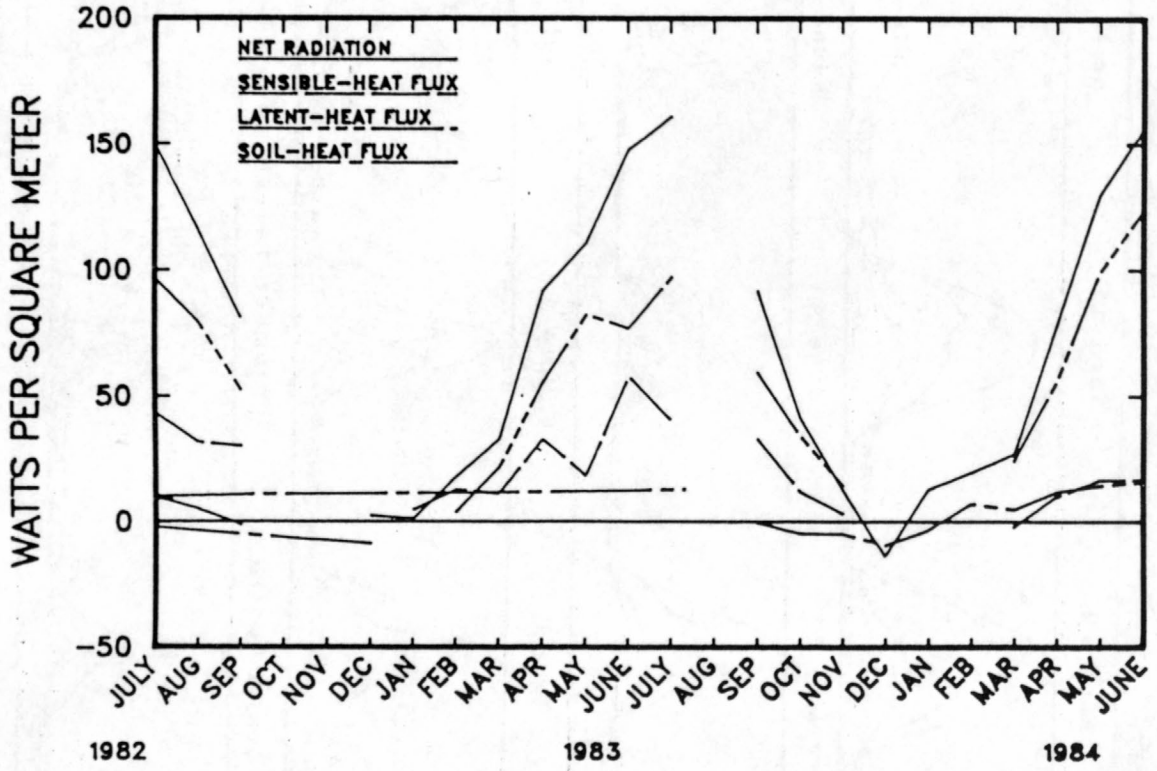

Figure 31.--Monthly energy budget for the Sheffield site with evapotranspiration estimated by the aerodynamic-profile method.

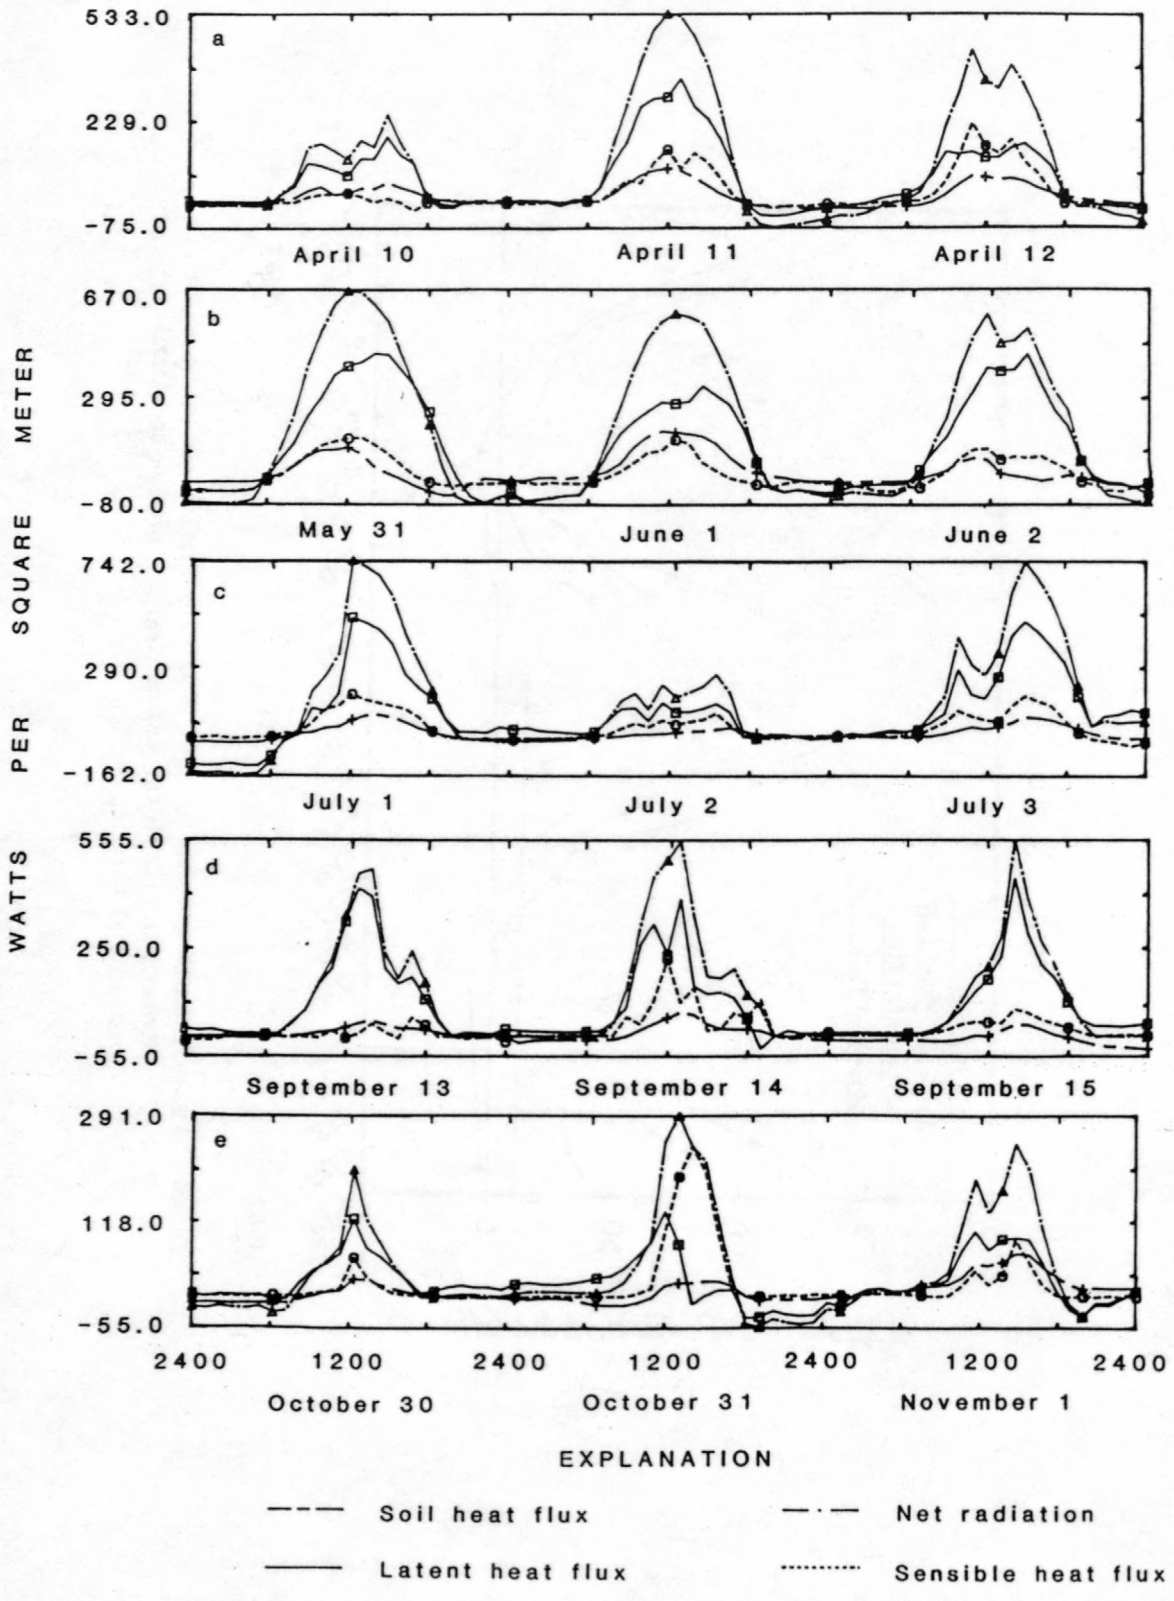

Figure 32.--Energy budget as estimated by the aerodynamic-profile method (a) April 10-12, 1984; (b) May 31 through June 2, 1984; (c) July 1-3, 1982; (d) September 13-15, 1982; and (e) October 30 through November 1, 1983.

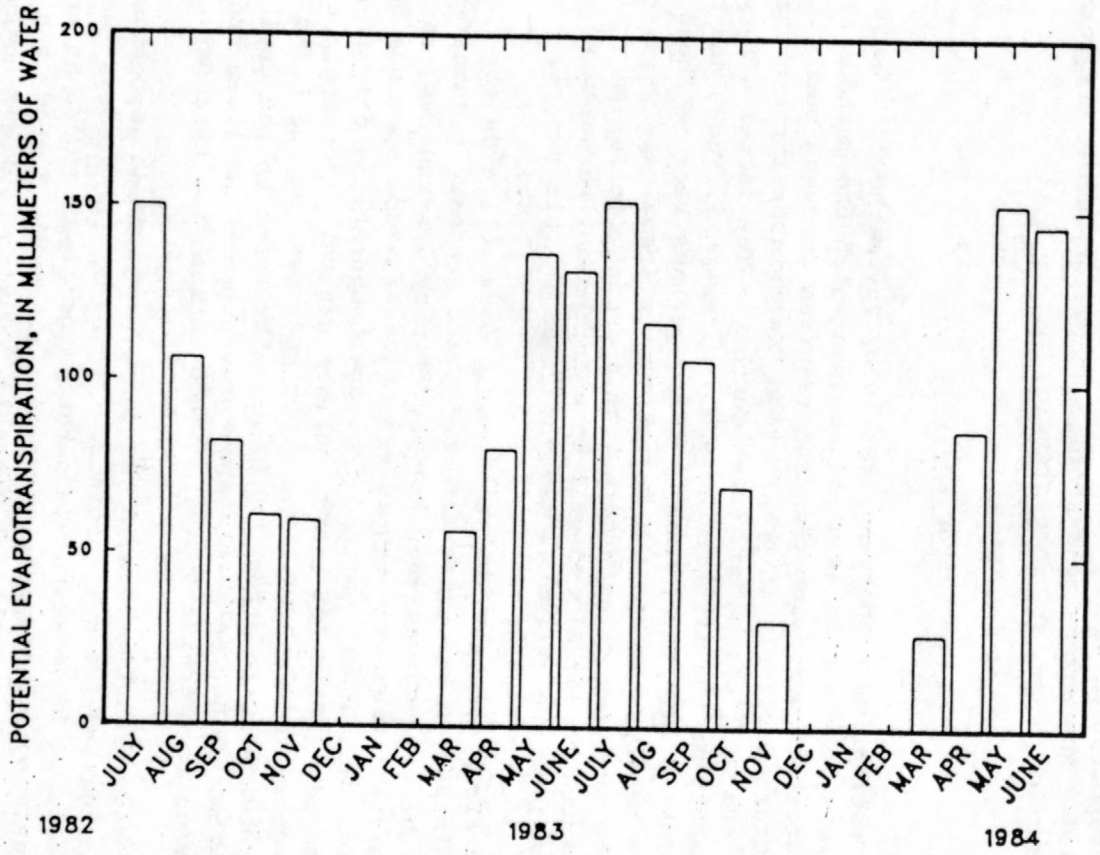

Figure 33.--Monthly potential evapotranspiration at the Sheffield site.

to potential (fig. 34); with the exception of March 1984, the ratios are highest in the summer months. However, analysis of daily values indicates that this is not the case. Correlation coefficients determined for the ratios of actual to potential evapotranspiration as a function of potential evapotranspiration were 0.03 for the energy-budget method and 0.10 for the aerodynamic-profile method, indicating that the ratios are independent of the magnitude of the potential evapotranspiration. The energy-budget estimates averaged 74 percent of potential. The aerodynamic-profile and water-budget estimates averaged 72 and 79 percent of potential, respectively.

Error Analysis

Errors in estimating evapotranspiration by any method can be divided into two types: errors inherent in assumptions upon which the methods are based, and errors inherent in measuring the data required for each method. The former errors were discussed briefly in the section "Techniques for estimating evapotranspiration" and will not be addressed further. The latter errors have been analyzed frequently in the literature (see, for example, Fuchs and Tanner, 1970; Revfeim and Jordan, 1976; Grant, 1975), perhaps because these errors are quantified more easily. Rather than presenting a formal analysis, as those authors did, the analyses given here use an approach similar to that taken by Stricker and Brutsaert (1978) and will look at typical measurement errors and show how they affect the estimates already given in this report.

It should first be noted that all hourly data collected for this study were manually inspected for gross errors. There are many reasons why invalid data values might be recorded--for example, faulty instruments, calibration drift, and inclement weather. Regardless of cause, some spurious data were recorded. These values were omitted from any computations only if a physical reason could be identified for their spurious nature. An example can be seen in figure 10a on April 12, 1984. The vapor pressures at the 0.5-m height for that day were obviously in error. This was attributed to the drying out of the wet-bulb wick. Thus, only the vapor pressures at the 1.0-m and 2.0-m heights were used in evapotranspiration calculations for that day.

The most significant errors in the energy-budget and aerodynamic-profile methods are in the temperature readings. Figure 35 illustrates that, for 3 days, the effects of the measured temperature gradient caused an error of $\pm$0.15°C in hourly evapotranspiration estimates. Table 5 shows the cumulative effects of these errors on the daily totals. During daylight hours, similar trends were apparent for the two methods. The hours of largest absolute errors corresponded to the hours of greatest evapotranspiration. The energy-budget method was slightly more sensitive to the temperature perturbation than was the aerodynamic-profile method. The largest relative errors occurred for the energy budget at times when the magnitude of the Bowen ratio was the largest (at night). This trend, according to Fuchs and Tanner (1970), should be apparent for this method. It was not apparent for the aerodynamic-profile method.

Figure 36 and table 5 show the effects of assuming an error of $\pm$0.02 kPa in the vapor-pressure gradient for the energy-budget method. The effect was quite significant during some hours, especially when the measured gradient was

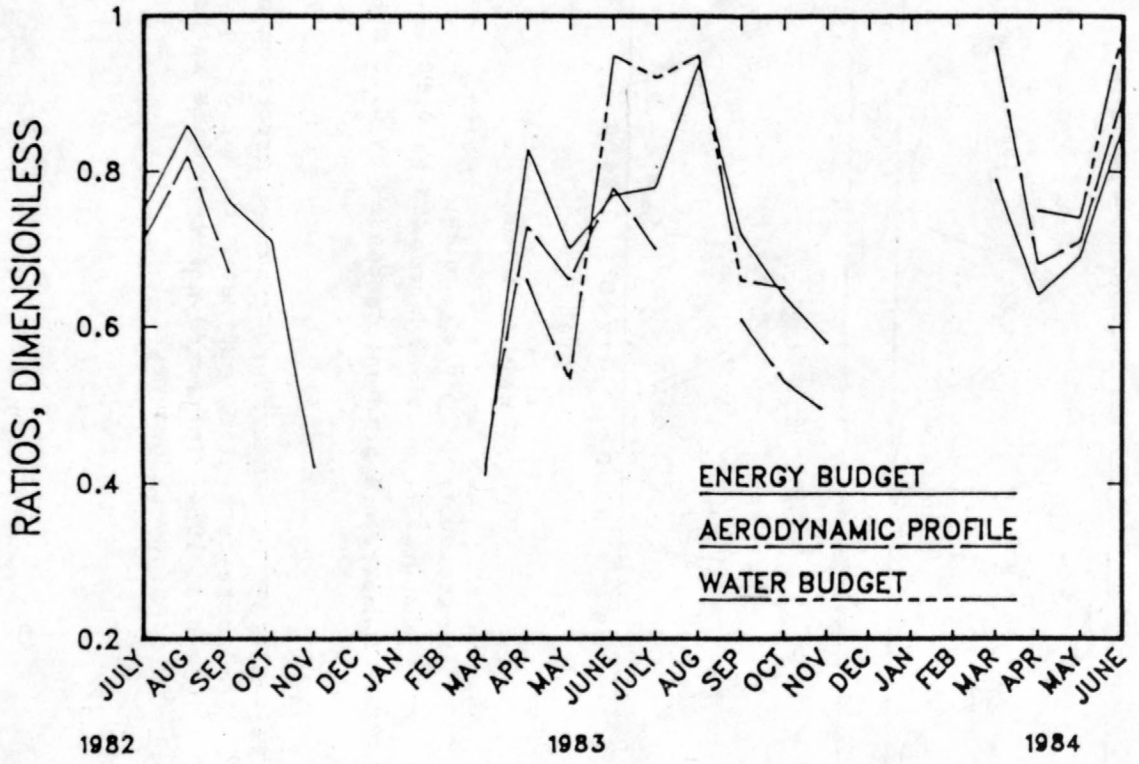

Figure 34.--Monthly ratios of evapotranspiration, as estimated by the energy-budget, aerodynamic-profile, and water-budget methods, to potential evapotranspiration at the Sheffield site.

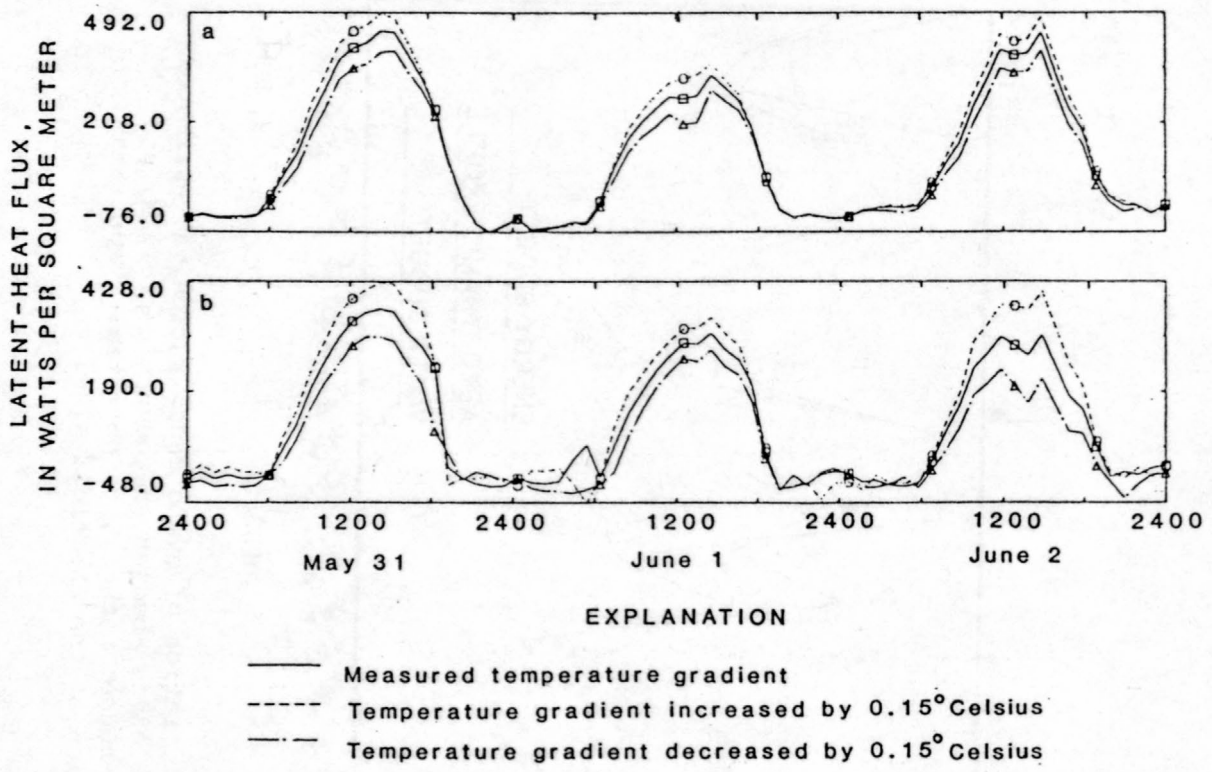

Figure 35.--Effects of temperature-gradient errors on hourly evapotranspiration estimates on May 31 through June 2, 1984, (a) aerodynamic-profile method and (b) energy-budget method.

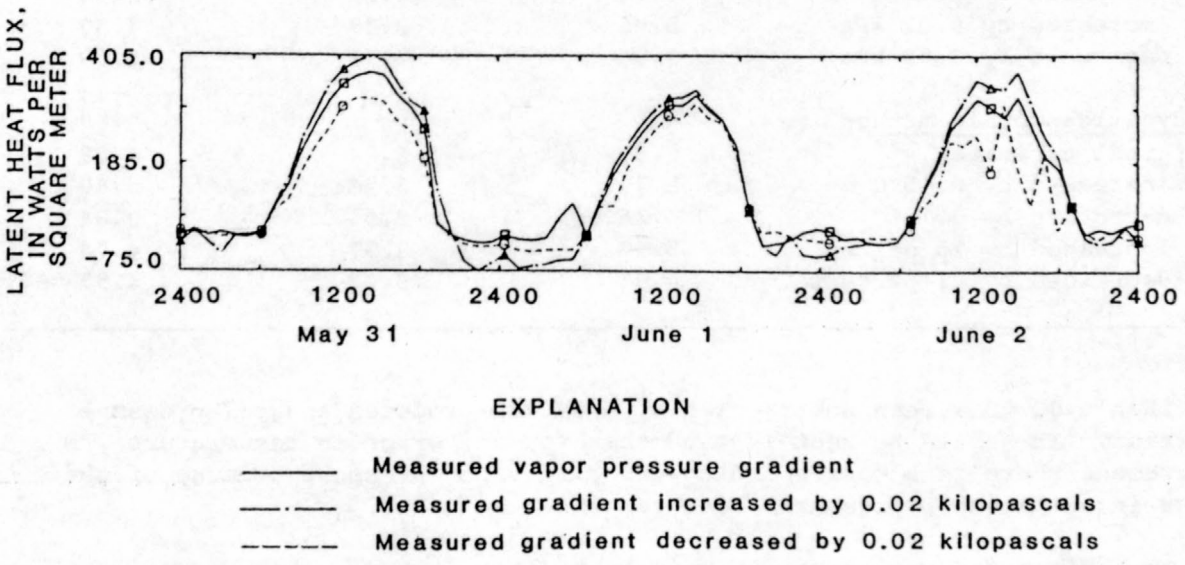

Figure 36.--Effects of vapor-pressure gradient errors on hourly evapotranspiration estimates by the energy-budget method on May 31 through June 2, 1984.

Table 5.--Changes in computed daily evapotranspiration, when assuming systematic measurement errors

	Evapotranspiration, in millimeters of water		
	May 31, 1984	June 1, 1984	June 2, 1984
Energy-budget method			
Original estimate	4.80	3.98	3.97
ΔT increased by 0.15°C	5.84	4.35	5.14
ΔT decreased by 0.15°C	3.71	4.52	2.54
Δe increased by 0.02 kPa	5.06	3.37	4.30
Δe decreased by 0.02 kPa	3.86	3.19	2.59
Aerodynamic-profile method			
Original estimate	5.07	3.24	4.69
ΔT increased by 0.15°C	5.79	3.76	5.40
ΔT decreased by 0.15°C	4.26	2.51	3.81
Δu increased by 25 percent	5.28	3.37	4.74
Δu decreased by 25 percent	4.91	3.12	4.57

less than 0.02 kPa, when subtraction of 0.02 kPa produced a vapor-pressure inversion. It should be kept in mind that for any error in temperature measurement there is a corresponding error in vapor pressure because of the manner in which vapor pressures were computed.

The effects of varying the vertical gradient in horizontal windspeed by ±15 percent on the aerodynamic-profile estimates are shown in figure 37 and table 5. The effects were rather small.

The effects of errors in net radiation (Rn) and soil-heat flux (G) are more easily assessed. If (Rn-G) is in error by a certain percentage, then the energy-budget estimate of evapotranspiration would be in error by that same percentage multiplied by $(Rn-G)/L(1+\beta)$. The aerodynamic-profile estimates would be in error by that percentage multiplied by $(Rn-G)/L$.

An additional error in the aerodynamic-profile method is possible in estimating the value of d, the zero-plane displacement. However, modifying d by up to 20 percent had virtually no effect on computed results. Furthermore, Sellers (1965, p. 151) states that, in most cases, d can be ignored.

The accuracy of the water-budget method is entirely related to the accuracy with which precipitation, runoff, and soil-moisture content can be measured. Precipitation measurements should be the least error prone of the three. Runoff measurements were estimated to be accurate within 5 percent (J. R. Gray, U.S. Geological Survey, oral commun., 1985). If soil-moisture measurements are assumed to be correct to ±1 percent volumetric-moisture content, then the total error for the 1.75-m thick soil zone would be ±17.5 mm of water per measurement. Total error ranges from about 13 percent to more than 40 percent of monthly evapotranspiration.

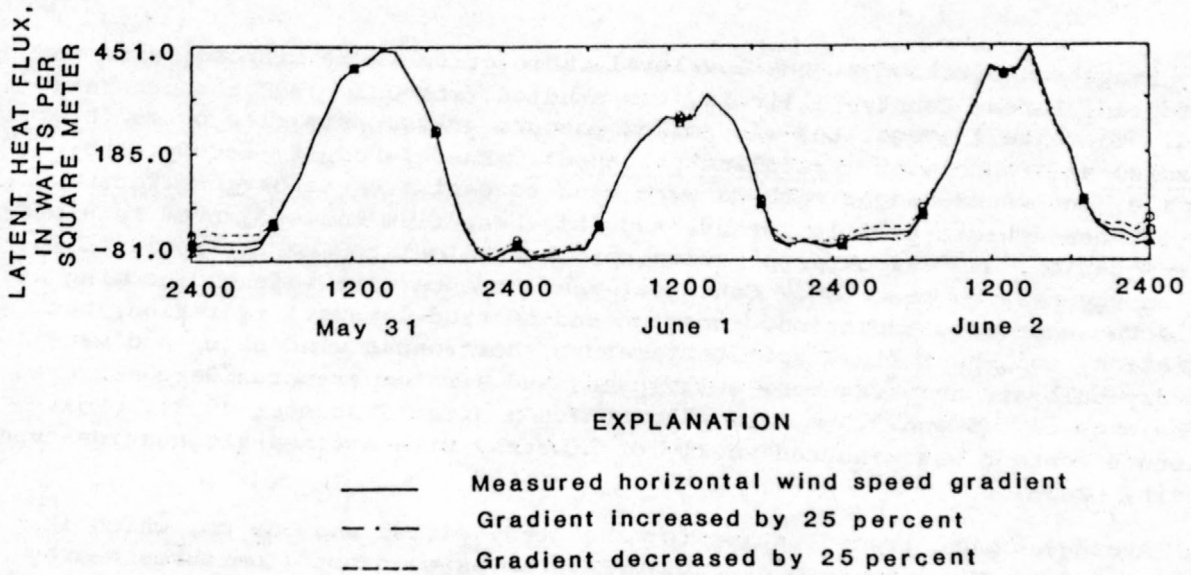

Figure 37.--Effects of errors in horizontal windspeed gradient on hourly evapotranspiration estimates by the aerodynamic-profile method on May 31 through June 2, 1984.

These results were all obtained by assuming a systematic error. In actuality, the measurement errors were probably much more random; hence, their effects on results should be much less than those presented in this simple analysis. Nevertheless, it is apparent that there may be significant errors in the evapotranspiration estimates presented in table 6 and discussed herein. The good agreement among the three methods, in terms of annual averages, is quite surprising. It would be unrealistic, however, to assume that, because the estimates are within 6 percent of each other, that all of the estimates are within 6 percent of actual evapotranspiration. The desirability of estimating evapotranspiration by more than one method is obvious from this analysis.

SUMMARY

Evapotranspiration at the low-level radioactive-waste disposal site near Sheffield, Bureau County, Illinois, was studied from July 1982 through June 1984. The site is vegetated with mixed pasture grass, primarily brome (Bromus inermis) and red clover (Trifolium pratense). Energy-budget, aerodynamic-profile, and water-budget methods were used to estimate evapotranspiration. For the aerodynamic-profile method, sensible-heat flux was estimated by a profile equation, and evapotranspiration was then calculated as the residual in the energy-balance equation. Continual measurements were made of incoming and reflected shortwave radiation, incoming and emitted longwave radiation, net radiation, soil-heat flux, soil temperature, horizontal windspeed, and wet- and dry-bulb air temperatures. Windspeeds and air temperatures were measured at heights of 0.5 and 2.0 m (and also at 1.0 m after September 1983). Soil-moisture content was measured weekly or biweekly with a gamma-attenuation type density probe.

Average annual precipitation for the study period was 938 mm, which is quite close to the long-term average of 890 mm as computed from three nearby National Weather Service stations. Most precipitation fell in heavy storms.

Annual shortwave radiation for the study period averaged 156 W/m^2, which is 65 percent of clear-sky solar radiation. For 117 days during the study period, measured shortwave radiation was greater than or equal to 90 percent of clear-sky solar radiation. Surface albedos averaged about 20 percent in late spring to early fall; in the winter, albedos were highly variable, depending on snow cover. Trends in incoming and outgoing longwave radiation were very similar to trends in air temperature. Net radiation averaged 70.1 W/m^2 annually and followed the same pattern as solar radiation.

Surface winds at the site during the study period were primarily out of the south-southeast and highly variable. The average windspeed was 3.5 m/s. Windspeeds in winter months tended to be slightly higher than in summer months. The plot of windspeed as a function of logarithm of height was usually linear only near dawn and dusk because of atmospheric instability.

Air temperatures averaged 10.8°C, with monthly averages ranging from a high of about 26°C in July 1983, to a low of -10°C in December 1983. The annual average is quite close to the long-term average of 10.3°C as computed from nearby National Weather Service stations. Water-vapor pressures varied directly with temperature.

The amount of water stored in the soil zone was highest in early spring at the start of the evapotranspiration cycle. Soil water decreased through the growing season and reached a minimum in mid- to late September. The annual variation in volumetric moisture content was closely related to depth. At a depth of 50 mm, moisture contents, as a percentage of total unit volume, ranged from 3 to 42 percent (full saturation). At a depth of 1.5 m, moisture contents showed a much smaller change--ranging from 30 to 42 percent.

Estimates of evapotranspiration by the energy-budget and aerodynamic-profile methods were calculated with hourly-averaged data. Vertical gradients in temperature, vapor pressure, and horizontal windspeed were computed using two heights (0.5 and 2.0 m). After September 1983, when three heights (0.5, 1.0, and 2.0 m) were monitored, evapotranspiration estimates were made with gradients computed from the three possible height combinations and then averaged.

Estimates of annual evapotranspiration (excluding the months of December, January, and February; and also March and November for the water-budget method) are as follows: the energy-budget method, 648 mm; the aerodynamic-profile method, 626 mm; and the water-budget method, 655 mm. The average for the three methods is 657 mm (assuming that the water-budget estimates for March and November were equal to the averages of the other two methods), which is approximately 70 percent of the precipitation. Approximately 73 percent of net radiation was converted into heat and used as energy to evapotranspire water, and the annual Bowen ratio was 0.38.

Seasonal trends were similar for all three methods and matched the trends in net radiation. June and July were the months with the highest evapotranspiration rates. Monthly Bowen ratios for late spring through summer were variable, averaging about 0.35. The ratios declined during fall, and some reached negative values in late fall. For November 1982 and 1983, the latent-heat flux was greater than the net radiation.

Daily rates of evapotranspiration ranged from essentially 0 mm during winter months up to a maximum of approximately 6.0 mm in midsummer. Rates could vary substantially from day to day, depending upon the net radiation.

Diurnal trends in evapotranspiration were similar to those of net radiation; the highest rates occurred around solar noon. The Bowen ratio also followed a diurnal pattern--that is, it was only slightly positive around dawn, rising to a low positive number in the morning, remaining fairly constant until late afternoon when it dropped to slightly below zero. At night the ratio could be either positive or negative and its magnitude could vary greatly.

Potential evapotranspiration was estimated using the Penman equation with the van Bavel wind function. The average annual estimate for the study period was 876 mm. The energy-budget estimates averaged 74 percent of potential evapotranspiration. The aerodynamic-profile and water-budget estimates averaged 72 and 79 percent, respectively. There was no seasonal trend in the relation between actual and potential evapotranspiration rates.

Although the annual averages estimated by the different methods are quite close (within 6 percent), the reader is cautioned to keep in mind that there are inherent errors in all estimates. The good agreement among methods should be considered fortuitous, but under no circumstances should the range in different estimates be considered an indication of accuracy of any of the methods.

All three methods used to estimate evapotranspiration appear to be adequate within the environment of the Sheffield site. Each has some advantages and disadvantages compared to the others that should be weighed for use in future studies.

REFERENCES CITED

Anderson, E. R., 1954, Energy-budget studies in Water-loss investigations: Lake Hefner studies, technical report: U.S. Geological Survey Professional Paper 269, p. 71-119.

Bellaire, F. R., and Anderson, L. J., 1951, A thermocouple psychrometer for field measurements: American Meteorological Society Bulletin, v. 32, no. 6, p. 217-220.

Blaney, H. F., and Criddle, W. D., 1962, Determining consumptive use and irrigation water requirements: U.S. Department of Agriculture Technical Bulletin 1275, 59 p.

Bowen, I. S., 1926, The ratio of heat losses by conduction and by evaporation from any water surface: Physical Review, v. 27, p. 779-787.

Brutsaert, Wilfried, 1982, Evapotranspiration into the atmosphere--theory, history, and applications: Boston, D. Reidel, 299 p.

Budyko, M. I., 1956, The heat balance of the earth's surface: Leningrad, Hydrometeorological Publications [translated by N. A. Stepanova, 1958, U.S. Department of Commerce], 259 p.

Campbell, A. P., 1973, The effect of stability on evaporation rates measured by the energy balance method: Agricultural Meteorology, v. 11, p. 261-267.

Campbell, G. S., 1977, An introduction to environmental biophysics: New York, Springer-Verlag, 159 p.

Changnon, S. A., Jr., and Huff, F. A., 1980, Review of Illinois summer precipitation conditions: Illinois Institute of Natural Resources, State Water Survey Bulletin 64, 160 p.

Chemical Rubber Co., 1972, Handbook of chemistry and physics, 53 ed.: Chemical Rubber Company, Cleveland, Ohio.

Deacon, E. L., Priestley, C. H. B., and Swinbank, W. C., 1958, Evaporation and the water balance: Climatological Reviews of Research, UNESCO Arid Zone Research Service, v. 10, p. 9-34.

Denmead, O. T., and McIlroy, I. L., 1970, Measurement of non-potential evaporation from wheat: Agricultural Meteorology, v. 7, p. 285-302.

Dyer, A. J., 1974, A review of flux-profile relationships: Boundary-layer Meteorology, v. 7, p. 363-372.

Fischer, J. N., 1983, Low-level radioactive-waste program of the U.S. Geological Survey--in transition, in Annual Participants' Information Meeting, DOE Low-Level Waste Management Program, 5th, Denver, 1983: Idaho Falls, Idaho, U.S. Department of Energy, CONF-8308106, p. 52-61.

Foster, J. B., and Erickson, J. R., 1980, Preliminary report on the hydrogeology of a low-level radioactive-waste disposal site near Sheffield, Illinois: U.S. Geological Survey Open-File Report 79-1545, 87 p, 5 plates.

Foster, J. B., Erickson, J. R., and Healy, R. W., 1984, Hydrogeology of a low-level radioactive-waste disposal site near Sheffield, Illinois: U.S. Geological Survey Water-Resources Investigations Report 83-4125, 83 p.

Foster, J. B., Garklavs, George, and Mackey, G. W., 1984, Hydrogeologic setting east of a low-level radioactive-waste disposal site near Sheffield, Illinois: U.S. Geological Survey Water-Resources Investigations Report 84-4123, 20 p.

Fritschen, L. J., 1965, Accuracy of evapotranspiration determinations by the Bowen ratio method, in Bulletin of the International Association of Scientific Hydrology, June, p. 38-48.

Fritschen, L. J., and Gay, L. W., 1979, Environmental instrumentation: New York, Springer-Verlag, 216 p.

Fuchs, M., and Tanner, C. B., 1970, Error analysis of Bowen ratios measured by differential psychrometry: Agricultural Meteorology, v. 7, p. 329-334.

Garklavs, George, and Healy, R. W., 1986, Hydrogeology, ground-water flow, and tritium movement at a low-level radioactive-waste disposal site near Sheffield, Illinois: U.S. Geological Survey Water-Resources Investigations Report 86-4153, 35 p.

Gee, G. W., and Kirkham, R. R., 1984, Transport assessment--arid: Measurement and prediction of water movement below the root zone, in Annual Participants' Information Meeting, DOE Low-Level Waste Management Program, 6th, Denver, 1984, Proceedings: Idaho Falls, Idaho, U.S. Department of Energy, CONF-8409115, p. 503-519.

Geiger, R., 1961, Das klima der bodennahen luftschicht, Friedr, Vieweg & Sohn, Braunschweig (English transl.: Scripta Technica, Inc., 1965, The climate near the ground: Cambridge, Harvard University Press, 646 p).

Grant, D. R., 1975, Comparison of evaporation measurements using different methods: Quarterly Journal of the Royal Meteorological Society, v. 101, p. 543-550.

Gray, J. R., 1984, Runoff, sediment transport, and landform modifications near Sheffield, Illinois, in Annual Participants' Information Meeting, DOE Low-Level Waste Management Program, 6th, Denver, 1984, Proceedings: Idaho Falls, Idaho, U.S. Department of Energy, CONF-8409115, p. 534-544.

Gray, J. R., and deVries, M. P., 1984, A system for surface runoff and collecting sediment samples from small areas in Meyer. E. L., ed., Selected papers in the hydrologic sciences: U.S. Geological Survey Water-Supply Paper 2262, p. 7-11.

Healy, R. W., deVries, M. P., and Striegl, R. G., 1986, Concepts and data-collection techniques used in a study of the unsaturated zone at a low-level radioactive-waste disposal site near Sheffield, Illinois: U.S. Geological Survey Water-Resources Investigations Report 85-4228, 37 p.

Healy, R. W., Peters, C. A., deVries, M. P., Mills, P. C., and Moffett, D. L., 1984, Study of the unsaturated zone at a low-level radioactive-waste disposal site, in Proceedings of Conference on Characterization and Monitoring of the Vadose Zone, Las Vegas, 1983: National Water Well Association, p. 820-830.

Huff, F. A., 1979, Spatial and temporal correlation of precipitation in Illinois: Illinois Institute of Natural Resources, State Water Survey Circular 141, 14 p.

Jensen, M. E., 1967, Evaluating irrigation efficiency: Journal of Irrigation and Drainage Diversion, Proceedings of American Society of Civil Engineers, v. 93, p. 83-98.

----- ed, 1973, Consumptive use of water and irrigation water requirements: New York, American Society of Civil Engineers, 215 p.

Jones, D. M. A., 1966, Variability of evapotranspiration in Illinois: Illinois Institute of Natural Resources, State Water Survey Circular 89, 13 p.

McGuinness, J. L., and Bordine, E. F., 1972, A comparison of lysimeter-derived potential evapotranspiration with computed values: U.S. Department of Agriculture Technical Bulletin 1452, 71 p.

Monin, A. S., and Obukhov, A. M., 1954, Basic laws of turbulent mixing in the ground layer of the atmosphere: Tr. Geofiz. Instit. Akad. Mauk, S.S.S.R., No. 24(151), p. 163-187.

Monteith, J. L., 1973, Principles of environmental physics: New York, American Elsevier Publishing Company, 241 p.

Penman, H. L., 1948, Natural evaporation from open water, bare soil, and grass: Proceedings of the Royal Society of London, v. 193A, p. 120-146.

----- 1956, Evaporation: An introductory survey: Netherland Journal of Agricultural Science, v. 4, p. 9-29.

Penman, H. L., and Schofield, R. K., 1951, Some physical aspects of assimilation and transpiration: Symposium of the Society of Experimental Biology, v. 5, p. 115-129.

Revfeim, K. J. A., and Jordan, R. B., 1976, Precision of evaporation measurements using the Bowen ratio: Boundary-layer meteorology, v. 10, p. 97-111.

Richardson, L. F., 1920, The supply of energy from and to atmospheric eddies: Proceedings of the Royal Society of London, v. A97, p. 354-373.

Robertson, J. B., 1981, Modeling in low-level radioactive waste management from the U.S. Geological Survey perspective, in Modeling and Low-Level Waste Management: An Interagency Workshop, Denver, 1980: Oak Ridge, Tennessee, Oak Ridge National Laboratory, ORO-821, p. 21-30.

Rouse, W. R., 1984, Microclimate at Artic tree line 1. radiation balance of tundra and forest: Water Resources Research, v. 20, no. 1, p. 57-66.

Schulz, R. K., 1984, Water management of humid area shallow land burial sites, in Annual Participants' Information Meeting, DOE Low-Level Waste Management Program, 6th, Denver, 1984, Proceedings: Idaho Falls, Idaho, U.S. Department of Energy, CONF-8409115, p. 178-190.

Sellers, W. D., 1965, Physical climatology: Chicago, University of Chicago Press, 272 p.

Stricker, H., and Brutsaert, W., 1978, Actual evapotranspiration over a summer period in the "Hupsel Catchment": Journal of Hydrology, v. 39, p. 139-157.

Striegl, R. G., 1984, Methods for determining the transport of radioactive gases in the unsaturated zone, in Annual Participants' Information Meeting, DOE Low-Level Waste Management Program, 6th, Denver, 1984, Proceedings: Idaho Falls, Idaho, U.S. Department of Energy, CONF 84-09115, p. 579-587.

Sutton, O. B., 1953, Micrometeorology: New York, McGraw-Hill, 333 p.

Swinbank, W. L., and Dyer, A. J., 1967, An experimental study of micrometeorology: Quarterly Journal of the Royal Meteorological Society, v. 93, p. 494-500.

Tanner, C. B., and Pelton, W. L., 1960, Potential evapotranspiration estimates by the approximate energy balance method of Penman: Journal of Geophysical Research, v. 65, no. 10, p. 3391-3413.

Thom, A. S., and Oliver, H. R., 1977, On Penman's equation for estimating regional evaporation: Quarterly Journal of the Royal Meteorological Society, p. 345-357.

Thornthwaite, C. W., 1948, An approach toward a rational classification of climate: Geographical Review, v. 38, p. 55-94.

Thornthwaite, C. W., and Holzman, Benjamin, 1942, Measurement of evaporation from land and water surfaces: U.S. Department of Agriculture, Technical Bulletin 817, 75 p.

U.S. Department of Commerce, National Oceanic and Atmospheric Administration, 1939-1984, Climatological data for Illinois, annual summary: Asheville, N.C., Environmental Data and Information Service, National Climatic Center.

U.S. Department of Energy, 1978, On the nature and distribution of solar radiation: HCP/T2552-01, UC-59, 62,63A, 256 p.

van Bavel, C. H. M., 1966, Potential evaporation: The combination concept and its experimental verification: Water Resources Research, v. 2, no. 3, p. 455-467.

van Bavel, C. H. M., and Ehrler, W. L., 1968, Water loss from a sorghum field and stomatal control: Agriculture Journal, v. 60, Jan.-Feb., p. 84-86.

van Hylckama, T. E. A., 1974, Water use by Salt Creek as measured by the water budget method: U.S. Geological Survey Professional Paper 491-E, 30 p.

----- 1980, Weather and evapotranspiration studies in a salt-cedar thicket, Arizona: U.S. Geological Survey Professional Paper 491-F, 78 p.

Wallace, J. S., Batchelor, C. H., and Hodnett, M. G., 1981, Crop evaporation and surface conductance calculated using soil moisture data from central India: Agricultural Meteorology, v. 25, p. 83-96.

TABLE 6

Table 6.--Daily estimates of evapotranspiration

[Dashes indicate no value.
Values are in millimeters of water.]

Date	Energy-budget method	Aerodynamic-profile method	Potential
July 1, 1982	4.79	4.42	5.77
July 2, 1982	1.21	1.07	1.59
July 3, 1982	2.74	2.61	3.99
July 4, 1982	5.74	5.53	5.32
July 5, 1982	4.52	3.70	5.49
July 6, 1982	2.70	2.67	3.70
July 7, 1982	5.63	5.45	7.56
July 9, 1982	4.57	--	--
July 10, 1982	2.12	--	4.42
July 11, 1982	3.88	4.21	6.60
July 12, 1982	4.17	3.91	7.59
July 13, 1982	4.07	2.70	6.18
July 14, 1982	2.78	--	3.83
July 15, 1982	4.27	3.83	5.24
July 16, 1982	2.80	1.99	3.64
July 17, 1982	4.93	4.12	6.00
July 18, 1982	2.34	2.21	3.44
July 19, 1982	2.87	--	3.86
July 20, 1982	--	--	5.14
July 21, 1982	3.52	2.56	4.31
July 22, 1982	1.17	2.12	2.25
July 23, 1982	--	--	5.05
July 24, 1982	4.11	2.53	4.64
July 25, 1982	3.79	3.36	4.68
July 26, 1982	3.41	3.23	3.95
July 27, 1982	2.30	2.35	3.09
July 28, 1982	--	--	4.86
July 29, 1982	3.30	--	3.26
July 30, 1982	3.40	4.96	5.09
July 31, 1982	3.93	4.37	4.34
Aug. 1, 1982	3.48	3.31	4.31
Aug. 2, 1982	3.88	3.92	4.54
Aug. 3, 1982	3.80	3.41	4.37
Aug. 4, 1982	1.74	2.37	2.37
Aug. 5, 1982	1.78	1.94	1.89
Aug. 6, 1982	.60	.54	.57
Aug. 7, 1982	1.15	.90	1.54
Aug. 8, 1982	5.29	5.84	5.94
Aug. 9, 1982	4.01	5.18	5.29
Aug. 10, 1982	--	4.05	2.85
Aug. 11, 1982	--	--	4.32
Aug. 12, 1982	4.46	3.72	4.73
Aug. 13, 1982	4.27	3.03	4.80
Aug. 14, 1982	3.75	2.31	4.43
Aug. 15, 1982	2.59	2.40	2.61
Aug. 16, 1982	--	--	3.67
Aug. 17, 1982	--	--	4.22
Aug. 18, 1982	2.85	--	4.40
Aug. 19, 1982	2.40	2.49	4.67
Aug. 20, 1982	--	--	3.60
Aug. 21, 1982	--	--	3.68
Aug. 22, 1982	--	--	1.85
Aug. 23, 1982	--	--	2.20
Aug. 24, 1982	--	--	2.23
Aug. 25, 1982	--	--	4.13
Aug. 26, 1982	1.78	--	--
Aug. 27, 1982	2.78	--	2.48
Aug. 28, 1982	4.60	--	4.58
Aug. 29, 1982	2.68	--	3.76
Aug. 30, 1982	.46	--	.63
Aug. 31, 1982	.94	--	1.24
Sept. 1, 1982	1.38	1.72	2.61
Sept. 2, 1982	3.25	4.17	5.54
Sept. 3, 1982	3.49	--	--
Sept. 4, 1982	3.61	2.39	3.81
Sept. 5, 1982	2.91	2.69	3.60
Sept. 6, 1982	.61	.63	.64
Sept. 8, 1982	1.51	--	2.07
Sept. 9, 1982	2.60	1.75	3.11
Sept. 10, 1982	2.10	1.49	3.27
Sept. 11, 1982	--	--	3.42
Sept. 12, 1982	--	--	1.97
Sept. 13, 1982	2.58	2.52	2.21
Sept. 14, 1982	2.18	1.72	2.60
Sept. 15, 1982	1.85	1.99	2.77
Sept. 16, 1982	3.24	3.63	4.98
Sept. 17, 1982	.74	--	--
Sept. 18, 1982	2.25	--	--
Sept. 19, 1982	2.34	--	--
Sept. 20, 1982	1.15	--	--
Sept. 21, 1982	2.57	--	--
Sept. 22, 1982	3.05	3.09	2.89
Sept. 23, 1982	2.19	--	2.17
Sept. 24, 1982	.86	--	1.05
Sept. 25, 1982	1.06	--	--
Sept. 26, 1982	.98	--	1.24
Sept. 27, 1982	2.02	--	2.65
Sept. 28, 1982	2.13	--	--
Sept. 29, 1982	--	--	2.49
Sept. 30, 1982	1.76	--	2.93
Oct. 1, 1982	1.62	.58	2.37
Oct. 2, 1982	1.79	--	2.59
Oct. 3, 1982	2.26	--	--
Oct. 7, 1982	2.38	--	--
Oct. 8, 1982	1.28	.49	1.92
Oct. 9, 1982	1.17	1.14	1.43
Oct. 10, 1982	1.25	--	1.68
Oct. 11, 1982	.67	--	--
Oct. 12, 1982	1.59	--	--
Oct. 13, 1982	.43	.53	1.13

Table 6.--Daily estimates of evapotranspiration--Continued

Date	Energy-budget method	Aero-dynamic-profile method	Potential
Oct. 14, 1982	1.00	--	2.69
Oct. 15, 1982	--	--	2.68
Oct. 16, 1982	--	1.52	2.64
Oct. 17, 1982	1.88	--	2.61
Oct. 18, 1982	1.94	--	--
Oct. 19, 1982	.00	--	--
Oct. 20, 1982	.94	--	.82
Oct. 21, 1982	.80	.92	1.30
Oct. 22, 1982	1.32	--	--
Oct. 23, 1982	1.67	--	1.93
Oct. 24, 1982	1.78	2.29	2.02
Oct. 25, 1982	1.40	--	1.88
Oct. 26, 1982	1.47	--	2.47
Oct. 27, 1982	.72	--	--
Oct. 28, 1982	.79	--	--
Oct. 29, 1982	1.36	--	--
Nov. 1, 1982	.25	--	--
Nov. 2, 1982	.30	--	--
Nov. 3, 1982	.90	--	--
Nov. 9, 1982	.80	--	--
Nov. 10, 1982	.00	--	--
Nov. 11, 1982	-.07	--	.47
Nov. 15, 1982	--	--	.64
Nov. 16, 1982	.45	--	1.18
Nov. 17, 1982	.74	--	1.19
Nov. 18, 1982	.45	--	--
Nov. 19, 1982	.00	--	-.05
Nov. 20, 1982	.00	--	.51
Nov. 21, 1982	--	--	1.12
Nov. 22, 1982	.18	--	.48
Nov. 23, 1982	.23	--	.59
Nov. 26, 1982	.28	--	--
Nov. 27, 1982	--	--	.58
Nov. 28, 1982	.03	--	.21
Nov. 29, 1982	.19	--	.22
Nov. 30, 1982	.38	--	.25
Mar. 1, 1983	--	.10	1.98
Mar. 2, 1983	--	.08	2.50
Mar. 3, 1983	--	.45	2.19
Mar. 4, 1983	--	.44	1.12
Mar. 5, 1983	--	.27	1.50
Mar. 6, 1983	--	1.66	1.23
Mar. 7, 1983	--	.49	.53
Mar. 8, 1983	--	.38	--
Mar. 10, 1983	--	1.05	--
Mar. 11, 1983	--	.94	--
Mar. 12, 1983	--	1.23	--
Mar. 13, 1983	.66	.26	2.15
Mar. 14, 1983	.66	.58	1.42
Mar. 15, 1983	1.40	1.77	3.27
Mar. 16, 1983	1.75	2.66	5.89
Mar. 17, 1983	1.04	2.16	5.04
Mar. 18, 1983	.00	.66	.62
Mar. 19, 1983	.69	1.03	1.49
Mar. 20, 1983	.00	-.53	--
Mar. 21, 1983	.00	--	--
Mar. 22, 1983	.00	--	--
Mar. 23, 1983	--	.03	--
Mar. 24, 1983	.50	--	--
Mar. 26, 1983	.26	.35	1.43
Mar. 27, 1983	.46	.38	.40
Mar. 28, 1983	1.98	1.49	1.35
Mar. 29, 1983	1.13	1.96	--
Mar. 30, 1983	.90	.40	.51
Mar. 31, 1983	.67	.49	.58
Apr. 1, 1983	.53	.87	.94
Apr. 2, 1983	-.02	-.27	-.06
Apr. 3, 1983	.81	.71	.40
Apr. 4, 1983	.86	1.21	1.00
Apr. 5, 1983	--	--	.45
Apr. 6, 1983	--	--	.65
Apr. 7, 1983	1.56	1.30	2.41
Apr. 9, 1983	--	--	.53
Apr. 11, 1983	--	1.46	1.67
Apr. 14, 1983	--	1.45	2.23
Apr. 15, 1983	--	2.00	3.44
Apr. 16, 1983	--	1.45	3.00
Apr. 17, 1983	--	3.61	2.68
Apr. 18, 1983	--	3.57	3.89
Apr. 19, 1983	--	2.91	3.59
Apr. 20, 1983	--	2.07	4.29
Apr. 21, 1983	3.65	2.38	4.87
Apr. 22, 1983	2.92	2.19	2.63
Apr. 23, 1983	3.27	3.75	3.85
Apr. 24, 1983	3.73	4.20	4.93
Apr. 25, 1983	3.40	2.10	5.20
Apr. 26, 1983	2.85	2.80	6.13
Apr. 27, 1983	3.76	4.47	4.91
Apr. 28, 1983	3.52	3.52	3.27
Apr. 29, 1983	--	--	2.06
Apr. 30, 1983	--	--	3.36
May 1, 1983	.49	--	1.44
May 2, 1983	1.12	1.37	1.97
May 3, 1983	3.09	3.29	3.14
May 4, 1983	4.89	4.68	6.70
May 5, 1983	2.78	2.15	3.53
May 6, 1983	3.34	3.67	5.79
May 7, 1983	1.08	.23	2.73
May 8, 1983	5.19	5.40	5.36
May 9, 1983	3.75	3.06	5.27

Table 6.--Daily estimates of evapotranspiration--Continued

Date	Energy-budget method	Aero-dynamic-profile method	Potential	Date	Energy-budget method	Aero-dynamic-profile method	Potential
May 10, 1983	4.03	3.28	5.41	June 30, 1983	4.42	3.21	5.00
May 11, 1983	4.14	3.71	4.73	July 1, 1983	3.19	3.10	3.58
May 12, 1983	1.90	1.73	2.20	July 2, 1983	2.51	1.66	2.80
May 13, 1983	1.39	1.39	1.45	July 3, 1983	4.59	4.50	5.82
May 14, 1983	.94	.91	.89	July 4, 1983	4.51	4.79	6.69
May 15, 1983	--	--	4.69	July 5, 1983	--	--	4.23
May 16, 1983	3.40	2.28	4.12	July 6, 1983	--	--	4.70
May 17, 1983	1.92	1.73	2.35	July 7, 1983	--	--	5.30
May 18, 1983	1.79	1.99	2.43	July 8, 1983	4.69	4.74	5.47
May 19, 1983	1.85	2.05	3.85	July 10, 1983	4.58	2.18	5.28
May 20, 1983	4.44	4.56	5.50	July 11, 1983	5.21	5.19	5.80
May 21, 1983	2.17	1.58	2.40	July 12, 1983	--	--	4.92
May 22, 1983	3.72	3.87	5.09	July 13, 1983	3.41	1.70	4.29
May 23, 1983	--	5.51	7.68	July 14, 1983	3.25	2.77	3.60
May 24, 1983	--	4.90	7.68	July 15, 1983	2.53	.64	3.26
May 25, 1983	--	5.48	5.76	July 16, 1983	4.08	3.79	5.47
May 26, 1983	--	2.79	5.26	July 17, 1983	4.44	5.32	5.94
May 27, 1983	2.32	2.03	3.50	July 18, 1983	3.52	4.45	3.89
May 28, 1983	--	--	2.46	July 19, 1983	4.30	4.90	5.82
May 29, 1983	--	3.71	--	July 20, 1983	3.14	4.12	6.14
May 30, 1983	2.13	2.33	--	July 21, 1983	--	4.29	--
May 31, 1983	1.90	2.03	3.83	July 22, 1983	--	4.29	--
June 1, 1983	--	4.43	--	July 26, 1983	3.07	2.94	--
June 2, 1983	2.28	2.31	2.48	July 27, 1983	3.36	1.48	4.85
June 3, 1983	2.43	2.79	2.43	July 28, 1983	3.28	2.08	4.86
June 4, 1983	5.37	5.76	6.44	July 29, 1983	--	--	2.90
June 5, 1983	2.34	2.50	2.96	July 30, 1983	3.87	3.99	4.39
June 6, 1983	3.88	5.25	5.98	Aug. 1, 1983	--	5.11	5.06
June 7, 1983	--	5.03	--	Aug. 2, 1983	4.28	--	5.03
June 8, 1983	4.50	3.57	6.49	Aug. 3, 1983	4.34	3.42	5.13
June 9, 1983	--	3.58	--	Aug. 4, 1983	3.21	--	3.93
June 10, 1983	3.83	2.98	4.59	Aug. 6, 1983	4.18	--	3.88
June 11, 1983	--	3.43	4.46	Aug. 7, 1983	4.96	--	4.43
June 12, 1983	--	3.41	4.82	Aug. 8, 1983	4.75	--	4.68
June 13, 1983	--	3.17	4.14	Aug. 9, 1983	--	--	4.23
June 14, 1983	--	.99	1.70	Aug. 10, 1983	3.84	--	5.37
June 15, 1983	4.64	3.58	5.78	Aug. 11, 1983	3.88	--	3.53
June 16, 1983	--	--	3.19	Aug. 13, 1983	4.10	--	3.99
June 17, 1983	--	--	2.82	Aug. 14, 1983	2.55	--	2.34
June 18, 1983	--	--	5.14	Aug. 15, 1983	3.38	--	3.54
June 19, 1983	--	--	4.01	Aug. 16, 1983	3.77	--	4.45
June 20, 1983	3.00	--	3.89	Aug. 17, 1983	3.29	--	3.98
June 21, 1983	3.33	--	4.73	Aug. 18, 1983	--	--	3.03
June 22, 1983	4.41	--	6.08	Aug. 19, 1983	4.23	--	4.28
June 23, 1983	3.93	--	4.50	Aug. 20, 1983	3.79	--	3.54
June 24, 1983	4.50	3.08	5.27	Aug. 21, 1983	3.45	--	4.55
June 25, 1983	4.12	--	5.44	Aug. 22, 1983	--	--	1.62
June 26, 1983	3.19	--	4.77	Aug. 23, 1983	--	--	2.03
June 27, 1983	2.06	--	2.71	Aug. 24, 1983	2.18	--	2.36
June 28, 1983	--	--	2.75	Aug. 25, 1983	2.70	--	2.42

Table 6.--Daily estimates of evapotranspiration--Continued

Date	Energy-budget method	Aero-dynamic-profile method	Potential
Aug. 26, 1983	3.11	--	--
Aug. 29, 1983	3.66	--	--
Aug. 30, 1983	1.73	--	--
Aug. 31, 1983	3.97	--	--
Sept. 2, 1983	3.72	--	--
Sept. 3, 1983	3.16	--	--
Sept. 4, 1983	2.83	--	--
Sept. 5, 1983	1.45	--	--
Sept. 6, 1983	2.95	--	--
Sept. 7, 1983	4.05	--	--
Sept. 8, 1983	3.30	--	--
Sept. 10, 1983	3.15	--	4.09
Sept. 11, 1983	2.79	--	2.38
Sept. 12, 1983	3.16	--	2.66
Sept. 13, 1983	3.73	--	3.30
Sept. 14, 1983	3.42	--	2.87
Sept. 15, 1983	.80	--	--
Sept. 16, 1983	2.68	2.60	3.95
Sept. 17, 1983	2.64	1.61	3.19
Sept. 18, 1983	2.43	2.23	3.04
Sept. 19, 1983	2.66	2.39	3.03
Sept. 20, 1983	.27	1.17	1.37
Sept. 21, 1983	2.01	2.17	--
Sept. 22, 1983	1.58	1.67	--
Sept. 23, 1983	2.57	1.64	5.04
Sept. 24, 1983	2.47	1.88	4.39
Sept. 25, 1983	.38	.48	.97
Sept. 26, 1983	1.54	--	2.32
Sept. 27, 1983	2.18	--	2.59
Sept. 28, 1983	2.25	1.49	2.53
Sept. 29, 1983	2.04	--	--
Sept. 30, 1983	2.76	1.80	3.52
Oct. 1, 1983	2.24	1.28	2.90
Oct. 2, 1983	2.35	2.11	3.74
Oct. 3, 1983	2.05	1.84	3.02
Oct. 4, 1983	1.91	1.55	2.58
Oct. 5, 1983	2.31	2.15	2.76
Oct. 6, 1983	1.97	--	--
Oct. 7, 1983	1.97	1.84	4.36
Oct. 8, 1983	.88	.77	1.49
Oct. 9, 1983	1.89	1.19	2.51
Oct. 10, 1983	1.81	.99	2.31
Oct. 11, 1983	1.48	1.58	2.44
Oct. 12, 1983	1.90	2.32	2.35
Oct. 13, 1983	.86	1.13	1.83
Oct. 14, 1983	1.87	1.16	2.54
Oct. 15, 1983	1.73	1.53	2.94
Oct. 16, 1983	1.03	1.00	2.37
Oct. 17, 1983	1.81	.98	2.59
Oct. 18, 1983	1.95	1.87	2.13
Oct. 19, 1983	0.44	0.69	1.07
Oct. 20, 1983	.60	.83	1.01
Oct. 21, 1983	.32	.44	.85
Oct. 22, 1983	.10	-.01	.61
Oct. 23, 1983	.73	.69	1.15
Oct. 24, 1983	.51	.67	.60
Oct. 25, 1983	1.95	1.81	2.33
Oct. 26, 1983	2.11	1.76	3.37
Oct. 27, 1983	1.38	.74	3.52
Oct. 28, 1983	1.33	.71	3.69
Oct. 29, 1983	.96	--	1.25
Oct. 30, 1983	.63	.73	1.16
Oct. 31, 1983	1.31	.55	1.22
Nov. 1, 1983	.76	.75	1.12
Nov. 2, 1983	.36	.45	.39
Nov. 3, 1983	.58	1.09	2.48
Nov. 4, 1983	.82	1.65	1.30
Nov. 5, 1983	.92	.53	1.49
Nov. 6, 1983	.42	.43	.93
Nov. 7, 1983	.37	.50	.36
Nov. 8, 1983	.99	.25	1.39
Nov. 9, 1983	.59	.67	.89
Nov. 10, 1983	.53	.66	.86
Nov. 11, 1983	--	1.68	1.96
Nov. 12, 1983	--	.61	--
Nov. 13, 1983	--	.89	1.20
Nov. 14, 1983	.39	.45	.94
Nov. 15, 1983	.00	.00	.41
Nov. 16, 1983	.95	1.01	1.31
Nov. 17, 1983	.68	.38	.72
Nov. 18, 1983	.49	-.41	.87
Nov. 19, 1983	.19	.35	.75
Nov. 20, 1983	.50	.34	1.00
Nov. 21, 1983	1.03	.46	1.04
Nov. 22, 1983	.00	.10	.79
Nov. 23, 1983	.21	--	.55
Nov. 24, 1983	--	.66	--
Nov. 25, 1983	--	1.08	--
Nov. 26, 1983	.28	.55	.86
Nov. 27, 1983	.12	--	.87
Mar. 1, 1984	--	1.08	--
Mar. 2, 1984	--	2.46	--
Mar. 13, 1984	--	.27	--
Mar. 14, 1984	--	.52	--
Mar. 15, 1984	1.56	1.65	.95
Mar. 16, 1984	.38	1.20	1.13
Mar. 17, 1984	--	.38	--
Mar. 18, 1984	--	-.16	--
Mar. 19, 1984	--	.22	--
Mar. 20, 1984	.73	--	--

Table 6.--Daily estimates of evapotranspiration--Continued

Date	Energy-budget method	Aerodynamic-profile method	Potential
Mar. 21, 1984	0.10	0.27	0.07
Mar. 22, 1984	2.10	2.41	1.45
Mar. 23, 1984	2.03	2.82	2.00
Mar. 24, 1984	.90	.94	--
Mar. 25, 1984	.81	.71	2.19
Mar. 26, 1984	1.45	1.48	2.17
Mar. 27, 1984	.46	.45	--
Mar. 28, 1984	1.24	--	--
Mar. 30, 1984	1.25	1.42	2.03
Mar. 31, 1984	2.51	2.67	2.89
Apr. 1, 1984	1.61	1.17	3.45
Apr. 2, 1984	.71	1.35	1.91
Apr. 3, 1984	.60	.75	1.36
Apr. 4, 1984	.30	.06	.11
Apr. 5, 1984	3.45	3.70	4.43
Apr. 6, 1984	3.26	3.81	4.36
Apr. 7, 1984	2.02	1.35	3.97
Apr. 8, 1984	1.43	1.74	1.77
Apr. 9, 1984	1.14	1.23	2.73
Apr. 10, 1984	2.90	2.89	5.38
Apr. 11, 1984	1.87	1.79	4.19
Apr. 12, 1984	1.01	1.64	2.50
Apr. 13, 1984	.96	.89	1.36
Apr. 14, 1984	.70	1.09	.98
Apr. 15, 1984	.49	.63	.51
Apr. 16, 1984	.63	.63	.97
Apr. 17, 1984	2.35	2.56	--
Apr. 18, 1984	.62	--	1.78
Apr. 19, 1984	--	3.26	--
Apr. 20, 1984	3.11	3.97	5.07
Apr. 21, 1984	--	1.45	--
Apr. 22, 1984	.40	.27	.47
Apr. 23, 1984	.47	.89	.38
Apr. 24, 1984	3.27	3.65	3.12
Apr. 25, 1984	3.51	2.78	4.94
Apr. 26, 1984	3.56	2.97	4.61
Apr. 27, 1984	--	2.29	--
Apr. 28, 1984	--	3.70	5.23
Apr. 29, 1984	--	.85	.58
May 2, 1984	3.71	4.45	7.31
May 3, 1984	.17	.58	--
May 4, 1984	2.24	3.25	2.64
May 5, 1984	3.39	3.06	3.92
May 6, 1984	3.04	2.98	3.45
May 7, 1984	2.51	2.92	5.14
May 8, 1984	.93	4.16	--
May 9, 1984	--	4.80	--
May 10, 1984	1.86	1.51	2.52
May 11, 1984	2.37	1.78	1.92
May 12, 1984	4.94	4.25	6.63
May 13, 1984	5.86	6.27	8.15
May 14, 1984	4.43	4.74	4.79
May 15, 1984	5.09	5.24	6.34
May 16, 1984	--	3.69	--
May 17, 1984	4.99	4.74	6.43
May 18, 1984	5.53	5.09	6.83
May 19, 1984	2.34	2.38	2.77
May 20, 1984	4.12	4.49	4.46
May 21, 1984	1.44	.71	1.48
May 22, 1984	.32	.58	.64
May 23, 1984	5.47	5.60	8.02
May 24, 1984	5.33	5.13	6.62
May 25, 1984	1.14	1.56	2.09
May 26, 1984	3.82	3.94	5.37
May 27, 1984	2.76	2.89	5.16
May 28, 1984	.84	.74	1.66
May 29, 1984	4.60	4.47	6.69
May 30, 1984	3.75	3.92	7.00
May 31, 1984	4.80	5.07	6.44
June 1, 1984	3.98	3.24	4.55
June 2, 1984	3.97	4.69	--
June 3, 1984	4.59	3.75	5.78
June 4, 1984	3.35	3.85	4.04
June 5, 1984	4.78	4.93	5.40
June 6, 1984	2.64	3.49	3.55
June 7, 1984	2.46	4.06	4.25
June 8, 1984	3.91	4.44	4.51
June 9, 1984	2.47	3.18	--
June 10, 1984	5.30	--	5.69
June 11, 1984	5.28	--	4.98
June 12, 1984	5.99	6.10	5.81
June 15, 1984	1.45	1.68	1.91
June 16, 1984	3.23	2.91	3.61
June 17, 1984	5.42	5.45	5.47
June 18, 1984	4.27	4.68	4.70
June 19, 1984	4.14	4.18	3.45
June 20, 1984	5.21	5.09	6.16
June 21, 1984	2.77	2.28	3.87
June 22, 1984	3.76	3.53	4.13
June 23, 1984	5.18	5.18	5.98
June 24, 1984	5.83	6.38	7.70
June 25, 1984	5.19	6.31	5.94
June 26, 1984	4.94	5.90	5.64
June 27, 1984	6.15	6.31	7.98
June 28, 1984	3.86	4.16	4.34
June 29, 1984	3.80	--	4.71
June 30, 1984	3.09	1.91	3.64