

**EXPLANATION OF MATERIAL CLASSES**  
[Materials are listed based on quality of match with reference spectra; class may contain one or more minerals or material types with the most likely option listed first. Number in parentheses indicates pixel count. Material classes that have small areal extent may not be visible at the publication scale of this map]

Calcite, abundant (37,104)	Alunite and kaolinite (0)
Calcite (12,317,518)	Pyrophyllite (alunite or kaolinite may be present) (4)
Calcite and muscovite/clay (124,611)	Jarosite (0)
Calcite and clay/muscovite (4,565,642)	Buddingtonite (3)
Carbonate and clay/muscovite (19,629)	Serpentine (17,881)
Carbonate, iron-bearing (1,212)	Serpentine, or dolomite and calcite (17,340)
Dolomite (22,888)	Tremolite or talc (36)
Dolomite and clay/muscovite (663)	Hydrated silica (0)
Epidote or chlorite (961,229)	Gypsum (0)
Muscovite (1,487,205)	Green vegetation (210,298)
Illite (2,351,906)	Dry vegetation (574,493)
Kaolinite (alunite, pyrophyllite, or dickite may be present) (96)	Snow and ice (0)
Kaolinite (6)	Cloud or cloud shadow (0)
Kaolinite and muscovite/clay/carbonate (10,898)	Water (3,020)
Montmorillonite (3,375)	Wet soils (54)
Alunite (0)	

**OTHER SYMBOLS**  
[Not all symbols shown may be present on this map]

Not classified (26,454)	Peak; elevation in meters
No data	City, town, or village
Road, improved or unimproved	International boundary

**DATA SUMMARY**  
This map shows the spatial distribution of selected carbonates, phyllosilicates, sulfates, altered minerals, and other materials derived from analysis of airborne HyMap™ imaging spectrometer (hyperspectral) data of Afghanistan collected in late 2007 (Kokaly and others, 2008). This map is one in a series of U.S. Geological Survey/Afghanistan Geological Survey quadrangle maps covering Afghanistan and is a subset of the version 2 map of the entire country showing carbonates, phyllosilicates, sulfates, altered minerals, and other materials (Kokaly and others, 2013). This version 2 map improved mineral mapping from the previously published version (Kokaly and others, 2011) by refining the classification procedures, especially in areas having wet soils. The version 2 map more accurately represents the mineral distributions and contains modifications to the material class names, as well as an additional mineral classification (Carbonate and clay/muscovite).  
Flown at an altitude of 50,000 feet (15,240 meters (m)), the HyMap™ imaging spectrometer measured reflected sunlight in 128 channels, covering wavelengths between 0.4 and 2.5 μm. The data were georeferenced, atmospherically corrected and converted to apparent surface reflectance, empirically adjusted using ground-based reflectance measurements, and combined into a mosaic with 25-m pixel spacing. Variations in water vapor and dust content of the atmosphere, in solar angle, and in surface elevation complicated correction; therefore, some classification differences may be present between adjacent flight lines.  
The reflectance spectrum of each pixel of HyMap™ imaging spectrometer data was compared to the reference materials in a spectral library of minerals, vegetation, water, and other materials (Clark and others, 2007). Minerals occurring abundantly at the surface and those having unique spectral features were easily detected and discriminated. Minerals having slightly different compositions but similar spectral features were less easily discriminated; thus, some map classes consist of several minerals having similar spectra, such as "Epidote or chlorite." A designation of "Not classified" was assigned to the pixel when there was no match with reference spectra. Further information regarding the processing procedures is presented in Kokaly and others (2011, 2013).

**REFERENCES CITED**  
Clark, R.N., Swayze, G.A., Wise, R.A., Livo, K.E., Hoefen, T.M., Kokaly, R.F., and Sutley, S.J., 2007. USGS digital spectral library spliblib: U.S. Geological Survey Data Series 231.  
Kokaly, R.F., King, T.V.V., and Hoefen, T.M., 2013. Surface mineral maps of Afghanistan derived from HyMap™ imaging spectrometer data, version 2. U.S. Geological Survey Data Series 787.  
Kokaly, R.F., King, T.V.V., Hoefen, T.M., Dudek, K.B., and Livo, K.E., 2011. Surface materials map of Afghanistan: carbonates, phyllosilicates, sulfates, altered minerals, and other materials: U.S. Geological Survey Scientific Investigations Map 3152-A, one sheet, scale 1:1,100,000.  
Kokaly, R.F., King, T.V.V., and Livo, K.E., 2008. Airborne hyperspectral survey of Afghanistan 2007: flight line planning and HyMap™ data collection: U.S. Geological Survey Open-File Report 2008-1235, 14 p.



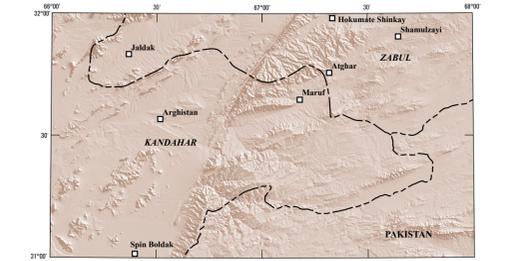


Figure 1.—Provinces and selected cities, towns, and villages in the map area. Topography is shown as shaded relief.

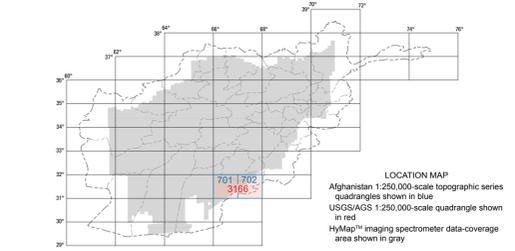

**LOCATION MAP**  
Afghanistan 1:250,000-scale topographic series quadrangles shown in blue  
USGS/AGS 1:250,000-scale quadrangle shown in red  
HyMap™ imaging spectrometer data coverage area shown in gray

Cultural data from digital files from Afghanistan Information Management Service (<http://www.aims.org.af>)  
Projection: Universal Transverse Mercator, Zone 42,  
WGS 1984 Datum



Any use of firm, trade, or product names is for descriptive purposes only and does not imply endorsement by the U.S. Government.  
Suggested citation: Kokaly, R.F., King, T.V.V., Hoefen, T.M., Livo, K.E., Giles, S.A., and Johnson, M.R., 2013. Hyperspectral surface materials map of quadrangle 3166, Jaldak (701) and Maruf-Nawa (702) quadrangles, Afghanistan, showing carbonates, phyllosilicates, sulfates, altered minerals, and other materials: U.S. Geological Survey Open-File Report 2013-1193-A, 1 sheet, scale 1:250,000. <http://dx.doi.org/10.71201/0820131193A>  
ISSN 2331-1258 (online)  
<http://dx.doi.org/10.71201/0820131193A>

**HYPERSPECTRAL SURFACE MATERIALS MAP OF QUADRANGLE 3166, JALDAK (701) AND MARUF-NAWA (702) QUADRANGLES, AFGHANISTAN, SHOWING CARBONATES, PHYLLOSILICATES, SULFATES, ALTERED MINERALS, AND OTHER MATERIALS**

By  
Raymond F. Kokaly, Trude V.V. King, Todd M. Hoefen, Keith E. Livo, Stuart A. Giles, and Michaela R. Johnson  
2013

