

EXPLANATION

- AM2**
Nonplastic to slightly plastic sandy soil derived from fluvial deposits of Pleistocene age
- AM24**
Nonplastic to slightly plastic sandy and silty soil derived from fluvial deposits of Pleistocene age
- AM26**
Nonplastic to highly plastic sandy and clayey soil derived from fluvial deposits of Pleistocene age
- U**
Urban areas where soil has been altered by man
- AR/2**
Flood-plain deposits associated with swamp deposits
- AM2/2**
Nonplastic to slightly plastic gravelly and sandy soil derived from fluvial deposits of Pleistocene age associated with AM2 soil
- AM2/23**
AM2 soil associated with nonplastic sandy soil derived from fluvial deposits of Pleistocene age
- AM2/24**
AM2 soil associated with AM24 soil
- AM2/26**
AM2 soil associated with AM26 soil
- AM23/24**
Nonplastic sandy soil derived from fluvial deposits of Pleistocene age associated with AM24 soil
- AM24/26**
AM24 soil associated with AM26 soil
- AM24/24**
AM24 soil associated with nonplastic to slightly plastic sandy (poorly graded) and silty soil derived from fluvial deposits of Pleistocene age
- AM24/46**
AM24 soil associated with slightly plastic to highly plastic silty and clayey soil derived from fluvial deposits of Pleistocene age

- Primary soil sample site**
Location and number of pit from which soil samples were obtained for laboratory analyses (see table 3). General characteristics are summarized in table 4.
- Secondary soil sample site**
Location and number of secondary soil sample sites. Samples were collected with a one-inch-diameter long-core soil sampler. For results of laboratory analyses see table 3; for general characteristics see table 4.
- Primary observation well**
Numerator is altitude of water table in November 1959. Denominator shows measured range in altitude of water table during 1959-60, based on 2 or 3 measurements and comparison with primary observation-well records.
- Secondary observation well**
Numerator is altitude of water table in November 1959. Denominator shows estimated range in altitude of water table during 1959-60 based on measurements from 1958 to 1960 and comparison with primary observation-well records.
- Domestic or farm well**
Numerator is altitude of water table in November 1959. Denominator shows estimated range in altitude of water table during 1959-60, based on 2 or 3 measurements and comparison with primary and secondary observation-well records.
- Water-table contour**
Number shows altitude of water table in feet above mean sea level in November 1959. Contour interval 10 feet. Relative position of water table in November 1959 is shown in hydrograph (Figure 2).
- Perennial stream**
Bottom of stream channel almost always below water table.
- Intermittent stream**
Bottom of stream channel above water table part of the time and below water table part of the time.

TABLE 1.—Explanation of letter symbols

Symbol	Explanation
AM	Surficial alluvial mantle, Pleistocene age.
AR	Recent alluvial deposit.
U	Urban area.
Z	Swamp deposit.

SOIL SYMBOLS

The map symbols used in this report to designate the various types of soils are a modification of the system used in the engineering soil survey of New Jersey (Rogers, 1955). The first part of the symbol is a letter or group of letters, which identifies the parent material according to the classification developed by Lueder (1950) (see table 1). The second part of the symbol is a number which identifies the soil group according to the classification system adopted by the Highway Research Board (Allen and others, 1945) and used with some modifications by the Delaware State Highway Department (see table 2). A two-digit number indicates that two soil types are present within the same soil profile; for example, the symbol AM24 implies that both A-2 and A-4 soils are present in the same soil profile, but usually in different horizons.

Two different soil symbols may be combined by a diagonal bar (AM2/24). A diagonal bar indicates that two soil types (AM2 and AM24) are present within the same area, but not necessarily within the same profile. The two soils are so finely intermixed that they cannot be mapped separately.

- REFERENCES**
- Allen, Harold, and others, 1945, Report of committee on classification of materials for subgrade and granular type roads: Highway Research Board, 25th Ann. Mtg., Oklahoma City, 1946, Highway Research Board Proc., v. 25, p. 375-386, Washington.
- Lueder, D. R., 1950, A system for designating map-units on engineering soil-maps in soil exploration and mapping: Highway Research Board Bull. 26, p. 17-35, Washington.
- Rogers, F. C., 1955, Engineering soil survey of New Jersey, Report No. 1: Rutgers Univ. Eng. Research Bull. 15, 114 p., New Brunswick, N. J.

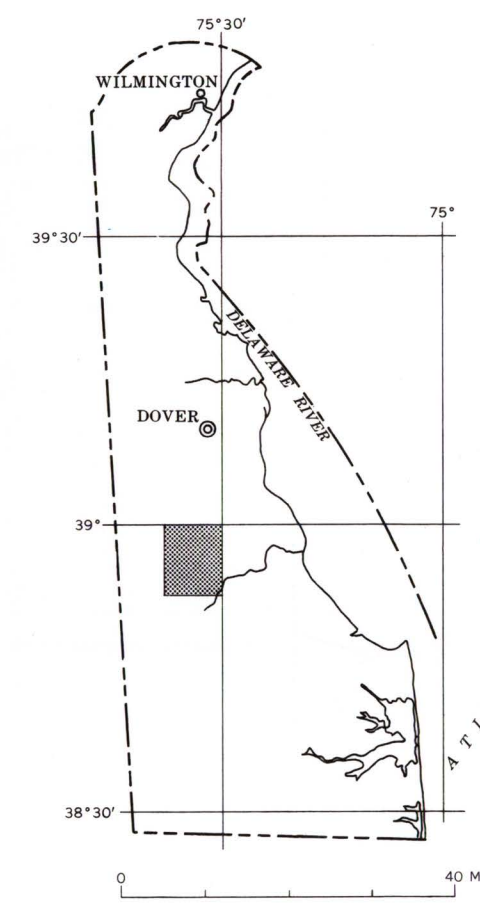


FIGURE 1.—Index map of Delaware showing location of the Harrington Quadrangle.

TABLE 2.—Soils classification

General classification	Granular materials (35 percent or less passing a No. 200 sieve)							Silt-clay materials (more than 35 percent passing a No. 200 sieve)						
	A-1		A-3		A-2			A-4		A-5	A-6	A-7		A-8
	a	b			4	5	6	7				5 ¹	6 ²	
Sieve analysis														
Percent passing														
No. 10 sieve	50 max.	30 max.	15 max.	51 min.	35 max.	35 max.	35 max.	35 max.	36 min.	36 min.	36 min.	40 min.	40 min.	42-60
No. 40 sieve	15 max.	5 max.	2 max.	10 max.	10 max.	10 max.	11 min.	11 min.	40 max.	40 max.	40 max.	41 min.	41 min.	40-60
No. 200 sieve	5 max.	2 max.	1 max.	10 max.	10 max.	10 max.	11 min.	11 min.	40 max.	40 max.	40 max.	41 min.	41 min.	40-60
Characteristics of fraction passing No. 40 sieve														
Liquid limit	6 max.	6 max.	Nonplastic	10 max.	10 max.	10 max.	11 min.	11 min.	40 max.	40 max.	40 max.	41 min.	41 min.	40-60
Plasticity index														
Group index ³	0	0	0	0	4 max.	8 max.	12 max.	16 max.	20 max.					
General subgrade rating	Excellent	Good	Good	Good	Fair	Poor	Poor	Poor	Poor	Very poor	Unsuitable			
Material	Well-graded gravel and sand	Clean sand and gravelly sand	Poorly graded, silty or clayey sand and gravel											

- ¹Plasticity index of A-7-5 subgroup is equal to or less than the liquid limit minus 30.
- ²Plasticity index of A-7-6 subgroup is greater than the liquid limit minus 30.
- ³The group index is calculated according to the following formula:
Group index = $\frac{L - U}{40 - U} \times 100$
where:
L = That portion of the percentage passing No. 200 sieve greater than 35 percent and not exceeding 75 percent, expressed as a positive whole number (1 to 40).
U = That portion of the percentage passing No. 200 sieve greater than 15 percent and not exceeding 40 percent, expressed as a positive whole number (1 to 40).
= That portion of the numerical liquid limit greater than 40 and not exceeding 60, expressed as a positive whole number (1 to 20).
= That portion of the numerical plasticity index greater than 10 and not exceeding 30, expressed as a positive whole number (1 to 20).

TABLE 3.—Results of laboratory analyses of soil samples													
Sample site number	Depth of interval sampled (inches)	Liquid limit: NL, nonliquid						Plasticity index: NP, nonplastic					
		Mechanical analyses					Percent by weight		Moisture-density				
		Cumulative percent by weight passing sieve—	No. 4 (4.7 mm)	No. 10 (2.0 mm)	No. 40 (0.85 mm)	No. 200 (0.075 mm)	Silt (0.002 to .0009 mm)	Clay (<.0009 mm)	Liquid limit ¹	Plasticity index ²	Maximum density ³ (lb per cu ft)	Optimum moisture (percent by weight)	H. R. B. Classification ⁴
131	0-7	100	100	100	99.6	84.4	42.9	<10	<10	126	8	A-4 (1)	AM24
	10-25	100	100	100	99.6	81.2	34.9	<10	<10	126	6	A-4 (4)	
	25-37	100	100	100	99.6	78.3	27.2	<10	<10	126	8	A-4 (10)	
132	0-5	100	100	100	99.6	83.5	5.1	NL	NP	103 ⁶	8	A-3 (9)	AM3
	5-30	100	100	100	99.6	73.9	6.1	NL	NP	103 ⁶	8	A-4 (10)	
	30-62	100	100	100	100	70.8	4.7	NL	NP	103 ⁶	8	A-3 (10)	
133	0-8	100	100	100	99.7	83.0	32.3	NL	NP	133	8	A-4 (1)	AM24
	12-30	100	99.7	99.2	86.9	40.9	42.9	NL	NP	133	8	A-4 (12)	
	30-48	99.9	97.3	95.6	89.9	28.8	28.8	NL	NP	132	8	A-4 (10)	
134	0-8	100	100	100	99.6	81.0	23.9	NL	NP	127	7	A-4 (2)	AM2
	8-38	100	100	100	99.6	83.7	17.1	NL	NP	127	7	A-4 (2)	
	38-48	100	100	100	100	83.4	24.3	NL	NP	127	7	A-4 (2)	
135	0-10	100	100	100	99.8	82.8	29.1	NL	NP	136	8	A-4 (2)	AM2
	10-22	100	100	100	99.8	80.4	29.1	NL	NP	136	8	A-4 (2)	
	22-48	100	100	100	99.6	80.1	11.7	NL	NP	126	8	A-2 (20)	
136	0-3	100	99.8	99.7	89.7	69.0	19.4	<10	<10	37	6	A-6 (1)	AM567
	3-38	100	100	100	99.9	88.3	13.4	<10	<10	37	17	A-6 (9)	
	38-55	100	100	100	99.9	86.9	8.6	<10	<10	49	38	A-6 (10)	
1A	0-12	99.5	80.3	80.3	41.7	<10	<10	<10	<10	<10	<10	A-4 (1)	AM24
	12-27	99.5	79.3	79.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	27-72	99.2	69.6	13.8	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	
1B	0-27	99.6	76.4	76.4	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	AM24
	27-42	99.8	54.4	15.6	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	42-72	99.6	23.9	7.6	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
1C	0-14	99.6	71.8	29.6	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	AM12
	14-22	97.2	66.6	26.7	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	
	22-72	99.6	29.7	11.2	<10	<10	<10	<10	<10	<10	<10	A-2 (130)	
1D	0-22	99.4	64.0	18.1	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	22-42	99.3	68.7	18.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	42-72	99.8	56.4	11.1	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
1E	0-21	99.4	74.1	29.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM24
	21-37	98.3	74.5	19.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	37-58	92.6	76.7	17	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
2B	0-28	95.7	61.1	14.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM23
	28-42	96.3	9.3	9.3	<10	<10	<10	<10	<10	<10	<10	A-3 (30)	
	42-72	98.9	65.5	17.8	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
2C	0-28	94.8	54.9	5.2	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM23
	28-40	98.0	52.6	10.8	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	40-62	92.8	9.4	2.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
2E	0-37	99.9	75.7	24.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	37-47	99.9	79.3	29.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	47-72	99.1	56.9	19.5	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
3A	0-20	100	87.4	33.6	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	AM24
	20-40	99.7	63.7	12.9	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	
	40-72	100	97.2	74.2	<10	<10	<10	<10	<10	<10	<10	A-4 (1)	
3D	0-18	99.3	69.3	17.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	18-30	97.5	63.1	17.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	30-72	98.7	63.8	26.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
3E	0-14	98.3	70.9	17.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	14-27	95.1	70.9	17.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	27-45	98.6	63.8	17.8	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
3E	45-72	98.7	63.8	21.6	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM26
	72-87	100	85.8	32.9	<10	<10	<10	<10	<10	<10	<10	A-4 (6)	
	87-97	97.9	61.2	29.9	<10	<10	<10	<10	<10	32	17	A-2 (40)	
4A	0-20	99.9	86.8	43.6	<10	<10	<10	<10	<10	<10	<10	A-4 (2)	AM24
	20-44	99.9	82.4	39.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	44-72	99.7	76.4	38.4	<10	<10	<10	<10	<10	<10	<10	A-3 (3)	
4B	0-14	99.9	82.8	19.6	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM24
	14-44	99.9	80.1	37.8	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	44-72	99.9	71.1	35.2	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
4C	0-14	99.7	70.6	16.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	14-30	99.7	69.0	11.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	30-72	98.8	69.9	22.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
4D	0-12	99.3	72.3	30.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	12-30	99.3	70.9	24.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	30-48	99.5	85.1	17.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
4E	0-14	99.6	75.9	19.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	14-30	99.3	80.1	31.5	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	30-72	99.3	80.1	33.5	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
5A	0-28	99.7	66.4	15.7	<10	<10	<10	<10	<10	<10	<10	A-4 (6)	AM24
	28-38	99.4	75.6	21.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	38-72	99.9	61.9	11.9	<10	<10	<10	<10	<10	<10	<10	A-3 (61)	
5B	0-25	100	84.1	47.9	<10	<10	<10	<10	<10	<10	<10	A-4 (3)	AM24
	25-72	99.6	86.1	44.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	72-87	100	100	46.2	<10	<10	<10	<10	<10	22	8	A-4 (3)	
5C	0-15	99.9	89.9	39.5	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM24
	15-34	100	91.6	17.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	45-72	100	97.6	28.2	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
5D	0-15	99.6	73.0	10.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	15-38	97.5	62.0	11.0	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	38-72	99.8	72.9	19.9	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
5E	0-29	99.9	86.4	49.8	<10	<10	<10	<10	<10	<10	<10	A-4 (3)	AM2
	29-52	99.8	84.6	18.6	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	52-72	99.9	79.5	8.2	<10	<10	<10	<10	<10	<10	<10	A-3 (6)	
6C	0-10	99.6	73.1	24.7	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	10-34	99.4	81.8	23.3	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	34-72	99.5	86.2	29.5	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
6E	0-21	99.7	74.3	22.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	AM2
	21-45	99.4	72.5	16.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	
	46-72	82.2	73.0	27.4	<10	<10	<10	<10	<10	<10	<10	A-2 (40)	

- ¹Based on AASHTO (American Association of State Highway Officials) Designation: T88-49.
- ²Based on AASHTO Designation: T91-49.
- ³Based on AASHTO Designations: T99-49 and T180-57 (All unstarred entries were determined by Designation T180-57).
- ⁴Highway Research Board system (see table 3); group index given in parentheses.
- ⁵Map symbol was determined from laboratory data and does not always agree with unit shown on map. Detailed field reconnaissance has shown that some sampling sites were not representative of the predominant soil in the area.

TABLE 4.—Characteristics of the engineering soil types in the Harrington quadrangle

Soil type ¹	Description	Origin	Engineering properties				Suitable compaction equipment
			In place		Disturbed ²		
			Suitability as a subgrade ³	Suitability as a wearing surface ⁴	Suitability as an embankment material	Compaction characteristics	
AM12	Nonplastic to slightly plastic, gravelly and sandy soil.	Fluvial deposits of Pleistocene age.	Excellent	Good if surface is A-1. Excellent to good, depending on under, if surface is A-2.	Excellent	Excellent	Rubber-tired equipment.
AM2	Nonplastic to slightly plastic sandy soil.	Fluvial deposits of Pleistocene age.	Good	Excellent to good depending on under present.	Good	Good	Rubber-tired equipment.
AM23	Nonplastic, generally poorly graded sandy soil.	Fluvial deposits of Pleistocene age.	Good to fair.	Excellent to good depending on under present if surface is A-2. Fair if surface is A-3. Fair if predominant material is A-3.	Good if predominant material is A-2. Fair if predominant material is A-3.	Good if predominant material is A-2. Poor if predominant material is A-3.	Rubber-tired equipment for soil which is predominantly A-2. Vibratory equipment for soil which is predominantly A-3.
AM24	Nonplastic to slightly plastic, sandy and silty soil.	Fluvial deposits of Pleistocene age.	Good if material left after grading is predominantly A-2. Fair if material left after grading is predominantly A-4.	Excellent to good depending on under present, if surface is A-2. Fair to poor if surface is A-4.	Good if predominant material is A-2. Fair if predominant material is A-4.	Good if predominant material is A-2. Poor if predominant material is A-4.	Rubber-tired equipment.
AM26	Nonplastic to highly plastic, sandy and clayey soil.	Fluvial deposits of Pleistocene age.	Good if material left after grading is predominantly A-2. Fair if material left after grading is predominantly A-6 or poorly drained A-2.	Good if surface is A-2. Poor if surface is poorly drained A-2. Very poor if surface is A-6.	Pair if predominant material is A-2. Very poor if predominant material is A-6.	Pair if predominant material is A-2. Fair if predominant material is A-6.	Rubber-tired equipment for soil which is predominantly A-2. Sheep-foot rollers for soil which is predominantly A-6.
AM24	Nonplastic to slightly plastic, sandy (poorly graded) and silty soil.	Fluvial deposits of Pleistocene age.	Fair	Fair if surface is A-3. Fair to poor if surface is A-4.	Fair. Good if A-3 and A-4 are combined as a well graded mixture. Poor if predominant material is A-3. Fair if predominant material is A-4.	Good if A-3 and A-4 are combined as a well graded mixture. Poor if predominant material is A-3. Rubber-tired equipment for soil which is predominantly A-4.	Vibratory equipment for soil which is predominantly A-3. Rubber-tired equipment for soil which is predominantly A-4.
AM46	Slightly plastic to highly plastic, silty and clayey soil.	Fluvial, glacial, and lacustrine deposits of Pleistocene age.	Poor if material left after grading is predominantly A-4. Very poor if material left after grading is predominantly A-6.	Poor if surface is A-4. Very poor if surface is A-6.	Poor if predominant material is A-4. Very poor if predominant material is A-6.	Poor	Sheeps-foot rollers.
AR	Alluvial gravel, sand, silt and clay.	Alluvium of Recent age.	Variable	Variable	Variable	Variable	Variable.
U	Urban areas where soil has been altered extensively by man.	Undetermined	Variable	Variable	Variable	Variable	Variable.
Z	Soil rich in organic material and frequently poorly drained. May be underlain at shallow depths by gravel, sand, or clay.	Swamp deposits of Recent age.	Variable	Variable	Variable	Variable	Variable.

- ¹Two different soil types may be combined into a single map symbol (AM2/24), but the engineering characteristics of the individual soil types are described separately.
- ²For soil types designated by two-digit numbers, these columns refer to the composite soil.
- ³When not subject to frost action. Frost will affect soils that contain appreciable silt and clay and have a high moisture content.
- ⁴Unstarred. Additive may aid in stabilization of the sandy soils and minimize dusty conditions.

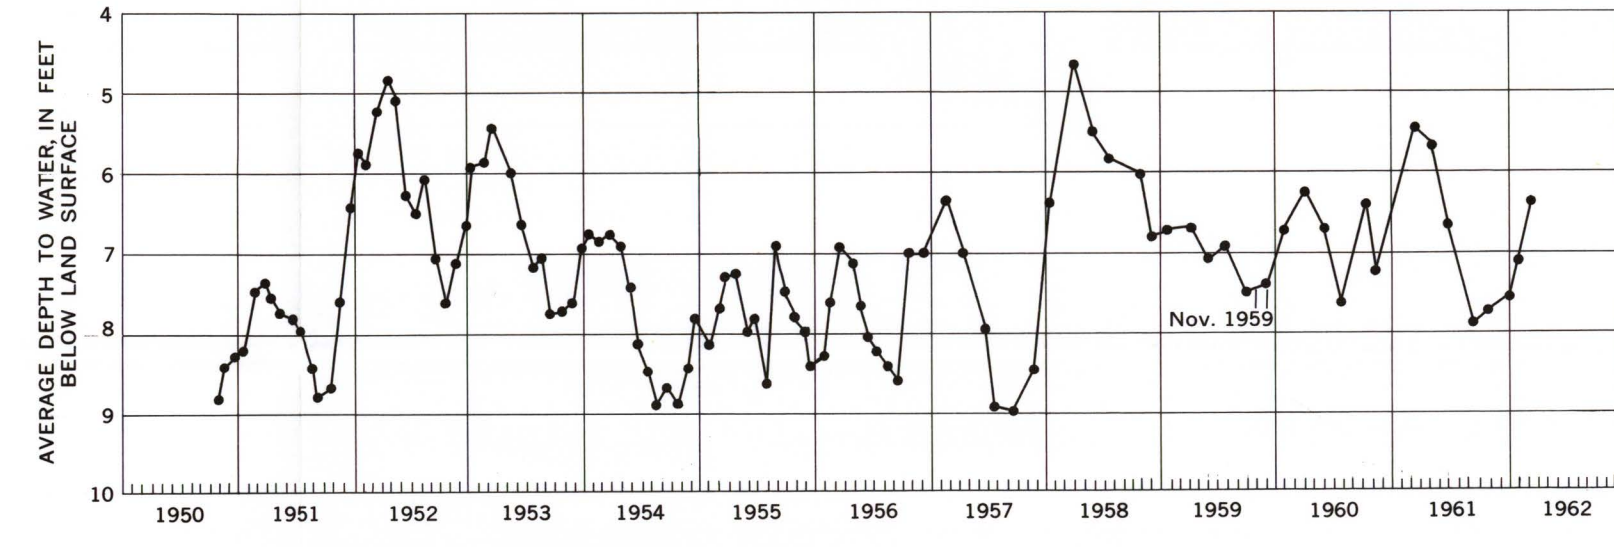


FIGURE 2.—Hydrograph showing average depth to water in 13 water-table wells in Delaware.

WATER-TABLE, SURFACE-DRAINAGE, AND ENGINEERING SOILS MAP OF THE HARRINGTON QUADRANGLE, DELAWARE

By
Christian F. Davis and Durward H. Boggess