

FLOODS IN NAPERVILLE QUADRANGLE, ILLINOIS

This report presents the results of a study of hydrologic data to evaluate the depth and frequency of flooding that affect the economic development of flood plains. The data provide a technical basis for making sound decisions concerning the use of flood-plain lands. No recommendations or suggestions for land-use regulations are made and no solutions of existing flood problems are proposed.

The approximate areas inundated by floods along streams in the Naperville 7½-minute quadrangle are delineated on a topographic map. The quadrangle location is shown in figure 1.



FIGURE 1.—Index map of northeastern Illinois showing location of quadrangles included in the flood-hazard mapping program.

Inundated areas are shown along Winfield Creek for the flood of May 1954, and along Kress Creek, Spring Brook, Ferry Creek, Wauvance Creek, and West Branch Du Page River for the flood of October 1954.

The general procedure followed in defining flood limits was to develop flood profiles on the basis of all available data. The horizontal extent of flooding delineated on the topographic map was derived from the profiles by interpolation between contours (lines of equal elevation) and by plotting overflow limits identified during field investigations and surveys. The location of flood limits shown on the map are only approximate because the map scale is small (1 inch = 2,000 feet) and the contour interval is relatively large (10 feet, supplemented by 5-foot-interval contours in some areas).

The flood limits shown on the map are not necessarily those for the highest floods expected. Greater floods are possible but definition of their probable overflow limits is not within the scope of this report. The flood limits shown reflect channel conditions existing when the floods occurred. No attempt is made to appraise the effect of changes in channel conditions, waterway openings at highways and railroads, or changes in runoff characteristics of the streams caused by the increased urbanization that may have taken place after the floods occurred. Protective works built after the floods of 1954 may reduce the frequency of flooding in the area but will not necessarily eliminate all future flooding. The inundation pattern of future floods may be affected by new highways and bridges, relocation and improvement of stream channels, and other cultural changes.

There are numerous depressions or lowland areas in the Naperville quadrangle where surface water accumulates. Flood limits are shown for many such areas but there may be other depressions subject to flooding that were not detected during this investigation.

Flood limits are not defined for areas inundated as a result of backup in storm drains.

Cooperation and acknowledgment — The preparation of this report is a part of an extensive flood-mapping program financed through a cooperative agreement between the Northeastern Illinois Metropolitan Area Planning Commission and the U.S. Geological Survey. Under the agreement, flood maps will be prepared for the 7½-minute quadrangles shown in figure 1. Areal limits of the program include parts of Cook, Kane, McHenry, and Will Counties, and all of Du Page and Lake Counties. The six counties cooperate in the program financially through separate agreements with the Planning Commission. Financial support for the preparation of this report was provided by Du Page County.

The cooperative program is administered on behalf of the Planning Commission by Matthew L. Rockwell, Executive Director, and is directly coordinated by John R. Shearfer, Chief Planner.

The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district engineer, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.

Acknowledgment is made to the following agencies that supplied some of the flood data on which this report is based: the State of Illinois, Department of Public Works and Buildings, Division of Waterways; the Du Page County Highway Department; and the Corps of Engineers, U.S. Army.

Additional data were obtained from officials of municipalities located in the area, and from field investigations.

Flood height — The height of a flood at a gaging station usually is stated in terms of gage height or stage, which is the elevation of the water surface above a selected datum plane. Elevation shown on the map are in feet above mean sea level. Gage heights for crest-stage gages located in the Naperville quadrangle can be converted to elevations above mean sea level by adding the gage height to the appropriate datum of gage listed in the following table. The size of drainage areas at each station is also shown in the table. Drainage divides are shown on the map.

Crest-stage gage	Datum of gage above mean sea level (feet)	Drainage area (square miles)
Winfield Creek at Winfield (U.S. Highway Alt. 30)	717.45	6.98
West Branch Du Page River: At West Chicago (U.S. Highway Alt. 30)	703.21	58.5
At Naperville (U.S. Highway 50)	685.85	89.4
Kress Creek at West Chicago (Joliet Road)	675.22	100
Spring Brook near Warrenville (Winfield Road)	705.44	18.2
Ferry Creek at Warrenville (State Highway 55)	706.73	5.87
	699.27	3.88

Gage height and year of occurrence of each annual flood (highest peak discharge in each calendar year) above 571-foot elevation at the gaging station on Du Page River at Troy during the period 1941-63 are shown in figure 2. The gaging station at Troy is located about 17 miles south of the Naperville quadrangle and about 10½ miles upstream from the mouth of Du Page River. The irregular occurrence of floods is evident.

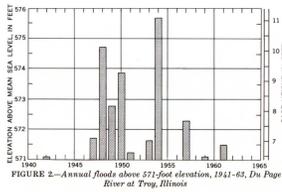


FIGURE 2.—Annual floods above 571-foot elevation, 1941-63, Du Page River at Troy, Illinois.

Flood discharge — The rate of discharge of a stream is the volume of flow that passes a particular location in a given period of time. Discharge rates usually are expressed in units of cubic feet per second (cfs). Peak discharge, the maximum discharge attained by a flood, generally occurs at the time of the maximum height (stage) of the flood, but if a stream is affected by variable backwater, the peak discharge may not coincide with the maximum stage. For example, backwater from an ice jam may cause a high stage during a period of relatively low discharge.

Flood frequency — Frequency of floods at the Geological Survey crest-stage gage on West Branch Du Page River at Warrenville was derived from streamflow records at this station combined with records at nearby stations and with the regional flood-frequency relation for streams in northern Illinois (Mitchell, 1954). The general relation between frequency and discharge is shown in figure 3, and the general relation between frequency and stage is shown in figure 4.



FIGURE 3.—Frequency of flood discharges on West Branch Du Page River at Warrenville (Warrenville Road).

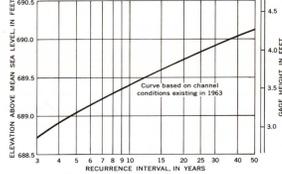


FIGURE 4.—Frequency of flood stages on West Branch Du Page River at Warrenville (Warrenville Road).

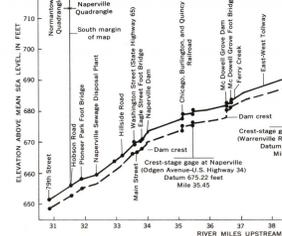


FIGURE 5.—Profiles of floods on West Branch Du Page River.

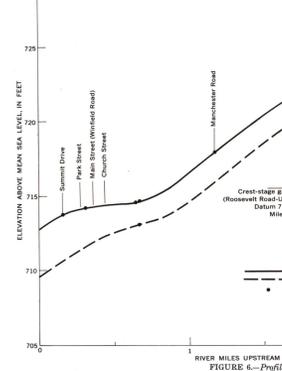


FIGURE 6.—Profiles of floods on Winfield Creek.

The relation between stage and frequency is dependent on the relation of stage to discharge which is affected by changes in physical conditions of channels and constrictions. The frequency curve shown in figure 4 is based on channel conditions existing in 1963. Longer records and future changes in channel conditions may define somewhat different flood-frequency curves. Extrapolation of the curves beyond the limits shown is not recommended because of the possibility of large errors.

Recurrence intervals — As applied to flood events, recurrence interval is the average interval of time within which a given flood will be equaled or exceeded once. Frequencies of floods may be stated in terms of their probabilities of occurrence (reciprocals of their recurrence intervals). For example, a flood with a 25-year recurrence interval would have a 4-percent chance of being equaled or exceeded in any given year or a flood with a 50-year recurrence interval would have a 2-percent chance of being equaled or exceeded in any given year.

The general relation between recurrence interval and flood height at the crest-stage gage on West Branch Du Page River at Warrenville (fig. 4) is tabulated below.

Recurrence interval (years)	Elevation above mean sea level (feet)
50	690.1
25	688.8
10	688.4
5	688.0
3	685.7

It is emphasized that recurrence intervals are average figures—the average number of years that will elapse between occurrences of floods that equal or exceed a given magnitude. The fact that a major flood is experienced in one year does not reduce the probability of that flood being exceeded in the next year or in the next week.

Flood profiles — Profiles of the water surface, based primarily on elevations of marks left by floods of April 1950, May and October 1954, and September 1961, are shown in figures 5-9. Where floodmarks could not be identified, the profiles were constructed on the basis of flood crests determined from photographs and reports of local residents, and elevations of streambeds and lower floods. River miles used for the profiles correspond to those marked along the stream on the flood map.

The abrupt changes in the profiles, shown at some road crossings, indicate the difference in water-surface elevations at the upstream and downstream sides of bridges which produced channel constrictions during the floods shown. The drop in water surface through bridge openings during future floods may be different from that shown on the profiles. An increase in channel capacity through a bridge opening would reduce the flood height on the upstream side. An accumulation of debris at a bridge would reduce the channel capacity and tend to increase the upstream flood height. Channel changes through bridge openings may also change the overflow pattern of future floods.

Flood depths — Depth of flooding at any point can be estimated by subtracting the ground elevation from the water-surface elevation indicated by the profiles in figures 5-9. The approximate ground elevation can be determined from information indicated by contours on the map, although more accurate elevations may be obtained by leveling to nearby bench marks.

Additional data — Other information pertaining to floods in the Naperville quadrangle may be obtained at the office of the U.S. Geological Survey, Oak Park, Ill., and from the following published reports: Daniels, W. S., and Hale, M. D., 1958, Floods of October 1954, in the Chicago area, Illinois and Indiana: U.S. Geol. Survey Water-Supply Paper 1870-B, p. 107-200. Illinois Department of Public Works and Buildings, Division of Waterways, 1962, Survey report for flood control, Du Page River, 200p. Mitchell, W. D., 1954, Floods in Illinois, magnitude and frequency: Illinois Dept. Public Works and Bldgs., Div. of Waterways, 386 p.

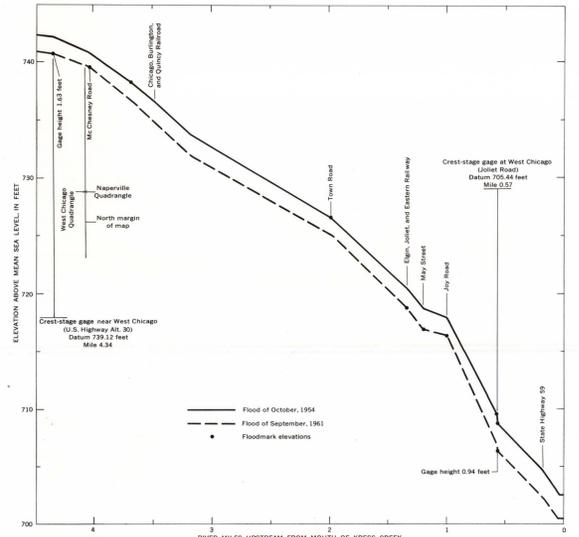


FIGURE 7.—Profiles of floods on Kress Creek.

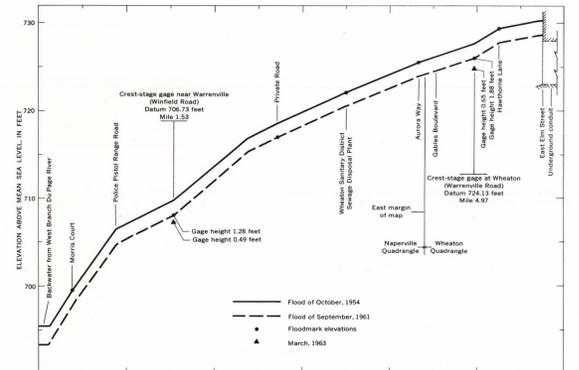


FIGURE 8.—Profiles of floods on Spring Brook.

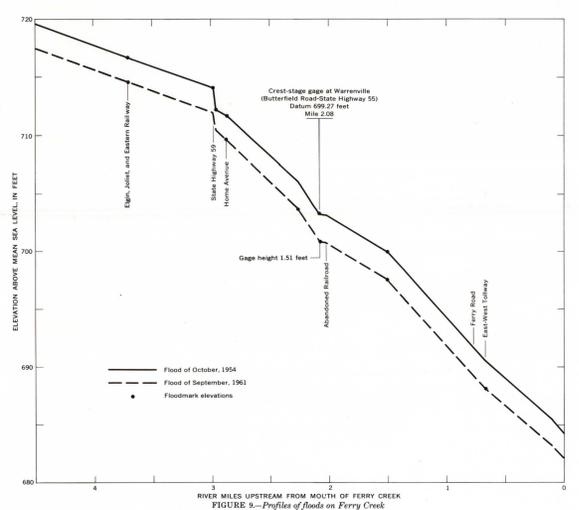


FIGURE 9.—Profiles of floods on Ferry Creek.

FLOODS IN NAPERVILLE QUADRANGLE, ILLINOIS

By
Howard E. Allen and V. Jeff May
1965