

FLOODS IN MANHATTAN QUADRANGLE  
NORTHEASTERN ILLINOIS

This report presents hydrologic data that can be used to evaluate the extent, depth, and frequency of flooding that affect the economic development of the Manhattan area, northeastern Illinois. It is intended to be a tool for individuals, governmental agencies, and others charged with the responsibility of formulating effective flood-plan regulations that would minimize the creation of new flood hazards, and the development of flood-resistant buildings and zoning regulations, localizing waste disposal facilities, developing recreational areas, and managing surface water in relation to ground-water resources.

The approximate areas inundated by floods in the Manhattan quadrangle are shown on a topographic map. The quadrangle location is shown in figure 1.

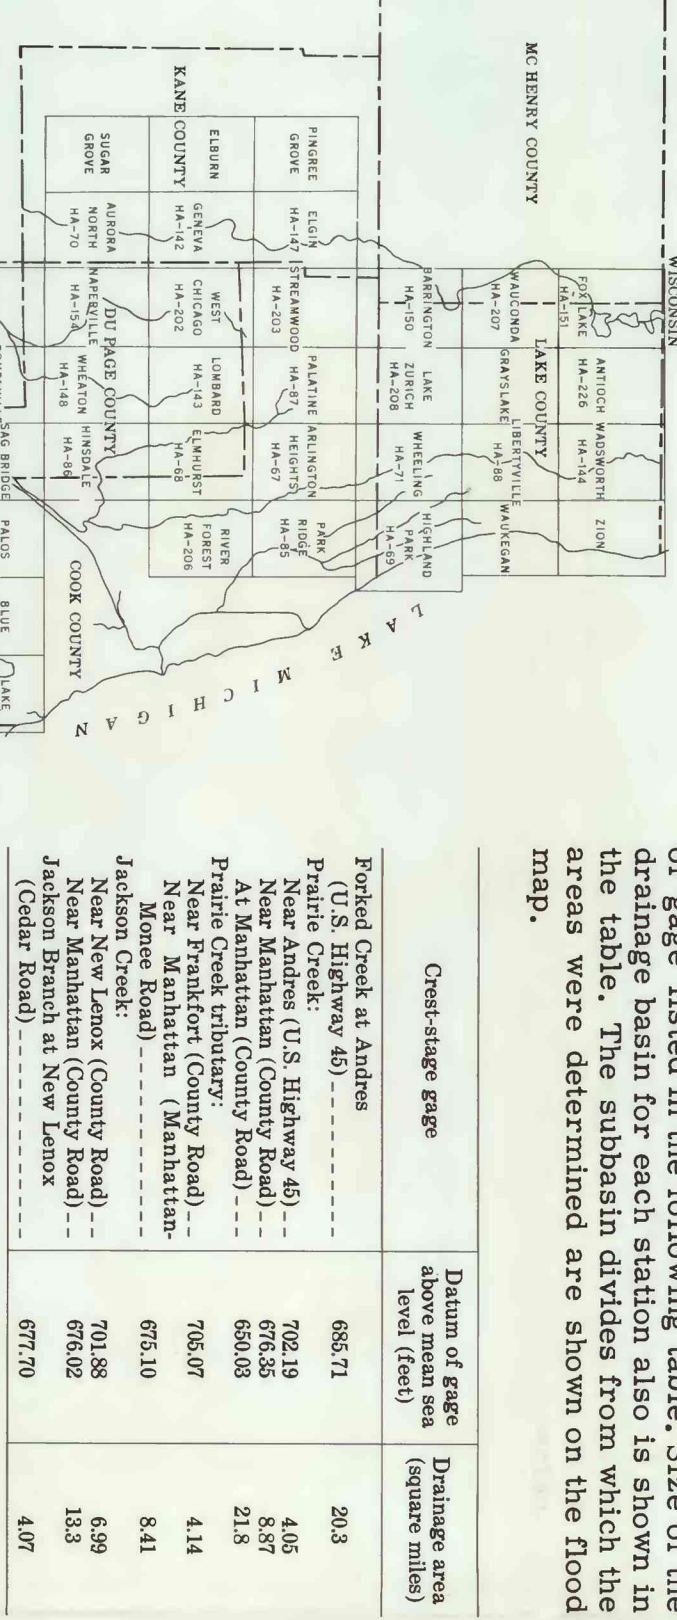


FIGURE 1.—Index map of northeastern Illinois showing location of quadrangle in the flood-hazard mapping program.

Inundated areas are shown along Forked Creek, Prairie Creek, Prairie Creek tributary, Jackson Creek, Jackson Branch, and several other un-named creeks and branches. The flood of April 1957, the flood of July 1957 was reported to be the most extensive in the past 60 years, on Jackson Creek in the past 56 years, on Forked Creek in the past 26 years, and on Jackson Creek in the past 23 years. The flood of July 1957, which is 4 miles northwest of the Manhattan quadrangle, are also indicative of the area. At this site the 1957 flood was 2 feet higher than any other flood recorded since 1945, and it exceeded the estimated 50-year flood stage by 1 foot.

Greater floods than those whose boundaries flood boundaries are shown provide a record of historic fact that reflect channel conditions existing when the floods occurred. Changes in channel conditions, or changes in runoff characteristics of the stream caused by increased urbanization, or changes in land use, or changes in the height reached by a future flood of comparable discharge. Protective works built after the floods the area but will not necessarily eliminate all future flooding. The inundation pattern of future floods may be indicated by measuring and bridges, roads, and other cultural changes.

The general procedure used in defining the flood boundaries was to construct flood profiles from elevations of floodmarks identified in the field and from topographic data from other agencies. The flood boundaries were derived from the topographic map by interpolation between contours of equal elevation. The flood boundaries were identified during field investigations and surveys. The portrayal of flood boundaries is consistent with the scale of the map (1 inch = 2,000 feet), contour interval, 10 feet.


There are several depressions or lowland areas in the Manhattan quadrangle where surface water tends to collect. These areas are related to the flooding in these areas are related to the areas are flooded only briefly after periods of heavy rainfall or snowmelt, whereas others remain inundated continuously, depending largely on the ground. Flood boundaries are shown for all such areas that were detected in this investigation.

**Operation and acknowledgment.**—The preparation of this report is a part of an extensive flood-hazard mapping program of the U.S. Geological Survey, in cooperation with the Illinois Metropolitan Area Planning Commission. The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district engineer, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.

Acknowledgment is made to the Will County Highway Department for furnishing information on the location of the flood boundaries. The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district engineer, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.

The cooperative program is administered on behalf of the Planning Commission by Matthew L. Ellis, district engineer, and under the administrative direction of John H. Sheffer, Chief Planner. The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district engineer, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.



Quadrangle name	Distance from flood (miles)	Distance from flood (miles)
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65
Prarie Creek (U.S. Highway 65)	0.65	0.65

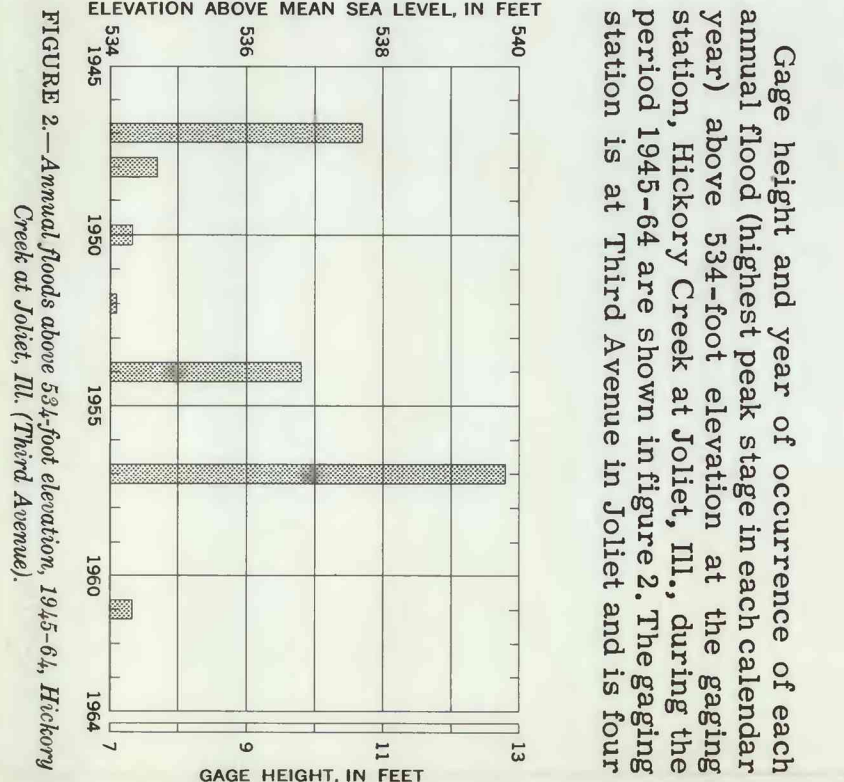

**Flood discharge.**—The rate of discharge of a stream is the volume of flow that passes a particular point in a given period of time. It is expressed in cubic feet per second (cfs). Peak discharge, the maximum discharge attained by a flood, generally occurs at the peak of the flood, but if a stream is affected by variable backwater, the time of the peak discharge may not coincide with that of the maximum discharge. The time of the peak discharge or a debris jam may cause a high stage during a period of relatively low discharge.

**Flood frequency.**—Frequency of floods at the creek at Joliet was derived from streamflow data for the period 1945-46. The frequency of floods for other nearby stations and with the regional flood-frequency relation for streams in northern Illinois (Atticus 1954).

The general relation between discharge and frequency is shown in figure 3 and the general flood-frequency relation for streams in northern Illinois is shown in figure 4. The relation between stage and frequency is shown in figure 5.

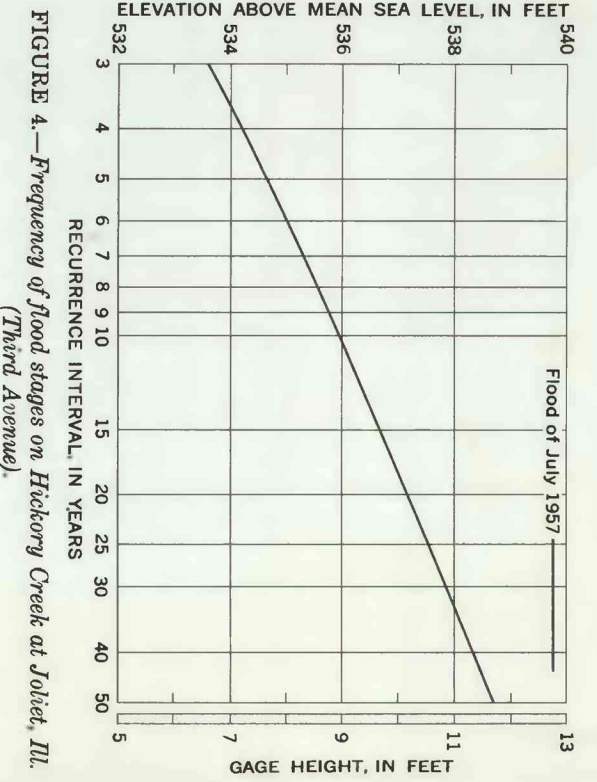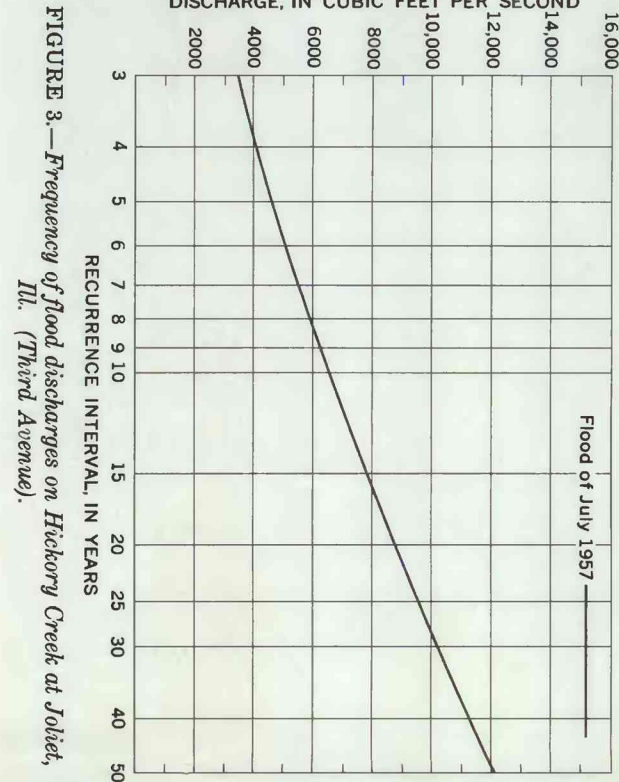

quency is dependent on the relation of stage to discharge which is affected by changes in the stream channel, the frequency of floods, and the frequency of floods. The frequency curve in figure 4 is based on channel conditions existing in 1955. Conditions may change in the future, and the frequency curves may change in the future. The frequency curves are not recommended for use beyond the limits shown in this report.

**Return period.**—As applied to flood events, the return period is the average interval of time within which a given flood will be equaled or exceeded. The return period can be stated in terms of their probabilities of occurrence (virtually, reciprocals of their frequency). For example, a flood with a 25-year recurrence interval would have a 4-percent chance of being equaled or exceeded in any given year. The return period of a flood with a 25-year recurrence interval would have a 4-percent chance of being equaled or exceeded in any given year.

Return period (years)	Discharge (cfs)
2	1,000
5	2,000
10	4,000
25	10,000
50	14,000
100	18,000

It is emphasized that recurrence intervals are average figures—the average number of years between occurrences of floods that equal or exceed a given magnitude. The fact that a flood has occurred in a given year does not reduce the probability of that flood being exceeded in the next year or even in the next week.

**Flood profiles.**—Profiles of the water surface, based primarily on elevations of marks left by floods of July 1957 and April 1958 are shown on the map. The profiles were constructed on the basis of flood crests determined from photographs and from reports by local residents. River miles used for the profiles correspond to those marked along the streams on the flood map.

**Flood depths.**—Depth of flooding at any point can be estimated by subtracting the ground elevation from the water elevation at that point. The approximate ground elevation can be determined from contours on the map, and the water elevation can be determined by leveling from nearby bench marks.

**Additional data.**—Other information pertaining to the flood hazard mapping program can be obtained at the office of the U.S. Geological Survey, Oak Park, Ill., and from the following published reports:

- Daniels, W. S., and Hale, M. D., 1956, Floods of October 1954 in the Chicago area, Illinois, U.S. Geological Survey Water-Supply Paper 1475-B, p. 167-200.
- Mitchell, W. D., 1954, Floods in Illinois, magnitude and frequency, Illinois State Public Works and Buildings, Div. of Waterways, 489 p.

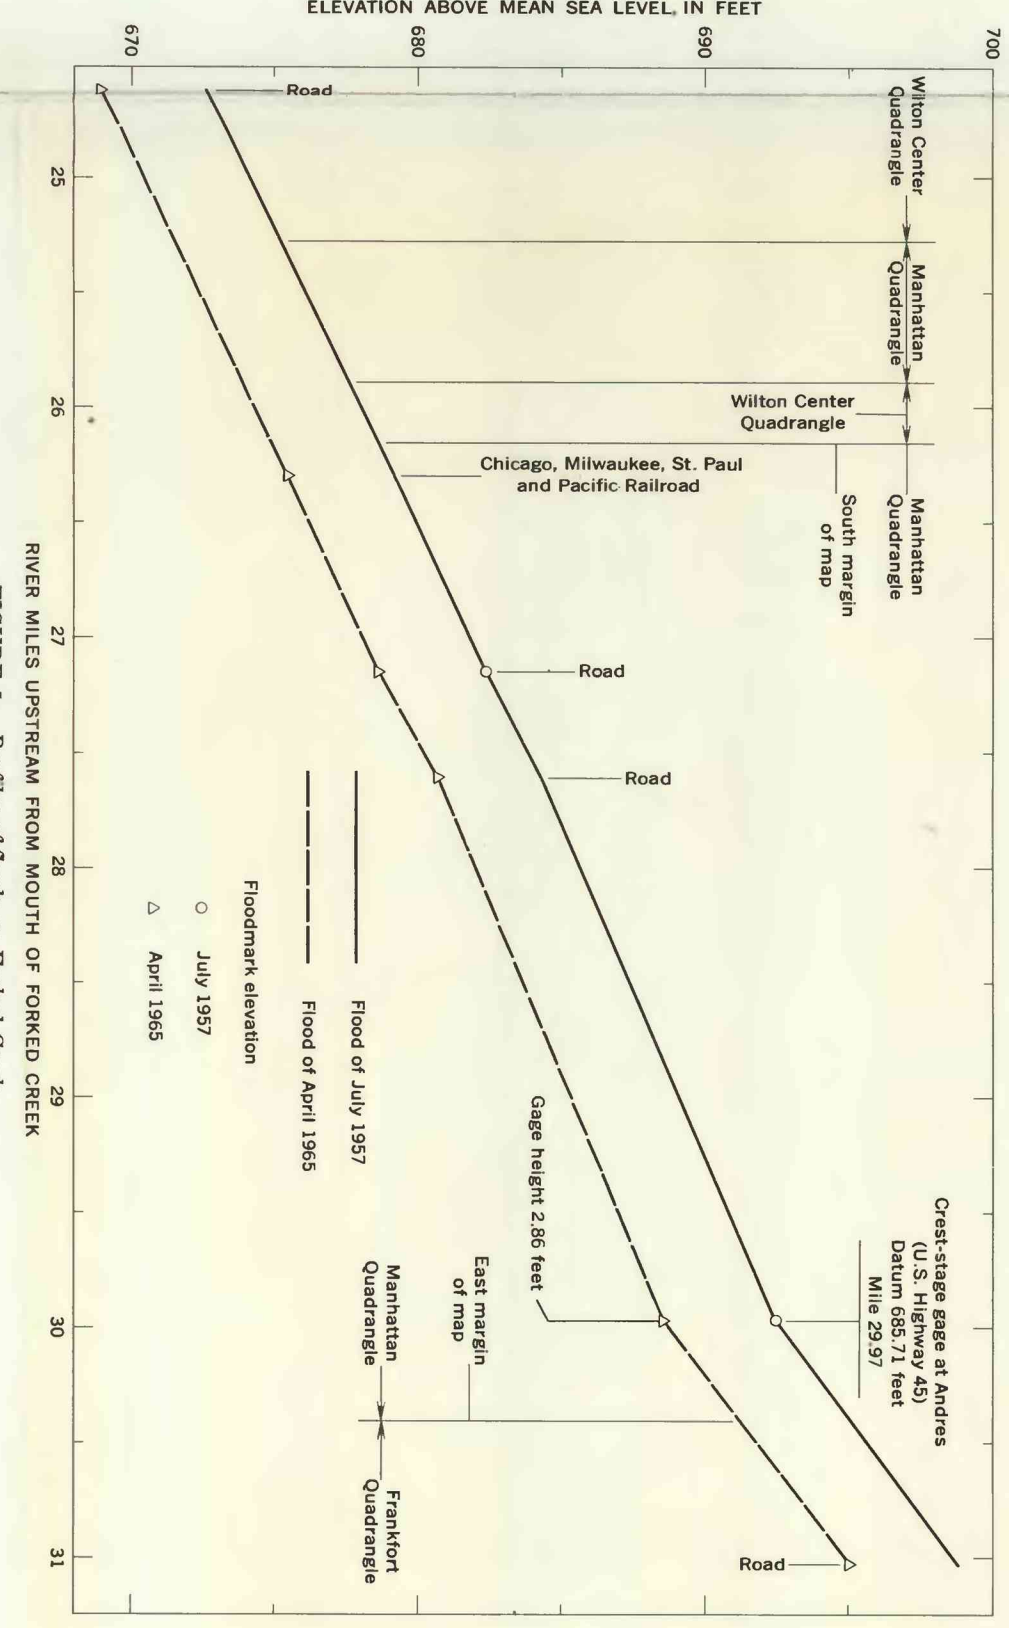


FIGURE 5.—Profile of flood on Forked Creek.

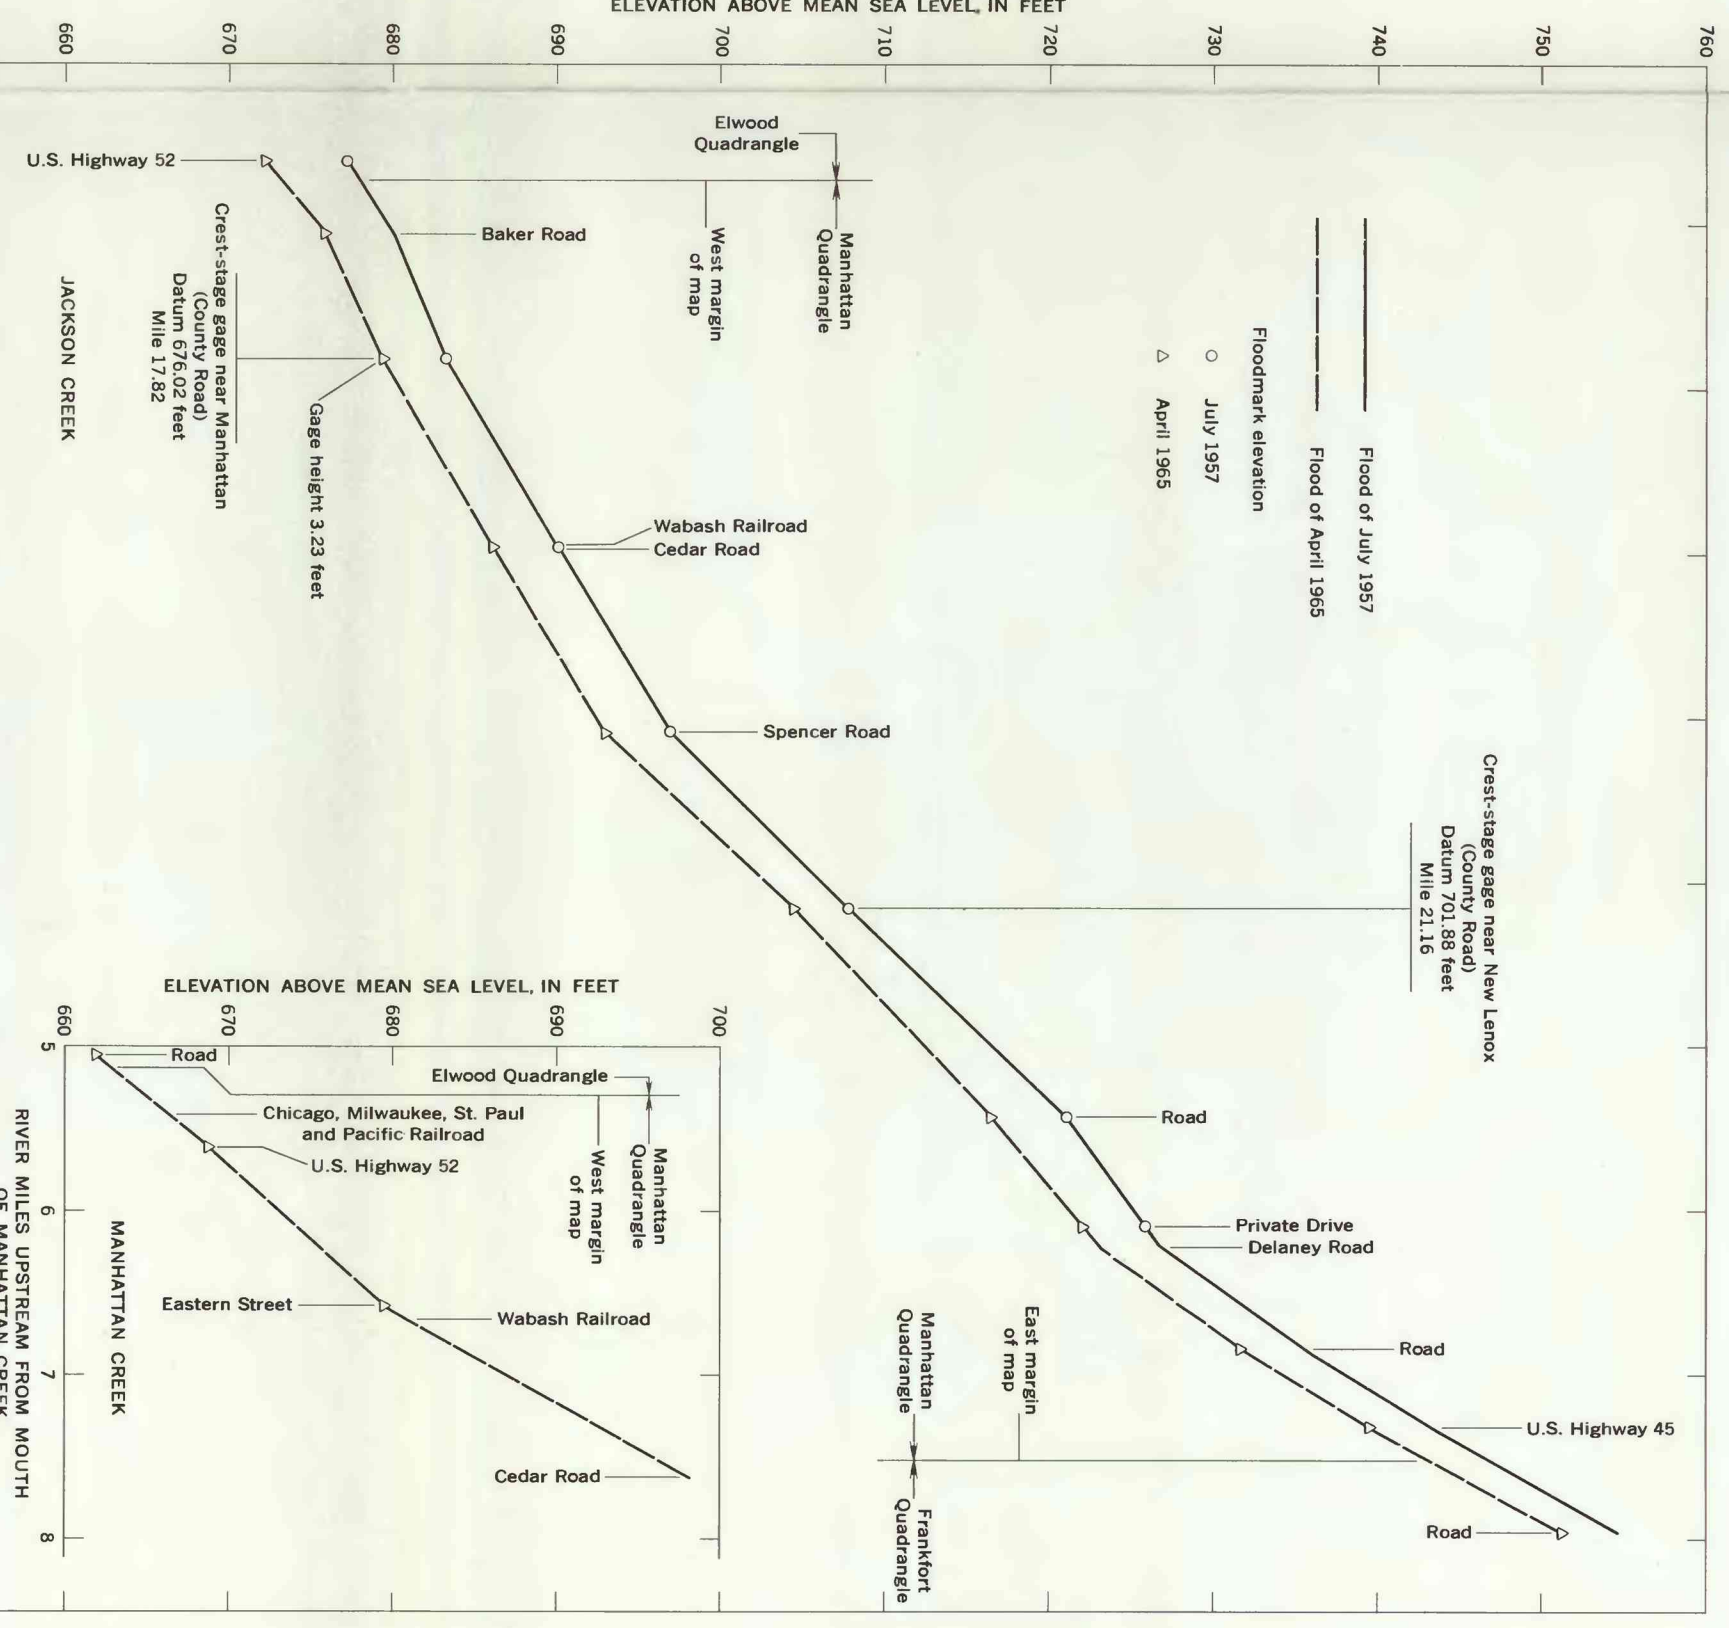


FIGURE 6.—Profile of flood on Jackson Creek and Manhattan Creek.

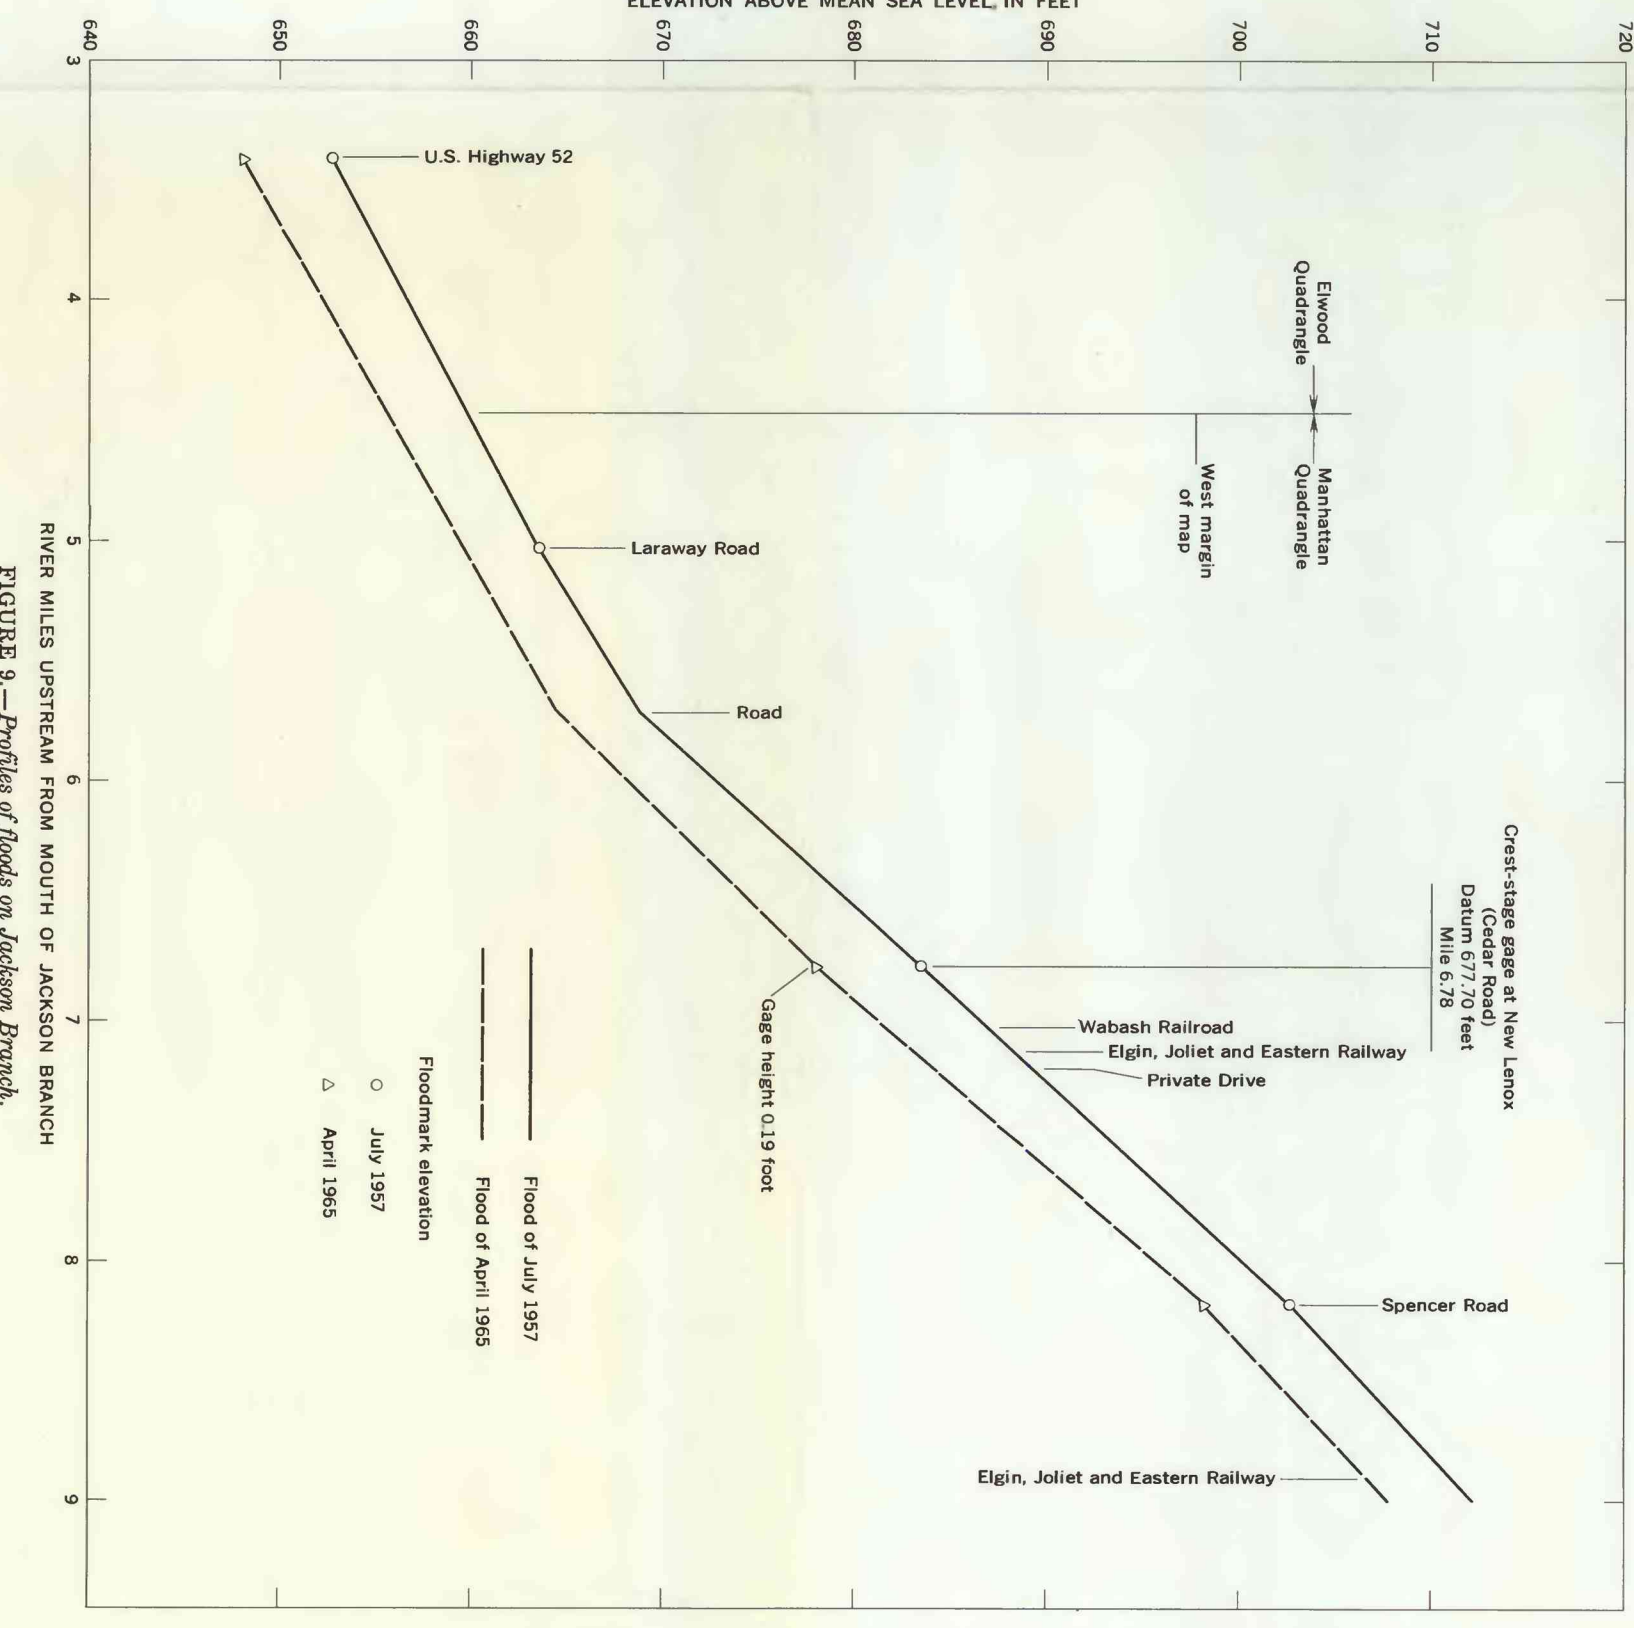


FIGURE 7.—Profile of flood on Jackson Branch.

FLOODS IN MANHATTAN QUADRANGLE, NORTHEASTERN ILLINOIS

By  
Howard E. Allen and Roman T. Mrycz