



**FLOODS IN ELBURN QUADRANGLE  
NORTHEASTERN ILLINOIS**

This report presents hydrologic data that can be used to evaluate the extent, depth, and frequency of flooding that affect the economic development of flood plains in the Elburn quadrangle, northeastern Illinois. It is intended to aid individuals, governmental agencies, and others responsible for solving existing flood problems and for formulating effective flood-plain regulations that would minimize the creation of new flood problems. The report will also be useful for preparing building and zoning regulations, locating waste disposal facilities, developing recreational areas, and managing surface water in relation to ground-water resources.

The approximate areas inundated by floods along streams in the Elburn 7½-minute quadrangle are delineated on a topographic map. The quadrangle location is shown in figure 1. Inundated areas for the flood of October 1954 are shown along Virgil ditch No. 1, Virgil ditch No. 2, Union ditch No. 3, Howes Creek, Stony Creek, Otter Creek tributary, Ferson Creek, Mill Creek, Blackberry Creek, Welch Creek, and several unnamed streams.

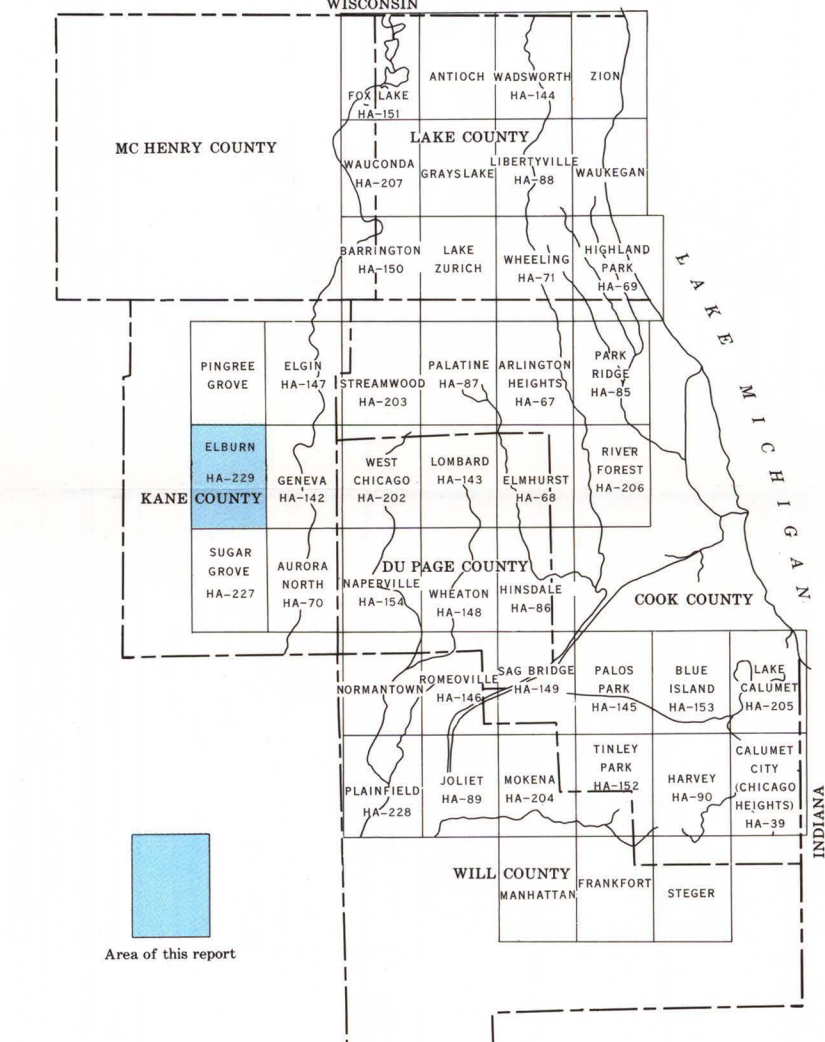


FIGURE 2.—Annual floods above 571-foot elevation, 1941-1965, Du Page River at Troy, Illinois.

According to reports of local residents, some of whom could remember as far back as 60 years, the October 1954 flood was the highest observed on streams throughout the Elburn quadrangle.

Greater floods than the flood whose boundaries are shown on the map are possible. The flood boundaries shown previously are based on historic fact that reflect channel conditions existing when the flood occurred. Changes in channel conditions, in waterway openings at highways and railroads, or in runoff characteristics of the streams caused by increased urbanization that may have taken place subsequent to the flood represented on the map could affect the flood height reached by a future flood of comparable discharge. Protective works built after the flood should reduce the frequency of flooding in the area but will not necessarily eliminate all future flooding. The inundation pattern of future floods may be affected by new highways and bridges, relocation and improvement of stream channels, and other cultural changes.

The general procedure used in defining the flood boundaries was to construct flood profiles from elevations of floodmarks identified in the field and from data available from other agencies. The extent of flooding delineated on the topographic map was derived from the profiles by interpolation between contours (lines of equal ground elevations) and by plotting overflow limits identified during field investigations and surveys. The portrayal of flood boundaries is consistent with the scale of the map (1 inch = 2,000 feet; contour interval, 5 feet and 10 feet).

There are several depressions or lowland areas in the Elburn quadrangle where surface water accumulates because of inadequate drainage into the streams. Frequency and depth of flooding in these areas are unrelated to the water-surface elevation along the streams. Some areas are flooded only briefly after periods of heavy rainfall or snowmelt, whereas others remain inundated continuously, depending largely upon the rates of evaporation and seepage into the ground. Flood boundaries are shown for all such areas that were detected in this investigation.

**Cooperation and acknowledgment.**—The preparation of this report is a part of an extensive flood-mapping program financed through a cooperative agreement between the Northeastern Illinois Metropolitan Area Planning Commission and the U.S. Geological Survey. Under the agreement, flood maps will be prepared for the 7½-minute quadrangles shown in figure 1. The program includes parts of Cook, Kane, McHenry, and Will Counties, and all of Du Page and Lake Counties. The six counties cooperate in the program financially through separate agreements with the Planning Commission. Financial support for the preparation of this report was provided by Kane County.

The cooperative program is administered on behalf of the Planning Commission by Matthew L. Rockwell, Executive Director, and is directly coordinated by John R. Sheaffer, Chief Planner. The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district chief, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.

Acknowledgment is made to the State of Illinois, Department of Public Works and Buildings, Division of Highways and to the Kane County Highway Department for furnishing information on floods at several bridges and culverts in the area.

**Flood height.**—The height of a flood at a gaging station usually is stated in terms of gage height, or stage, which is the elevation of the water surface above a selected datum plane. Elevations shown in this report are in feet above mean sea level. Gage heights for crest-stage gages in the Elburn quadrangle can be converted to elevations above mean sea level by adding the gage height to the appropriate datum of gage listed in the following table. The size of drainage basin for each station is also shown in the table. The subbasin divides from which the areas were determined are shown on the flood map.

Crest-stage gage	Station number	Datum of gage above mean sea level (feet)	Drainage area (square miles)
Virgil ditch No. 2 near Lily Lake (U.S. Highway 47)	5-4915	907.60	3.55
Ferson Creek at Wasco (Coron Road)	5-5311	801.63	6.12
Mill Creek near Wasco (U.S. Highway Alternate 30)	5-5613	764.75	8.05

Gage height and year of occurrence of each annual flood (highest peak stage in each calendar year) above 571-foot elevation at the gaging station, Du Page River at Troy, Ill., during the period 1941-65 are shown in figure 2. The gaging station is just upstream from U.S. Highway 57, about 27 miles southeast of the Elburn quadrangle, and is 10½ miles upstream from the mouth of the Du Page River. The graph illustrates the irregular occurrence of floods on the Du Page River and typifies the probable relative magnitude of floods on streams in Elburn quadrangle.

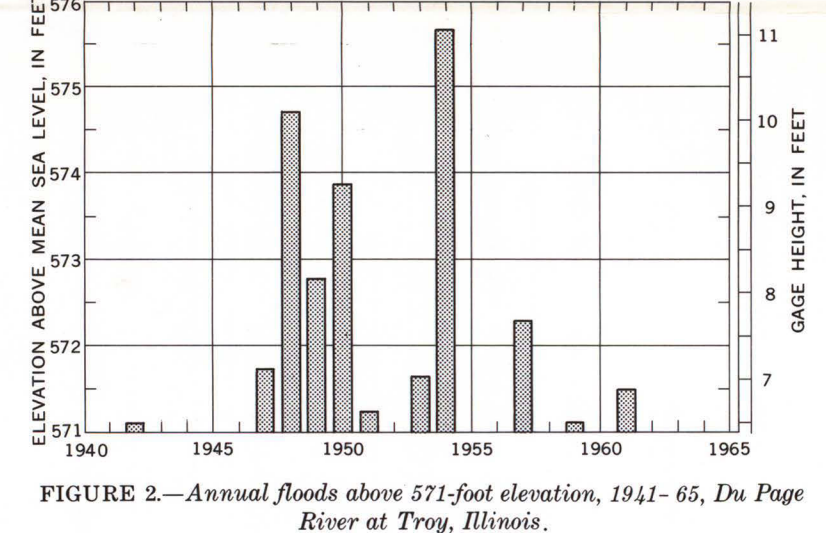


FIGURE 3.—Frequency of flood discharges on Blackberry Creek near Yorkville, Ill. (Boomer Road).

**Flood discharge.**—The rate of discharge of a stream is the volume of water that passes a particular location in a given period of time. Discharge rates usually are expressed in units of cubic feet per second (cfs). Peak discharge, the maximum discharge attained by a flood, generally occurs at the time of the maximum height (stage) of the flood, but if a stream is affected by variable backwater, the time of the peak discharge may not coincide with that of the maximum stage. For example, backwater from a levee or debris jam may cause a high stage during a period of relatively low discharge.

**Flood frequency.**—Frequency of floods at the Geological Survey gaging stations on Blackberry Creek near Yorkville, Ill., and on Ferson Creek near St. Charles, Ill., were derived from stream-flow records at these stations combined with records for other nearby stations and with the regional flood-frequency relation for streams in Northern Illinois (Mitchell 1954). The Blackberry Creek gaging station is at Boomer Road, about 13 miles south of the Elburn quadrangle and 3.4 miles upstream from the mouth of Blackberry Creek. The Ferson Creek gaging station is at Randall Road 1.8 miles east of the Elburn quadrangle and 2.2 miles upstream from the mouth of Ferson Creek.

The general relation between discharge and frequency is shown in figures 3 and 4 and the general relation between stage and frequency is shown in figures 5 and 6. The relation between stage and frequency is dependent on the relation of stage to discharge which is affected by changes in the physical condition of stream channels and constrictions. The frequency curves in figures 5 and 6 are based on channel conditions existing in 1966. Longer records and future changes in channel conditions may define somewhat different flood-frequency curves. Extrapolation of the curves beyond the limits shown is not recommended.

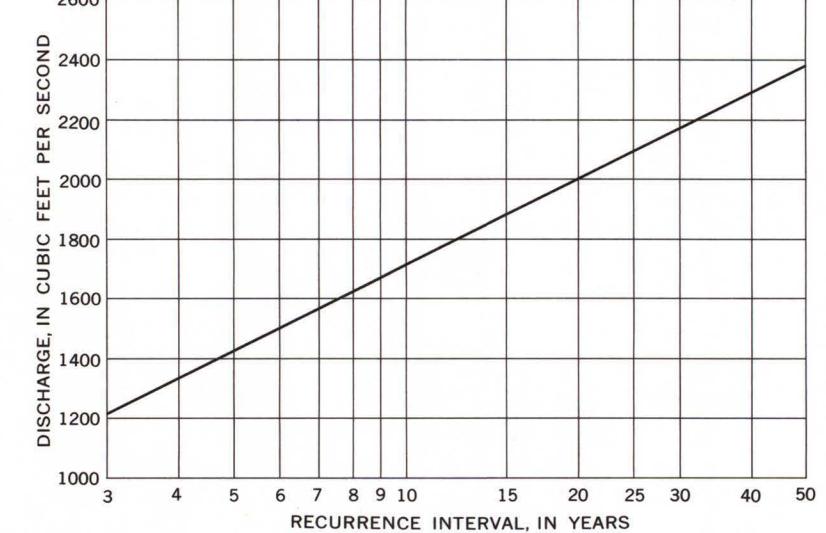


FIGURE 4.—Frequency of flood discharges on Ferson Creek near St. Charles, Ill. (Randall Road).

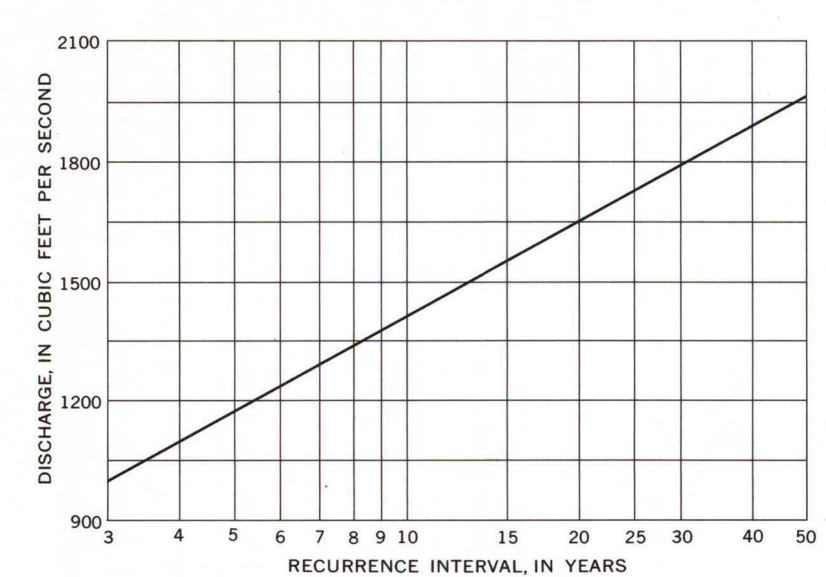


FIGURE 5.—Frequency of flood stages on Blackberry Creek near Yorkville, Ill. (Boomer Road).

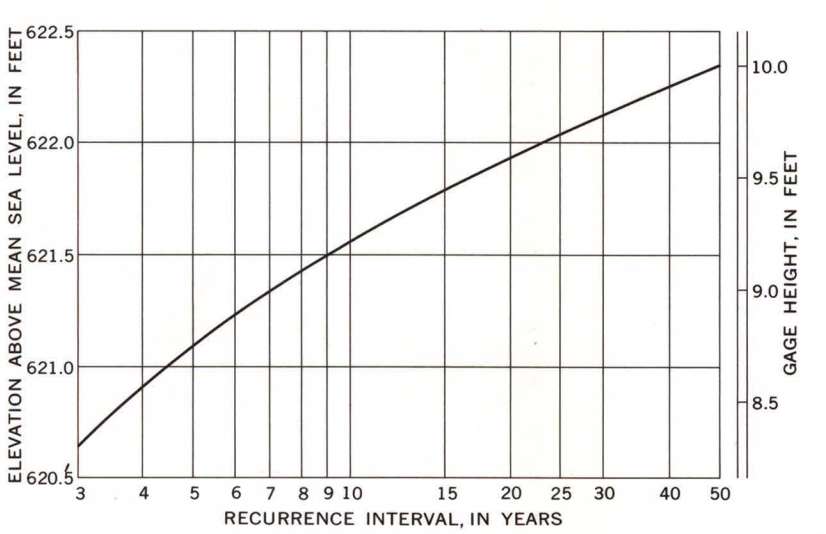


FIGURE 6.—Frequency of flood stages on Ferson Creek near St. Charles, Ill. (Randall Road).

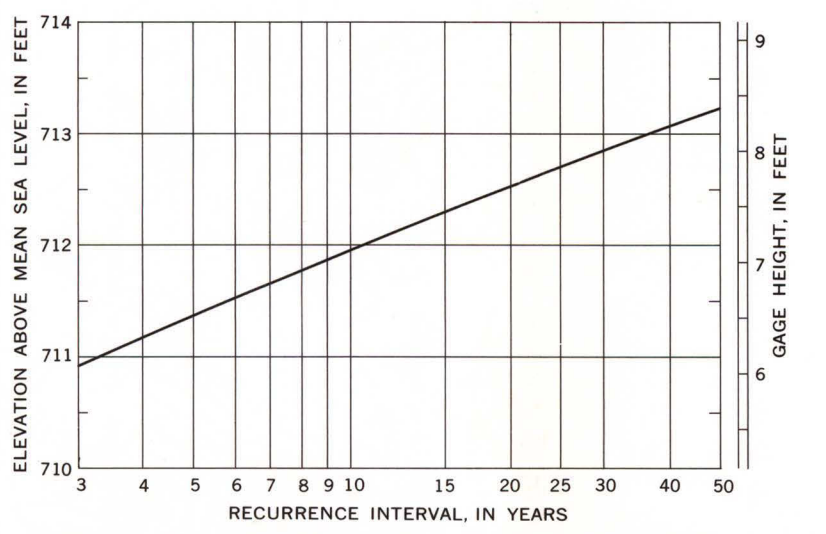


FIGURE 7.—Profile of flood on Virgil Ditch No. 2.

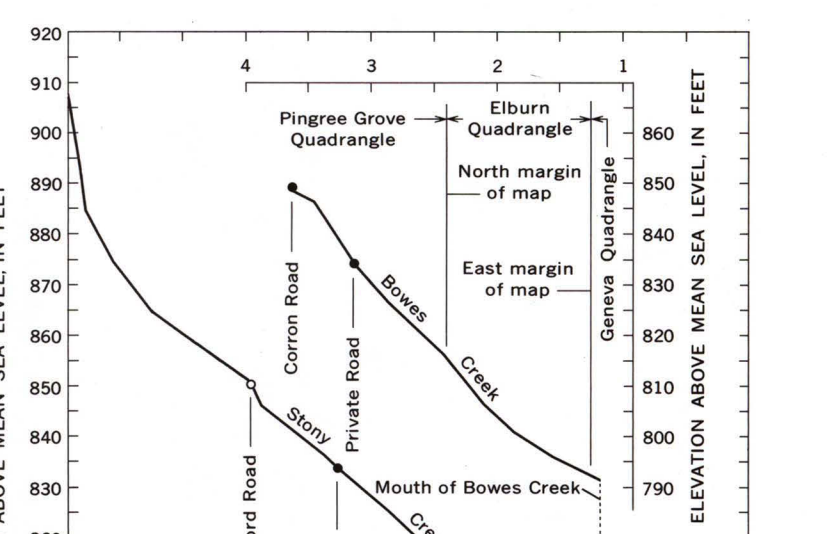


FIGURE 8.—Profiles of flood on Stony Creek and Howes Creek.

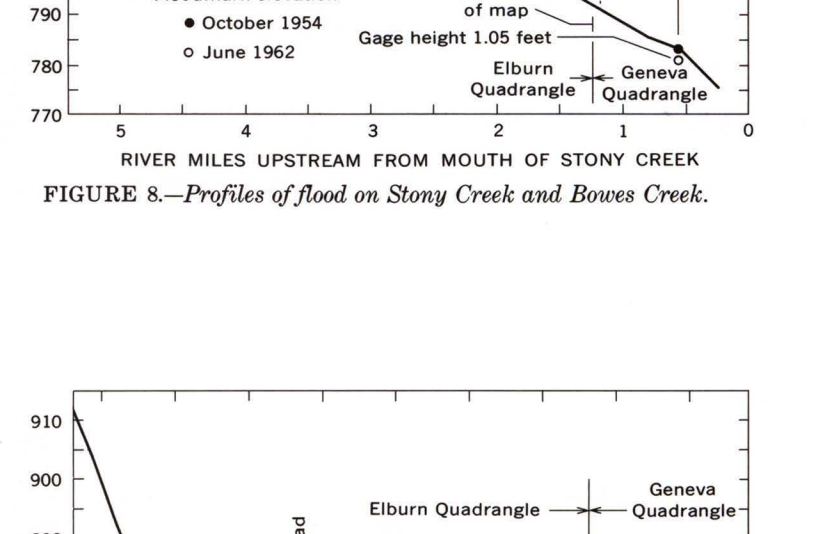


FIGURE 9.—Profile of flood on Otter Creek tributary.

**Recurrence intervals.**—As applied to flood events, recurrence interval is the average interval of time within which a given flood will be equaled or exceeded once. Frequencies of floods can be stated in terms of their probabilities of occurrence (virtually, reciprocals of their recurrence intervals for floods with recurrence intervals greater than 10 years). For example, a flood with a 25-year recurrence interval would have a 4-percent chance of being equaled or exceeded in any given year, or a flood with a 50-year recurrence interval would have a 2-percent chance of being equaled or exceeded in any given year.

The general relation between recurrence interval and flood height at the gaging stations on Blackberry Creek near Yorkville (fig. 5) and Ferson Creek near St. Charles (fig. 6) is tabulated below:

Recurrence interval (years)	Elevation above mean sea level (feet)	
	Blackberry Creek near Yorkville	Ferson Creek near St. Charles
50	822.3	713.2
30	821.1	712.8
20	820.6	712.5
10	820.6	711.9
5	821.1	711.4
3	820.6	710.9

It is emphasized that recurrence intervals are average figures—the average number of years between occurrences of floods that equal or exceed a given magnitude. The fact that a major flood is experienced in one year does not reduce the probability of that flood being exceeded in the next year or even in the next week.

**Flood profiles.**—Profiles of the water surface, based primarily on elevations of marks left by floods of October 1954 and June 1962 are shown in figures 7-12. Where floodmarks could not be identified, the profiles were constructed on the basis of flood crests determined from photographs and from reports by local residents, and on elevations of streambeds and lower flood stages. River miles used for the profiles correspond to those marked along the streams on the flood map.

**Flood depths.**—Depth of flooding at any point can be estimated by subtracting the ground elevation from the water-surface elevation at the same point, indicated by the profiles in figures 7-12. The approximate ground elevation can be determined from contours on the map, although more accurate elevations can be obtained by leveling from nearby bench marks.

**Additional data.**—Other information pertaining to floods in the Elburn quadrangle can be obtained at the office of the U.S. Geological Survey, Oak Park, Ill., and from the following published reports:

Daniels, W. S., and Hale, M. D., 1958, Floods of October 1954 in the Chicago area, Illinois and Indiana: U.S. Geol. Survey Water-Supply Paper 1370-B, p. 107-200.

Mitchell, W. D., 1954, Floods in Illinois, magnitude and frequency: Illinois Dept. Public Works and Bldgs., Div. of Waterways, 386p.

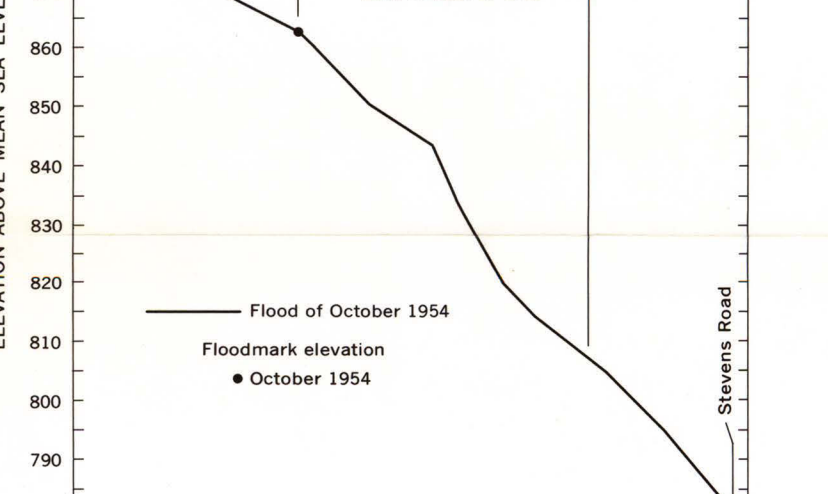


FIGURE 10.—Profile of flood on Ferson Creek.

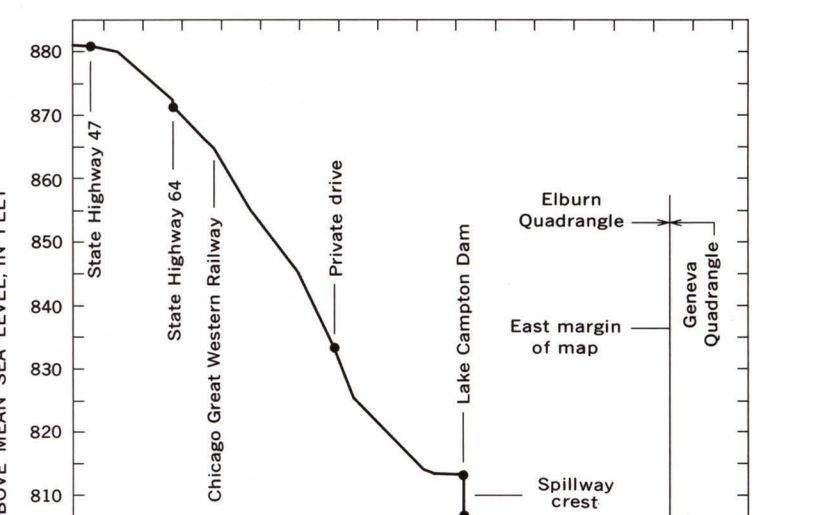


FIGURE 11.—Profile of flood on Mill Creek.

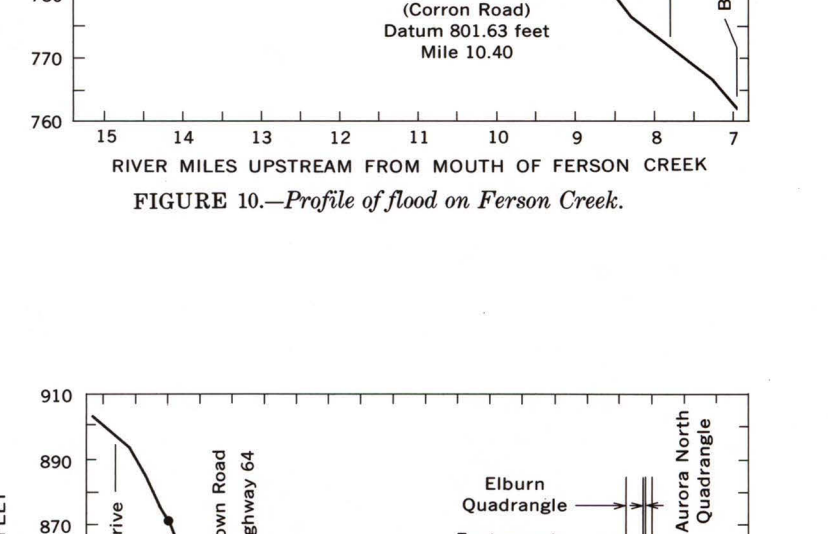


FIGURE 12.—Profiles of flood on Blackberry Creek and Welch Creek.