**FLOODS IN FRANKFORT QUADRANGLE,
NORTHEASTERN ILLINOIS**

This report presents hydrologic data that can be used to evaluate the extent, depth, and frequency of flooding that affect the economic development of flood plains in the Frankfort quadrangle, northeastern Illinois. It is intended to aid individuals, government agencies, and others responsible for solving existing flood problems and for formulating effective floodplain regulations that would minimize the creation of new flood problems. The report will also be useful for preparing building and zoning regulations, locating waste disposal facilities, developing recreational areas, and managing surface water in relation to ground-water resources.

The approximate areas inundated by floods along streams in the Frankfort 7½-minute quadrangle are delineated on a topographic map. The quadrangle location is shown in figure 1. Inundated areas are shown along Rock Creek, Forked Creek and tributaries, South Branch Forked Creek, Prairie Creek and tributaries, Jackson Creek, Hickory Creek and tributaries, and several unnamed streams for the flood of July 1957. The flood of July 1957 was reported to have been the highest observed in many areas. In the Forked Creek basin this flood was the highest in the past 56 years and in the Hickory Creek basin it was the highest in the past 55 years. The July 1957 flood was also the highest in the Prairie Creek basin in the past 40 years, and in Rock Creek basin it was the highest in the past 39 years. Records at the gaging station on Hickory Creek at Joliet, which is about 10½ miles northwest of the Frankfort quadrangle, are also indicative of the relative magnitude of the July 1957 flood in the area. At this site the 1957 flood was 2 feet higher than any other flood recorded since 1945, and it exceeded the estimated 50-year flood stage by 1 foot.

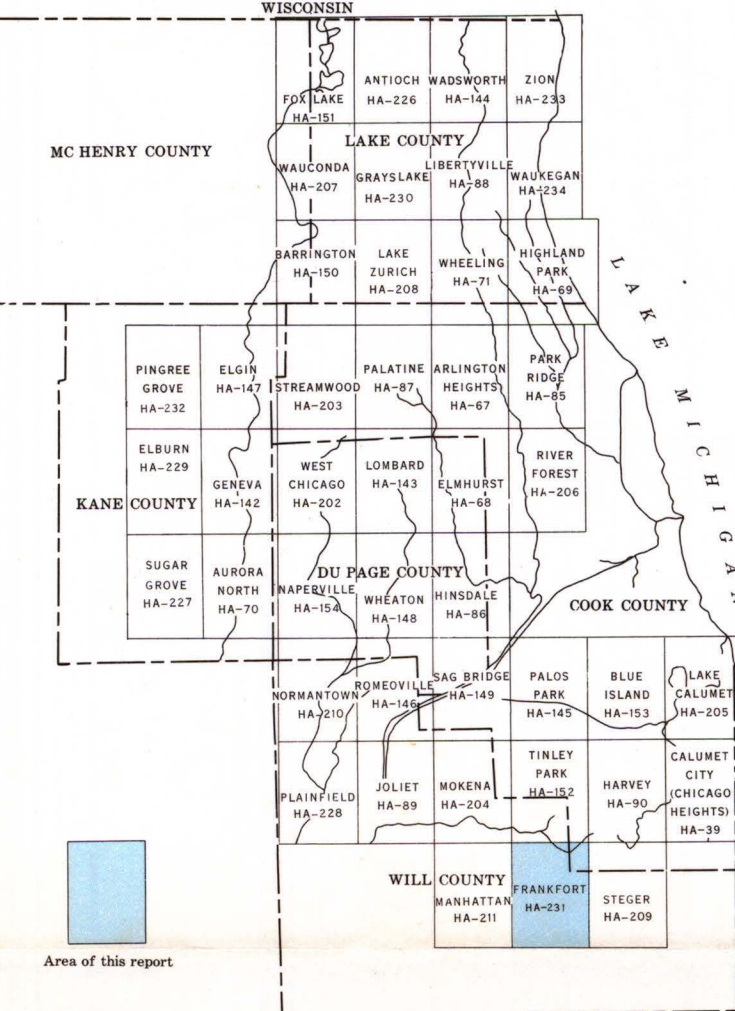


FIGURE 1.—Index map of northeastern Illinois showing location of quadrangles in the flood-hazard mapping program.

Greater floods than those whose boundaries are shown on the map are possible. The flood boundaries shown provide a record of historic fact that reflect channel conditions existing when the floods occurred. Changes in channel conditions, in waterway openings at highways and railroads, or changes in runoff characteristics of the streams caused by increased urbanization that may have taken place subsequent to the floods represented on the map could affect the flood height reached by a future flood of comparable discharge. Protective works built after the floods shown may reduce the frequency of flooding in the area but will not necessarily eliminate all future flooding. The inundation pattern of future floods may be affected by new highways and bridges, relocation and improvement of stream channels, and other cultural changes.

The general procedure used in defining the flood boundaries was to construct flood profiles from elevations of floodmarks identified in the field and from data available from other agencies. The extent of flooding delineated on the topographic map was derived from the profiles by interpolation between contours (lines of equal ground elevations) and by plotting overflow limits identified during field investigations and surveys. The portrayal of flood boundaries is consistent with the scale of the map (1 inch = 2,000 feet; contour interval, 10 feet).

There are several depressions or lowland areas in the Frankfort quadrangle where surface water accumulates because of inadequate drainage into the streams. Frequency and depth of flooding in these areas are unrelated to the water-surface elevation along the streams. Some areas are flooded only briefly after periods of heavy rainfall or snowmelt, whereas others remain inundated continuously, depending largely upon the rates of evaporation and seepage into the ground. Flood boundaries are shown for all such areas that were detected in this investigation.

Cooperation and acknowledgment.—The preparation of this report is a part of an extensive flood-mapping program financed through a cooperative agreement between the Northeastern Illinois Metropolitan Area Planning Commission and the U.S. Geological Survey. Under the agreement, flood maps will be prepared for the 7½-minute quadrangles shown in figure 1. The program includes parts of Cook, Kane, McHenry, and Will Counties, and all of Du Page and Lake Counties. The six counties cooperate in the program financially through separate agreements with the Planning Commission. Financial support for the preparation of this report was provided by Will County.

The cooperative program is administered on behalf of the Planning Commission by Matthew L. Rockwell, Executive Director, and is directly coordinated by John R. Sheaffer, Chief Planner.

The report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district chief, and under the immediate supervision of Davis W. Ellis, engineer-in-charge of the project.

Acknowledgment is made to the Cook County Highway Department for furnishing information on floods at several bridges.

Flood heights.—The height of a flood at a gaging station usually is stated in terms of gage height or stage, which is the elevation of the water surface above a selected datum plane. Elevations shown in this report are in feet above mean sea level. Gage heights for crest-stage gages in the Frankfort quadrangle can be converted to elevations above mean sea level by adding the gage height to the appropriate datum of gage listed in the following table. Size of the drainage basin for each station also is shown in the table. The subbasin divides from which the areas were determined are shown on the flood map.

Crest-stage gage	Station number	Datum of gage above mean sea level (feet)	Drainage area (square miles)
Forked Creek: Near Menard (Manhattan-Monroe Road)	5-5270.1	729.36	3.88
Near Andros (County Road)	5-5270.2	706.60	12.8
Forked Creek tributary near Menard (County Road)	5-5270.15	730.61	3.42
South Branch Forked Creek near Peotone (County Road)	5-5270.35	715.13	4.39
Prairie Creek near Frankfort (County Road)	5-5270.5	730.11	0.83
Hickory Creek near Matteson (Harlem Avenue)	5-5381	701.96	3.24
East Branch Hickory Creek near Richton Park (Harlem Avenue)	5-5381.2	725.82	6.06

Gage height and year of occurrence of each annual flood (highest peak stage in each calendar year) above 534-foot elevation at the gaging station, Hickory Creek at Joliet, Ill., during the period 1945-65 are shown in figure 2. The gaging station is at Third Avenue in Joliet and is 10½ miles northwest of the Frankfort quadrangle.

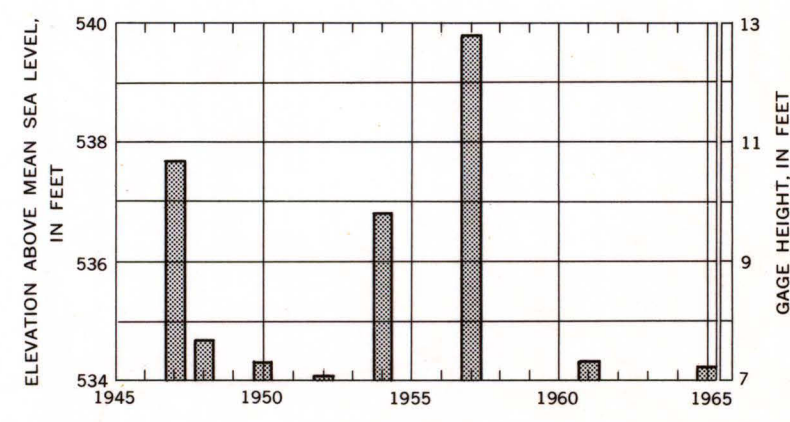


FIGURE 2.—Annual floods above 534-foot elevation, 1945-65, Hickory Creek at Joliet, (Third Avenue).

Flood discharge.—The rate of discharge of a stream is the volume of flow that passes a particular location in a given period of time. Discharge rates usually are expressed in units of cubic feet per second (cfs). Peak discharge, the maximum discharge attained by a flood, generally occurs at the time of the maximum height (stage) of the flood, but if a stream is affected by variable backwater, the time of the peak discharge may not coincide with that of the maximum stage. For example, backwater from an ice or a debris jam may cause a high stage during a period of relatively low discharge.

Flood frequency.—Frequency of floods at the Geological Survey gaging station on Hickory Creek at Joliet was derived from streamflow records for this station combined with records for other nearby stations and with the regional flood-frequency relation for streams in northern Illinois (Mitchell 1954).

The general relation between discharge and frequency is shown in figure 3 and the general relation between stage and frequency is shown in figure 4. The relation between stage and frequency is dependent on the relation of stage to discharge which is affected by changes in the physical conditions of stream channels and constrictions. The frequency curve in figure 4 is based on channel conditions existing in 1966. Longer records and future changes in channel conditions may define somewhat different flood-frequency curves. Extrapolation of the curves beyond the limits shown is not recommended.

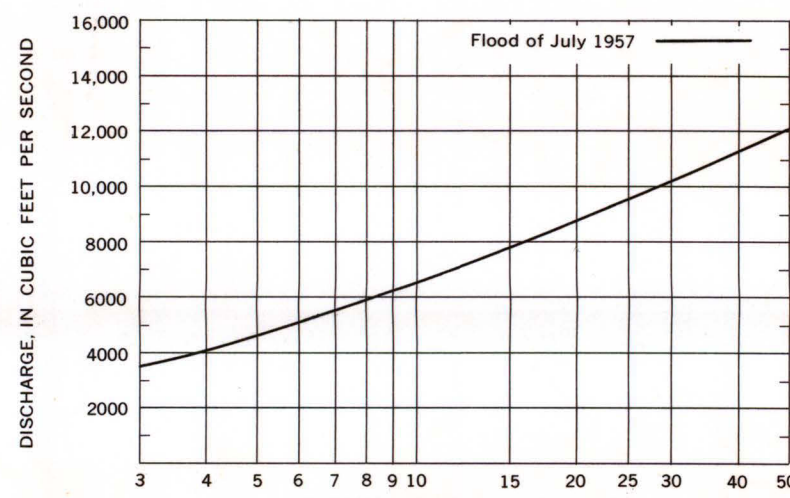


FIGURE 3.—Frequency of flood discharges on Hickory Creek at Joliet, (Third Avenue).

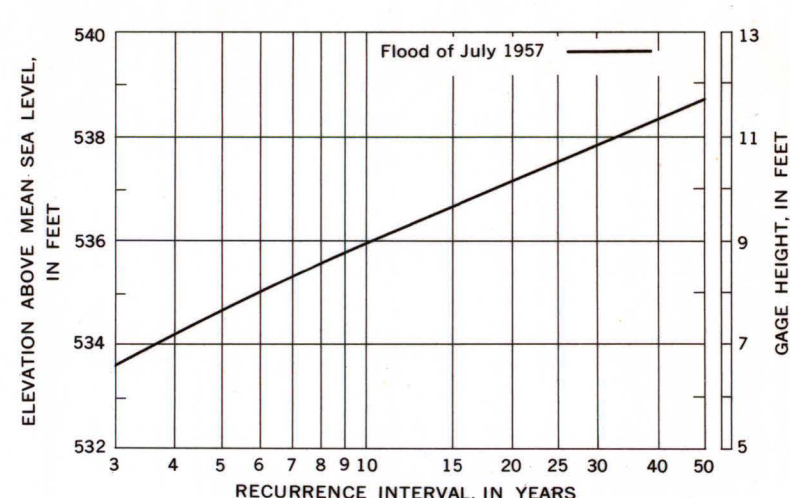


FIGURE 4.—Frequency of flood stages on Hickory Creek at Joliet, (Third Avenue).

Recurrence intervals.—As applied to flood events, recurrence interval is the average interval of time within which a given flood will be equaled or exceeded once. Frequencies of floods can be stated in terms of their probabilities of occurrence (virtually, reciprocals of their recurrence intervals for floods with recurrence intervals greater than 10 years). For example, a flood with a 25-year recurrence interval would have a 4-percent chance of being equaled or exceeded in any given year, or a flood with a 50-year recurrence interval would have a 2-percent chance of being equaled or exceeded in any given year.

The general relation between recurrence interval and flood height at the gaging station on Hickory Creek at Joliet (figure 4) is tabulated below:

Recurrence interval (years)	Elevation above mean sea level (feet)
50	538.7
30	537.8
20	537.2
10	535.9
5	534.6
3	533.6

It is emphasized that recurrence intervals are average figures—the average number of years between occurrences of floods that equal or exceed a given magnitude. The fact that a major flood is experienced in one year does not reduce the probability of that flood being exceeded in the next year or even in the next week.

Flood profiles.—Profiles of the water surface, based primarily on elevations of marks left by floods of July 1957, September 1961, April 1965, and December 1965 are shown in figures 5-13. Where floodmarks could not be identified, the profiles were constructed on the basis of flood crests determined from reports by local residents, and on elevations of streambeds and lower flood stages. River miles used for the profiles correspond to those marked along the streams on the flood map.

Flood depth.—Depth of flooding at any point can be estimated by subtracting the ground elevation from the water-surface elevation, at the same point, indicated by the profiles in figures 5-13. The approximate ground elevation can be determined from contours on the map, although more accurate elevations can be obtained by leveling from nearby bench marks.

Additional data.—Other information pertaining to floods in the Frankfort quadrangle can be obtained at the office of the U.S. Geological Survey, Oak Park, Ill., and from the following published reports:

Daniels, W. S., and Hale, M. D., 1958, Floods of October 1954 in the Chicago area, Illinois and Indiana: U.S. Geol. Survey Water-Supply Paper 1370-B, p. 107-200.

Mitchell, W. D., 1954, Floods in Illinois, magnitude and frequency: Illinois Dept. Public Works and Bldgs., Div. of Waterways, 386p.

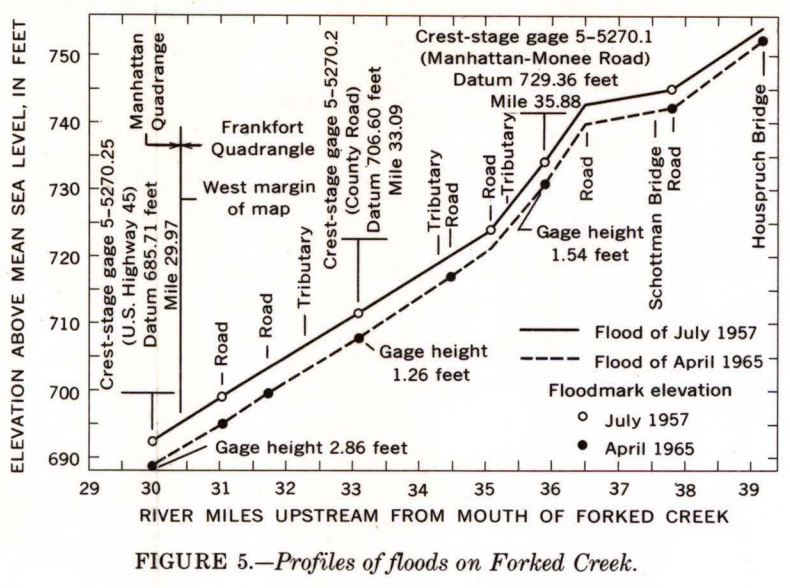


FIGURE 5.—Profiles of floods on Forked Creek.

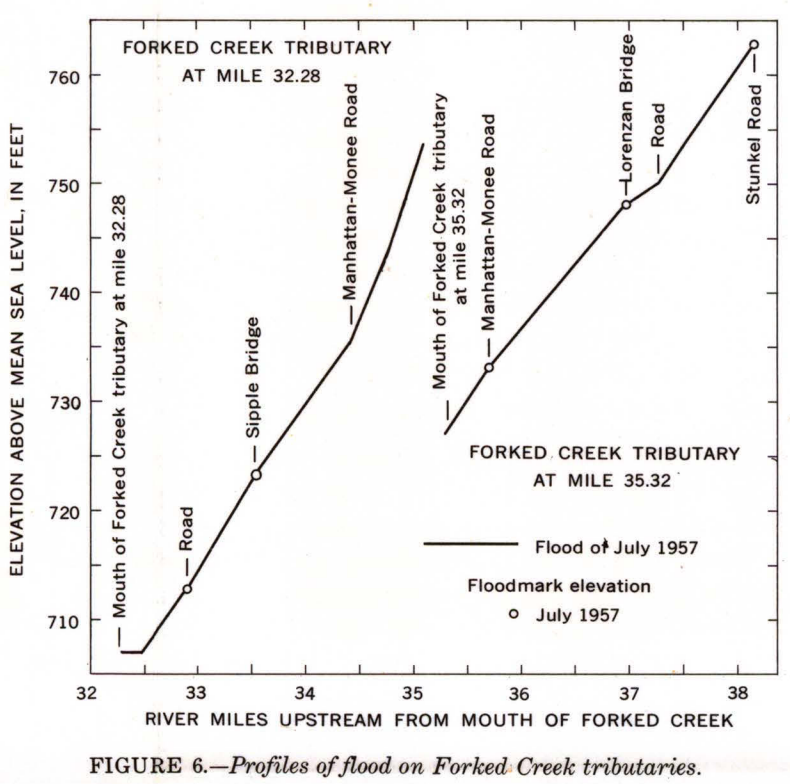


FIGURE 6.—Profiles of flood on Forked Creek tributaries.

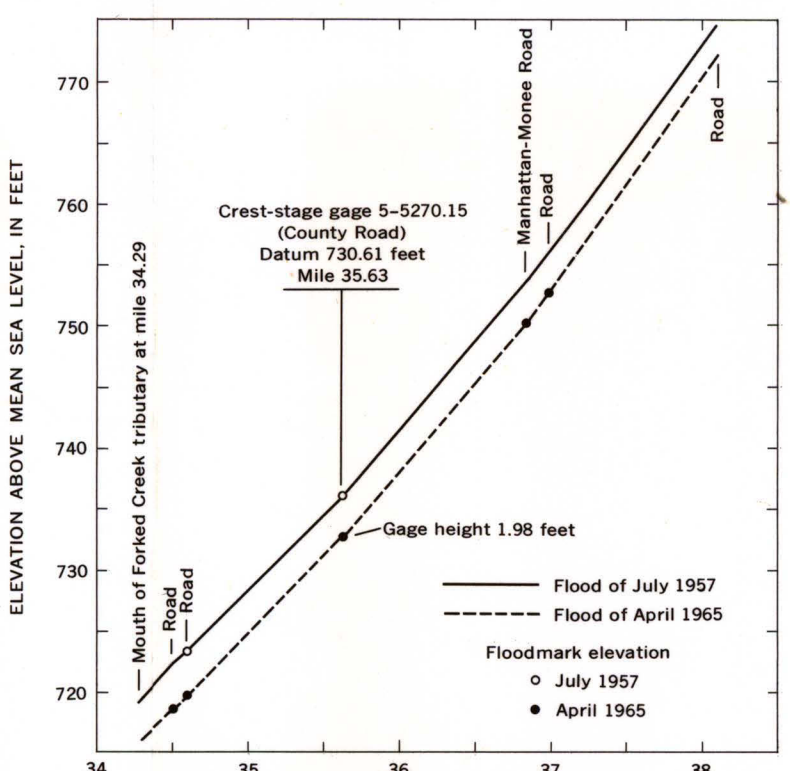


FIGURE 7.—Profiles of floods on Forked Creek tributary at mile 31.29.

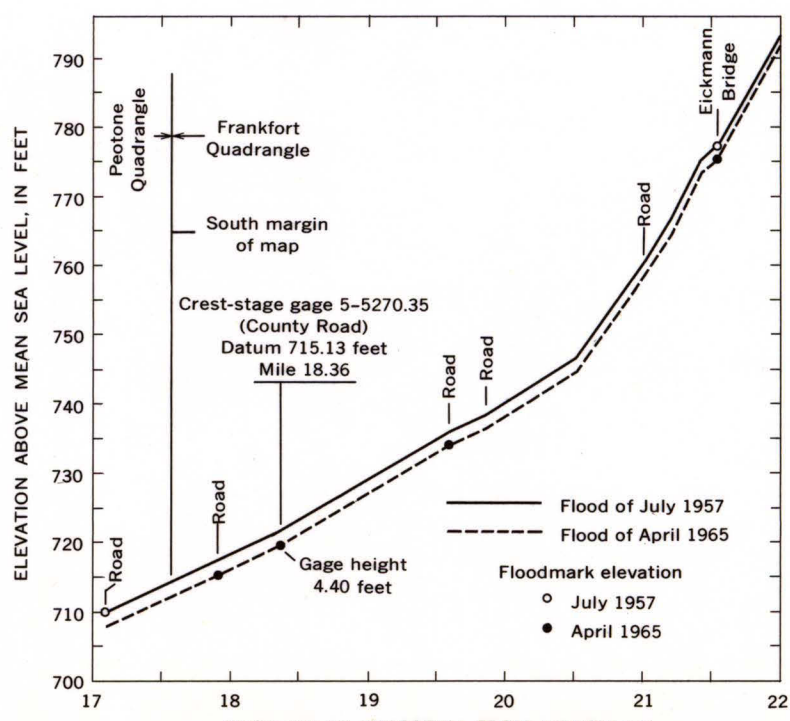


FIGURE 8.—Profiles of floods on South Branch Forked Creek.

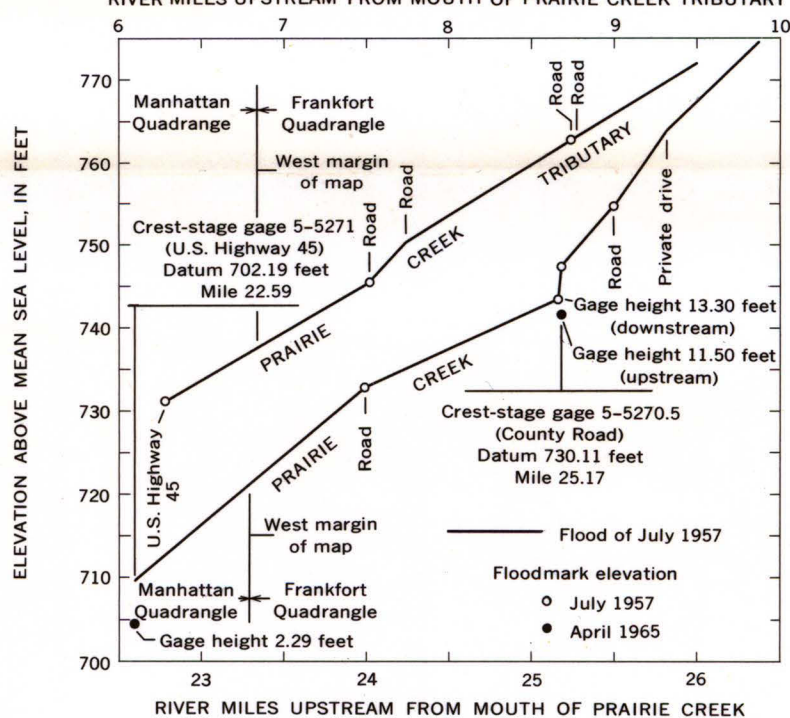


FIGURE 9.—Profiles of flood on Prairie Creek and Prairie Creek tributary.

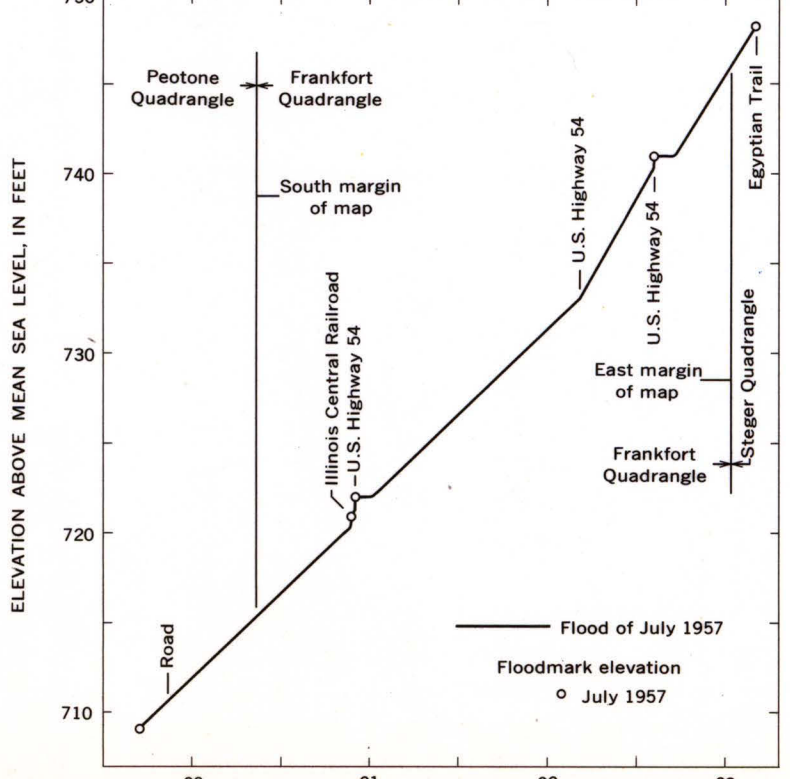


FIGURE 10.—Profile of flood on Rock Creek.

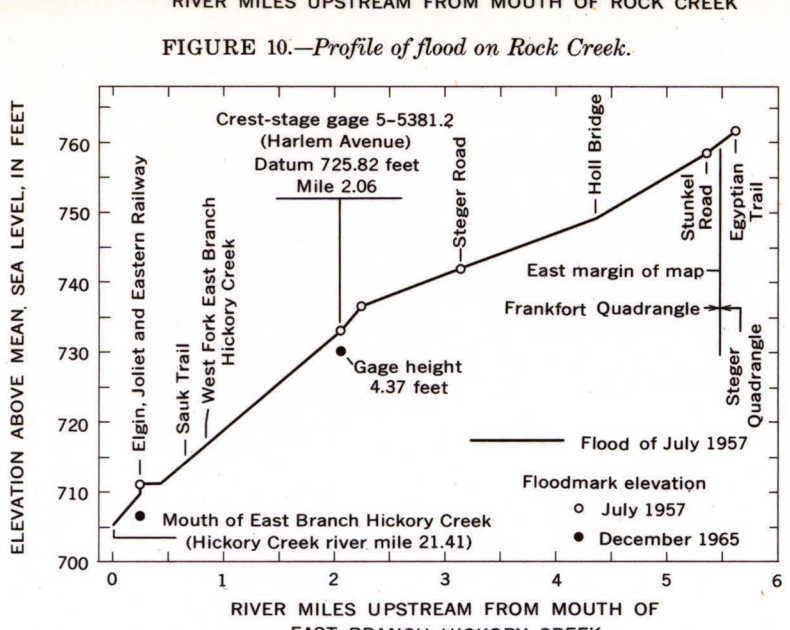


FIGURE 11.—Profile of flood on East Branch Hickory Creek.

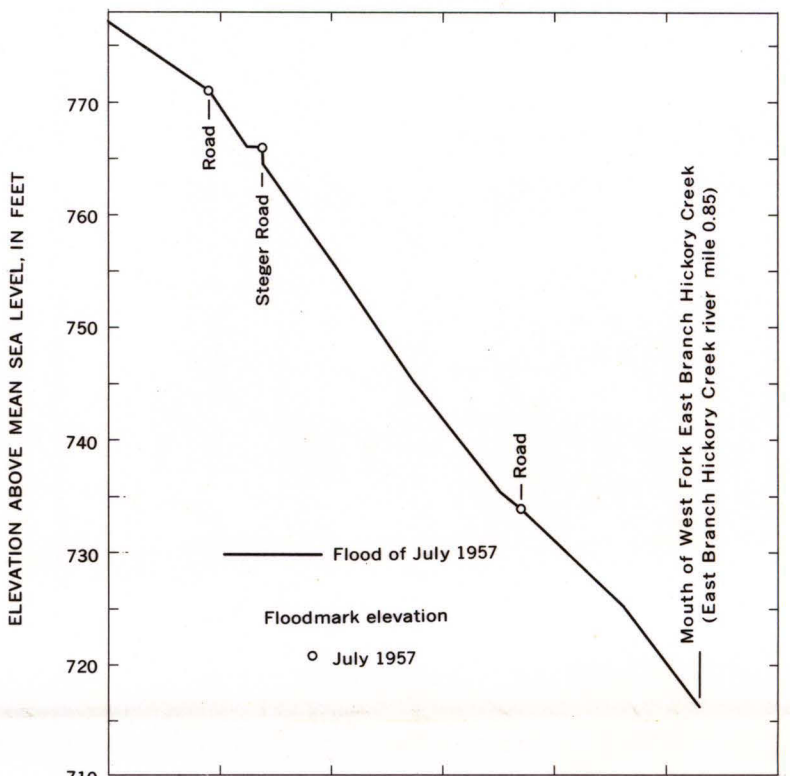


FIGURE 12.—Profile of flood on West Fork West Branch Hickory Creek.

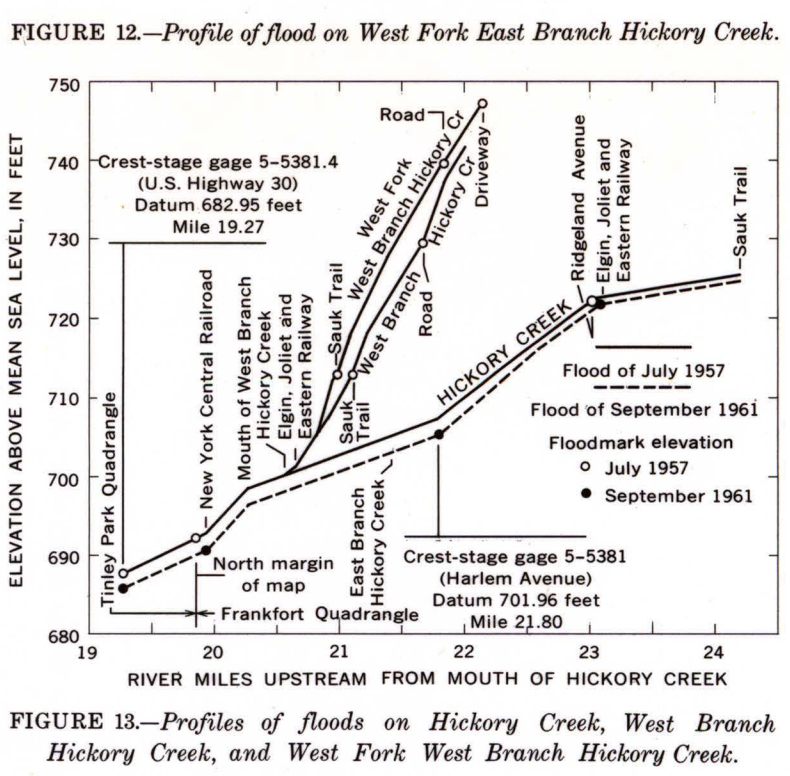


FIGURE 13.—Profiles of floods on Hickory Creek, West Branch Hickory Creek, and West Fork West Branch Hickory Creek.

FLOODS IN FRANKFORT QUADRANGLE, NORTHEASTERN ILLINOIS

By
Roman T. Mycyk
1967