

**FLOODS IN MAPLE PARK QUADRANGLE
NORTHEASTERN ILLINOIS**

Introduction.—This report presents hydrologic data that can be used to evaluate the extent and depth of flooding that affect the economic development of flood plains in the Maple Park quadrangle, northeastern Illinois. It will be useful to the general public, and others responsible for solving existing flood problems and for creating effective flood-control regulations that will minimize the formation of new flood problems. The report will also be useful for preparing building and zoning regulations, locating waste disposal facilities, developing recreational areas, and managing surface water in relation to the ground-water resources.

The approximate areas inundated by floods along streams in the Maple Park quadrangle are delineated on a topographic map. The quadrangle location is shown in figure 1.

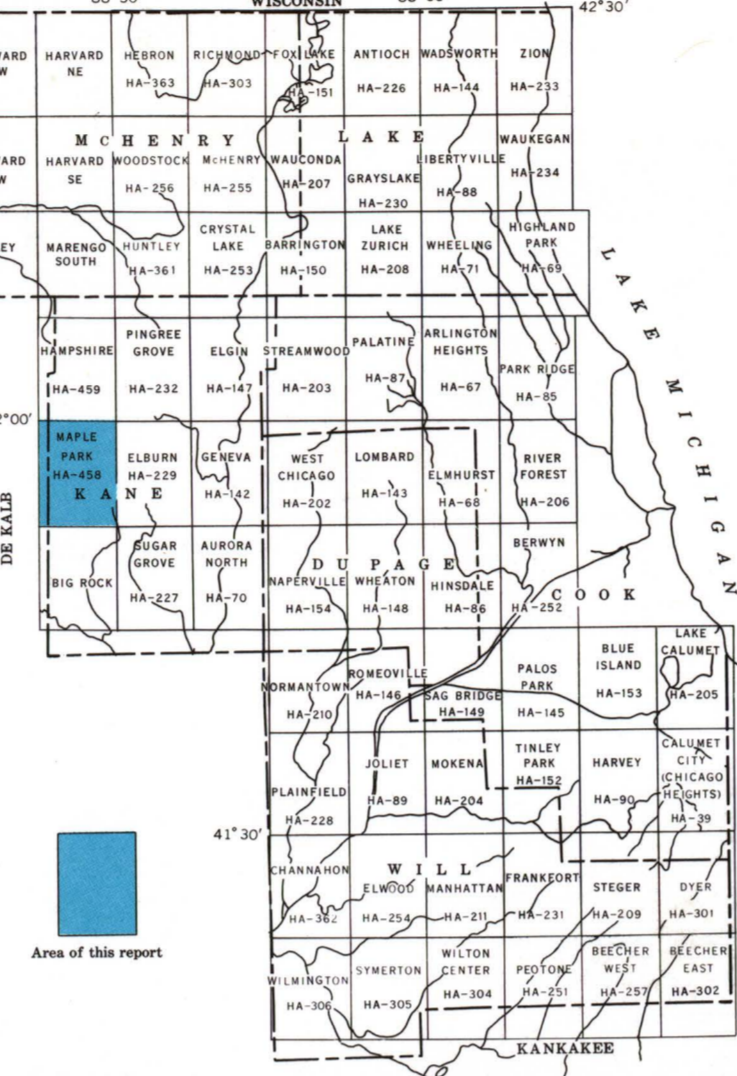


FIGURE 1.—Index map of northeastern Illinois showing location of quadrangle included in flood-hazard mapping program.

Inundated areas for the flood of October 1954 are shown along Union ditch No. 2, Union ditch No. 3, Virgil ditch No. 1, Virgil ditch No. 2, Virgil ditch No. 3, and several unnamed streams.

The flood of October 1954 on streams throughout the Maple Park quadrangle was reported by local residents to be the highest observed in the past 65 years.

Greater floods than the flood whose boundaries are shown on the map are possible. The flood boundaries shown provide a record of historic fact that reflect channel conditions existing when the floods occurred. Changes in channel conditions, waterway openings at highways and railroads, or changes in runoff characteristics of the streams caused by increased urbanization that may take place subsequent to the flood shown on the map could affect the flood height of future floods of comparable discharge. Protective works built after the flood shown may reduce the frequency of flooding in the area but will not necessarily eliminate all future flooding. The inundation pattern of future floods may be affected by new highways and bridges, relocation and improvement of stream channels, and other cultural changes.

The general procedure used in defining flood boundaries was to construct flood profiles from elevations of floodmarks identified in the field and from data available from other agencies. The extent of flooding delineated on the topographic map was derived from the profiles by interpolation between contours (lines of equal ground elevations) and by plotting overflow limits identified during field investigations and surveys. The portrayal of flood boundaries is consistent with the scale of the map (1 inch = 2,000 feet, contour intervals, 5 feet and 10 feet).

There are depressions and lowland areas in the Maple Park quadrangle where surface water accumulates because of inadequate drainage into the streams. Frequency and depth of flooding in these areas are unrelated to the water-surface elevation along the streams. Some areas are flooded only briefly after periods of heavy rainfall or snowmelt, whereas others remain inundated continuously, depending largely upon the rate of evaporation and seepage into the ground. Flood boundaries are shown for all such areas that were detected in this investigation.

Cooperation and acknowledgment.—The preparation of this report is a part of an extensive flood-mapping program financed through cooperative agreements between the Northeastern Illinois Planning Commission and the U.S. Geological Survey. Under previous agreements with the Northeastern Illinois Planning Commission and the Illinois Department of Public Works and Buildings, Division of Waterways, flood maps have been prepared as shown in figure 1.

The total program includes part of Cook County, nearly all of Kane and Will Counties, and all of Du Page, Lake and McHenry Counties. Financial support for the preparation of this report was provided by Kane County through the Northeastern Illinois Planning Commission.

The cooperative program is administered on behalf of the Planning Commission by Matthew L. Rockwell, Executive Director.

This report was prepared by the U.S. Geological Survey under the administrative direction of William D. Mitchell, district chief, and under the immediate supervision of Allen W. Noche, hydrologist-in-charge of the project.

Acknowledgment is made to the Kane County Highway Department and the State of Illinois, Department of Public Works and Buildings, Division of Waterways for furnishing some of the data on which this report is based.

Additional data were obtained from public officials in the area and from field investigations.

Flood height.—The height of a flood at a gaging station usually is stated in terms of gage height, or stage, which is the elevation of the water surface above a selected datum plane. Elevations shown in this report are in feet above mean sea level. Gage heights for crest-stage gages in the Maple Park quadrangle can be converted to elevations above mean sea level by adding the gage height to the appropriate datum of gage listed in the following table.

Crest-stage gage	Station number	Datum of gage above mean sea level (feet)	Drainage area (square miles)
Union ditch No. 2 at Maple Park (Maple Park Road).....	5-4392.1	843.69	3.64
Virgil ditch No. 1: Near Elburn (Francis Road).....	5-4391.8	861.00	4.57
Near Maple Park (Beth Road).....	5-4391.9	846.76	8.53
Virgil ditch No. 2 at Virgil (State Highway 64).....	5-4391.6	860.59	10.3
Virgil ditch No. 3: Near Richardson (Ramm Road).....	5-4391.2	863.44	17.2
At Virgil (State Highway 64).....	5-4391.3	856.16	26.2

Size of the drainage basin for each station also is given in the table. The subbasin divides from which the areas were determined are shown on the flood map. The divides were described in the traditional manner of following the ridge line or highest ground elevation between adjacent streams. Relief in parts of the quadrangle is slight and at times some of the divides may become submerged during floods. When this occurs water may flow in either direction across the divides depending upon the relative elevation of the streams and conveyance of their channels.

Gage height and year of occurrence of each annual flood (highest peak stage in each calendar year) above 742-foot elevation at the gaging station South Branch Kishwaukee River near Fairdale during the period 1940-67 are shown in figure 2. This gaging station is at Iron Road near Fairdale and is 16.2 miles northwest of the Maple Park quadrangle.

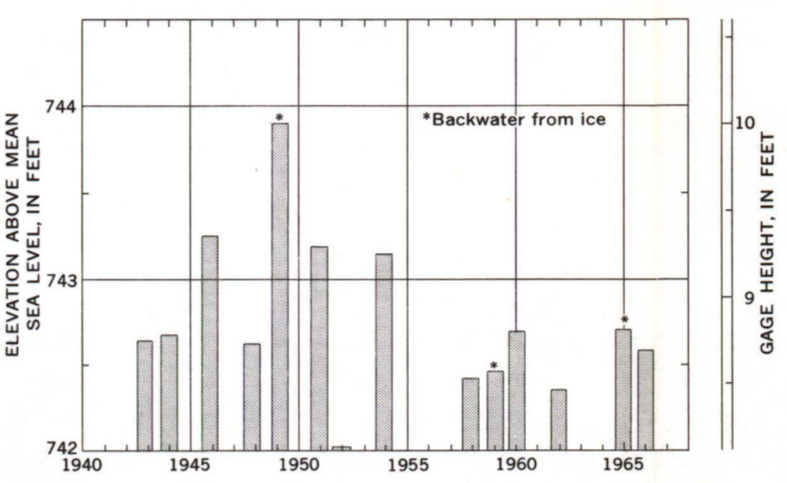


FIGURE 2.—Annual floods above 742-foot elevation, 1940-67, South Branch Kishwaukee River near Fairdale.

Flood discharge.—The rate of discharge of a stream is the volume of flow that passes a particular location in a given period of time. Discharge rates usually are expressed in units of cubic feet per second (cfs). Peak discharge, the maximum discharge attained by a flood, generally occurs at the time of the maximum height (stage) of the flood, but if a stream is affected by variable backwater, the time of the peak discharge may not coincide with that of the maximum stage. For example, backwater from debris or an ice jam may cause a high stage during a period of relatively low discharge.

Flood frequency.—Frequency of floods at the Geological Survey gaging station South Branch Kishwaukee River near Fairdale was derived from streamflow records of this station using log-Pearson Type III method. The general relation between frequency and discharge at the gaging station is shown in figure 3, and the relation between frequency and stage is shown in figure 4. The relation between stage and

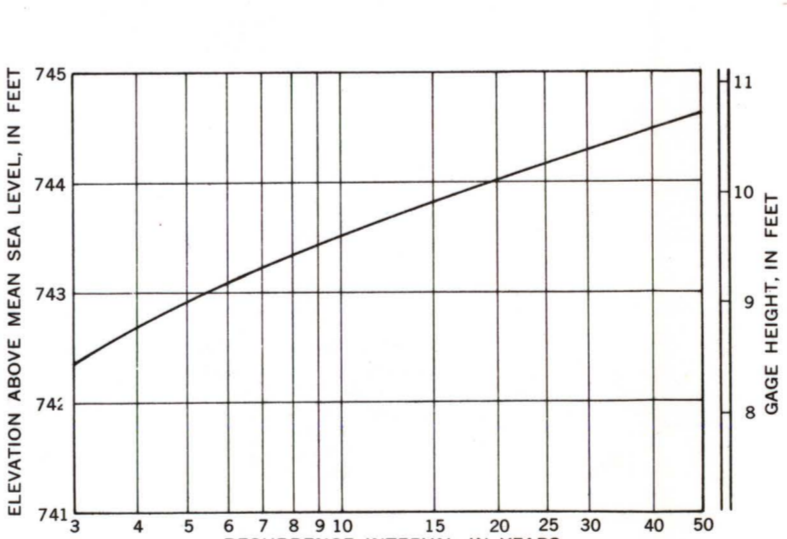


FIGURE 3.—Frequency of flood discharges on South Branch Kishwaukee River near Fairdale.

frequency is dependent on the physical stage to discharge which is affected by changes in relation of conditions of stream channels and constrictions. The frequency curve shown in figure 4 is based on channel conditions existing in 1968. Longer records and future changes in channel conditions may define somewhat different flood-frequency curves. Extrapolation of the curves beyond the limits shown is not recommended.

Recurrence intervals.—As applied to flood events, recurrence interval is the average interval of time within which a given flood will be equalled or exceeded once. Frequencies of floods can be stated in terms of their probabilities of occurrence (virtually, reciprocals of their recurrence intervals for floods with recurrence intervals greater than 10 years). For example, a flood with a 25-year recurrence interval would have a 4-percent chance of being equalled or exceeded in any given year, or a flood with a 50-year recurrence interval would have a 2-percent chance of being equalled or exceeded in any given year. The general relation between recurrence interval and flood height at the gaging station on South Branch Kishwaukee River near Fairdale (fig. 4) is tabulated below:

Recurrence interval (years)	Elevation above mean sea level (feet)
50	744.6
30	744.3
20	744.0
10	743.5
5	742.9
3	742.4

It is emphasized that recurrence intervals are average figures—the average number of years between occurrences of floods that equal or exceed a given magnitude. The fact that a major flood is experienced in one year does not reduce the probability of that flood being exceeded during the next year or even during the next week.

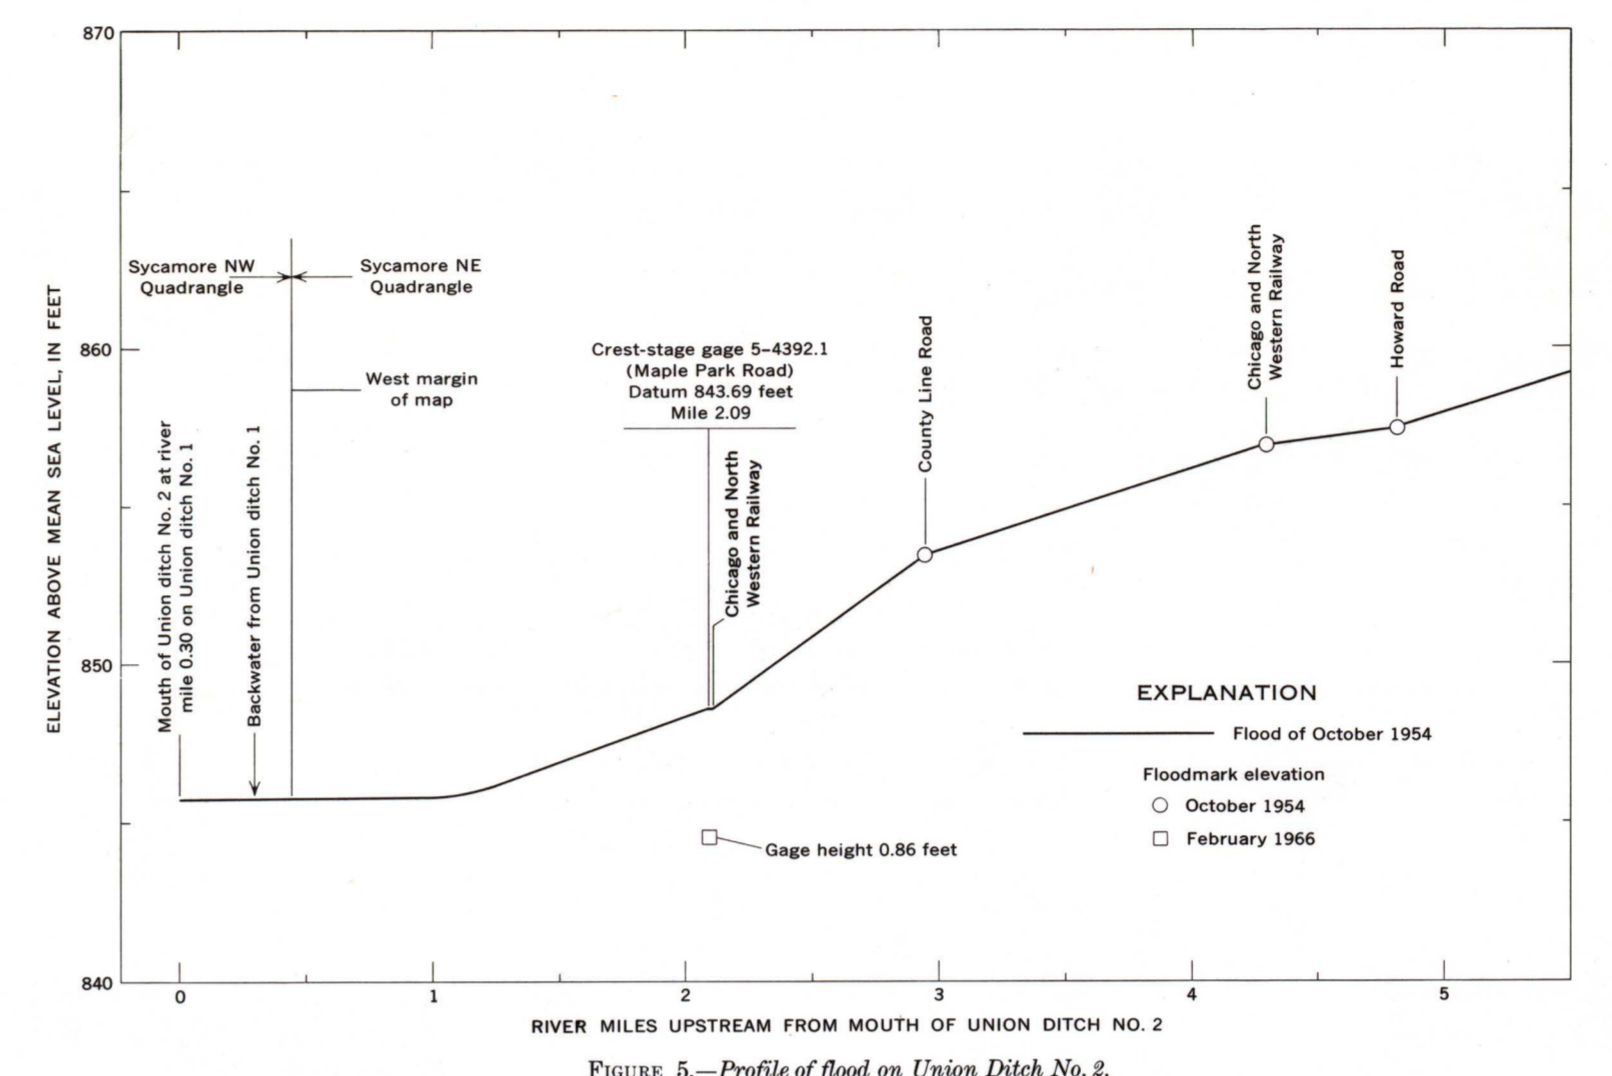


FIGURE 5.—Profile of flood on Union Ditch No. 2.

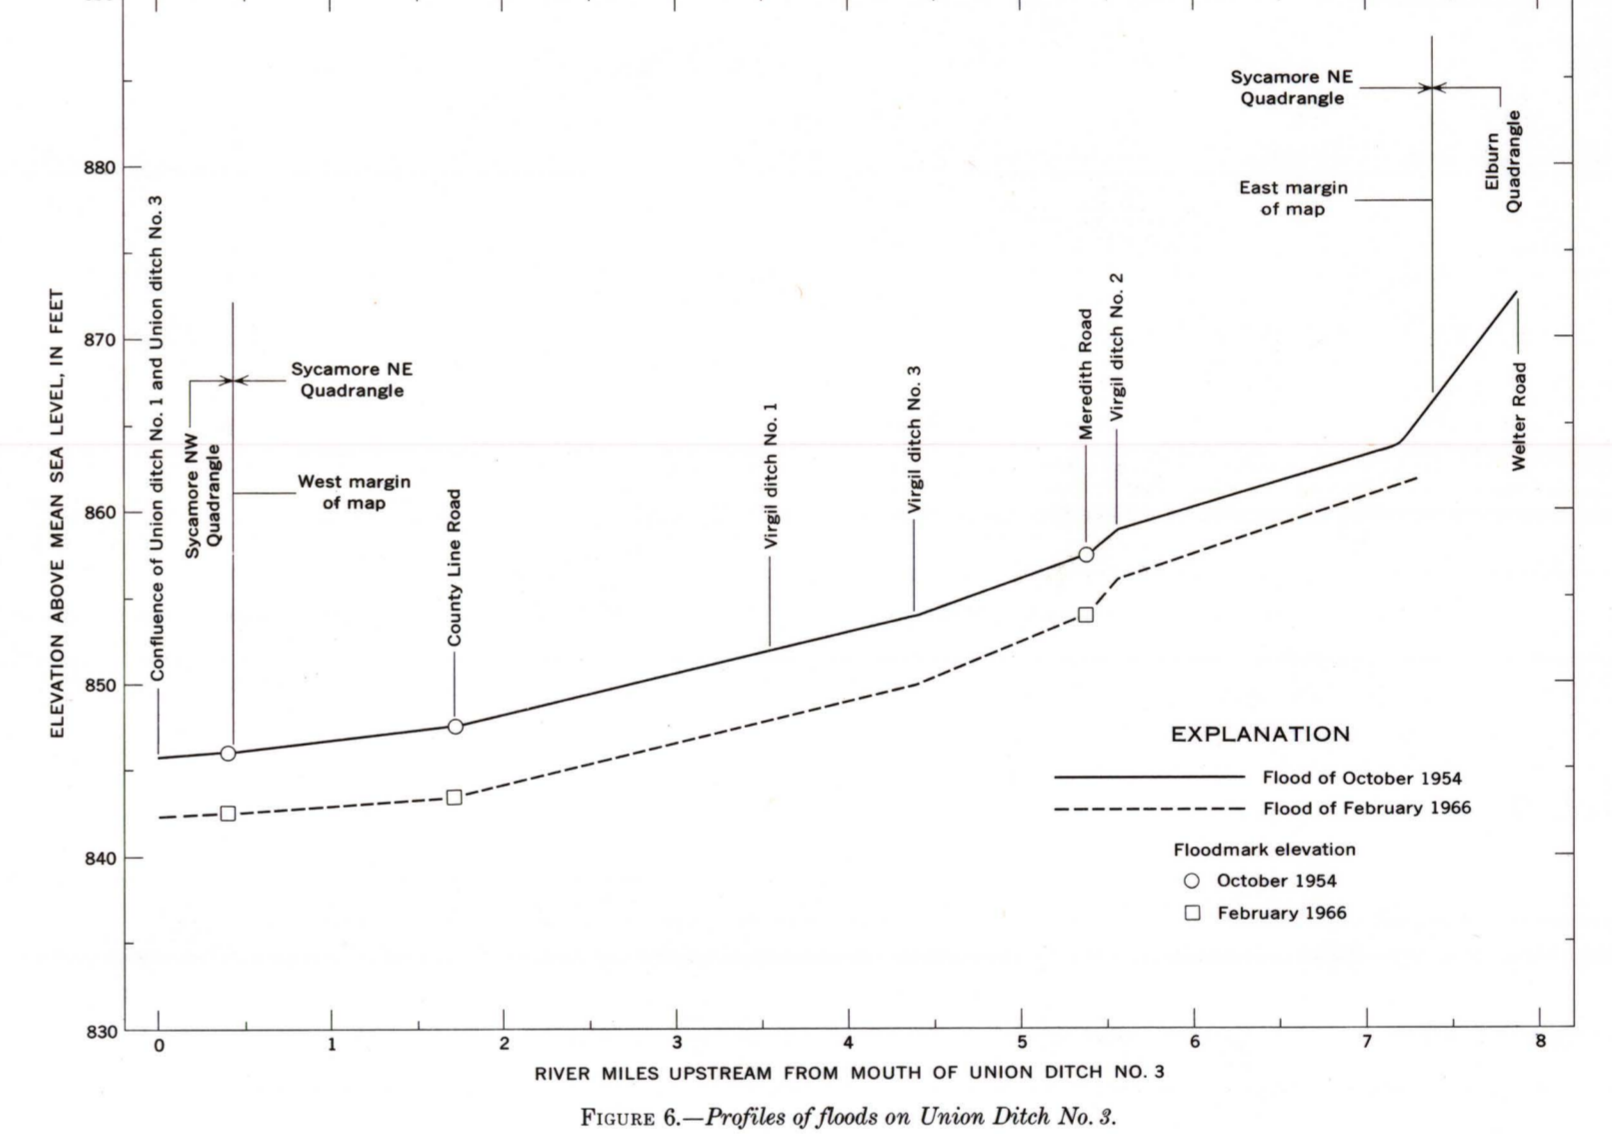


FIGURE 6.—Profile of floods on Union Ditch No. 3.

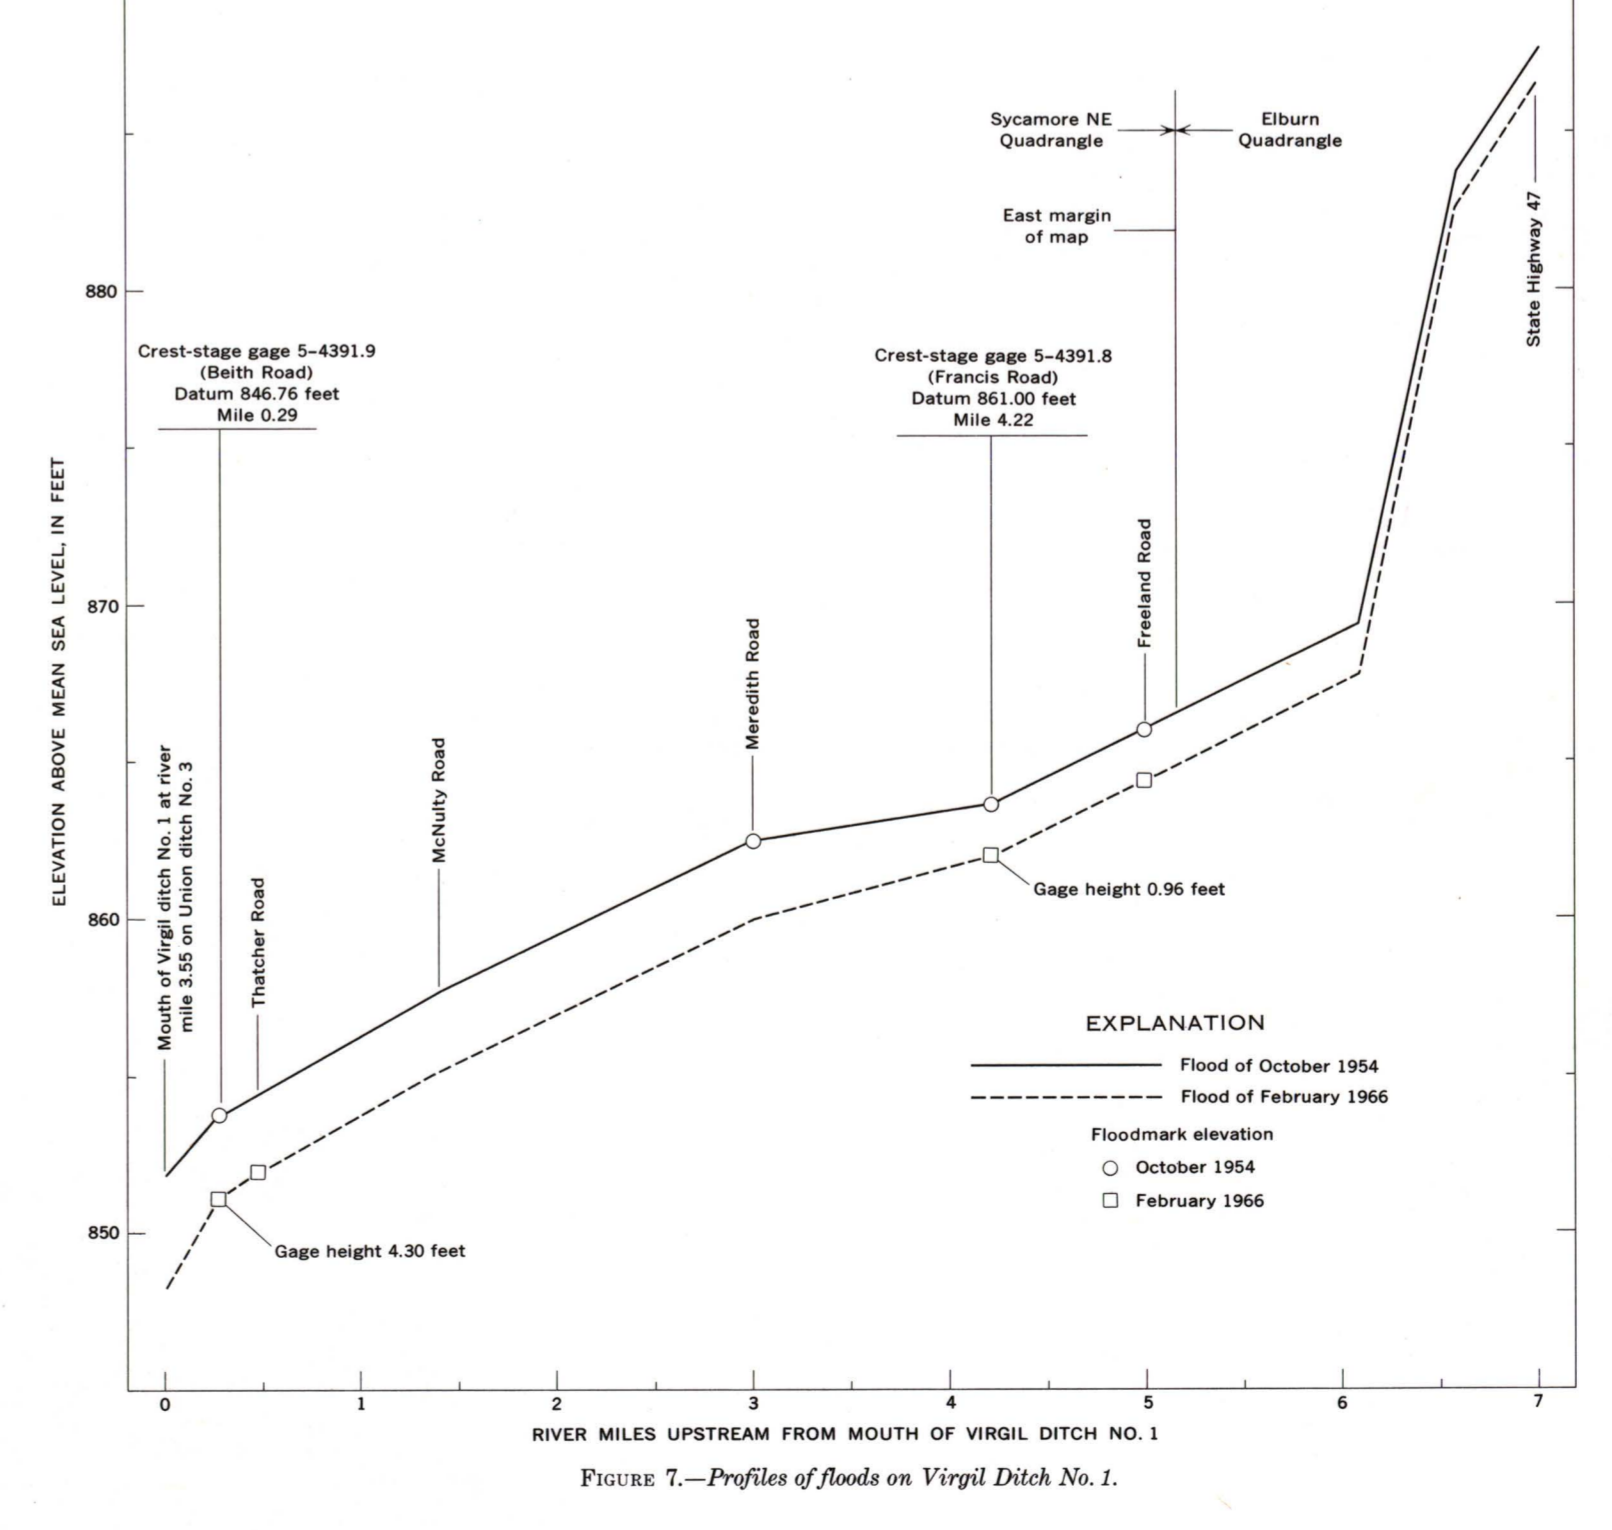


FIGURE 7.—Profile of floods on Virgil Ditch No. 1.

different from that shown on the profiles. An increase in channel capacity through a bridge opening would reduce the flood height on the upstream side. An accumulation of debris at a bridge would reduce the channel capacity and tend to increase the upstream flood height. Channel changes through bridge openings may also change the overflow pattern of future floods.

Flood depths.—Depth of flooding at any point can be estimated by subtracting the ground elevation from the water-surface elevation at the same point, indicated by the profiles in figures 5-9. The approximate ground elevation can be determined from contours on the map, although more accurate elevations can be obtained by leveling from nearby bench marks.

Additional data.—Other information pertaining to floods in the Maple Park quadrangle can be obtained at the office of the U.S. Geological Survey, Oak Park, Ill., and from the following reports:

Daniels, W.S., and Hale, M.D., 1958, Floods of October 1954 in the Chicago area, Illinois and Indiana. U.S. Geol. Survey Water-Supply Paper 1370-B, p. 107-200.

Mitchell, W.D., 1954, Floods in Illinois, magnitude and frequency. Illinois Dept. Public Works and Bldgs., Div. of Waterways, 386 p.

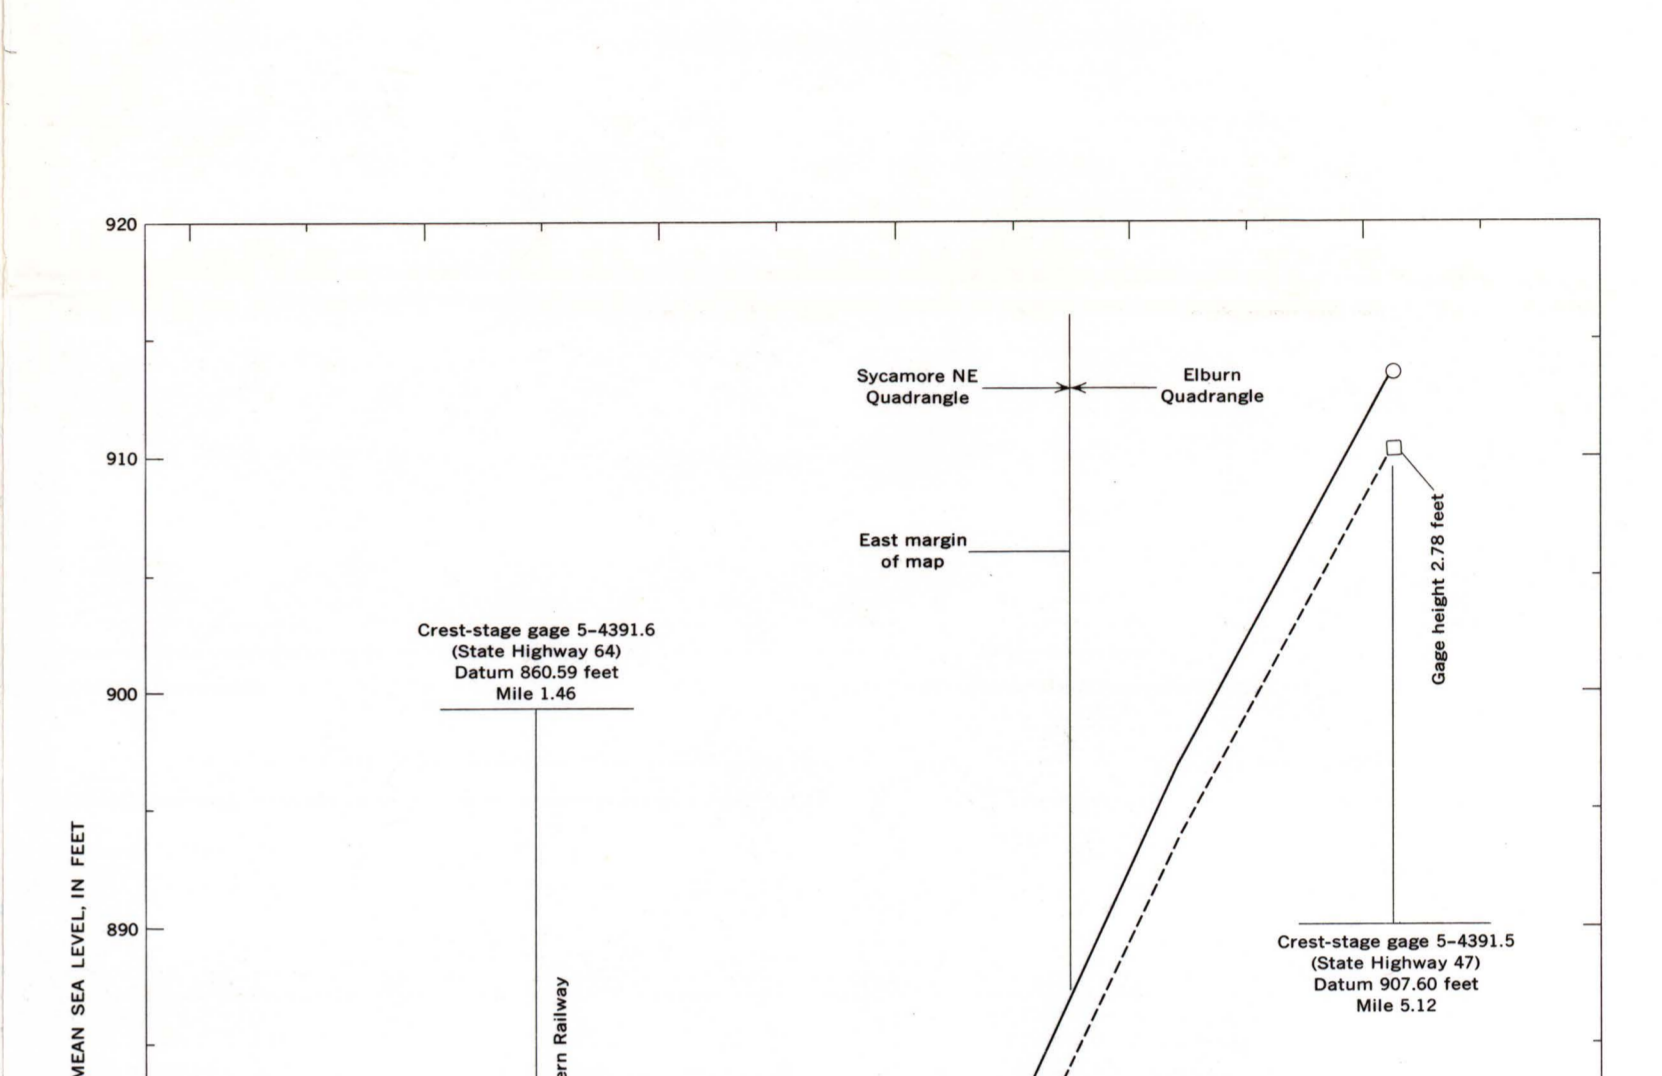


FIGURE 8.—Profile of floods on Virgil Ditch No. 2.

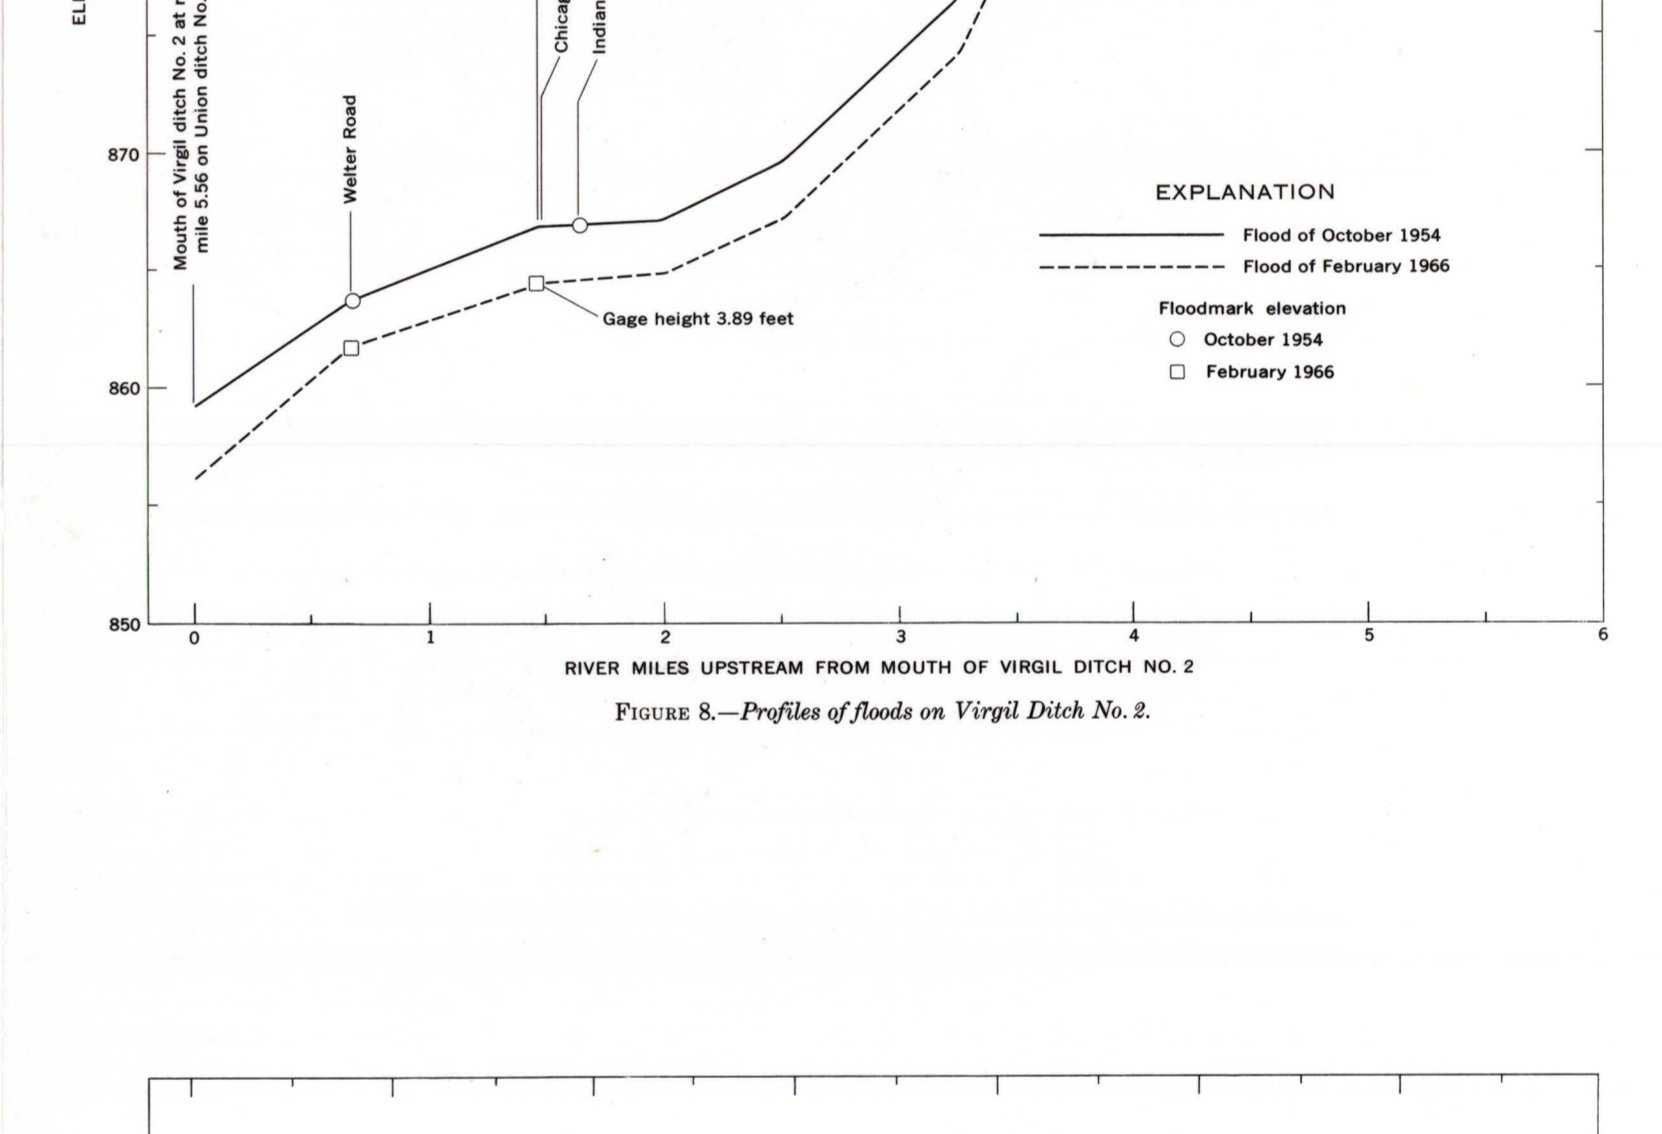


FIGURE 9.—Profile of floods on Virgil Ditch No. 3.

FLOODS IN MAPLE PARK QUADRANGLE, NORTHEASTERN ILLINOIS

By
Roman T. Mycyk and Gerald L. Walter