



The representation of surficial deposits on this map reflects the way in which a geologist, working exclusively with aerial photographs, interpreted the origin of various elements of the present landscape. The deposits shown here have not been examined in the field. However, by viewing overlapping vertical aerial photographs through a stereoscope, the geologist sees a three-dimensional relief model of the ground surface and can study and interpret the origins of landforms with considerable ease. In fact, for mapping surficial deposits, particularly in reconnaissance-type studies, photointerpretation has advantages over both ground observations and laboratory studies of surficial materials. Of course, better information can be provided when all aspects of the study are integrated. These preliminary photointerpretation maps are only the first stage in a detailed study of surficial deposits in the bay region, but they should provide land-use planners with immediately useful information about the regional distribution of landslide and other surficial deposits.

This map indicates the dominant surficial processes that have probably been operative by showing the distribution of different types of surficial deposits. Processes such as weathering, erosion, sedimentation, and the slow as well as rapid downslope movement of earth materials have constantly reshaped the land surface in the past and will continue to in the future, although at varying rates. The processes are interrelated to varying degrees. For example, crustal uplift of the Coast Ranges will lead to increased erosion and downcutting by streams that in turn generally result in increased deposition of sediments in river valleys, lakes, and shoreline areas. Older flood plains and river deposits may be eroded, leaving elevated terrace deposits. In addition, downcutting by streams may cause adjacent slopes to become unstable, thereby increasing the possibility of slope failures.


EXPLANATION



Colluvial deposits and alluvial fan deposits



Alluvial terrace deposits (boundaries dashed and queried where uncertain)



Alluvial deposits



Bedrock (queried where identification uncertain)

Colluvial deposits: unstratified or poorly stratified, unconsolidated to poorly consolidated deposits composed of fresh and weathered rock fragments, organic material, sediments, or irregular mixtures of these materials that accumulate by the slow downslope movement or surficial material predominantly by the action of gravity, but assisted by running water that is not concentrated into channels.

Alluvial fan deposits: irregularly stratified, unconsolidated to poorly consolidated, fan-shaped accumulations of water-laid sediment formed where narrow canyons emerge onto more gently sloping valley floors. The fan sediments are composed of mud, silt, clay, and gravel and where they form a distinct apron near the base of slopes or where they spill from the colluvial deposits and may be interbedded with them.

deposits may move downslope along the axes of ravines and may form fan-shaped deposits where they emerge onto more gently sloping valley floors.

Alluvial terrace deposits: irregularly stratified alluvial deposits of mud, silt, sand, and gravel deposited in stream and river beds and on adjoining flood plains. Alluvial deposits are generally not present sites of sedimentation, but represent older levels of stream deposition and erosion that have been abandoned as the stream continued to erode downward. Some areas may consist only of flat stream-cut surfaces eroded into bedrock without alluvial deposits on them. These areas cannot be easily distinguished from true terrace deposits by photointerpretation.

Note: Because of the difficulties in distinguishing alluvial fan deposits from fan-shaped colluvial deposits on aerial photographs, the two units have not been distinguished on this map.

CHARACTERISTICS OF SURFICIAL DEPOSITS RELEVANT TO LAND-USE PLANNING

potential for slope failures, including increasing slope angles for road or building construction; adding water to marginally stable slopes by watering lawns, improperly handling rain-water runoff and choosing poor sites for septic tank drainfields; adding to the weight of marginally stable slopes by building structures as well as by adding fill foundations; and removing natural vegetation. Thus, slope failure, a natural phenomenon that has occurred throughout the bay region in the past, may be aggravated by improper land use.

The landslide deposits shown on the map may or may not be continuously or intermittently moving at the present time. The potential for continued movement varies greatly and depends on many factors, including the age of the deposits and their previous histories of activity. Some deposits may pose no problem for many types of development, while development on others may offer serious problems. Most landslides take place in areas where landslides have occurred before, and old landslide deposits are commonly reactivated by either natural or artificial means. The materials that form landslide deposits may be so broken up and disturbed that landslide may easily recur, especially if slope angles or moisture contents are changed. Landslide deposits are characterized by (1) small isolated ponds, lakes, and other closed depressions; (2) abundant natural springs; (3) abrupt and irregular changes in slope and mudflows; (4) hummocky irregular surfaces; (5) smaller landslide deposits that are commonly younger and more within older and larger landslide deposits; (6) steep, arcuate scarps at the upper edge of the deposit; (7) irregular soil and vegetation patterns; (8) disturbed vegetation and (9) abundant flat areas that might appear suitable as construction sites. In general, fewer of these characteristics will be noted in the smaller deposits. Detailed ground studies, of course, are required for predicting the future behavior of landslide deposits under changing conditions.

Alluvial deposits:

The surfaces of these deposits generally are relatively flat, with finer grained sediments deposited on flood plain surfaces of the active stream channels. Excellent soils suitable for diverse agricultural activities are found on many older flood plains. These deposits may be water bearing, are commonly porous and permeable, and may compact slightly upon loading. In larger drainage basins, they may be excellent shallow sources of water and of

Man's activities can alter natural physical processes in many ways. Simple acts such as overwatering a lawn or ploughing a septic tank drainfield in ground that is marginally stable may weaken the bedrock and surficial materials enough to induce landsliding. Relatively stable areas may be made unstable as a result of construction activities that involve cutting or oversteepening of natural slopes. Engineers, builders, conservationists, and others concerned with land use must evaluate the potential effects of all types of development, and maps that show the nature and distribution of surficial deposits should provide much of the basic information they need.

This map, then, shows the cumulative effects of various processes that have yielded surficial deposits up to the time the photographs used for photointerpretation were taken. It does not indicate directly areas where processes will be most active, nor does it show the rate at which they will operate. However, knowledge of the history of geologic events is a key to understanding the character of the land. Almost all new landslides, for example, occur in areas with a history of landslide activity.

Irregularly stratified, poorly consolidated deposits of mud, silt, sand, and gravel deposited in stream and river beds and on adjoining flood plains. Alluvial deposits are generally not present sites of sedimentation, but represent older levels of stream deposition and erosion that have been abandoned as the stream continued to erode downward. Some areas may consist only of flat stream-cut surfaces eroded into bedrock without alluvial deposits on them. These areas cannot be easily distinguished from true terrace deposits by photointerpretation.

These deposits have many of the characteristics of alluvial deposits. However, because they are older and lie well above present stream level, they probably contain less water and may be more consolidated than alluvial deposits. The terrace deposits may be subject to slope failures, particularly where adjacent stream undercuts the edge of the terrace. The lowest terrace deposit may still be subject to periodic flooding and sediment deposition, inasmuch as complete abandonment by the stream cannot be determined by photointerpretation.

Colluvial deposits and alluvial fan deposits: Colluvial deposits generally are easily eroded and excavated; they will probably compact under loading and may continue to move slowly downward, particularly the steeper parts. They may be water-bearing, with small springs associated with some. Grading (road construction, etc.), particularly when it results in steeper slopes, may accelerate the rate of downslope movement and produce landslide deposits.

Alluvial fan deposits range in character from very thick, extensive, stream-deposited sands and gravels to thin, small deposits from single mudflows. Some fans include abundant colluvial material, while others contain only alluvial sediments. As a result, porous and permeable gravel-rich layers may alternate with impermeable clay-rich layers. If the gravels are anally extensive, the deposits may be a good shallow source of water. Fan deposits are generally easy to excavate and not very resistant to erosion. Fanning and considerable erosion of the fans can be expected during periods of heavy rainfall. Natural slopes are normally stable, although stream undercutting can produce streambank failure, and some compaction or local subsidence of the fan surface may take place.

construction aggregate. They are probably easy to excavate, with pebble- and cobble-rich layers locally abundant. The surface may be subject to flooding seasonally or less frequently; the active stream channel may alter its course gradually over a long period of time or rapidly during flooding. Migration of the channel can result in erosion, undercutting, and failure of the stream banks if the bank edges slump or fall off into the stream channel.

Alluvial terrace deposits:

These deposits have many of the characteristics of alluvial deposits. However, because they are older and lie well above present stream level, they probably contain less water and may be more consolidated than alluvial deposits. The terrace deposits may be subject to slope failures, particularly where adjacent stream undercuts the edge of the terrace. The lowest terrace deposit may still be subject to periodic flooding and sediment deposition, inasmuch as complete abandonment by the stream cannot be determined by photointerpretation.

Colluvial deposits and alluvial fan deposits: Colluvial deposits generally are easily eroded and excavated; they will probably compact under loading and may continue to move slowly downward, particularly the steeper parts. They may be water-bearing, with small springs associated with some. Grading (road construction, etc.), particularly when it results in steeper slopes, may accelerate the rate of downslope movement and produce landslide deposits.

Alluvial fan deposits range in character from very thick, extensive, stream-deposited sands and gravels to thin, small deposits from single mudflows. Some fans include abundant colluvial material, while others contain only alluvial sediments. As a result, porous and permeable gravel-rich layers may alternate with impermeable clay-rich layers. If the gravels are anally extensive, the deposits may be a good shallow source of water. Fan deposits are generally easy to excavate and not very resistant to erosion. Fanning and considerable erosion of the fans can be expected during periods of heavy rainfall. Natural slopes are normally stable, although stream undercutting can produce streambank failure, and some compaction or local subsidence of the fan surface may take place.

FACTORS AFFECTING MAP ACCURACY

Urbanization: Surficial geologic features can be obscured in urbanized areas by (1) modification of the natural landscape by grading (leveling, cutting, filling, or terracing), and (2) man-made structures that cover the natural landscape. Less than 3 percent of the area included in the Altamont 15-minute quadrangle has been extensively urbanized.

Problems in interpretation: Mapping of surficial deposits by photointerpretation alone presents a number of difficult problems, some of which can be resolved only through field checking. Problems that are especially difficult include: (1) distinguishing terrace-shaped slump-type landslide deposits from alluvial terrace deposits where both are located adjacent to stream courses; (2) recognizing bedrock cropping out beneath surficial deposits, especially where a creek or stream has cut down through the overlying surficial deposits to expose bedrock along the streambed; (3) determining boundaries between adjacent surficial deposits that laterally grade into or interfinger with one another without leaving any easily discernible topographic boundaries, e.g., the downstream projection of alluvial terrace deposits into alluvial deposits; (4) recognizing landslide deposit boundaries—whereas the upslope boundary is commonly defined by an easily recognized scarp, the toe or downslope boundary is seldom well defined and is difficult to locate exactly; (5) recognizing stable masses of bedrock within landslide deposits, especially where the bedrock may appear only as a large block within the surrounding landslide deposit; and (6) distinguishing between irregular or hummocky topography caused either by variations in the erosional resistance of bedrock or by the erosion of landslide deposits.

SELECTED REFERENCES

Geology of the San Francisco Bay region


- Ballley, E. H., ed., 1966, Geology of northern California: California Div. Mines and Geology Bull. 190, 506 p.
- Danahy, E. A., ed., 1969, Urban environmental geology in the San Francisco Bay region: Assoc. Eng. Geologists, San Francisco Sec., Spec. Pub., 162 p.
- Jenkins, F. B., ed., 1951, Geologic handbook of the San Francisco Bay Counties: California Div. Mines Bull. 154, 392 p.
- Radruch, D. H., and Wentworth, C. M., 1971, Estimated relative abundance of landslides in the San Francisco Bay region, California: U.S. Geol. Survey open-file map, scale 1:500,000.
- Rogers, T. H., compiler, 1966, Geologic map of California, Chief P. Jenkins Edition—San Jose sheet: California Div. Mines and Geology, scale 1:250,000.
- Schlocker, J., compiler, 1971, Generalized geologic map of the San Francisco Bay region: U.S. Geol. Survey open-file map, scale 1:500,000.

General references on landslide deposits

- Eckel, E. B., ed., 1958, Landslides and engineering practice: Highway Research Board Spec. Rept. 29, NAS-NRC 544, Washington, D.C., 232 p.
- Flann, P. T., 1970, Environmental geology: conservation, land-use planning, and resource management. New York, Harper & Row, 313 p.
- Leighton, F. B., 1966, Landslides and hillside development, in Engineering geology in southern California: Assoc. Eng. Geologists, Los Angeles Sec., Spec. Pub., p. 149-193.
- Shreve, C. F. S., 1960, Landslides and related phenomena: Paterson, N. J., Pagan Books, 177 p.
- Terzaghi, Karl, 1950, Mechanism of landslides, in Paige, S. M., ed., Application of geology to engineering practice (Berkeley volume): New York, Geol. Soc. America, p. 82-123.
- Zaruba, Quido, and Mencl, Vojtech, 1969, Landslides and their control: Amsterdam, Elsevier Pub. Co., 205 p.

APPENDIX

These illustrations show the nomenclature used to describe landslide deposits and four common types of landslide deposits found in the San Francisco Bay region:

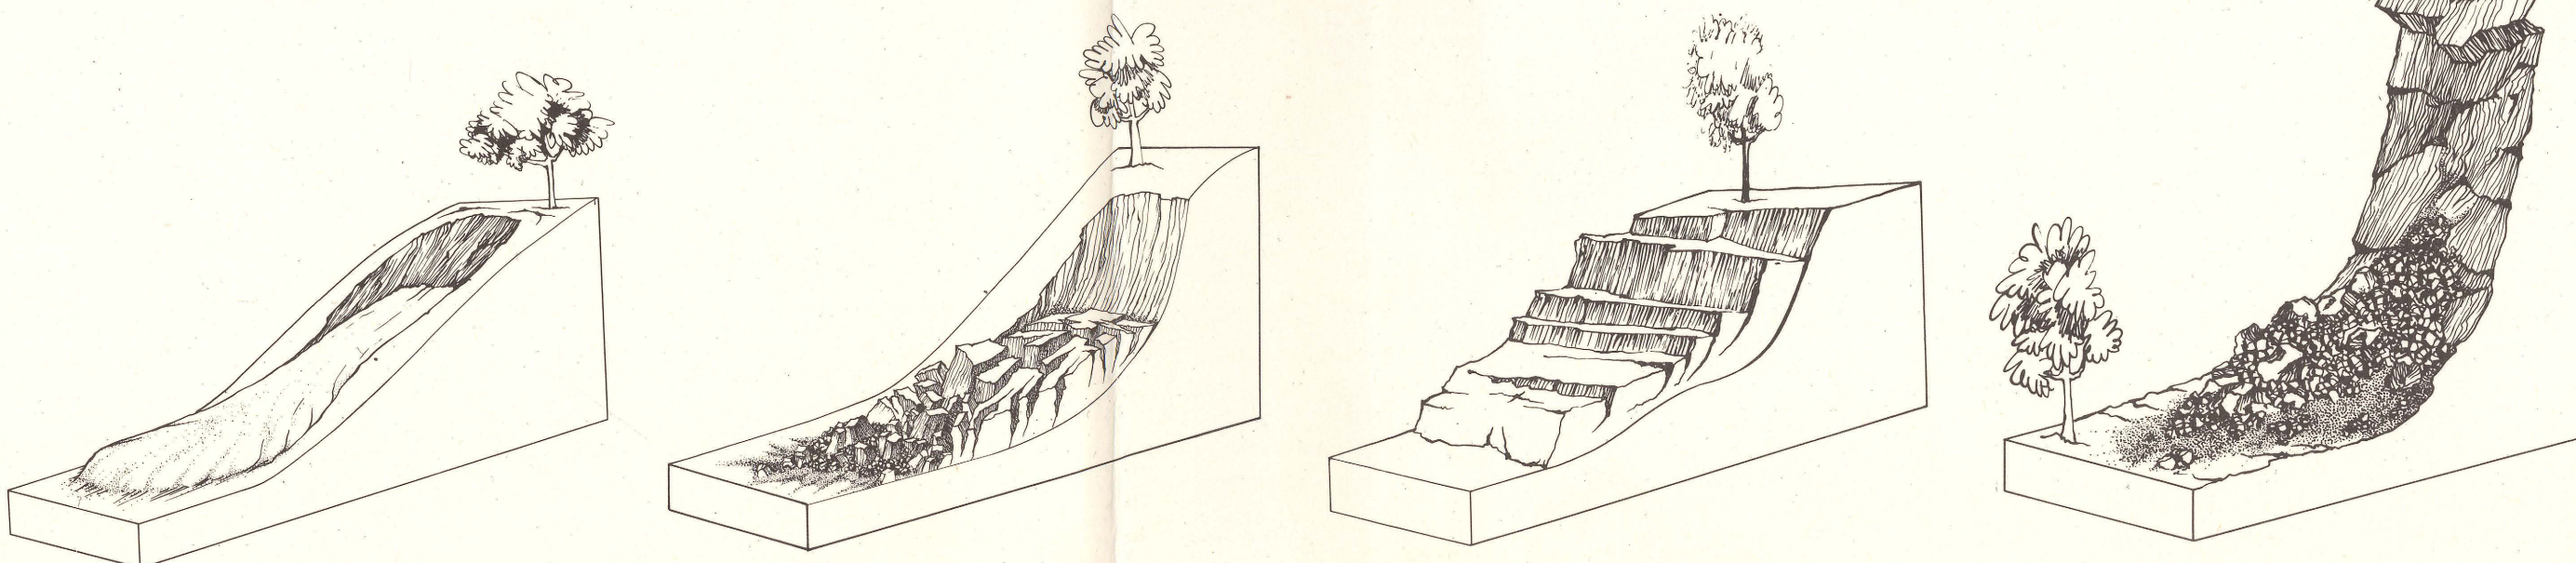

Earthflow: soil and other colluvial materials that move downslope in a manner similar to a viscous fluid.

Debris slide: soil and other colluvial materials that move downslope as a coherent mass on a surface that underlies the deposit.

Slump: coherent or intact masses that move downslope by rotational slip on surfaces that underlie as well as penetrate the landslide deposit.

Rockfall: rock masses that move primarily by falling through the air.

The nine San Francisco Bay region counties lie within a geologically active, young, and dynamic part of the central and northern Coast Ranges of California. Significant movements of the earth's crust are occurring here at the present time, posing numerous problems to urbanization, including some of special concern. Geological processes such as fault movements, earthquakes, land subsidence, landsliding, slow downslope movement of bedrock and surficial materials, coastal and stream erosion, flooding, and sedimentation are all potentially hazardous. Because of these factors, an understanding of the operation of physical processes in the bay region is desirable for harmonious, efficient, and safe land-use planning, particularly now, with greatly expanded pressures for urban growth.

This map presents preliminary information about one aspect of the physical environment necessary to sound land-use planning—the nature and distribution of surficial deposits. Because surficial deposits are common and well developed in much of the bay region, it is useful to know how and why they have formed, as well as what properties they possess. When maps like this are used in combination with other types of environmental information, such as data on soils, bedrock geology, slopes, vegetation, climatic variation, seismic response, and hydrology, it should be easier to arrive at sound decisions regarding the physical aspects of land use. The U.S. Geological Survey is studying many of these factors in the bay region and hopes to provide the community with much of the required information as part of its San Francisco Bay Region Study in cooperation with the Department of Housing and Urban Development.



Landslide deposit larger than approximately 500 feet in longest dimension. Queried where identification uncertain. Arrows indicate general direction of downslope movement.

Landslide deposit approximately 200-500 feet in longest dimension. Queried where identification uncertain. Arrow indicates general direction of downslope movement and is positioned over location of deposit.

Debris composed of fresh and weathered rock fragments, sediment, colluvial material, and artificial fill, or any combinations thereof, that has been transported downslope by falling, sliding, slumping, or flowing. Landslide deposits smaller than approximately 200 feet in longest dimension are not mapped on this map. Complex landslides, which result from combinations of different types of downslope movement, are perhaps the most common type of landslide deposit in the bay region. In particular, landslides are the only materials that move in a different manner than materials at the toe. The landslide deposits shown on this map have not been classified according to either type of movement or type of material on which the deposit is composed. The deposits vary in appearance from clearly discernible, largely unweathered and unsorted topographic features, but only the thicker and more extensive accumulations that are recognizable on aerial photographs have been mapped. In some narrow stream valleys, colluvial deposits include alluvial deposits. Colluvial

General background:

The physical properties and engineering characteristics of the mapped surficial deposits can be inferred from knowledge of the geologic processes that formed them. Thus, with the information provided by this map, preliminary evaluations of the significance of the materials and processes with regard to land-use decisions can be made.

Landslide deposits:

Landslides occur when the pull of gravity on earth materials overcomes their frictional resistance to downslope movement. Slope stability is affected by (1) type of earth materials—unconsolidated, soft sediments or surficial deposits will move downslope easier than consolidated, hard bedrock; (2) structural properties of earth materials—the orientation of the layering of some rocks and sediments relative to slope directions, as well as the extent and type of fracturing and crushing of the materials, will affect landslide potential; (3) steepness of slopes—landslides occur more readily on steeper slopes; (4) water—landsliding is generally more frequent in areas of seasonally high rainfall, because the addition of water to earth materials commonly decreases their resistance to sliding; water decreases internal friction between particles, decreases cohesive forces that bind clay minerals together, lubricates surfaces along which slippage may occur, adds weight to surficial deposits and bedrock, reacts with some clay minerals, causing volume changes in the material, and mixes with fine-grained unconsolidated materials to produce wet, unstable slurries; (5) ground shaking—strong shaking during earthquakes can loosen bedrock and surficial materials, thus making them less stable; (6) type of vegetation—trees with deep penetrating roots tend to hold bedrock and surficial deposits together, thereby increasing ground stability; (7) proximity to areas undergoing active erosion—rapid undercutting and downcutting along stream courses and shorelines makes slopes in these areas particularly susceptible to landsliding.

All the natural factors that promote landsliding are present in the bay region. In addition, man has at times decreased the potential for slope failures by leveling slopes, building retaining walls at the base of slopes, planting trees or seedling forests, as well as practicing soil conservation. However, other types of activities have increased the

SUGGESTIONS FOR MAP USERS

Planning departments and developers:

The density of landslide deposits is a crude measure of the importance of slope failure as an erosional process and, therefore, a measure of the overall slope stability of an area. However, this map cannot be used to determine the probability of future landsliding, primarily because geologic and climatic changes during the past few hundred thousand years have altered slope stability and because the map does not provide detailed information regarding the composition and type of movement of individual landslide deposits. Therefore, the map should not be used as a substitute for detailed site investigations by engineering geologists and soils engineers; areas susceptible to landslide activity should be carefully studied before any development.

Geologists and engineers:

This map has been prepared to provide a regional context for interpreting detailed site investigations and should be used in conjunction with slope maps, bedrock geology maps, soils maps, and other available information. It is not intended as a substitute for site investigations, and its limitations should be clear. Comments regarding its usefulness and accuracy would be appreciated.

Home buyers:

Areas with relatively low densities of landslide deposits probably have good slope stability compared with areas with high densities of landslide deposits. However, landslide deposits less than 200 feet long have not been mapped, and the scale of this map is such that individual buildings cannot be precisely located. In fact, areas mapped as landslide deposits are not necessarily less stable than adjacent areas. The map, therefore, should not be used as a substitute for a report by an engineering geologist or soils engineer, because detailed site investigations are necessary for judgments about the slope stability of individual areas. In addition, other types of surficial deposits may pose construction problems and require investigation.

SOURCE MATERIALS

1949

Vertical aerial photographs taken for the U.S. Geological Survey, scale 1:23,000, were used principally in the preparation of this map (see diagram at left for area of coverage). Two series of photographs were used: (1) GS-U, taken in October 1949, including photograph numbers 1-2-15, 2-16 to 2-38, 2-42, 2-48 to 2-56, 2-77 to 2-86, and 3-81 to 3-96, and (2) GS-V, taken in July 1953, including photograph numbers 1-2-15, 2-16 to 2-18, 2-19 to 2-37, 2-42, and 2-101. In addition, vertical aerial photographs taken in April 1970, scale 1:80,000, were used as a supplement to the larger-scale photographs; these photographs came from the series GS-U(1), and include photograph numbers 1-35 to 1-139 and 1-162 to 1-166.

1953

Vertical aerial photographs taken for the U.S. Geological Survey, scale 1:23,000, were used principally in the preparation of this map (see diagram at left for area of coverage). Two series of photographs were used: (1) GS-U, taken in October 1949, including photograph numbers 1-2-15, 2-16 to 2-38, 2-42, 2-48 to 2-56, 2-77 to 2-86, and 3-81 to 3-96, and (2) GS-V, taken in July 1953, including photograph numbers 1-2-15, 2-16 to 2-18, 2-19 to 2-37, 2-42, and 2-101. In addition, vertical aerial photographs taken in April 1970, scale 1:80,000, were used as a supplement to the larger-scale photographs; these photographs came from the series GS-U(1), and include photograph numbers 1-35 to 1-139 and 1-162 to 1-166.

PRELIMINARY PHOTINTERPRETATION MAP OF LANDSLIDE AND OTHER SURFICIAL DEPOSITS OF PARTS OF THE
ALTAMONT AND CARBONA 15-MINUTE QUADRANGLES, ALAMEDA COUNTY, CALIFORNIA

by
Tor H. Nilsen
1972