The Connecticut Valley Urban Area Project (CVUAP) covers about 5,000 square miles from New Haven and New London, Conn., on Long Island Sound north to Brattleboro, Vt., and Keene, N.H. Major cities within the project area include New Haven and Hartford, Conn., and Springfield, Mass. Commuter traffic to these urban centers reaches almost all parts of the project area. Interstate routes provide major north-south and east-west transportation corridors. Urbanization and industrial development are likely to continue within this central valley area of New England. In order that such anticipated growth be accomplished in an orderly manner and with a minimum of adverse environmental effects, information on the nature and distribution of natural resources will become increasingly important.

The objective of CVUAP is to anticipate this need by providing geologic and hydrologic information to aid in planning and resource management. This information is in the form of maps, each presenting a single resource characteristic, or combination of related characteristics of the land surface, earth materials, or water resources at a common scale and in a simplified format. This is one in a series of maps showing one of the geologic or hydrologic characteristics of the map area.

Regional and local planners and other decision makers responsible for land use and resource management, including landowners, developers, and consultants should find these maps helpful in landuse analysis. Because statutory regulations, technological capabilities, available funding, and local land-use priorities vary from place to place, and can be expected to change with time, these maps are designed to provide a resource-data base with maximum flexibility for long-term usefulness. The maps can be used in various combinations, as in a series of overlays, according to the specific needs of a partticular planning problem. As planning criteria change, the selection of pertinent resource-characteristic maps can be adjusted to meet the changing needs.

CVUAP maps, or maps derived from them, are not intended to replace onsite investigations. The maps can be used, however, to identify areas of potential interest for a particular land use. These areas can then be the subject of detailed site evaluation.

EXPLANATION

The units on this map indicate the first material of substantial thickness (generally greater than 3 feet) encountered beneath the soil layer. The soil layer (commonly a foot or two thick) is not mapped. Other materials, different in composition, may underlie each map unit (see cross sections) or may occur as minor lenses within each map unit.

Particle sizes range from 100 percent coarse to 50 percent coarse and 50 percent sand-sized. Locally contains minor amounts of fine particles

GRAVEL

sg

SAND AND GRAVEL

Particle sizes range from 50 percent coarse and 50 percent sand-sized to 25 percent coarse and 75 percent sand-sized. Includes deposits in which layers of well-sorted sand a few inches thick are interbedded with thin layers of well-sorted gravel; also includes poorly sorted deposits in which sand and gravel are mixed and occur in layers several feet thick. Locally contains minor amounts of fine particles

Particle sizes range from 25 percent coarse and 75 percent sand-sized through 100 percent sand-sized to 50 percent sand-sized and 50 percent fine. Locally contains minor amounts of fine particles

FINE DEPOSITS particle sizes range from 50 percent sand-sized and 50 percent fine to 100 percent fine; includes very fine sand, silt, and clay. May occur as regularly bedded, alternating, discrete layers of silt with some sand and clay or as thick, massive beds of clay with only minor amounts of sand and

TILL (HARDPAN)

silt. May also be poorly sorted, very fine sand, silt, and clay. Locally contains scattered stones

Poorly sorted mixture of large and small stones with sand-sized and fine particles in varying proportions. Some till, averaging less than 10 feet thick, is sandy, loose, and very stony; other till, commonly more than 10 feet thick, is less sandy, less stony, and very compact. Where these tills occur together, the loose, sandy till is always on top. The compact till forms the bulk of many smooth elongate hills (drumlins) even where the sandy till is exposed at the surface.

SWAMP DEPOSITS

Fine and sand-sized particles commonly mixed with partly decomposed organic material in poorly drained areas. Locally contains scattered stones

> sr SLIDE ROCK (TALUS)

Large angular rock fragments at the base of cliffs; locally contains organic matter and silt

Gaf ARTIFICIAL FILL

Areas that have been filled for highways, solid-waste storage, and other major construction af, predominantly earth materials or undifferentiated fill

BEDROCK (LEDGE) OUTCROPS

aft, predominantly trash

Areas without a substantial thickness of unconsolidated material

DEVELOPED LAND

Areas where natural conditions have been extensively altered by man; limits of altered land are unknown. Within these areas cut and fill associated with building construction, parking areas, and general grading is widespread and manmade fill of variable thickness and extent commonly overlies the natural materials shown on the map


SELECTED WATER BODIES

In general, only water bodies larger than five acres in area, or streams wider than 200 feet are outlined and have a letter symbol

Areas without a substantial thickness of unconsolidated material are shown in black.

The map is intended to serve as an aid in reconnaissance evaluation of unconsolidated materials and can be used to identify areas of potential interest. The map should NOT be used as a substitute for onsite investigations.

MATERIALS CLASSIFICATION

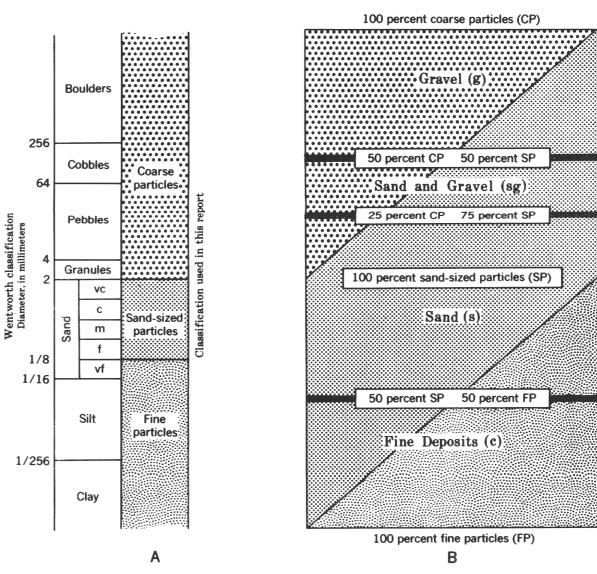

Particle sizes, as defined by the Wentworth classification (Wentworth, 1922), are grouped into three classes: coarse, sand-sized and fine particles (A). Coarse particles include all sizes larger than 2 mm (granules, pebbles, cobbles, and boulders). Sandsized particles include all sizes ranging from 2 to 1/8 mm (very coarse, coarse, medium, and fine sand). Fine particles include all sizes smaller than 1/8 mm (very fine sand, silt, and clay). Very fine sand is included in this latter class because it commonly is associated with finer materials, and because very fine sand, silt, and clay are similar when water soaked and under compression or shear.

Most unconsolidated materials are mixtures of the particle-size classes. The map units gravel, sand and gravel, sand, and fine deposits, therefore, are defined by percentages of each class size present (B). The map unit gravel is a mixture of coarse particles and sand-sized particles containing 50 percent or more coarse sizes. The map unit sand and gravel is a mixture in which coarse particles range from 50 to 25 percent and sand-sized particles range from 50 to 75 percent. The map unit sand is a mixture of particle sizes ranging from 25 percent coarse and 75 percent sand-sized particles through 100 percent sand-sized particles to 50 percent sand-sized and 50 percent fine particles. The map unit fine deposits contains more than 50 percent fine particles.

Materials mapping involves a visual estimate of particle-size distribution in a deposit by the field geologist. Percentages of particle sizes therefore may vary somewhat from place to place beyond the limits set forth in the definition above. Minor amounts of particle sizes other than those defined for each map unit may also occur locally in some deposits.

Some map units, such as till and swamp deposits commonly contain such a wide range of particle sizes in such variable proportions that they have not been included in this material classification. These map units are described separately in the explanation.

Unconsolidated materials are nonrenewable resources, composed predominantly of sand, gravel, silt, and clay. These materials cover large areas in most regions and consequently are the earth materials most commonly involved in our everyday affairs. They must be used as necessary, but they should not be wasted and should, therefore, be an important consideration in many landuse decisions.

The nature of the unconsolidated materials and the slopes on which they lie determine the characteristics of agricultural soils. The characteristics of unconsolidated materials can also determine: 1) suitability for construction materials, 2) engineering properties, and 3) capability for effective waste disposal. The three-dimensional distribution of unconsolidated materials below the water table is a critical factor in the occurrence and availability of ground water. The shape of the land in areas underlain by unconsolidated materials reflects the physical properties and origin of these materials and provides an important aesthetic element in natural settings.

REFERENCES

Randall, A. D., 1970, Surficial geologic map of the Tariffville quadrangle, Connecticut-Massachusetts: U.S. Geol. Survey Geol. Quad. Map GQ-798. Wentworth, C. K., 1922, A scale of grade and class terms for clastic sediments: Jour. Geology, v. 30, p. 377-392.

EAST 1000 1000 900' 800' 800 700' 700 600' 600 500' -500 Bedrock (ledge) 400' -400 300 300 200' Bedrock (ledge) 100 SEA LEVEL SEA LEVEL Generalized geologic section across southern part of map area -100 VERTICAL EXAGGERATION × 8 1000 EAST -1000 900 - 900 **80**0' - 800° 700' -- 700′ 600'-- 600' 500'-- 500' 400'-- 400' 300 - **3**00' 200 200 Bedrock (ledge) 100 Bedrock (ledge) 100 SEA LEVEL SEA LEVEL -100 -100′ -200 Generalized geologic section across southern part of map area -200 VERTICAL EXAGGERATION