


This map shows the relative amounts of soil and hard bedrock within the upper 6 feet (1.8 m) of the land surface. (See schematic section.) It provides information useful for broad-scale land-use decisions. The map is based on reconnaissance field studies and aerial-photograph interpretation. The depth of soil and partly weathered rock was measured directly in roadcuts and other excavations and was estimated from seismic profiles in areas of few or no excavations or outcrops. Secondary characteristics of map units, such as percentage of outcrop in a given area, steepness of slope, type and amount of vegetation cover, and general appearance of the landscape, were used in drawing the boundaries between map units. Localities were assigned to the different map units by field inspection; lines separating the different map units were then drawn by aerial-photograph interpretation and were transferred photogrammetrically to the base map.

The bedrock geology of this area, including bedrock types and orientation of structural features, is shown on the geologic maps of the Morrison quadrangle by Scott (1972), the Evergreen quadrangle by Sheridan, Reed, and Bryant (1972), and the Squaw Pass quadrangle by Sheridan and Marsh (1976). The old gravel deposits (patterned), landslides (screened), and some of the surficial deposits delineated on this map are taken directly from the reference maps.

The U.S. Geological Survey has initiated a program of geologic and hydrologic studies of the Front Range Urban Corridor. This study of mountain soils is part of that ongoing program.

This map is not intended to replace onsite inspection of individual sites for specific purposes.

The readability of this map can be enhanced by coloring the different map units: AI, yellow; MS, brown; SR, orange; RS, green, and MR-red.

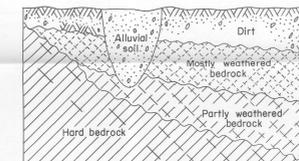

SCHEMATIC SECTION SHOWING RELATIONS BETWEEN DIFFERENT SURFICIAL MATERIALS AND BEDROCK

"Soil" is used here to include all unconsolidated or partly weathered material over hard bedrock.

"Dirt" is the upper part of the "soil" and here refers to an amorphous mixture of sand, silt, clay and rock fragments above weathered bedrock. The upper part of the dirt commonly contains organic matter.

Mostly weathered bedrock is "rotted," and fragments of it can be crushed or broken by hand. Weathered bedrock still retains its original structure including such features as foliation, layering, minor folds. Chemical weathering has produced moderate yellowish- or reddish-brown colors.

Partly weathered bedrock is firm but can be dug with a pick. Fragments can be broken with considerable effort by hand. When hit with a hammer makes a thud rather than a metallic ring like fresh rock. Chemical weathering has produced light-brown and yellow colors.

REFERENCES


Pierce, K. L., and Schmidt, P. W., 1975a, Reconnaissance map showing relative amounts of soil and bedrock in the mountainous part of the Eldorado Springs quadrangle, Boulder and Jefferson Counties, Colorado: U.S. Geol. Survey Misc. Field Studies Map MF-695.

Pierce, K. L., and Schmidt, P. W., 1975b, Reconnaissance map showing relative amounts of soil and bedrock in the mountainous part of the Raisin Buttes quadrangle and adjoining areas to the east and west in Jefferson County, Colorado: U.S. Geol. Survey Misc. Field Studies Map MF-699.


Scott, G. R., 1972, Geologic map of the Morrison quadrangle, Jefferson County, Colorado: U.S. Geol. Survey Misc. Geol. Inv. Map I-790-A.

Sheridan, D. W., Reed, J. C., Jr., and Bryant, Bruce, 1972, Geologic map of the Evergreen quadrangle, Jefferson County, Colorado: U.S. Geol. Survey Misc. Geol. Inv. Map I-786-A.

Sheridan, D. W., and Marsh, S. P., 1976, Geologic map of the Squaw Pass quadrangle, Clear Creek, Jefferson, and Gilpin Counties, Colorado: U.S. Geol. Survey Geol. Quad. Map GQ-1337 (in press).

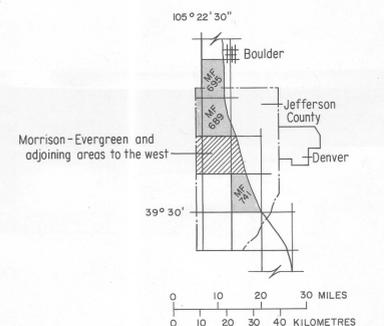

Index of U.S. Geological Survey Miscellaneous Field Studies Maps on mountain soils in the Front Range Urban Corridor, Colorado

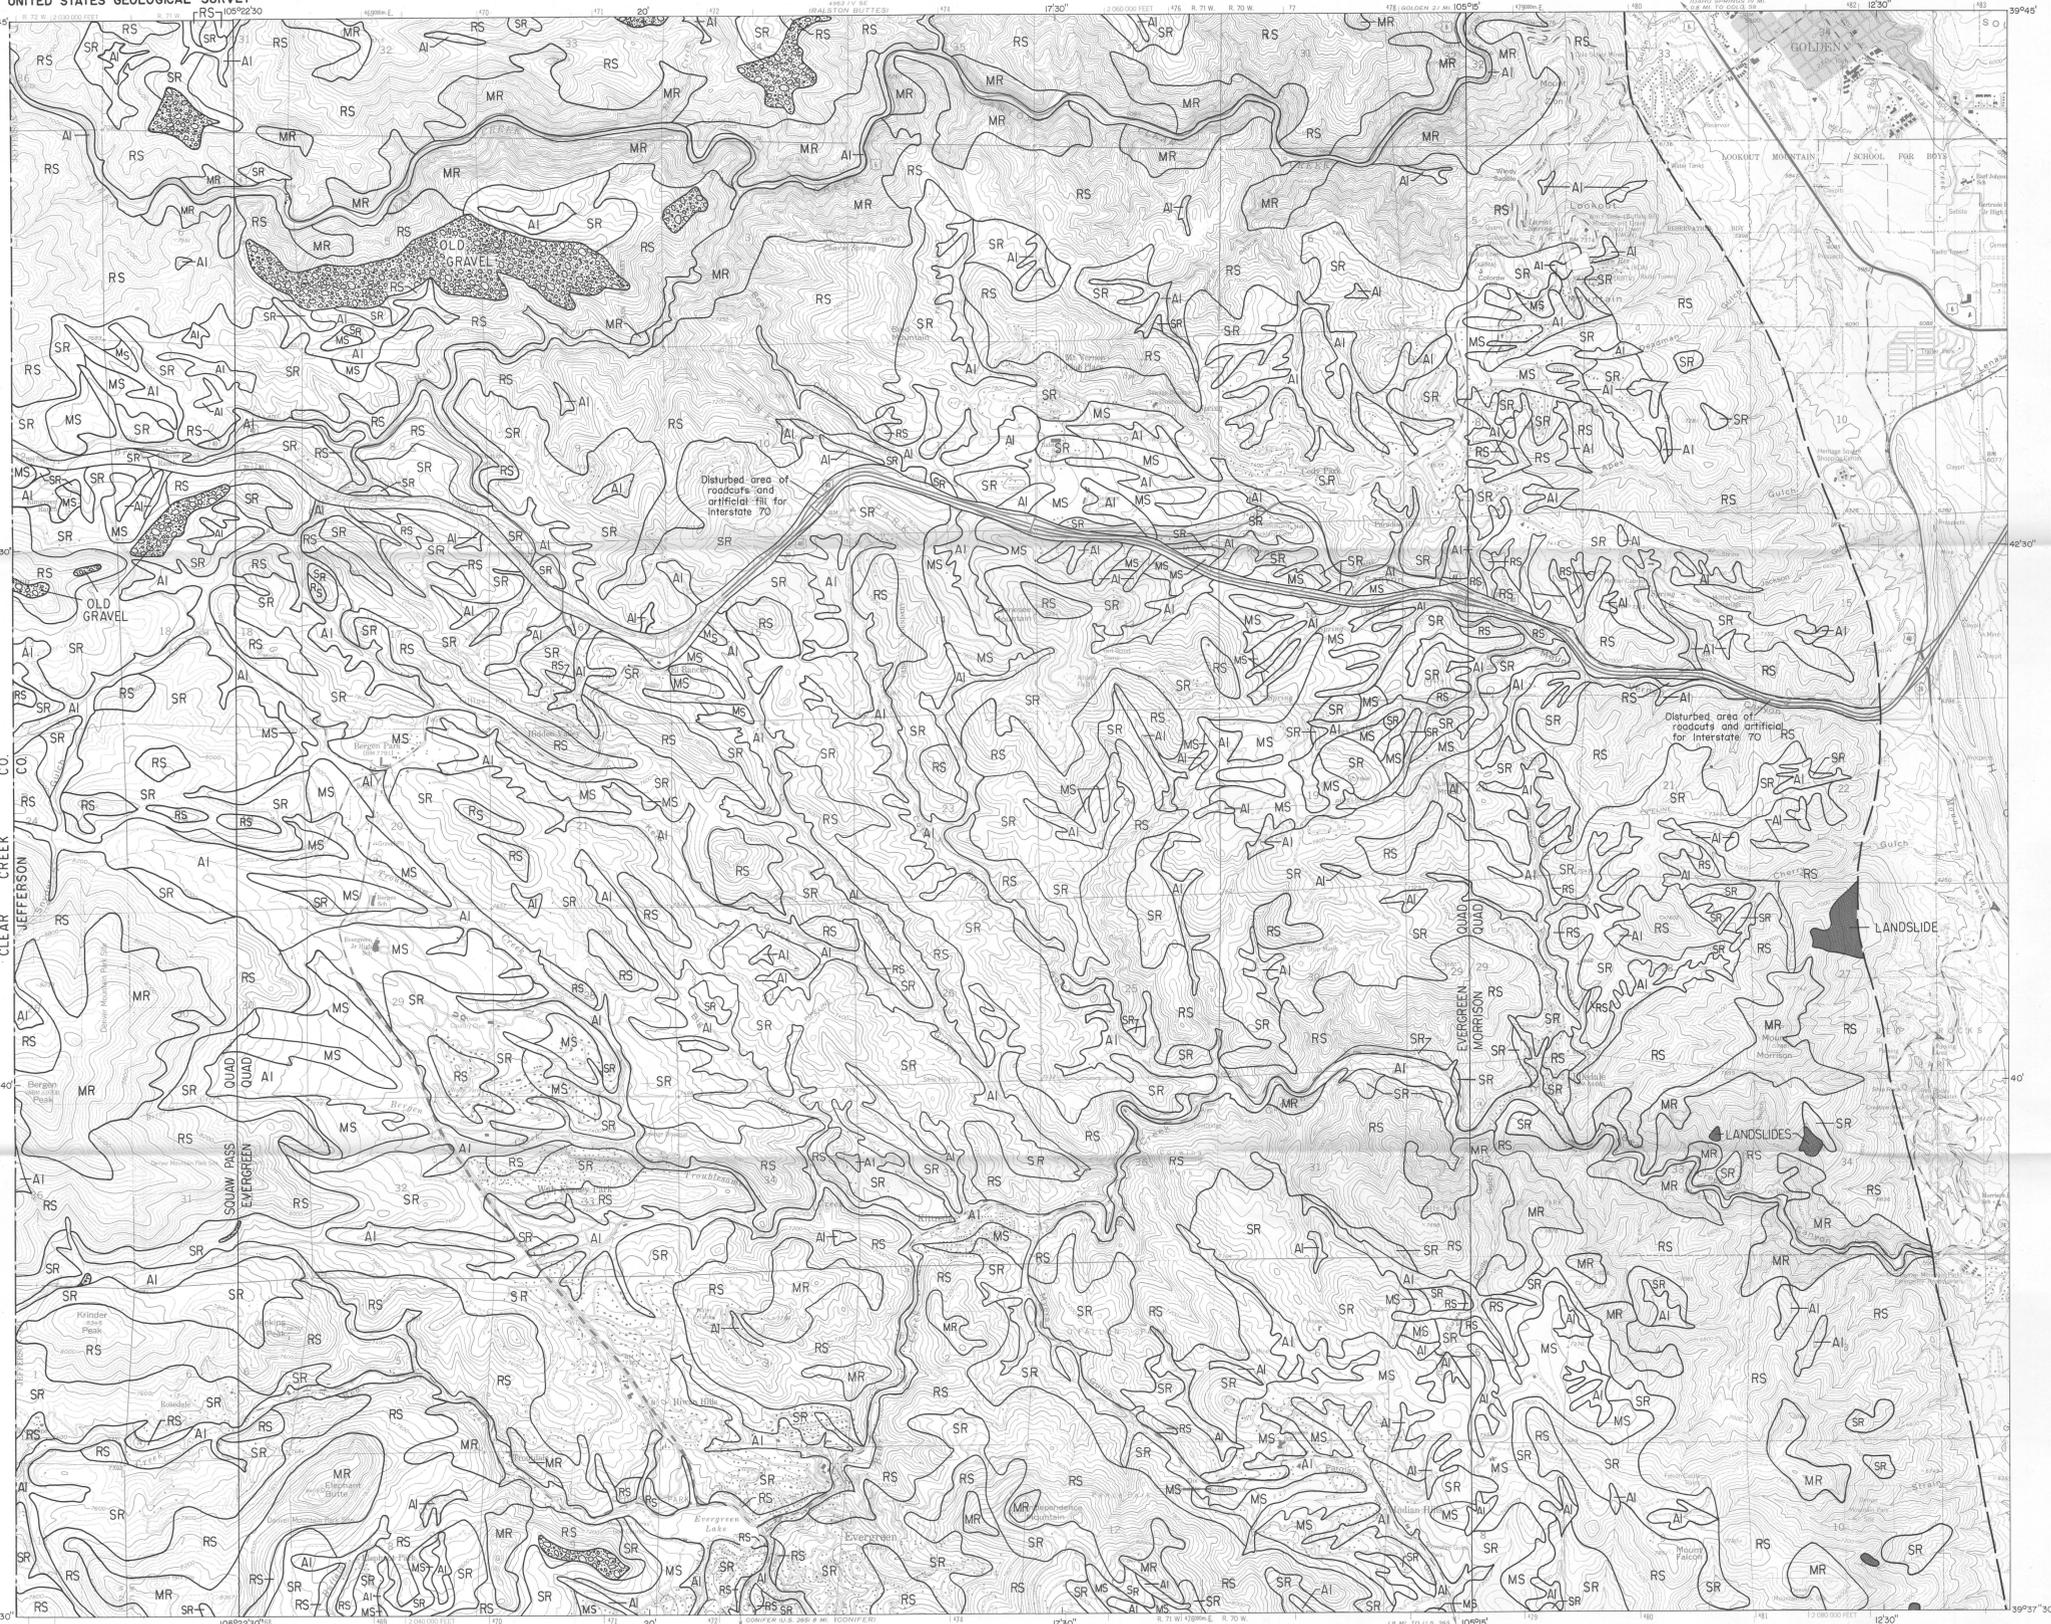

Base from U.S. Geological Survey, Squaw Pass, 1957; Evergreen, 1965, photorevised 1971; and Morrison, 1965, photorevised 1971. SCALE 1:24,000. Geology mapped in 1974-75.

MAP UNIT	DESCRIPTION	LANDSCAPE CHARACTERISTICS	RELATIVE CONSTRAINTS REGARDING SEPTIC SYSTEMS WITH LEACH FIELDS	RELATIVE EASE OF EXCAVATION IN UPPER 6 FT (1.8 M)
AI Alluvial soil	Alluvial soil 5 ft (1.5 m) to more than 10 ft (3 m) thick with variation in average grain size depending on topographic position. In small upland basins consists primarily of silt, sand, and clay, which grades marginally into colluvium containing angular rock fragments. Beneath valley floors along major drainages, the upper 1-4 ft (0.3-1.2 m) generally is silty sand which overlies coarse sand and gravel, and at the base of valley slopes commonly includes colluvium with angular rock fragments. Fine-grained alluvium is commonly rich in organic matter.	In upland areas, gently sloping valley bottoms are cut locally by small steep-walled gullies; lush grassy vegetation. On valley floors adjacent to larger drainages, narrow sinuous flats support coniferous and deciduous trees, shrubs, and grasses.	WATER-TABLE CONSTRAINTS--Although the unconsolidated materials in this area are easily excavated for septic systems with leach fields, the seasonal rise of the water table and local inundation of the surface make this area one of high potential constraint. Slopes are gentle. Only after careful site evaluation, especially during infiltration of the spring snowmelt, can this area be considered safe for septic systems with leach fields. Along major valleys, septic systems with leach fields may drain through highly permeable alluvial-gravels and contaminate nearby streams.	EASY--Hard bedrock absent at or near the surface, making most shallow excavations easy. Machinery can get mired in areas of seasonally wet ground, especially in humus-rich sediment.
MS Mostly soil	More than 70 percent of area is covered by dirt and weathered bedrock to a depth of at least 6 ft (1.8 m). The dirt at the surface averages 2-4 ft (0.6-1.2 m) in thickness. It generally overlies at least 3 ft (0.9 m) of mostly weathered bedrock which, in turn, overlies at least 2 ft (0.6 m) of partly weathered bedrock, which grades down into hard bedrock. This map unit includes scattered outcrops of hard bedrock (pegmatite dikes, granitic core-stones, quartzose metamorphic rocks, and other rocks).	Gently rolling to nearly flat slopes covered mostly by grass and locally, widely spaced coniferous trees. Scattered sparse bedrock outcrops, mostly pegmatite dikes, locally protrude through the vegetation.	FEWEST CONSTRAINTS--Fewest geologic constraints for septic systems with leach fields, except for possible water-table situations where sites near local drainages may be seasonally saturated, especially following spring snowmelt. Detailed site study should be made to determine if seasonal saturation will be a problem. Constraints are fewest because hard bedrock is only locally present within 6 ft (1.8 m) of ground surface and because slopes are gentle. With proper planning, this area can accommodate the greatest, but still limited, density of septic systems with leach fields.	EASY--Hard bedrock generally absent at or near the surface, making most shallow excavations easy.
SR Soil with subordinate rock	From 40-70 percent of area is covered by dirt and weathered bedrock to a depth of at least 6 ft (1.8 m). The dirt at the surface averages 1-3 ft (0.3-0.9 m) in thickness. It generally overlies at least 4 ft (1.2 m) of mostly to partly weathered bedrock. At a depth of 6 ft (1.8 m), partly weathered bedrock is more common than mostly weathered bedrock. Hard bedrock is at or just beneath the ground surface in about 10-30 percent of the area.	Gentle to moderate slopes covered by grass or open coniferous forests. Slopes locally are steep; north-facing slopes have dense coniferous forests and south-facing slopes have scattered coniferous trees and shrubs. Bedrock outcrops are commonly small and scattered.	FEM CONSTRAINTS--Few geologic constraints because hard bedrock is at or near the surface in less than 40 percent of the area and because slopes are mostly gentle to moderate. With proper planning, can accommodate a moderate density of septic systems with leach fields.	MODERATELY EASY--Hard bedrock at or near the surface only locally, making most shallow excavations moderately easy if such hard bedrock areas are avoided.
RS Rock with subordinate soil	From 10-50 percent of area is covered by dirt and weathered bedrock to a depth of 6 ft (1.8 m). Where soil is 6 ft (1.8 m) deep, the dirt at the surface is commonly about 1 ft (0.3 m) thick but may be as much as 4 ft (1.2 m). Much of this dirt has moved downslope and concentrated in pockets. This dirt generally overlies a few feet of partly weathered bedrock. The areas with soil as thick as 6 ft (1.8 m) commonly occur in pockets between rock outcrops or locally as thick colluvium along drainages at the base of steep slopes. Hard bedrock is at or very near the ground surface in more than 30 percent of the area.	Moderate to steep slopes covered with a dense to scattered coniferous forest. Rubbly surfaces covered by shrubs and sparse grass are common on south-facing slopes and along the mountain front, whereas very dense coniferous forests that often mask the soil and bedrock surface are common on north-facing slopes. Bedrock outcrops are generally extensive, locally with large knobs or pinnacles.	MANY CONSTRAINTS--Many geologic constraints because of the large amount of hard bedrock at or near the ground surface and because slopes are mostly moderate to steep. With proper site evaluation, this area can accommodate only a limited density of septic systems with leach fields.	DIFFICULT--Hard bedrock common at or near the surface, making most shallow excavations difficult. Many hard bedrock areas may be avoided if local conditions are carefully studied and development is limited.
MR Mostly rock	Less than 10 percent of area is covered by dirt and partly weathered bedrock to a depth of 6 ft (1.8 m). Soil, where present, fills small pockets where dirt and rock rubble have been concentrated by downslope movement. More than 50 percent of the area is hard bedrock outcrops; much of the remainder consists of rock fragments underlain by hard bedrock at shallow depths. Generally occurs on ridge crests and very steep slopes.	Mostly rock outcrops on ridge crests and cliffs, covered with scattered trees and shrubs growing in cracks between rocks and in pockets of soil. Rock fragments mantle the slopes between outcrops.	MOST CONSTRAINTS--Most geologic constraints because hard bedrock or coarse rock rubble is common at or near the ground surface and because slopes are mostly steep. Septic systems with leach fields should be restricted to those few areas where acceptable amounts of unconsolidated material can be located on suitable slopes or where previous fill can be added.	VERY DIFFICULT--Hard bedrock and rock fragments are nearly continuous at or near the surface, making most shallow excavations very difficult.

RECONNAISSANCE MAP SHOWING RELATIVE AMOUNTS OF SOIL AND BEDROCK IN THE MOUNTAINOUS PART OF THE MORRISON-EVERGREEN QUADRANGLES AND ADJOINING AREAS TO THE WEST IN JEFFERSON COUNTY, COLORADO

By  
Paul W. Schmidt  
1976