



EXPLANATION



OVERBURDEN ISOPACH—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 100 feet (30.5 m). Dashed where inferred, dotted where concealed.

○ 88

DRILL HOLE—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Drill holes which do not intersect top of coal bed or from which bed elevation could not be determined are not shown.



TRACE OF FAULT—Dashed where approximately located; dotted where concealed; queried where inferred. U, upthrown side; D, downthrown side.



BURNED AND CLINKERED COAL BED—Showing area of baked and fused rock (v symbol). Dotted line indicates inferred limit of burning.




UNDERGROUND MINE WORKINGS

To convert feet to meters, multiply feet by 0.3048.


OPEN FILE REPORT

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

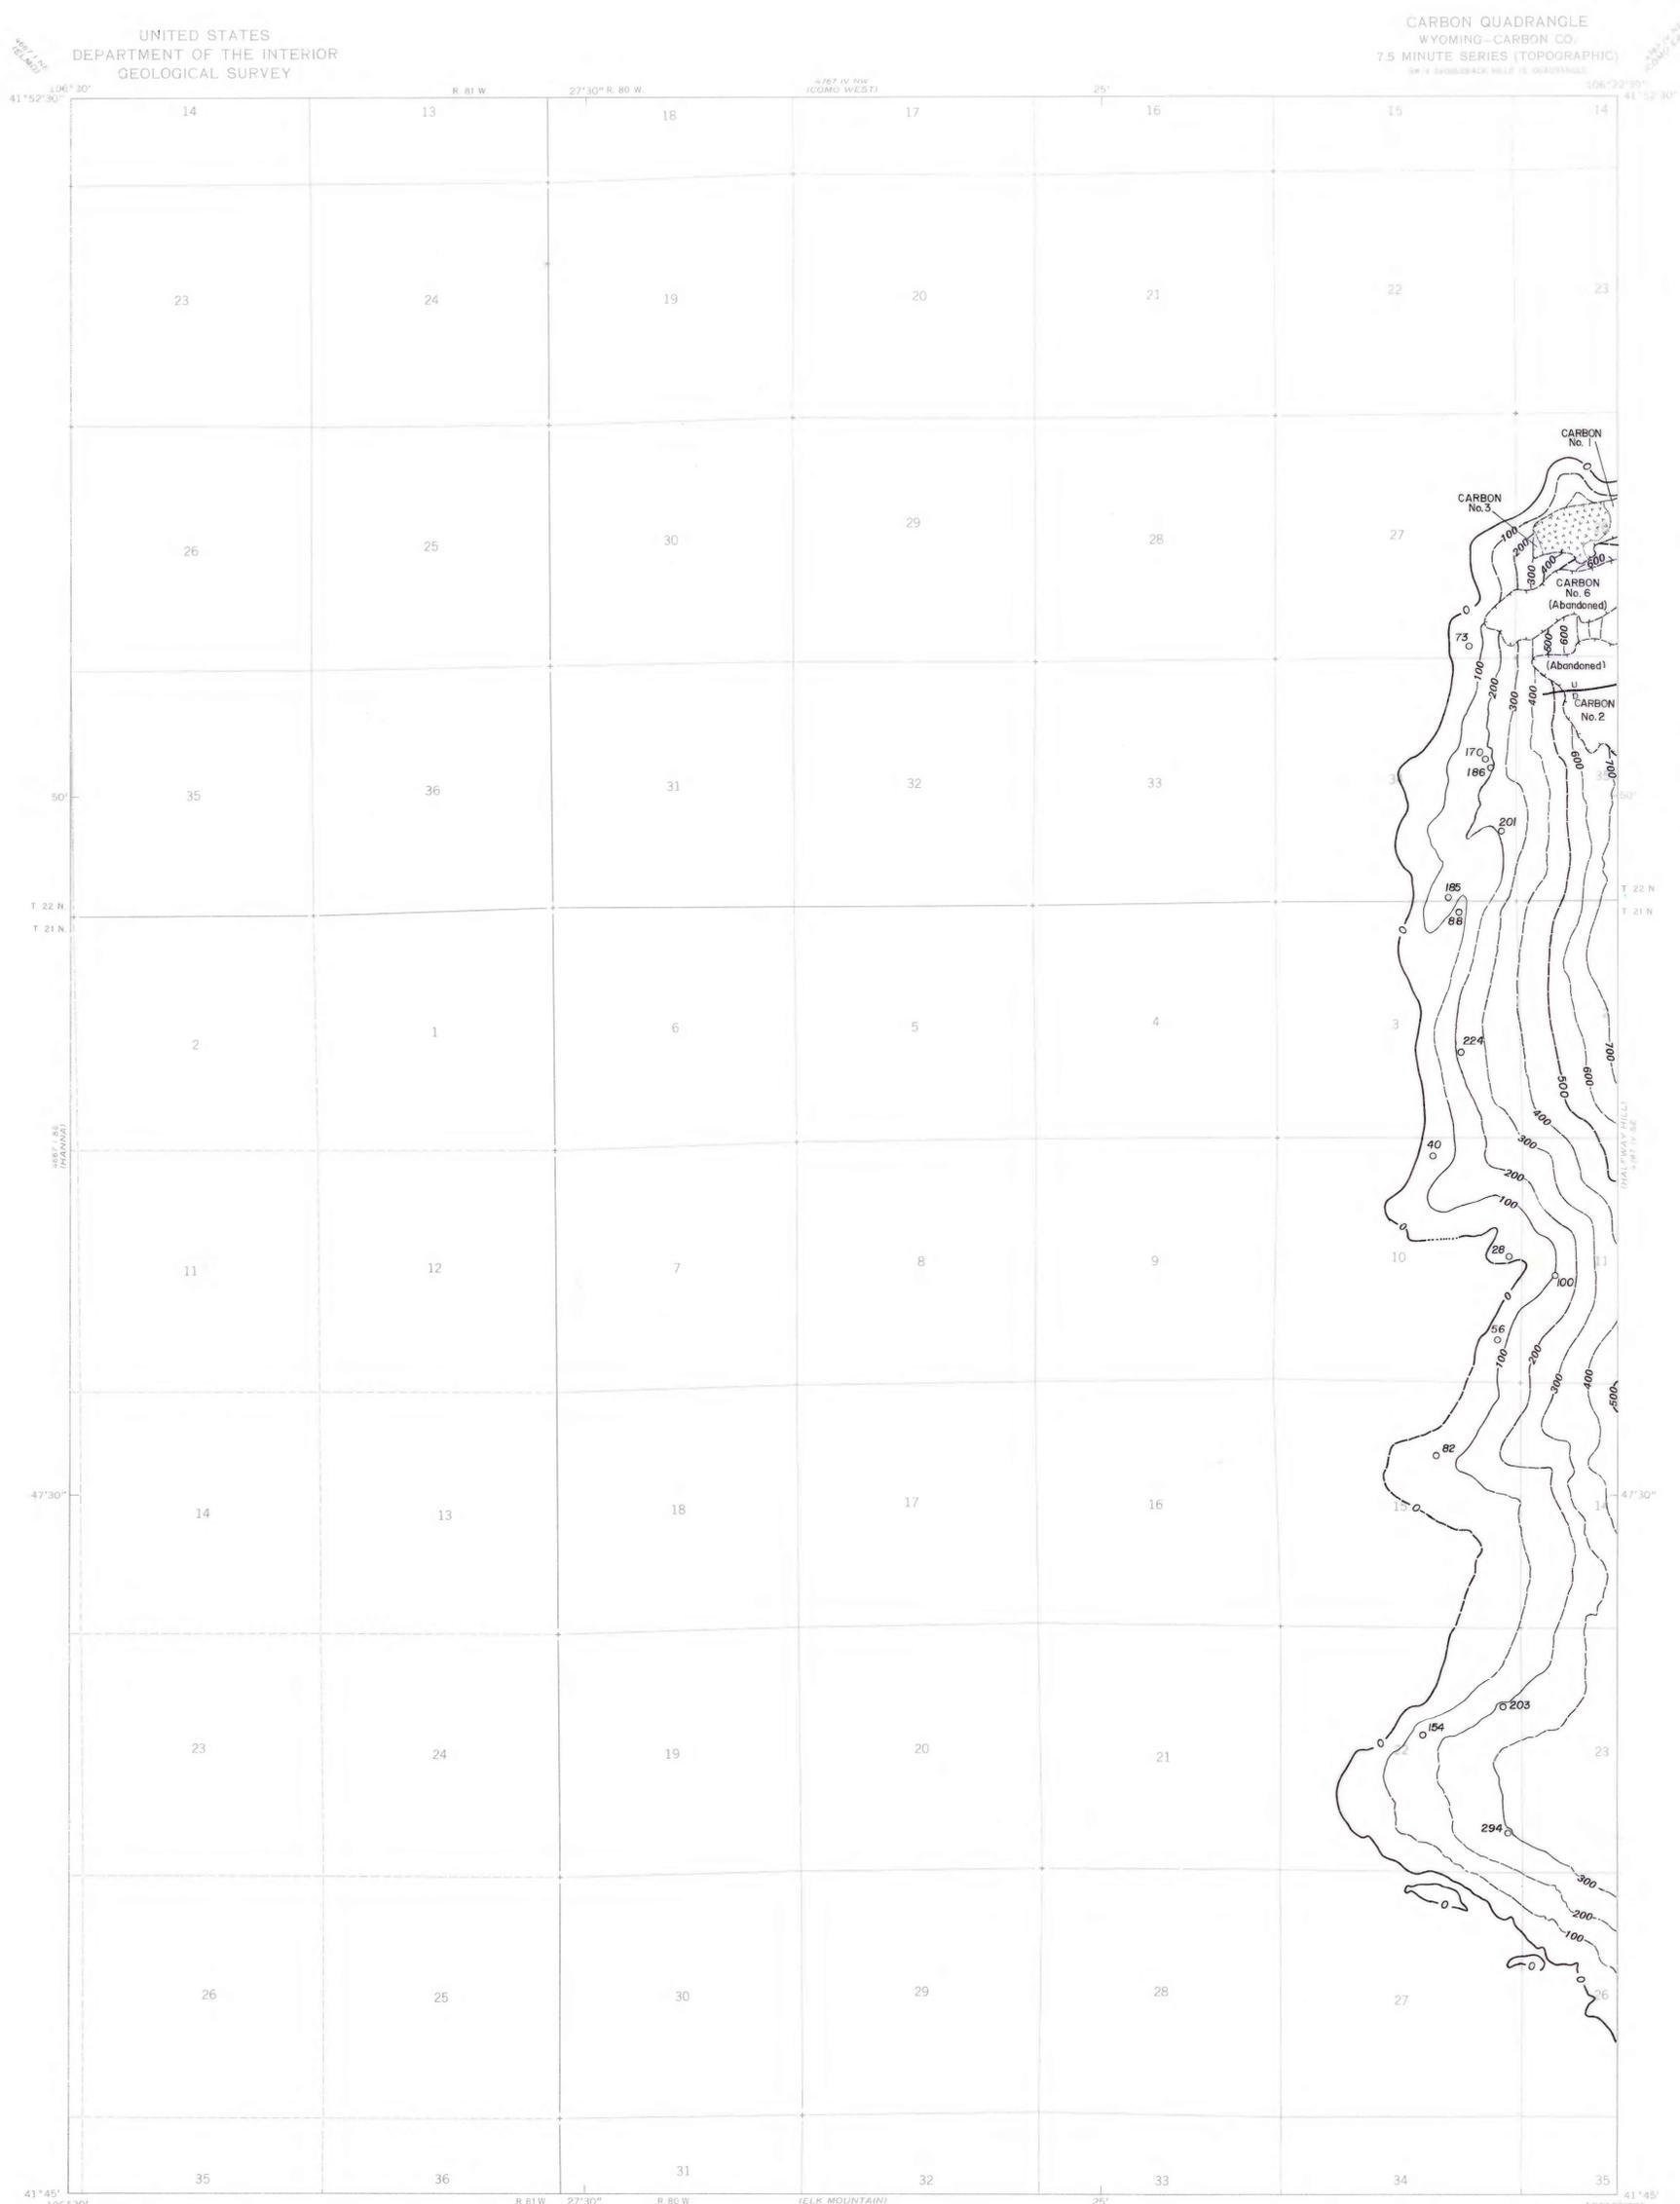

Base map from U.S. Geological Survey, 1971

Compiled in 1977 by TEXAS INSTRUMENTS INCORPORATED



COAL RESOURCE OCCURRENCE MAP OF THE CARBON QUADRANGLE, CARBON COUNTY, WYOMING BY TEXAS INSTRUMENTS INCORPORATED 1978