

EXPLANATION


400
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Dashed where vertical accuracy possibly not within 40 feet. Isopach interval 200 feet.

440
O
DRILL HOLE - Showing thickness of overburden, in feet, from the surface to the top of the coal bed.

10
MINING-RATIO CONTOURS - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas suitable for surface mining within the stripping limit.

G
TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed. Dashed where inferred.

To convert feet to meters, multiply feet by 0.3048.

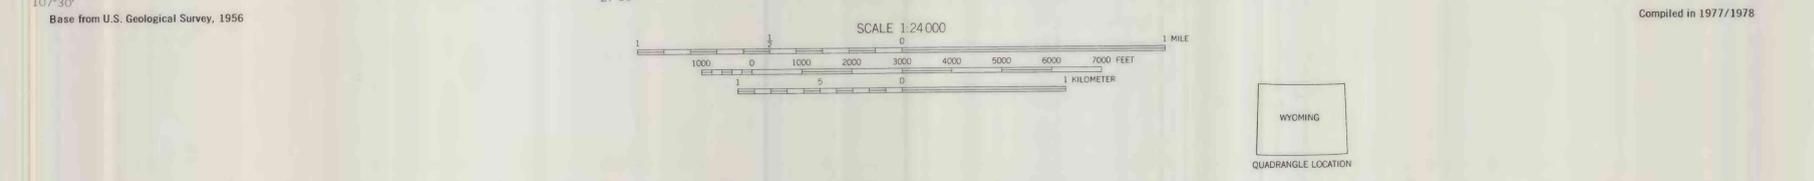

COAL RESOURCE OCCURRENCE MAP OF THE SOUTHWEST QUARTER OF THE RAWLINS PEAK 15-MINUTE QUADRANGLE, CARBON COUNTY, WYOMING
BY
DAMES & MOORE
1978

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.