U.S. Geological Survey
Open-File Report 80-488

Figure 23.--Gamma-gamma log of drill-hole DM-D32

Hole location: 950 FNL, 350 FEL, sec. 7, T. 15 N., R. 90 W., 6th P.M., Carbon County, Wyoming

Collar elevation: 6,968 ft

Date drilled: Oct. 29-30, 1977

Open-hole diameter: 4-3/4 in.

Casing: 6-in. plastic, 0-8 ft

Drilling fluids: air, 0-115 ft; air and water, 115-360 ft

Depth determined by driller: 360 ft

Water level: 177 ft

Logged depth: 359 ft

Detector type: scintillation

Time constant: 4 sec

Source type: Cs-137

Source size: 32.5 millicuries

Source-to-detector spacing: 16 in.

Logging speed: 17 ft/mi

Calibration: see log

Logged by: R. McCullough

Logger unit: Well Reconnaissance W-236265
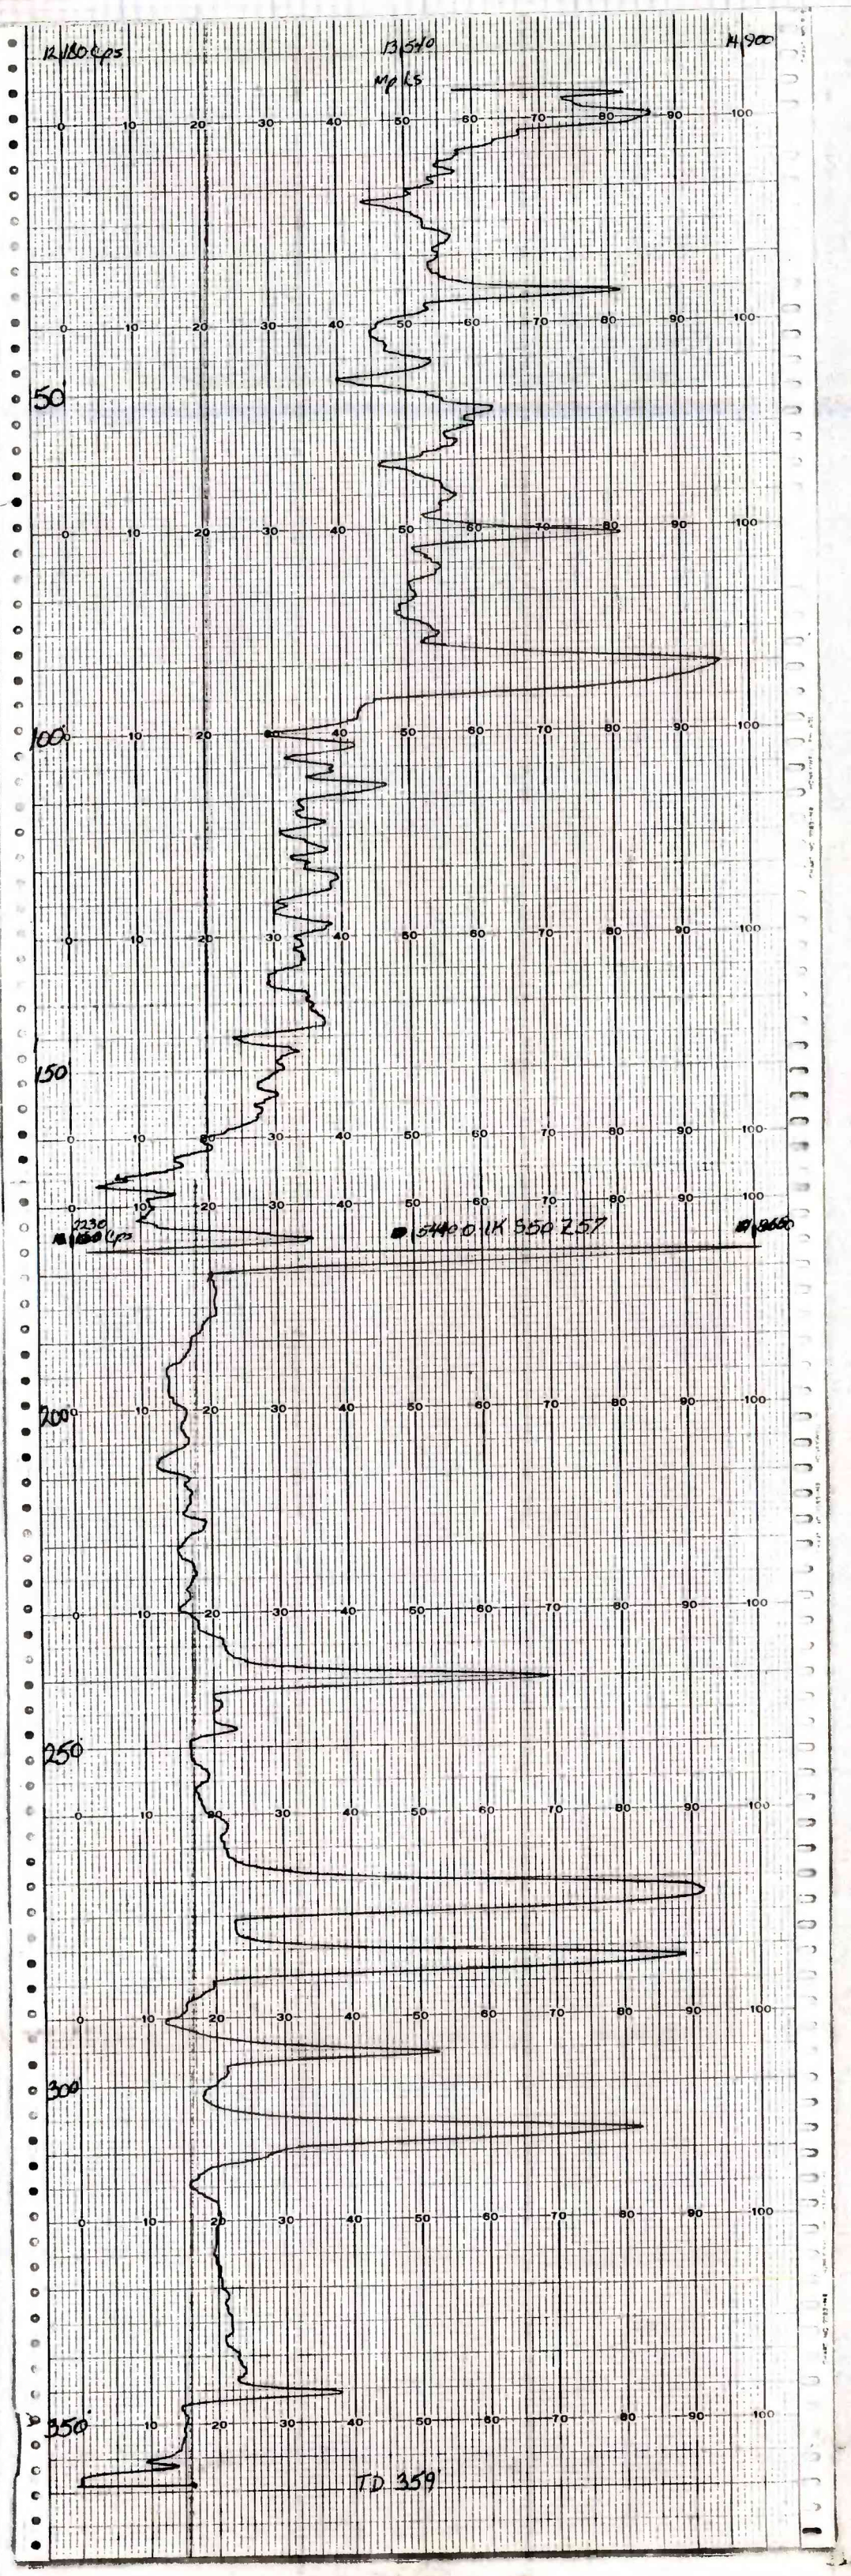
Date logged: Oct. 30, 1977