U.S. Geological Survey
Open-File Report 80-488

Figure 103.--Natural gamma and neutron logs of drill-hole DM-D63

Hole location: 150 FSL, 1,550 FEL, sec. 22, T. 15 N., R. 90 W., 6th P.M., Carbon County, Wyoming

Collar elevation: 7,605 ft

Date drilled: July 18-19, 1978

Open-hole diameter: 5-1/8 in.

Casing: 6-in. plastic, 0-18 ft

Drilling fluids: air, 0-320 ft; air and water, 320-575 ft

Depth determined by driller: 575 ft

Water level: 451 ft

Logged depth: 572 ft

Detector type: scintillation

Time constant: 4 sec

Source type: Am-Be

Source size: 3 curies

Source-to-detector spacing: 1 ft (approx.)

Logging speed: 17 ft/min

Calibration: see log

Logged by: L. Shoaff

Logger unit: Gearhart-Owen 3200
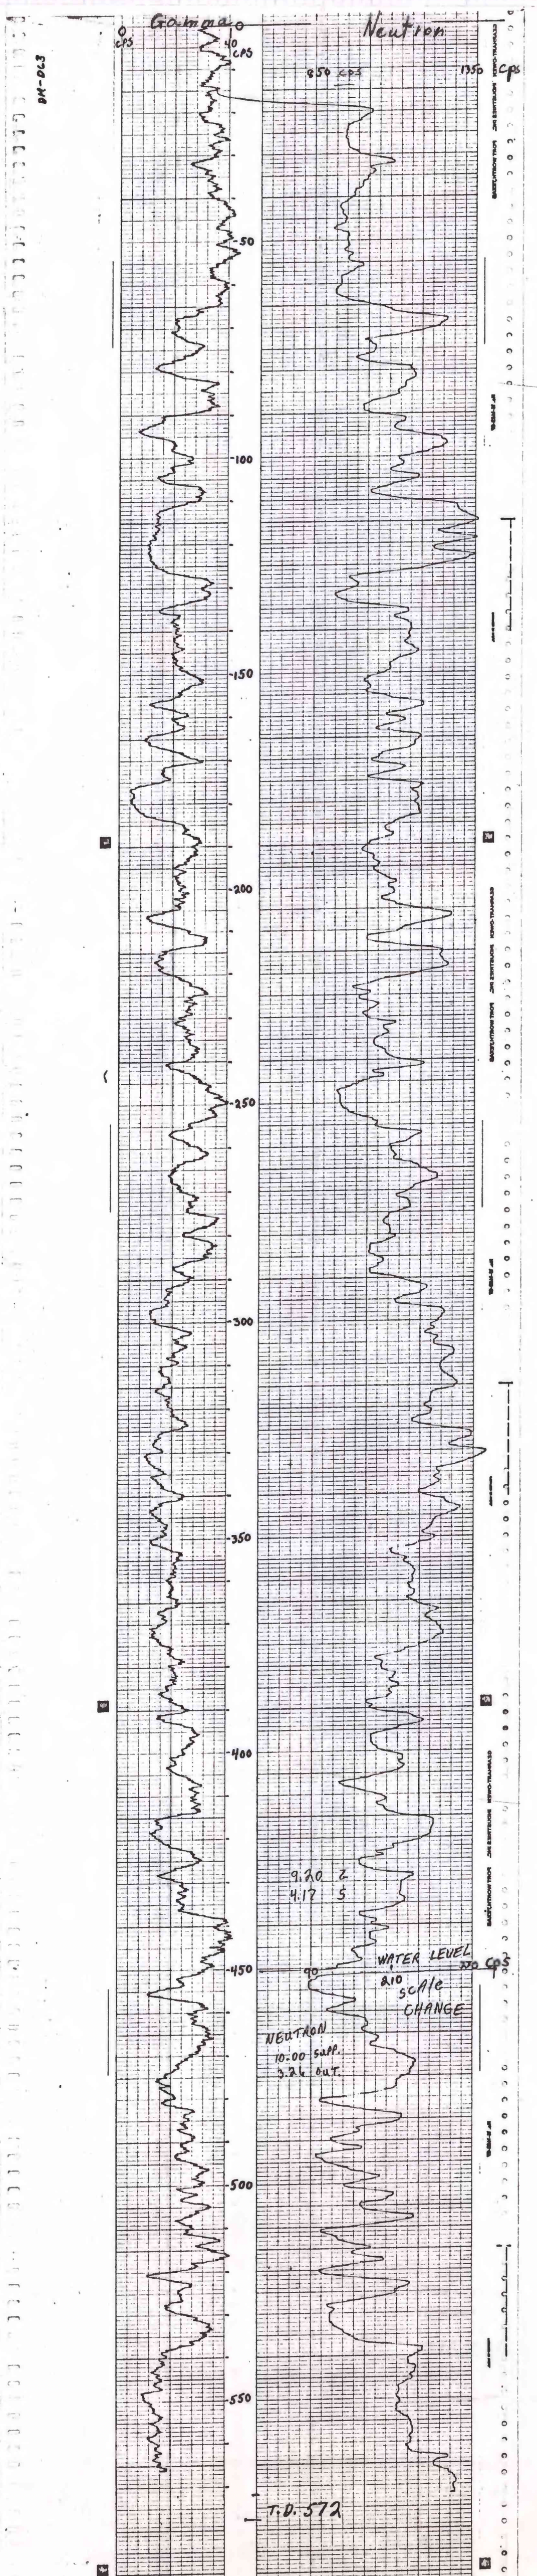
Date logged: July 19, 1978