

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

GROUND-WATER NOTES
HYDRAULICS

NO. 28
AUGUST 1955

GROUND-WATER HYDRAULICS

A summary of lectures presented by

John G. Ferris

at short courses conducted by
the Ground Water Branch

PART I THEORY

Compiled by

Doyle B. Knowles, Hydraulic Engineer

Austin, Tex.--- June 1952

Revised and modified by
Russell H. Brown and Robert W. Stallman
Hydraulic Engineers
Washington, D. C. --- 1955

For distribution in Ground Water Branch only
Open-file report

CONTENTS

	Page
Introduction	1
Purpose and scope	1
Darcy's law	2
Coefficients of permeability and transmissibility	3
Coefficient of storage	5
The artesian case	6
The water-table case	8
Elasticity of artesian aquifers	9
Internal forces	9
Transmission of forces between aquifers	11
Effects of changes in loading	11
Excavations	11
Moving railroad trains	12
Changes in atmospheric pressure	14
Tidal fluctuations	16
Ocean, lake or stream tides	16
Earth tides	17
Earthquakes	18
The coefficient of storage and its relation to elasticity	19
Part I. Aquifer tests -- basic theory	22
Well methods -- point sink or point source	22
Constant discharge or recharge without vertical leakage	22
Equilibrium formula	22
Nonequilibrium formula	23
Modified nonequilibrium formula	30
Theis recovery formula	31
Applicability of methods to water-table and artesian aquifers	32
Instantaneous discharge or recharge	33
"Bailer" method	33
"Slug" method	34
Constant head without vertical leakage	35
Constant discharge with vertical leakage	41
Leaky aquifer formula	41
Variable discharge without vertical leakage	48
Continuously varying discharge	48
Intermittent or cyclic discharge	52
Channel methods -- line sink or line source	52
Constant discharge	52
Non-steady state, no recharge	52
Constant head	55
Non-steady state, no recharge	55
Steady state, uniform recharge	61
Sinusoidal head fluctuations	63
Areal methods	66
Numerical analysis	66
Flow-net analysis	70

CONTENTS

	Page
Part I. Aquifer tests -- basic theory (continued)	
Theory of images and hydrologic boundary analysis	75
Perennial stream -- line source at constant head	75
Impervious barrier	77
Two impervious barriers intersecting at right angles	80
Impervious barrier and perennial stream intersecting at right angles	80
Two impervious barriers intersecting at an angle of 45 degrees	84
Impervious barrier paralleling a perennial stream	86
Two parallel impervious barriers intersected at right angles by a third impervious barrier	88
Rectangular aquifer bounded by two intersecting impervious barriers paralleling perennial streams	88
Applicability of image theory involving infinite systems of image wells	88
Corollary equations for application of image theory	91
Concluding observations on applicability of analytical equations	94
References	98
Nomenclature	103

ILLUSTRATIONS

Figure 1	Diagram for explaining coefficients of permeability and transmissibility	4
2	Diagrams for explaining the coefficient of storage for artesian and for water-table aquifers	7
3	Diagrams for explaining elastic phenomena in artesian aquifers	10
4	Effect on artesian aquifer of excavation in overlying confining material	12
5	Diagrams showing effects of changes in loading on an elastic artesian aquifer	13
6	Sections of water-table and artesian aquifers showing atmospheric pressure loading	15
7	Logarithmic graph of the well function -- type curve	28
8	Relation of $W(u)$ and u to s and r^2/t	29
9	Suggested equipment for use in making a "slug" test	36
10	Type curve for values of α from 10^{-1} to 10^{14} plotted against corresponding values of $G(\alpha)$	39
11	Logarithmic graph of the modified Bessel function of second kind of zero order, $K_0(x)$	46
12	Nomenclature for a problem involving continuously varying discharge	50
13	Schematic plot of family of type curves for problems involving continuously varying discharge	51
14	Logarithmic graph of the drain-function for channel method -- constant discharge	56
15	Logarithmic graph of the drain-function for channel method -- constant head	59

ILLUSTRATIONS

	Page
Figure 16. Section views for analyzing steady-state flow in hypothetical aquifer of large thickness with uniform accretion from precipitation	62
17 Finite grid and nomenclature used in numerical analysis	68
18 Flow net for a discharging well in an aquifer bounded by a perennial stream paralleling an impervious barrier	72
19 Idealized section views of a discharging well in a semi-infinite aquifer bounded by a perennial stream, and of the equivalent hydraulic system in an infinite aquifer	76
20 Generalized flow net showing stream lines and potential lines in the vicinity of a discharging well dependent upon induced infiltration from a nearby stream	78
21 Idealized section views of a discharging well in a semi-infinite aquifer bounded by an impervious formation, and of the equivalent hydraulic system in an infinite aquifer	79
22 Generalized flow net showing streamlines and potential lines in the vicinity of a discharging well near an impervious boundary	81
23 Plan of image-well system for a discharging well in an aquifer bounded by two impervious barriers intersecting at right angles	82
24 Plan of image-well system for a discharging well in an aquifer bounded by an impervious barrier intersected at right angles by a perennial stream	83
25 Plan of image-well system for a discharging well in an aquifer bounded by two impervious barriers intersecting at an angle of 45 degrees	85
26 Image-well system for a discharging well in an aquifer bounded by an impervious barrier paralleling a perennial stream	87
27 Plan of image-well system for a discharging well in an aquifer bounded by two parallel impervious barriers intersected at right angles by a third impervious barrier	89
28 Plan of image-well system for a discharging well in a rectangular aquifer enclosed by two intersecting impervious barriers and two intersecting perennial streams	90
29 Geometry for locating a point on a hydrologic boundary, with reference to the locations of a discharging well and a nearby observation well	95

TABLES.

		Page
Table 1	Approximate average velocities and paths taken by different types of shock waves caused by earthquakes	19
2	Values of $W(u)$ for values of u between 10^{-15} and 9.9 .	26
3	Values of $G(a)$ for values of a between 10^{-4} and 10^{12} .	38
4	Values of $K_0(x)$, the modified Bessel function of the second kind of zero order, for values of x between 10^{-2} and 9.9	44
5	Values of $D(u)_q$, u , and u^2 for channel method-constant discharge formula	54
6	Values of $D(u)_h$, u , and u^2 for channel method-constant head formula	58

INTRODUCTION

Purpose and Scope

The basic objective of the Ground Water Branch is to evaluate the occurrence, availability, and quality of ground water. The science of ground-water hydrology is applied toward attaining that goal. Although many ground-water investigations are of a qualitative nature, quantitative studies are necessarily an integral component of the complete evaluation of occurrence and availability. The worth of an aquifer as a fully developed source of water depends largely on two inherent characteristics: its ability to store, and its ability to transmit water. Furthermore, quantitative knowledge of these characteristics facilitates measurement of hydrologic entities such as recharge, leakage, evapotranspiration, etc. It is recognized that these two characteristics, referred to as the coefficients of storage and transmissibility, generally provide the very foundation on which quantitative studies are constructed. Within the science of ground-water hydrology, ground-water hydraulics methods are applied to determine these constants from field data.

Ground-water hydraulics, as now defined by common practice, can be described as the process of combining observed field data on water levels, water-level fluctuations, natural or artificial discharges, etc., with suitable equations or computing methods to find the hydraulic characteristics of the aquifer; it includes the logical extension of these data and computing methods to the prediction of water levels, to the design of well fields, to the determination of optimum well yields, etc., all under stated conditions. The selection of equations or computing procedures to be used for analysis is governed largely by the physical conditions of the aquifer studied, insofar as they establish the hydraulic boundaries of the system. The extraordinary variability in the coefficients of storage and transmissibility, combined with the irregularity of shape of flow systems encountered in many ground-water studies preclude uninhibited support of calculated coefficients based on vague or meager data. One quantitative test does not satisfy the demand for a quantitative study of an aquifer. It is merely a guidepost, indicator, or segment of knowledge which must be supported by additional tests. Often the initially calculated results may require revision on the basis of the discoveries resulting from additional testing as the field investigation proceeds.

Obviously the results from ground-water hydraulics must be completely in accord with the geology of the aquifer or of the area under investigation. Circumstance frequently demands that tests be conducted without prior knowledge of the geology in the vicinity of the test site. To varying degrees, lack of knowledge of the geology in most cases reduces the reliability of the test results to a semi-quantitative category until more adequate support is found.

The principle method of ground-water hydraulics analysis is the application of equations derived for particular boundary conditions. The number of equations available has grown rapidly and steadily during the

past few years. These are described in a wide assortment of publications, some of which are not conveniently available to many engaged in ground-water hydraulics. The Ground Water Short Course lectures necessitated the compilation of a number of the more useful equations, and afforded a start toward a type of handbook which can be used as a convenient reference. This report is not intended as an exhaustive or complete treatise on ground-water hydraulics. Indeed the science is advancing so rapidly it may be virtually impossible ever to prepare a complete treatise. So it should be understood that in this report the essence of each of many hydraulics concepts is being presented and briefly discussed and frequent recourse should be made to the more exhaustive treatment given in the cited references.

This report has been developed from a summary of the lectures on ground-water hydraulics presented by John G. Ferris at Nashville, Tennessee, June 18-23, 1951, and at Ground Water Short Courses held at Madison, Wisconsin, September 3-15, 1951, and Baton Rouge, Louisiana, March 10-22, 1952.

The material has been arranged in two major parts so that the theory behind many hydraulics concepts appears in Part 1, to be followed by the applications to actual field problems in Part 2. Where the definition of a hydraulics or ground-water term is considered necessary, it is stated where the term first appears and the symbol and units in which the term is ordinarily expressed are given. This information is not necessarily repeated thereafter except at the end of the report much of the terminology is conveniently listed under "Nomenclature."

Darcy's Law

Hagen (1839) and Poiseuille (1846) were the first to study the law of flow of water through capillary tubes. They found that the rate of flow is proportional to the hydraulic gradient. Later Darcy (1856) verified this observation and demonstrated its applicability to the laminar (viscous, streamline) flow of water through porous material while he was investigating the flow of water through horizontal filter beds discharging at atmospheric pressure. He observed that, at low rates of flow, the velocity varied directly with the loss of head per unit length of sand column through which the flow occurred and expressed this law as

$$v = \frac{Ph}{l}$$

In which v is velocity of the water through a column of permeable material, h is the difference in head at the ends of the column, l is the length of the column, and P is a constant that depends on the character of the material, especially the size and arrangement of the grains.

The velocity component in laminar flow is proportional to the first power of the hydraulic gradient. It can be seen, therefore, that Darcy's law is valid only for laminar flow. The flow is probably turbulent or in a transitional stage from laminar to turbulent flow near the screens of many large-capacity wells. Jacob (1950) agrees with Meinzer and Fishel (1934) that because water behaves as a viscous fluid at extremely low hydraulic gradients, it will obey Darcy's law at gradients

much smaller than can be measured in the laboratory. He points out, however, that Darcy's law may not be valid for the flow of water in sands that are not completely saturated, or in extremely fine-grained materials.

Coefficients of Permeability and Transmissibility

The coefficient of permeability, P , of material comprising a formation, is a measure of the material's capacity to transmit water. The coefficient of permeability was expressed by Meinzer (Stearns, N.D., 1928) as the rate of flow of water in gallons per day through a cross-sectional area of 1 square foot under a hydraulic gradient of 1 foot per foot at a temperature of 60° F. In figure 1, then, it would be the flow of water through opening A which is 1 foot square. In field practice the adjustment to the standard temperature of 60° F. is commonly ignored and permeability is then understood to be a field coefficient at the prevailing water temperature. Theis (1935) introduced the term coefficient of transmissibility, T , which is expressed as the rate of flow of water, at the prevailing water temperature, in gallons per day, through a vertical strip of the aquifer 1 foot wide extending the full saturated height of the aquifer under a hydraulic gradient of 100 percent. In figure 1 it would be the flow through opening B which has a width of 1 foot and a height equal to the thickness, m , of the aquifer. A hydraulic gradient of 100 percent means a 1 foot drop in head in 1 foot of flow distance as shown schematically by the pair of observation wells in figure 1. It is seldom necessary to adjust the coefficient of transmissibility to an equivalent value for the standard temperature of 60° F., because the temperature range (and, hence, range in viscosity) in most aquifers is not large. The relationship between the coefficient of transmissibility and the field coefficient of permeability, as they apply to flow in an aquifer, can be seen in figure 1.

A useful form of Darcy's law that is often applied in groundwater hydraulics problems is given by the expression

$$Q_d = PIA$$

In which Q_d is the discharge in gallons per day, P is the coefficient of permeability, in gallons per day per square foot, I is the hydraulic gradient in feet per foot, and A is the cross-sectional area in square feet through which the discharge occurs. For most ground-water problems, this expression can be more conveniently written as

$$Q_d = TIL$$

In which Q_d and I are defined as above, T is the coefficient of transmissibility in gallons a day per foot, and L is the width, in feet, of the cross section through which the discharge occurs. In many field problems it may be more practical to express I in feet per mile and L in miles. The units for T and Q_d will remain as already stated. The coefficient of transmissibility may be determined by means of field observations of the effects of wells or surface-water systems on ground-water levels. It is then possible to determine the field coefficient of permeability from the formula $P = T/m$. Physically, however, P has limited significance under these conditions. It

merely represents the over-all average permeability of an ideal aquifer that behaves hydraulically like the aquifer tested.

Laboratory measurements of permeability, in general, should be applied with extreme caution. The packing arrangement of a poorly sorted sediment is a critical factor in determining the permeability, and large variations in permeability may be introduced by repacking a disturbed sample. Furthermore, a laboratory measurement of permeability on one sample is representative of only a minute part of the water-bearing formation. Obviously, therefore, if quantitative data are to be developed by laboratory methods, it is desirable to collect samples of the water-bearing material at close intervals of depth and at as many locations within the aquifer as is feasible.

Coefficient of Storage

The coefficient of storage, S , of an aquifer is defined as the volume of water it releases from or takes into storage per unit surface area of the aquifer per unit change in the component of head normal to that surface.

A simple way of visualizing this concept is to imagine an artesian aquifer which is elastic and is uniform in thickness, and which is assumed, for convenience, to be horizontal. If the head of water in that aquifer is decreased there will be released from storage some finite volume of water that is proportional to the change in head. Because the aquifer is horizontal, the full observed head change is evidently effective perpendicular to the aquifer surface. Imagine further a representative prism extending vertically from the top to the bottom of this aquifer, and extending laterally so that its cross-sectional area is coextensive with the aquifer-surface area over which the head change occurs. The volume of water released from storage in that prism, divided by the product of the prism's cross-sectional area and the change in head, results in a dimensionless number which is the coefficient of storage. If this example were revised slightly, it could be used to demonstrate the same concept of coefficient of storage for a horizontal water-table aquifer or for a situation in which the head of water in the aquifer is increased.

As with almost any concise definition of a basic concept it is necessary to develop its full significance, its limitations, and its practical use and application through elaborative discussion. The coefficient of storage is no exception in this respect, and the following discussion will serve to bring out a few ideas that are important in applying the concept to artesian and water-table aquifers in horizontal or inclined attitudes.

Observe that the statement of the storage-coefficient concept first focuses attention on the volume of water that the aquifer releases from or takes into storage. Identification and measurement of this volume poses no particular problem but it should be recognized that it is measured outside the aquifer under the natural local conditions of temperature and


atmospheric pressure; it is not the volume that the same amount of water would occupy if viewed in place in the aquifer.

Although the example used to depict the concept of the storage coefficient was arbitrarily developed around a horizontally disposed artesian aquifer, the concept applies equally well to water-table aquifers and is not compromised by the attitude of the aquifer. This flexibility of application relies importantly, however, on relating the storage-coefficient concept to the surface area of the aquifer and to the component of head change that is normal to that surface. In turn this relationship presupposes that the particular aquifer prism involved in the movement of water into or out of storage is that prism whose length equals the saturated thickness of the aquifer, measured normal to the aquifer surface, and whose cross-sectional area equals the area of the aquifer surface over which the head change occurs. Furthermore, water moves into or out of storage in this prism in direct proportion only to that part of the head change that acts to compress or distend the length of the prism. In other words, the component of the head change to be considered in the release or storage of water is that which acts normal to the aquifer surface. The mathematical models devised for analyzing ground-water flow usually require uniform thickness of aquifer. However, the storage coefficient concept, as defined here, applies equally well to aquifers that thicken or thin substantially, if the "surface area" is measured in the plane that divides the aquifer into upper and lower halves that are symmetrical with respect to flow. The imaginary prism would then be taken perpendicular to this mean plane of flow.


The Artesian Case

Consider an artesian aquifer, in any given attitude, in which the head of water is changed, but which remains saturated before, during, and after the change. It is assumed that the beds of impermeable material confining the aquifer are fluid in the sense that they have no inherent ability to absorb or dissipate changes in forces external to or within the aquifer. Inasmuch as no dewatering or filling of the aquifer is involved, the water released from or taken into storage can be attributed only to the compressibility of the aquifer material and of the water. By definition the term "head of water" and any changes therein connote measurements in a vertical direction with reference to some datum. In a practical field problem the change in head very likely would be observed as a change in water-level elevation in a well. The change in head is an indication of the change in pressure in the aquifer prism, and the total change in force tending to compress the prism is equal to the product of the change in pressure multiplied by the end area of the prism. Obviously this change in force is not affected by the inclination of the aquifer inasmuch as a confined pressure system is involved and the component of force due to pressure always acts normal to the confining surface. Thus any conventional method of observing head change will correctly identify the change in pressure normal to the aquifer surface and may be considered as a component of head acting normal to that surface.

Examine figure 2A depicting, in schematic fashion, a horizontal artesian aquifer. Shown within the aquifer is a prism of unit cross-sectional area and of height, m , equal to the aquifer thickness. If the

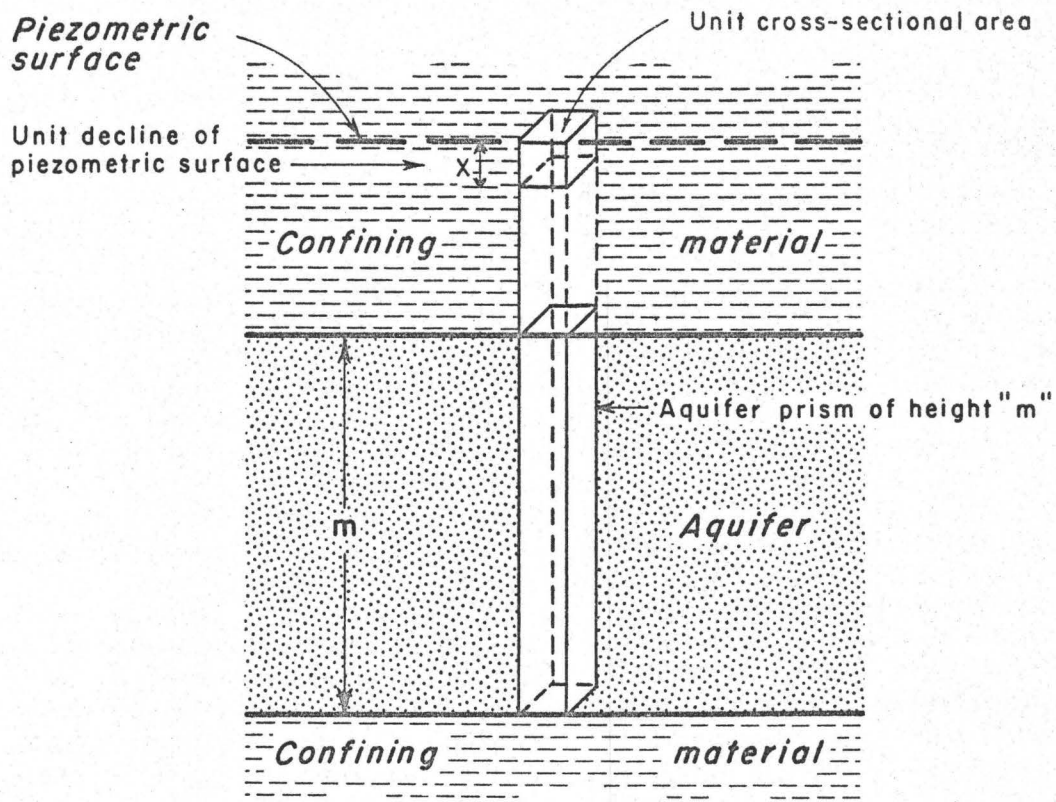

A. ARTESIAN AQUIFER

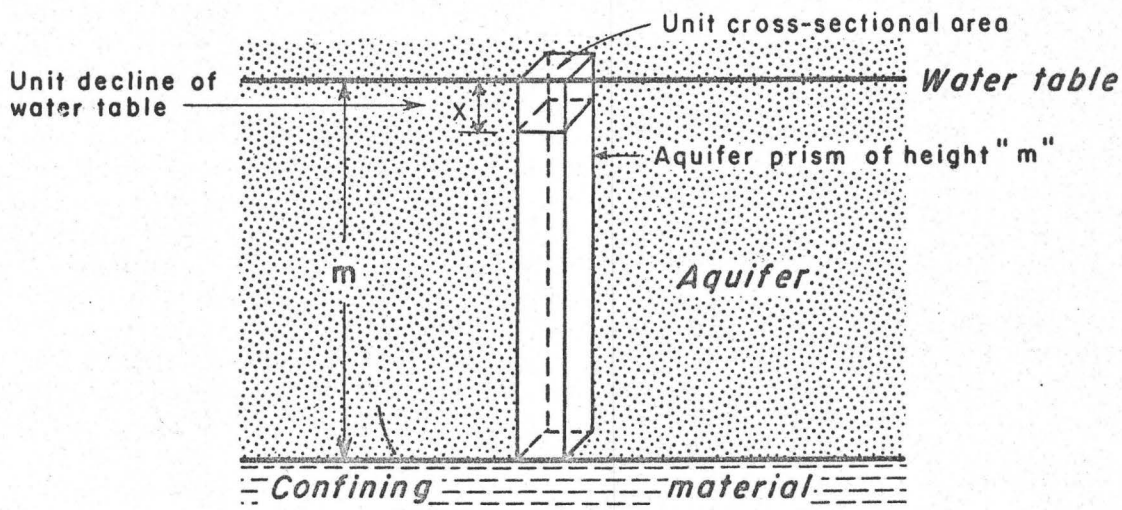

B. WATER-TABLE AQUIFER

Figure 2 -- Diagrams for explaining the coefficient of storage for artesian and for water-table aquifers

piezometric surface is lowered a unit distance, x , as shown, a certain amount of water will be released from the aquifer prism. This occurs in response to a slight expansion of the water itself and a slight decrease in porosity due to distortion of the grains of material comprising the aquifer skeleton.

Summary statement.-- For an artesian aquifer, regardless of its attitude, the water released from or taken into storage, in response to a change in head, is attributed solely to compressibility of the aquifer material and of the water. The volume of water (measured outside the aquifer) thus released or stored, divided by the product of the head change and the area of aquifer surface over which it is effective, correctly determines the storage coefficient of the aquifer. Although rigid limits cannot be established the storage coefficient may have an order of magnitude ranging from say 0.0001 to 0.001.

The Water-Table Case

Application of the storage coefficient concept to water-table aquifers is more complex, although reasoning similar to that developed in the preceding paragraphs can be applied to the saturated zone of an inclined water-table aquifer. Consider a water-table aquifer, in any given attitude, in which the head of water is changed. Obviously there will now be dewatering or refilling of the aquifer, inasmuch as it is an open gravity system with no confinement of its upper surface. Thus the volume of water released from or taken into storage must now be attributed not only to the compressibility of the aquifer material and of the water, in the saturated zone of the aquifer, but also to gravity drainage or refilling in the zone through which the water table moves. The volume of water involved in the gravity drainage or refilling, divided by the volume of the zone through which the water table moves, is the specific yield. Except in aquifers of low porosity the volume of water involved in gravity drainage or refilling will ordinarily be so many hundreds or thousands of times greater than the volume attributable to compressibility that for practical purposes it can be said that the coefficient of storage equals the specific yield. The conventional method of measuring change in head by observing change in water-level elevation in a well evidently identifies the vertical change in position of the water table. In other words, head change equals vertical movement of the water table. It can be seen that the volume of the zone through which the water table moves is equal to the area of aquifer surface over which the head change occurs, multiplied by the head change, multiplied by the cosine of the angle of inclination of the water table. The product of the last two factors is the component of head change acting normal to the aquifer surface. The importance of interpreting correctly the phrase "component of head change" which appears in the definition of the storage coefficient cannot be over-emphasized.

Examine figure 2B depicting, in schematic fashion, a horizontal water-table aquifer. Again a unit prism of the aquifer is shown and it is assumed that the water table is lowered a unit distance, x . Usually

the water that is thereby released represents, for practical purposes, the gravity drainage from the x portion of the aquifer prism. Theoretically, however, a slight amount of water comes from the portion of the prism that remains saturated, in accord with the principles discussed for the artesian case.

Summary statement.--For a water-table aquifer, regardless of its attitude, the water released from or taken into storage, in response to a change in head, is attributed partly to gravity drainage or refilling of the zone through which the water table moves, and partly to compressibility of the water and aquifer material in the saturated zone. The volume of water thus released or stored, divided by the product of the area of aquifer surface over which the head change occurs, and the component of head change normal to that surface, correctly determines the storage coefficient of the aquifer. Usually the volume of water attributable to compressibility is a negligible proportion of the total volume of water released or stored and can be ignored. The storage coefficient then is sensibly equal to the specific yield. The storage coefficient may have an order of magnitude ranging from say 0.05 to 0.30.

ELASTICITY OF ARTESIAN AQUIFERS

It has long been recognized that artesian aquifers have volume elasticity. D. G. Thompson, though not the first to publish on the subject, apparently was among the first in the Geological Survey to recognize this phenomenon. In studying the relation between the decline in artesian head and the withdrawals of water from the Dakota sandstone in North Dakota, Meinzer (Meinzer and Hard, 1925) came to the conclusion that the water was derived locally from storage. He found that the withdrawals could not be accounted for by the compressibility of the water alone, but might be accounted for by the compressibility of the aquifer.


Internal Forces

The diagram in figure 3A shows the forces acting at the interface between an artesian aquifer and the confining material. These forces may be expressed algebraically as


$$s_t = s_w + s_k$$

where s_t is the total load exerted on a unit area of the aquifer, s_w is that part of the total load borne by the confined water, and s_k is that part borne by the structural skeleton of the aquifer. Assume that the total load (s_t) exerted on the aquifer is constant. If s_w is reduced, say as a result of pumping, the load borne by the skeleton of the aquifer increases and there is slight distortion of the component grains of material. At the same time, the water expands to the extent permitted by its elasticity. Distortion of the grains of the aquifer skeleton means that they will encroach somewhat on pore space formerly occupied by water.

Conversely, if s_w is increased, say in response to cessation of pumping, the piezometric head builds up again gradually approaching its original value, and the water itself undergoes slight contraction. With

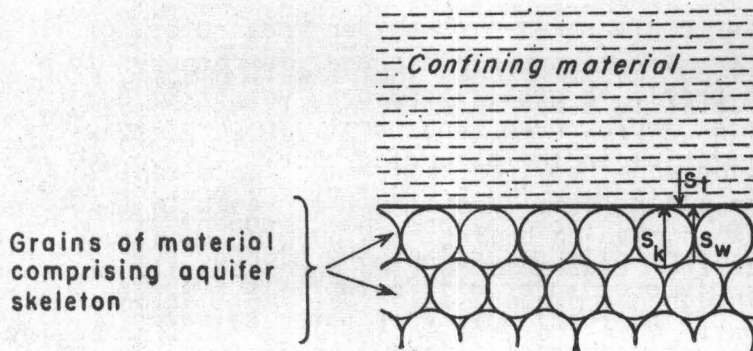

A. MICROSCOPIC VIEW OF FORCES ACTING AT INTERFACE BETWEEN ARTESIAN AQUIFER AND CONFINING MATERIAL

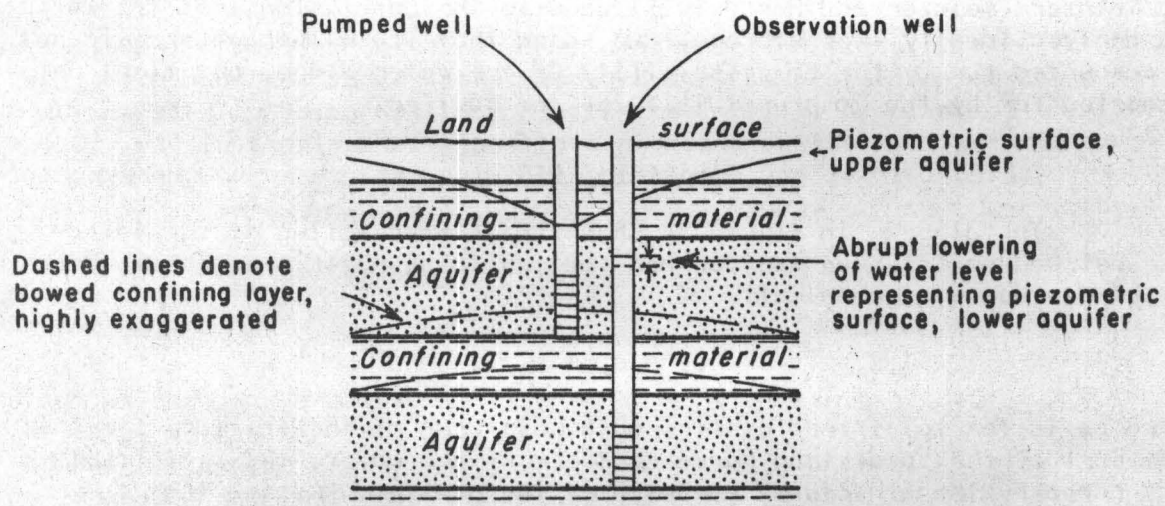

B. DIAGRAM SHOWING THE EFFECT ON A DEEP ARTESIAN AQUIFER OF PUMPING FROM A SHALLOW ARTESIAN AQUIFER

Figure 3 -- Diagrams for explaining elastic phenomena in artesian aquifers

an increase in s_w there is an accompanying decrease in s_k and the grains of material in the aquifer skeleton return to their former shape. This releases pore space that can now be reoccupied by water moving into that part of the formation that was influenced by the compression.

Transmission of Forces Between Aquifers

It has been observed in some places that a well pumping from an aquifer affects the water level in a nearby well that is screened in a deeper or shallower artesian aquifer. Consider the case shown in figure 3B. The well screened in the upper aquifer, for convenience depicted as artesian, is pumped and the water level in the well screened in the lower aquifer abruptly declines when pumping begins. As pumping continues, the water level of the lower aquifer ceases to decline and gradually recovers its initial position. Although not proven, a logical explanation of this phenomenon may be as follows: When the well in the upper aquifer begins pumping, there is a lowering of the pressure head in the vicinity of the pumped well. The decrease in pressure head unbalances the external forces that were acting on the upper and lower surfaces of the confining layer separating the two aquifers. In seeking a new static balance the confining layer will be bowed upward slightly thereby creating additional water storage space in the lower aquifer. The abrupt lowering of water level in the observation well represents the response to the newly created storage space and the reduction in the forces s_k and s_w in the lower aquifer. The subsequent water-level recovery, approaching the initial position, represents filling of the new storage space and return to the original pressure head as water in the lower aquifer moves in from more remote regions.

An interesting phenomenon that has been observed a few times, but for which no completely satisfactory explanation has yet been given, is that where pumping a well in one artesian aquifer causes a rise in the water level in a nearby well screened in a different artesian aquifer. (See Barksdale, Sundstrom, and Brunstein, 1936; and Andreasen and Brookhart, 1952.)

Effects of Changes in Loading

Excavations

"Blowthroughs" may occur if deep excavations are made in the confining materials overlying an artesian aquifer that has a high artesian head. This is shown diagrammatically in figure 4. An excavation lowers the total load on part of the aquifer, which means that the forces s_w and s_k (see fig. 3A), are now the dominant forces acting on the remaining layer of confining material, separating the bottom of the excavation from the top of the aquifer. Thus this layer will be bowed upward and if it is incompetent to contain the bowing forces, it will rupture in the form of "blowthroughs" or "sand boils". It is the practice in Holland (Krul and Lief-rinck, 1946), where this situation is commonly encountered, to install relief wells to lower the artesian head until an excavation is refilled.


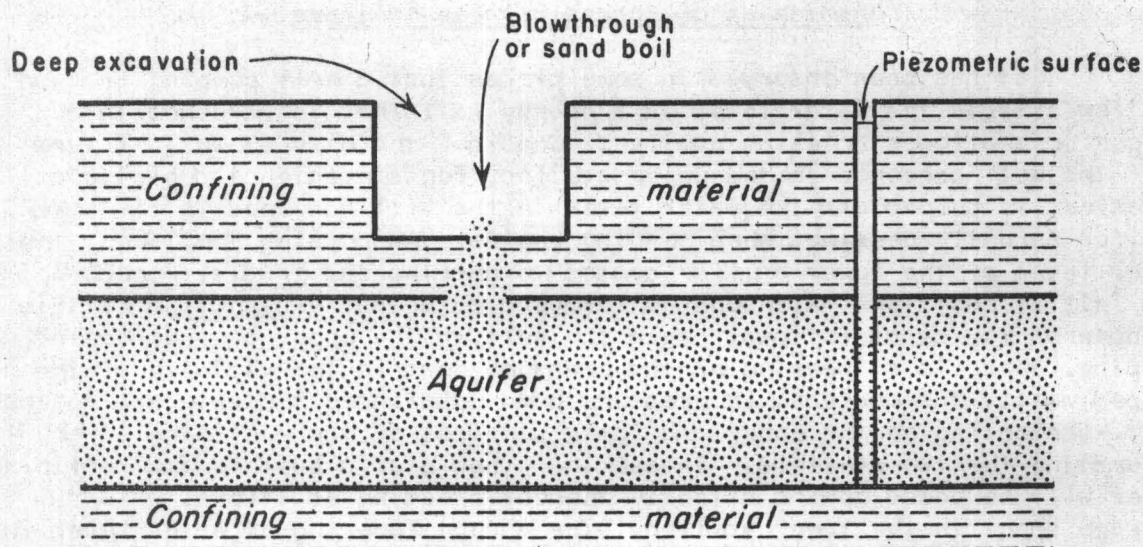



Figure 4--Effect on artesian aquifer of excavation in overlying confining material

Moving Railroad Trains

It is a frequent observation that a passing railroad train affects the water levels in nearby artesian wells. This is another demonstration of the elasticity of artesian aquifers. The fluctuation of water level in a well on Long Island, N.Y. produced by a passing railroad train is shown in figure 5A. As the train approaches the well, an additional load is placed on the aquifer. This load tends to compress the aquifer, causing a rapid rise in water level which reaches a maximum when, or shortly after, the locomotive is opposite the well. As the aquifer becomes adjusted to the new loading, the water level declines toward its initial position. When the entire train has passed the well, the aquifer expands and the water level in the well declines rapidly and reaches a minimum shortly after the train has left the well. The water level then recovers toward its initial position as the aquifer again becomes adjusted to this new condition of loading. The time required for this cycle of events is commonly of the order of a few minutes. Thus the fluctuations in water levels caused by the passing of a train usually appear as vertical lines on water-stage recorder charts because the time scale ordinarily used is too small to record the fluctuations in any greater detail.

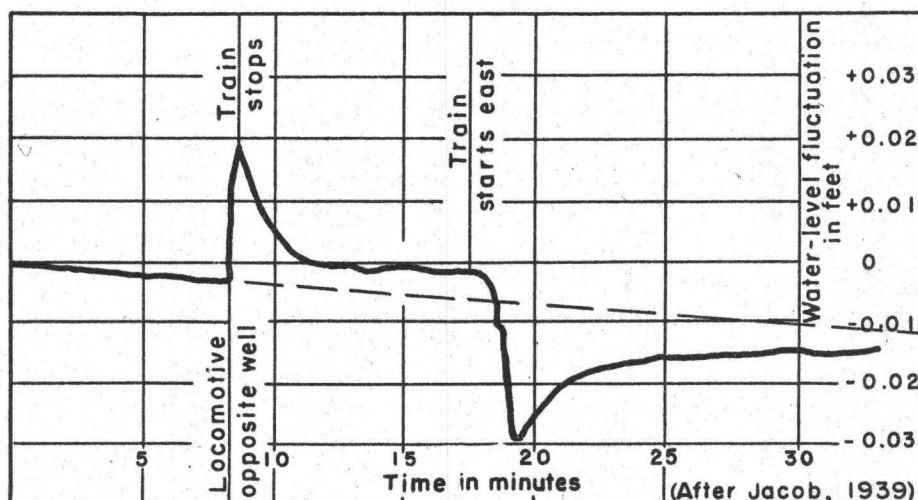

A. WATER-LEVEL FLUCTUATION IN WELL S-201, LONG ISLAND, N.Y., PRODUCED BY EAST-BOUND FREIGHT TRAIN, MARCH 21, 1938

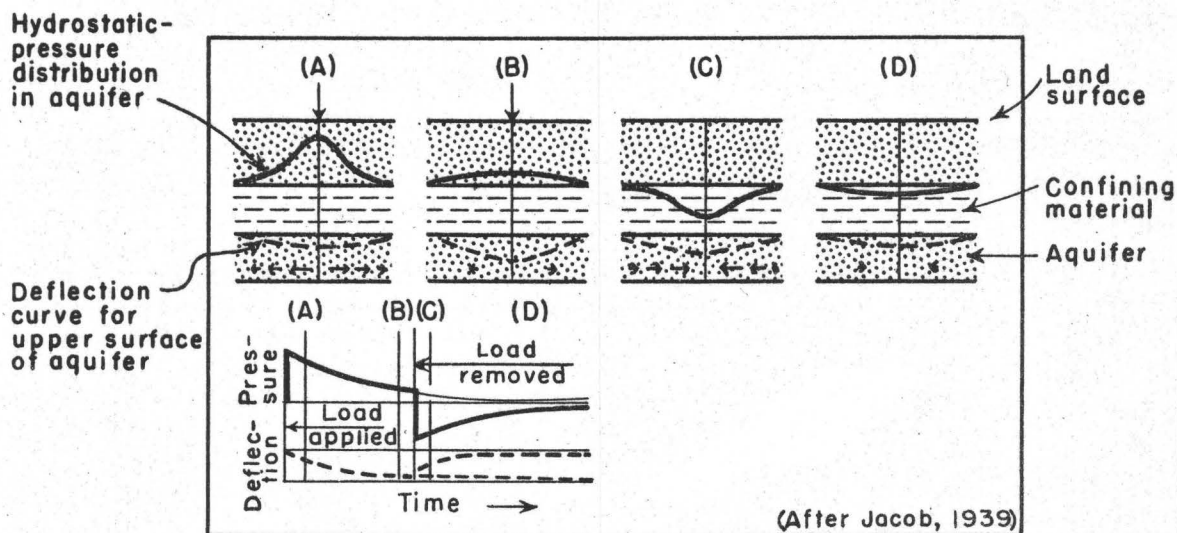

B. SCHEMATIC DIAGRAM SHOWING EFFECT OF INSTANTANEOUS APPLICATION AND SUBSEQUENT REMOVAL OF A SINGLE CONCENTRATED LOAD AT THE LAND SURFACE ON THE PRESSURE DISTRIBUTION AND ON THE COMPRESSION AND SUBSEQUENT EXPANSION OF AN ELASTIC ARTESIAN AQUIFER

Figure 5--Diagrams showing effects of changes in loading on an elastic artesian aquifer

The diagram in figure 5B shows, schematically, the effect of an instantaneously-applied load on the pressure distribution within an elastic artesian aquifer and on the compression and subsequent expansion of the aquifer after removal of the load. In discussing figure 5B Jacob (1939) says:


"The (upper) diagrams A, B, C, and D show the distribution of pressure and the deflection of the upper surface of the aquifer at the respective times indicated on the time-pressure and time-distribution curves. The hydrostatic pressure in the aquifer is plotted as a full line, the upper limit of the confining layer arbitrarily being adopted as a base. The deflection-curve for the upper surface of the aquifer is plotted as a dashed line. (The lower surface of the aquifer is assumed fixed.) These quantities are, of course, grossly exaggerated and are obviously plotted to quite different scales. The length of the arrows indicates the relative magnitude of the velocity of flow at various distances from the load. The lower diagram shows, by the heavy full line, the change in pressure produced by the load, and, by the heavy dashed line, the deflection of the upper surface of the aquifer, plotted against time."

Changes in Atmospheric Pressure


It has been often observed that water levels in wells tapping artesian aquifers respond to changes in atmospheric pressure. An increase in the atmospheric pressure causes the water level to decline, and a decrease in atmospheric pressure causes the water level to rise. The diagrams shown in figure 6 will aid in explaining why this phenomenon is observed in artesian wells and why it ordinarily is not observed in water-table wells.

Referring to diagram A the force Δp_0 , representing the change in atmospheric pressure, is exerted on the free water surface in the well. The same force Δp_0 is also exerted simultaneously on the water table because there is direct communication between the atmosphere and the water table through the unsaturated pore space of the soil. Thus the system of forces remains in balance and there is no appreciable change in water level in the well with changes in atmospheric pressure. Some water-table wells do exhibit barometric fluctuations if the soil is frozen or saturated with water. Either of these conditions, however, is in effect only a special case of the artesian condition.

Referring to diagram B, figure 6, the force Δp_0 , which again represents the change in atmospheric pressure, acts on the free water surface in the well and also on the layer of material confining the artesian aquifer. Jacob (1940) in discussing this situation, reasons that barometric fluctuations in a well are an index of the elasticity of the aquifer. In other words the confining layer, viewed as a unit, has no beam strength or resistance to deflection sufficient to withstand or contain any sensible part of an applied load. Thus in effect any changes in the atmospheric pressure loading on a confining layer are transmitted through

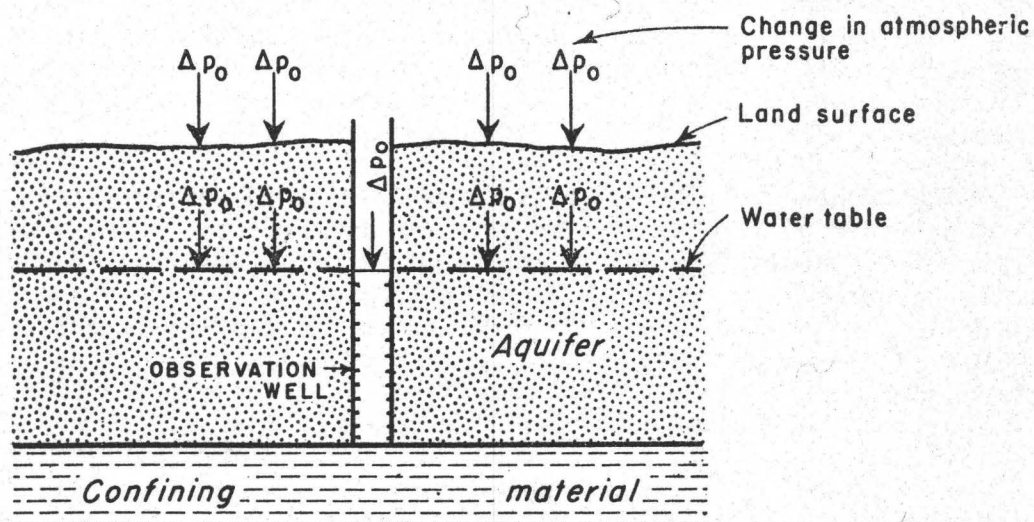

A. IDEALIZED SECTION OF WATER-TABLE AQUIFER

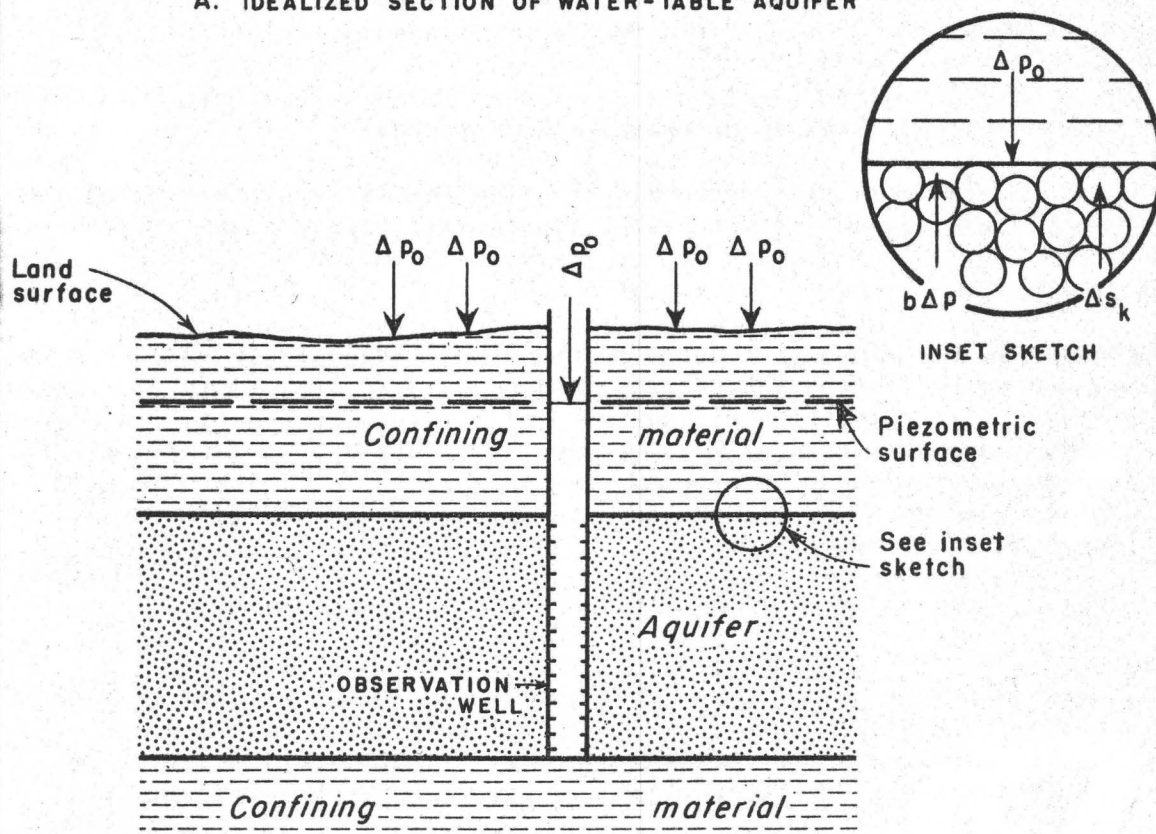

B. IDEALIZED SECTION OF ARTESIAN AQUIFER

Figure 6 -- Sections of water-table and artesian aquifers showing atmospheric pressure loading

it undiminished in magnitude. The forces acting at a point at the interface between the aquifer and the confining layer may then be drawn as shown in the inset sketch. Observe that the change in atmospheric pressure, Δp_o , is now accommodated by a change in stress in the skeleton of the aquifer, Δs_k , plus a change in the water pressure in the aquifer, Δp , applied over b percent of the interface. It is evident, therefore, that in an artesian situation there will be a pressure differential between an observation well where the water is directly subject to the full change in atmospheric pressure, and a point cut in the aquifer where the water is required to accept only part of the change in atmospheric pressure. Thus barometric fluctuations will be observed in the well. Some wells near the outcrop of an artesian aquifer or near a discontinuity in the confining layer will show little or no response to atmospheric pressure changes.

Although not associated with the elasticity of artesian aquifers, it is interesting to note that the phenomena of blowing and sucking wells, which exhibit a pronounced updraft or downdraft of air at the well mouth, may also be related to changes in atmospheric pressure. In areas where such wells have been noted a bed of fine-grained, relatively impervious material usually lies some distance above the water table thereby effectively confining, in the intervening unsaturated pore space, a body of air that can communicate with the atmosphere only through wells.

The barometric efficiency of an aquifer may be expressed as

$$B.E. = \frac{s_w}{s_b}$$

where s_w is the net change in water level observed in a well tapping the aquifer and s_b is the corresponding net change in atmospheric pressure, both expressed in feet of water. It is frequently convenient to determine the barometric efficiency by plotting the water-level changes as ordinates and the corresponding changes in atmospheric pressure as abscissas on rectangular coordinate paper. The slope of the straight line drawn through the plotted points is the barometric efficiency.

Tidal Fluctuations

Ocean, lake or stream tides.--Water levels in wells near the ocean or near some lakes or streams exhibit semidiurnal fluctuations in response to tidal fluctuations. In wells tapping water-table aquifers the water-level response to tidal fluctuations is due to actual movement of water in the aquifer. However, in wells tapping artesian aquifers, that are effectively separated from the body of surface water by an extensive confining layer, the response is due to the changing load on the aquifer which is transmitted through the confining layer with the changing tide. Thus with the rise of the tide the load on the aquifer is increased which means that in the aquifer there will be compensating increases in the water pressure and the stress in the skeleton. Accordingly, the water-level rise in the well is but a reflection of the increased pressure head in the aquifer caused by the tidal loading.

An artesian well that responds to tidal fluctuations should also respond to changes in atmospheric pressure because it is the same mechanism

in the aquifer that produces both types of response.

The tidal efficiency of an aquifer may be expressed as

$$T.E. = \frac{s_w}{s_t}$$

where s_w is the range of water-level fluctuation, in feet, in a well tapping the aquifer, and s_t is the range of the tide, in feet, corrected for density when necessary. There is a direct relationship between the tidal efficiency or the barometric efficiency and the coefficient of storage as will be discussed in a later section of this report.

Jacob (1950, p. 331-332) has derived expressions relating the tidal and barometric efficiency and the elasticity of an artesian aquifer. The two pertinent equations are

$$T.E. = \frac{\alpha/\theta\beta}{1 + \alpha/\theta\beta}$$

and

$$B.E. = \frac{1}{1 + \alpha/\theta\beta}$$

where α is the bulk modulus of compression of the solid skeleton of the aquifer, β is the bulk modulus of compression of water (reciprocal of the bulk modulus of elasticity), and θ is the porosity of the aquifer. If these two equations are added it is evident that the sum of the barometric efficiency and the tidal efficiency equals unity, that is,

$$B.E. + T.E. = 1$$

Earth tides.--It has been observed that earth tides, which are caused by the forces exerted on the earth's surface by the sun and the moon, may produce water-level fluctuations in artesian wells. Water-level fluctuations due to earth tides were apparently first observed by Klonne (1880) in a flooded coal mine at Dux, Bohemia. Such fluctuations in wells were first observed by Young (1913) near Cradock, South Africa. After the water levels have been adjusted for changes in atmospheric pressure the "high" water levels have been observed near moonrise and moonset and the "low" water levels near the upper and lower culminations of the moon.

For a well near Carlsbad, New Mexico and for a well at Iowa City, Iowa, Robinson (1939) showed that the water-level fluctuations, after adjustment for changes in atmospheric pressure are coincident with the earth tides. The low water levels showed a tendency to precede the culmination of the moon, suggesting that the tide in the well precedes the culmination of the moon.

According to Theis (1939), the possible effects of tidal forces acting either directly upon the water in the aquifer or upon the aquifer itself, by varying the weight of the overburden could not account for the

observed water-level fluctuations. The explanation for these water-level fluctuations is probably the distortion of the earth's crust. In this regard Theis (1939) states:

"As the crust of the earth in any given area rises and falls with the deformation of the earth caused by the tidal forces the crust is most probably alternately expanded and compressed laterally -- expanded when the earth bulges up and compressed when it subsides. Water in an artesian aquifer making up part of the crust shares in this deformation. In localities distant from points of outflow of the water, it is in effect confined without possibility of outflow within the period of tidal fluctuations. The slight hydraulic gradient imposed by the tidal distortion is too small to cause effective release of pressure. Hence the aquifer is essentially sealed with respect to its included fluid. With the expansion of the aquifer incident to the tidal bulge the hydrostatic pressure falls and with its compression incident to tidal depression the hydrostatic pressure rises."

Earthquakes

Fluctuations in water levels due to earthquakes have been observed in many wells equipped with water-stage recorders. Veatch (1906, p. 70) was apparently one of the first hydrologists in this country to recognize that some water-level fluctuations might be in response to earthquake disturbances. Subsequent investigators who have published papers on the subject include Stearns, H. T. (1928), Piper (1933), Leggett and Taylor (1935), LaRocque (1941), Parker and Stringfield (1950), and Vorhies (1953). An earthquake may be defined as a vibration or oscillation of the earth's crust caused by a transient disturbance of the elastic or gravitational equilibrium of the rocks at or beneath the land surface. Earthquakes are classified as shallow or deep depending on the vertical position, relative to the land surface, of the source of the disturbance. Shock waves, propagated by an earthquake, travel through the earth and along the earth's surface. Because the earth is an elastic body it is first compressed by the shock waves and subsequently it expands after the shock wave is dissipated. Where an aquifer is included in the segment of the earth affected by the shock waves of an earthquake there will first be an abrupt increase in water pressure as the water assumes part of the imposed compressive stress, followed by an abrupt decrease in water pressure as the imposed stress is removed. In attempting to adjust to the pressure changes, the water level in an artesian well first rises and then falls. The amounts of the rise and fall of the water level, with respect to the initial position, are approximately the same. Cases have been recorded, however, where the water level did not return to its initial position (Brown, 1948, p. 193-195). This is presumably due to permanent rearrangement of the grains of material composing the aquifer. Fluctuations of greater magnitude have been observed in wells in limestone aquifers than in wells in granular material.

The following table gives the types of shock waves caused by earthquakes, the approximate average velocities at which they travel and the path they take.

Table 1.--Approximate average velocities and paths taken by different types of shock waves caused by earthquakes

Type of shock wave	Approximate average velocity				Path
	km/sec	ft/sec	mi/min	mi/hr	
Deep-seated	5.5	18,000 ±	205 ±	12,300 ±	Chord
Surface	3.2	10,500 ±	120 ±	7,200 ±	Arc

After Byerly, P., 1933, p. 155.

The Coefficient of Storage and its Relation to Elasticity

The coefficient of storage is a function of the elasticity of an artesian aquifer. Jacob (1950) has expressed the relation as

$$S = \gamma_0 \theta m (\beta + \frac{\alpha}{\theta})$$

where in this instance γ_0 is the specific weight of the water at a stated reference temperature, and θ , m , β , and α are as defined earlier (see p. 17) in this report. This formula assumes no leakage from or into contiguous beds.

Digressing momentarily, the specific weight, γ , of a fluid at a stated reference temperature is defined as its density, ρ , multiplied by the local acceleration due to gravity, g . Stated another way it is the weight per unit volume which takes into account the magnitude of the local gravitational force. The manner in which specific weight is related to such more commonly used properties as mass, weight, and density can be developed in the following fashion. First it should be recognized that in the English engineering system the unit of mass is termed a "slug". It is the mass in which an acceleration of 1 ft per sec² is produced by a force of 1 lb. Thus 1 slug of mass is approximately equal to 32.2 lbs. of mass. The mass, M , in slugs, of any substance is determined from the relation

$$M = \frac{W}{g}$$

where W is the weight of the substance in pounds. Inasmuch as weight is dependent on the local gravitational force it obviously varies with location. Thus, the fraction W/g takes into account in both numerator and denominator the local force of gravity, which shows that mass is an absolute property that does not change with location. Density is defined as mass per unit volume, V . That is:

$$\text{Density} = \frac{M}{V}$$

Thus density also is an absolute property that does not change with location. (Slight changes occur with change in temperature but ordinarily, within the range of ground-water temperatures encountered, no adjustment for this factor is necessary.) If the original relation given for deter-

mining mass, M , is solved for the weight, W , and if both sides of the rewritten equation are divided by the volume, V , there follows:

$$\left[\frac{W}{V} \right] = \left[\frac{M}{V} \right] g$$

The brackets on the left side of the equation are now seen to include the fraction which is equivalent to specific weight and the brackets on the right side include the fraction equivalent to density. That is:

$$\gamma = \rho g$$

Returning to the discussion at hand, it is important to point out that considerable study remains to be done regarding the elastic behavior of artesian reservoirs. It would be worthwhile, for example, to compute the values of the bulk modulus of compression (α) of the solid skeleton of the various artesian reservoirs where coefficients of storage have been determined from various types of aquifer tests. R. R. Bennett has supplied the following data for the principal aquifer in the Baltimore area, Md.:

$$S = 0.0002$$

$$\theta = 0.30$$

$$m = 100 \text{ ft} = 1200 \text{ inches}$$

Recognizing that for water

$$\gamma_o = 62.4 \text{ lbs/ft}^3 = \frac{62.4}{1728} \text{ or } 0.0361 \text{ lb/in}^3$$

and

$$\beta = \frac{1}{300,000} = 3.3 \times 10^{-6} \text{ in}^2/\text{lb}$$

appropriate substitution of all known quantities is made in Jacob's equation for the storage coefficient and the value of α is computed. Thus

$$0.0002 = (0.0361)(0.30)(1200) \left[0.0000033 + \frac{\alpha}{0.30} \right]$$

or

$$\alpha = 0.00000363 \text{ in}^2/\text{lb} \text{ or } 3.63 \times 10^{-6} \text{ in}^2/\text{lb}$$

Conversely, it is possible to determine the coefficient of storage if α is known. Jacob (1941) determined from pumping tests that the modulus of compression (α) of the Lloyd sand member of the Raritan formation on Long Island, N.Y., was $2.1 \times 10^{-6} \text{ in}^2/\text{lb}$. In a location where this sand has a porosity (θ) of 0.30 and is confined to form an aquifer having a thickness (m) of 50 feet the coefficient of storage may be computed as

$$S = (0.0361)(0.30)(50 \times 12) \left[(3.3 \times 10^{-6}) + \frac{2.1 \times 10^{-6}}{0.30} \right]$$

$$S = 6.7 \times 10^{-5}$$

The coefficient of storage is related to barometric and tidal efficiency. As stated previously, Jacob (1940) showed mathematically that the sum of the barometric efficiency and tidal efficiency must equal unity ($B.E. + T.E. = 1$). He showed further that when $b = 1$ the storage coefficient is related to the barometric efficiency as follows,

$$S = (\gamma_0 \theta m \beta) \left[\frac{1}{B.E.} \right]$$

using the same terminology as before and assuming no leakage from or into contiguous beds. By observing tidal fluctuations in a well, screened in the Lloyd sand member of the Raritan formation on Long Island, Jacob (1940) could then determine tidal efficiency and compute the coefficient of storage. His computations for well Q-288, near Rockaway Park, where the tidal efficiency was determined as 42 percent, are as follows:

$$\frac{1}{B.E.} = \frac{1}{1 - (T.E.)} = \frac{1}{1 - 0.42} = 1.72$$

Ascribing a thickness of 200 feet and a porosity of 0.35 to the Lloyd sand member in the vicinity of Rockaway Park, Long Island, and substituting in the foregoing equation for storage coefficient there results

$$S = (0.0361)(0.35)(200 \times 12) \left[\frac{1}{300,000} \right] (1.72)$$

$$S = 1.7 \times 10^{-4}$$

This value for the coefficient of storage is comparable to the values determined from pumping tests.

Jacob (1941) observed that the compressibility of the Lloyd sand member, as computed from a discharging-well test, was about $2\frac{1}{2}$ times that computed from tidal fluctuations and reasoned that this disparity might be due, in part, to the range of stress involved. He states,

".... during the pumping test of 1940 the head in the Lloyd sand declined to a new low over a considerable area in the vicinity of the pumped wells, and consequently the stress in the skeleton of the aquifer reached a new high. It is to be expected that the modulus of elasticity would be smaller for the new, higher range of stress than for the old range over which the stress had fluctuated many times."

PART I. AQUIFER TESTS -- BASIC THEORY

Well Methods -- Point Sink or Point Source

Constant Discharge or Recharge without Vertical Leakage

Equilibrium formula.--Wenzel (1942, p. 79-82) showed that the equilibrium formulas used by Slichter (1899), Turneaure and Russell (1901), Israelson (1950), and Wyckoff, Botset, and Muskat (1932) are essentially modified forms of a method developed by Thiem (1906) as are the formulas developed by Dupuit (1848) and Forchheimer (1901). Thiem apparently was the first to use the equilibrium formula for determining permeability and it is frequently associated with his name. The formula was developed by Thiem from Darcy's law and provides a means for determining aquifer transmissibility if the rate of discharge of a pumped well and the drawdown in each of two observation wells at different known distances from the pumped well are known. The Thiem formula, in non-dimensional form, can be written as

$$T = \frac{Q \log_e (r_2/r_1)}{2\pi (s_1 - s_2)} \quad (1)$$

where the subscript e in the log term indicates the natural logarithm. In the usual Geological Survey units, and using common logarithms, equation (1) becomes

$$T = \frac{527.7 Q \log_{10} (r_2/r_1)}{s_1 - s_2} \quad (2)$$

where

T = coefficient of transmissibility, in gallons per day per foot

Q = rate of discharge of the pumped well, in gallons per minute

r_1 and r_2 = distances from the pumped well to the first and second observation wells, in feet

s_1 and s_2 = drawdowns in the first and second observation wells, in feet,

The derivation of the formula is based on the following assumptions: (1) The aquifer is homogeneous, isotropic, and of infinite areal extent, (2) the discharging well penetrates and receives water from the entire thickness of the aquifer, (3) the coefficient of transmissibility is constant at all times and at all places, (4) pumping has continued at a uniform rate for sufficient time for the hydraulic system to reach a steady-state (i.e., an unchanging rate of drawdown) condition, and (5) the flow is laminar. The formula has wide application to ground-water problems despite the restrictive assumptions on which it is based.

The procedure for application of equation 2 is to select some convenient elapsed pumping time, t , after reaching the steady-state condition, and on semilog coordinate paper plot for each observation well the drawdowns

s, versus the distances, r. By plotting the values of s on the arithmetic scale and the values of r on the logarithmic scale the observed data should lie on a straight line for the equilibrium formula to apply. From this straight line make an arbitrary choice of s_1 and s_2 and record the corresponding values of r_1 and r_2 . Equation 2 can then be solved for T.

Jacob (1950, p. 368) recognized that the coefficient of storage could also be determined if the hydraulic system had reached a steady-state condition (see assumption 4, above) for thereafter the drawdown is expressed very closely by the non-dimensional formula

$$s = \frac{Q}{4\pi T} \log_e \frac{2.25Tt}{r^2 S} \quad (3)$$

or in the customary Survey units, and using common logarithms,

$$s = \frac{264Q}{T} \log_{10} \frac{0.3Tt}{r^2 S} \quad (4)$$

Thus after the coefficient of transmissibility has been determined, the coordinates of any point on the semilogarithmic graph previously described can be used to solve equation 4 for the coefficient of storage.

Nonequilibrium formula.--Theis (1935) derived the nonequilibrium formula from the analogy between the hydrologic conditions in an aquifer and the thermal conditions in an equivalent thermal system. The analogy between the flow of ground water and heat conduction for the steady-state condition had been recognized at least since the work of Slichter (1899), but Theis was the first to introduce the concept of time to the mathematics of ground-water hydraulics. Jacob (1940) verified the derivation of the nonequilibrium formula directly from hydraulic concepts.

The nonequilibrium formula in non-dimensional form is

$$s = \frac{Q}{4\pi T} \int_{r^2 S/4Tt}^{\infty} \frac{e^{-u}}{u} du \quad (5)$$

where $u = r^2 S/4Tt$, and where the integral expression is known as an exponential integral.

Using the ordinary Survey units equation 5 may be written as

$$s = \frac{114.6 Q}{T} \int_{1.87r^2 S/Tt}^{\infty} \frac{e^{-u}}{u} du \quad (6)$$

where

$$u = 1.87r^2 S/Tt$$

s = drawdown, in feet, at any point of observation in the vicinity of a well discharging at a constant rate

Q = discharge of a well, in gallons per minute
 T = transmissibility, in gallons per day per foot
 r = distance, in feet, from the discharging well to the point of observation
 S = coefficient of storage, expressed as a decimal fraction
 t = time in days since pumping started.

The nonequilibrium formula is based on the following assumptions: (1) The aquifer is homogeneous and isotropic, (2) the aquifer has infinite areal extent, (3) the discharge or recharge well penetrates and receives water from the entire thickness of the aquifer, (4) the coefficient of transmissibility is constant at all times and at all places, (5) the well has an infinitesimal diameter, and (6) water removed from storage is discharged instantaneously with decline in head. Despite the restrictive assumptions on which it is based, the nonequilibrium formula has been applied successfully to many problems of ground-water flow.

The integral expression in equation 6 cannot be integrated directly, but its value is given by the series

$$\begin{aligned}
 \int_0^{\infty} \frac{e^{-u}}{u} du &= W(u) \\
 &= -0.577216 - \log_e u + u - \\
 &\quad - \frac{u^2}{2 \cdot 2!} + \frac{u^3}{3 \cdot 3!} - \frac{u^4}{4 \cdot 4!} \dots \dots \quad (7)
 \end{aligned}$$

where, as already indicated,

$$u = \frac{1.87 r^2 S}{Tt} \quad (8)$$

The exponential integral is written symbolically as $W(u)$ which is read "well function of u ." Values of $W(u)$ for values of u from 10^{-15} to 9.9, as tabulated by Wenzel (1942), are given in table 2. In order to determine the value of $W(u)$ for a given value of u , using table 2, it is necessary to express u as some number (N) between 1.0 and 9.9, multiplied by 10 with the appropriate exponent. For example, when u has a value of 0.0005 (i.e., 5.0×10^{-4}), $W(u)$ is determined from the line $N = 5.0$ and the column $N \times 10^{-4}$ to be 7.0242.

Referring to equations 6 and 8, if s can be measured for one value of r and several values of t , or for one value of t and several values of r , and if the discharge Q is known, then S and T can be determined. Once these aquifer constants have been determined, it is possible, theoretically, to compute the drawdown for any time at any point on the cone of depression for any given rate and distribution of pumping from wells. It is not possible, however, to determine T and S directly from equation 6, because T occurs in the argument of the function and again as a divisor of the exponential integral. There is devised a convenient graphical method of superposition that

makes it possible to obtain a simple solution of the equation.

The first step in this method is the plotting of a type curve on logarithmic coordinate paper. From table 2 values of $W(u)$ have been plotted against the argument u to form the type curve shown in figure 7. It is shown in two segments, A-A and B-B, in order that the portion of the type curve necessary in the analysis of pumping test data could be plotted on a sheet of convenient size. Curve B-B is an extension of curve A-A and overlaps curve A-A for values of $W(u)$ from about 0.22 to 1.0. (A continuous type curve giving values of $W(u)$ for values of u between 0.000001 and about 9.0, using 3-inch log-log cycles, is available from the Washington office of the Ground Water Branch.)

Rearranging equations 6 and 8 there follows

$$s = \left[\frac{114.6 Q}{T} \right] W(u)$$

or

$$\log s = \left[\log \frac{114.6 Q}{T} \right] + \log W(u) \quad (9)$$

and

$$\frac{r^2}{t} = \left[\frac{T}{1.87 S} \right] u$$

or

$$\log \frac{r^2}{t} = \left[\log \frac{T}{1.87 S} \right] + \log u \quad (10)$$

If the discharge, Q , is held constant, the bracketed parts of equations (9) and (10) are constant for a given pumping test, and $W(u)$ is related to u in the manner that s is related to r^2/t . This is shown graphically in figure 8. Therefore, if values of the drawdown s , are plotted against r^2/t , or $1/t$ if only one observation well is used, on logarithmic tracing paper to the same scale as the type curve, the curve of observed data will be similar to the type curve. The data curve may then be superposed on the type curve, the coordinate axes of the two curves being held parallel, and translated to a position which represents the best fit of the field data to the type curve. An arbitrary point is selected anywhere on the overlapping portion of the sheets and the coordinates of this common point on both sheets are recorded. These data are then used with equations 9 and 10 to solve for T and S .

A type curve on logarithmic coordinate paper of $W(u)$ versus $1/u$, the reciprocal of the argument, could have been plotted. Values of the drawdown (or recovery), s , would then have been plotted versus t , or t/r^2 and superposed on the type curve in the manner outlined above. This method eliminates the necessity for computing $1/t$ values for the values of s . (A type curve of $W(u)$ versus $1/u$, using 3-inch log-log cycles, is also available from the Washington office of the Ground Water Branch.)

Table 2.--Values of $W(u)$ for values of u between 10^{-15} and $9.9 \frac{a}{l}$

u	$K \times 10^{-15}$	$K \times 10^{-14}$	$K \times 10^{-13}$	$K \times 10^{-12}$	$K \times 10^{-11}$	$K \times 10^{-10}$	$K \times 10^{-9}$	$K \times 10^{-8}$	$K \times 10^{-7}$	$K \times 10^{-6}$	$K \times 10^{-5}$	$K \times 10^{-4}$	$K \times 10^{-3}$	$K \times 10^{-2}$	$K \times 10^{-1}$	W
1.0	33.9616	31.6590	29.3564	27.0538	24.7512	22.4486	20.1460	17.8435	15.5409	13.2383	10.9357	8.6332	6.3315	4.0379	1.8229	0.2194
1.1	33.8662	31.5637	29.2611	26.9585	24.6559	22.3533	20.0507	17.7482	15.4456	13.1430	10.8404	8.5379	6.2363	3.9436	1.7371	.1860
1.2	33.7792	31.4767	29.1741	26.8715	24.5689	22.2663	19.9637	17.6611	15.3586	13.0560	10.7534	8.4509	6.1494	3.8576	1.6595	.1584
1.3	33.6992	31.3966	29.0940	26.7914	24.4889	22.1863	19.8837	17.5811	15.2785	12.9759	10.6734	8.3709	6.0695	3.7785	1.5889	.1355
1.4	33.6251	31.3225	29.0199	26.7173	24.4147	22.1122	19.8096	17.5070	15.2044	12.9018	10.5993	8.2968	5.9955	3.7054	1.5241	.1162
1.5	33.5561	31.2535	28.9509	26.6483	24.3458	22.0432	19.7406	17.4380	15.1354	12.8328	10.5303	8.2278	5.9266	3.6374	1.4645	.1000
1.6	33.4916	31.1890	28.8864	26.5838	24.2812	21.9786	19.6760	17.3735	15.0709	12.7683	10.4657	8.1634	5.8621	3.5739	1.4092	.08631
1.7	33.4309	31.1283	28.8258	26.5232	24.2206	21.9180	19.6154	17.3128	15.0103	12.7077	10.4051	8.1027	5.8016	3.5143	1.3578	.07465
1.8	33.3738	31.0712	28.7686	26.4660	24.1634	21.8608	19.5583	17.2557	14.9531	12.6505	10.3479	8.0455	5.7446	3.4581	1.3098	.06471
1.9	33.3197	31.0171	28.7145	26.4119	24.1094	21.8068	19.5042	17.2016	14.8990	12.5964	10.2939	7.9915	5.6906	3.4050	1.2649	.05620
2.0	33.2684	30.9658	28.6632	26.3607	24.0581	21.7555	19.4529	17.1503	14.8477	12.5451	10.2426	7.9402	5.6394	3.3547	1.2227	.04890
2.1	33.2196	30.9170	28.6145	26.3119	24.0093	21.7067	19.4041	17.1015	14.7989	12.4964	10.1938	7.8914	5.5907	3.3069	1.1829	.04261
2.2	33.1731	30.8705	28.5679	26.2653	23.9628	21.6602	19.3576	17.0550	14.7524	12.4498	10.1473	7.8449	5.5443	3.2614	1.1454	.03719
2.3	33.1286	30.8261	28.5235	26.2209	23.9183	21.6157	19.3131	17.0106	14.7080	12.4054	10.1028	7.8004	5.4999	3.2179	1.1099	.03250
2.4	33.0861	30.7835	28.4809	26.1783	23.8758	21.5732	19.2705	16.9680	14.6654	12.3628	10.0603	7.7579	5.4575	3.1763	1.0762	.02844
2.5	33.0453	30.7427	28.4401	26.1375	23.8349	21.5323	19.2298	16.9272	14.6246	12.3220	10.0194	7.7172	5.4167	3.1365	1.0443	.02491
2.6	33.0060	30.7035	28.4009	26.0983	23.7957	21.4931	19.1905	16.8880	14.5854	12.2826	9.9802	7.6779	5.3776	3.0983	1.0139	.02185
2.7	32.9683	30.6657	28.3631	26.0606	23.7580	21.4554	19.1528	16.8502	14.5476	12.2450	9.9425	7.6401	5.3400	3.0615	.9849	.01918
2.8	32.9319	30.6294	28.3268	26.0242	23.7216	21.4190	19.1164	16.8138	14.5113	12.2087	9.9061	7.6038	5.3037	3.0261	.9573	.01686
2.9	32.8968	30.5943	28.2917	25.9891	23.6865	21.3839	19.0813	16.7788	14.4762	12.1736	9.8710	7.5687	5.2687	2.9920	.9309	.01482
3.0	32.8629	30.5604	28.2578	25.9552	23.6526	21.3500	19.0474	16.7449	14.4423	12.1397	9.8371	7.5348	5.2349	2.9591	.9057	.01305
3.1	32.8302	30.5276	28.2250	25.9224	23.6198	21.3172	19.0146	16.7121	14.4095	12.1069	9.8043	7.5020	5.2022	2.9273	.8815	.01149
3.2	32.7984	30.4958	28.1932	25.8907	23.5881	21.2855	18.9829	16.6803	14.3777	12.0751	9.7726	7.4703	5.1706	2.8965	.8583	.01013
3.3	32.7676	30.4651	28.1625	25.8599	23.5573	21.2547	18.9521	16.6495	14.3470	12.0444	9.7418	7.4395	5.1399	2.8668	.8361	.008939
3.4	32.7378	30.4352	28.1326	25.8300	23.5274	21.2249	18.9223	16.6197	14.3171	12.0145	9.7120	7.4097	5.1102	2.8379	.8147	.007891
3.5	32.7088	30.4062	28.1036	25.8010	23.4985	21.1959	18.8933	16.5907	14.2881	11.9855	9.6830	7.3807	5.0813	2.8099	.7942	.006970
3.6	32.6806	30.3780	28.0755	25.7729	23.4703	21.1677	18.8651	16.5625	14.2599	11.9574	9.6548	7.3526	5.0532	2.7827	.7745	.006160
3.7	32.6532	30.3506	28.0481	25.7455	23.4429	21.1403	18.8377	16.5351	14.2325	11.9300	9.6274	7.3252	5.0259	2.7563	.7554	.005448
3.8	32.6266	30.3240	28.0214	25.7188	23.4162	21.1136	18.8110	16.5085	14.2059	11.9033	9.6007	7.2985	4.9993	2.7306	.7371	.004820
3.9	32.6006	30.2980	27.9954	25.6928	23.3902	21.0877	18.7851	16.4825	14.1799	11.8773	9.5748	7.2725	4.9735	2.7056	.7194	.004267
4.0	32.5753	30.2727	27.9701	25.6675	23.3649	21.0623	18.7598	16.4572	14.1546	11.8520	9.5495	7.2472	4.9482	2.6813	.7024	.003779
4.1	32.5506	30.2480	27.9454	25.6428	23.3402	21.0376	18.7351	16.4325	14.1299	11.8273	9.5248	7.2225	4.9236	2.6576	.6859	.003349
4.2	32.5265	30.2239	27.9213	25.6187	23.3161	21.0136	18.7110	16.4084	14.1058	11.8032	9.5007	7.1985	4.8997	2.6344	.6700	.002969
4.3	32.5029	30.2004	27.8978	25.5952	23.2926	20.9900	18.6874	16.3848	14.0823	11.7797	9.4771	7.1749	4.8762	2.6119	.6546	.002633
4.4	32.4800	30.1774	27.8748	25.5722	23.2696	20.9670	18.6644	16.3619	14.0593	11.7567	9.4541	7.1520	4.8533	2.5899	.6397	.002336
4.5	32.4575	30.1549	27.8523	25.5497	23.2471	20.9446	18.6420	16.3394	14.0368	11.7342	9.4317	7.1295	4.8310	2.5684	.6253	.002073
4.6	32.4355	30.1329	27.8303	25.5277	23.2252	20.9226	18.6200	16.3174	14.0148	11.7122	9.4097	7.1075	4.8091	2.5474	.6114	.001841
4.7	32.4140	30.1114	27.8088	25.5062	23.2037	20.9011	18.5985	16.2959	13.9933	11.6907	9.3882	7.0860	4.7877	2.5268	.5979	.001635
4.8	32.3929	30.0904	27.7878	25.4852	23.1826	20.8800	18.5774	16.2748	13.9723	11.6697	9.3671	7.0650	4.7667	2.5068	.5848	.001453
4.9	32.3723	30.0697	27.7672	25.4646	23.1620	20.8594	18.5568	16.2542	13.9516	11.6491	9.3465	7.0444	4.7462	2.4871	.5721	.001291

 $\frac{a}{l}$ Same as table facing p. 89 in Water-Supply Paper 887 (see Wenzel, 1942).

N	Nx10-15	Nx10-14	Nx10-13	Nx10-12	Nx10-11	Nx10-10	Nx10-9	Nx10-8	Nx10-7	Nx10-6	Nx10-5	Nx10-4	Nx10-3	Nx10-2	Nx10-1	N
5.0	32.3521	30.0495	27.7470	25.4444	23.1418	20.8392	18.5366	16.2340	13.9314	11.6289	9.3263	7.0242	4.7261	2.4679	0.5598	0.001148
5.1	32.3323	30.0297	27.7271	25.4246	23.1220	20.8194	18.5168	16.2142	13.9116	11.6091	9.3065	7.0044	4.7064	2.4491	.5478	.001021
5.2	32.3129	30.0103	27.7077	25.4051	23.1026	20.8000	18.4974	16.1948	13.8922	11.5896	9.2871	6.9850	4.6871	2.4306	.5362	.0009086
5.3	32.2939	29.9913	27.6887	25.3861	23.0835	20.7809	18.4783	16.1758	13.8732	11.5706	9.2681	6.9659	4.6681	2.4126	.5250	.0008086
5.4	32.2752	29.9726	27.6700	25.3674	23.0648	20.7622	18.4596	16.1571	13.8545	11.5519	9.2494	6.9473	4.6495	2.3948	.5140	.0007198
5.5	32.2568	29.9542	27.6516	25.3491	23.0465	20.7439	18.4413	16.1387	13.8361	11.5336	9.2310	6.9289	4.6313	2.3775	.5034	.0006409
5.6	32.2388	29.9362	27.6336	25.3310	23.0285	20.7259	18.4233	16.1207	13.8181	11.5155	9.2130	6.9109	4.6134	2.3604	.4930	.0005708
5.7	32.2211	29.9185	27.6159	25.3133	23.0108	20.7082	18.4056	16.1030	13.8004	11.4978	9.1953	6.8932	4.5958	2.3437	.4830	.0005085
5.8	32.2037	29.9011	27.5985	25.2959	22.9934	20.6908	18.3882	16.0856	13.7830	11.4804	9.1779	6.8758	4.5785	2.3273	.4732	.0004532
5.9	32.1866	29.8840	27.5814	25.2789	22.9763	20.6737	18.3711	16.0685	13.7659	11.4633	9.1608	6.8588	4.5615	2.3111	.4637	.0004039
6.0	32.1698	29.8672	27.5646	25.2620	22.9595	20.6569	18.3543	16.0517	13.7491	11.4465	9.1440	6.8420	4.5448	2.2953	.4544	.0003601
6.1	32.1533	29.8507	27.5481	25.2455	22.9429	20.6403	18.3378	16.0352	13.7326	11.4300	9.1275	6.8254	4.5283	2.2797	.4454	.0003211
6.2	32.1370	29.8344	27.5318	25.2293	22.9267	20.6241	18.3215	16.0189	13.7163	11.4138	9.1112	6.8092	4.5122	2.2645	.4366	.0002864
6.3	32.1210	29.8184	27.5158	25.2133	22.9107	20.6081	18.3055	16.0029	13.7003	11.3978	9.0952	6.7932	4.4963	2.2494	.4280	.0002555
6.4	32.1053	29.8027	27.5001	25.1975	22.8949	20.5923	18.2898	15.9872	13.6846	11.3820	9.0795	6.7775	4.4806	2.2346	.4197	.0002279
6.5	32.0898	29.7872	27.4845	25.1820	22.8794	20.5768	18.2742	15.9717	13.6691	11.3665	9.0640	6.7620	4.4652	2.2201	.4115	.0002034
6.6	32.0745	29.7719	27.4693	25.1667	22.8641	20.5616	18.2590	15.9564	13.6538	11.3512	9.0487	6.7467	4.4501	2.2058	.4036	.0001816
6.7	32.0595	29.7569	27.4543	25.1517	22.8491	20.5465	18.2439	15.9414	13.6388	11.3362	9.0337	6.7317	4.4351	2.1917	.3959	.0001621
6.8	32.0446	29.7421	27.4395	25.1369	22.8343	20.5317	18.2291	15.9265	13.6240	11.3214	9.0189	6.7169	4.4204	2.1779	.3883	.0001448
6.9	32.0300	29.7275	27.4249	25.1223	22.8197	20.5171	18.2145	15.9119	13.6094	11.3068	9.0043	6.7023	4.4059	2.1643	.3810	.0001293
7.0	32.0156	29.7131	27.4105	25.1079	22.8053	20.5027	18.2001	15.8976	13.5950	11.2924	8.9899	6.6879	4.3916	2.1508	.3738	.0001155
7.1	32.0015	29.6989	27.3963	25.0937	22.7911	20.4885	18.1860	15.8834	13.5808	11.2782	8.9757	6.6737	4.3775	2.1376	.3668	.0001032
7.2	31.9875	29.6849	27.3823	25.0797	22.7771	20.4746	18.1720	15.8694	13.5668	11.2642	8.9617	6.6598	4.3636	2.1246	.3599	.00009219
7.3	31.9737	29.6711	27.3685	25.0659	22.7633	20.4608	18.1582	15.8556	13.5530	11.2504	8.9479	6.6460	4.3500	2.1118	.3532	.00008239
7.4	31.9601	29.6575	27.3549	25.0523	22.7497	20.4472	18.1446	15.8420	13.5394	11.2368	8.9343	6.6324	4.3364	2.0991	.3467	.00007364
7.5	31.9467	29.6441	27.3415	25.0389	22.7363	20.4337	18.1311	15.8286	13.5260	11.2234	8.9209	6.6190	4.3231	2.0867	.3403	.00006583
7.6	31.9334	29.6308	27.3282	25.0257	22.7231	20.4205	18.1179	15.8153	13.5127	11.2102	8.9076	6.6057	4.3100	2.0744	.3341	.00005886
7.7	31.9203	29.6178	27.3152	25.0126	22.7100	20.4074	18.1048	15.8022	13.4997	11.1971	8.8946	6.5927	4.2970	2.0623	.3280	.00005263
7.8	31.9074	29.6048	27.3023	24.9997	22.6971	20.3945	18.0919	15.7893	13.4868	11.1842	8.8817	6.5798	4.2842	2.0503	.3221	.00004707
7.9	31.8947	29.5921	27.2895	24.9869	22.6844	20.3818	18.0792	15.7766	13.4740	11.1714	8.8689	6.5671	4.2716	2.0386	.3163	.00004210
8.0	31.8821	29.5795	27.2769	24.9744	22.6718	20.3692	18.0666	15.7640	13.4614	11.1589	8.8563	6.5545	4.2591	2.0269	.3106	.00003767
8.1	31.8697	29.5671	27.2645	24.9619	22.6594	20.3568	18.0542	15.7516	13.4490	11.1464	8.8439	6.5421	4.2468	2.0155	.3050	.00003370
8.2	31.8574	29.5548	27.2523	24.9497	22.6471	20.3445	18.0419	15.7393	13.4367	11.1342	8.8317	6.5298	4.2346	2.0042	.2996	.00003015
8.3	31.8453	29.5427	27.2401	24.9375	22.6350	20.3324	18.0298	15.7272	13.4246	11.1220	8.8195	6.5177	4.2226	1.9930	.2943	.00002699
8.4	31.8333	29.5307	27.2282	24.9256	22.6230	20.3204	18.0178	15.7152	13.4126	11.1101	8.8076	6.5057	4.2107	1.9820	.2891	.00002415
8.5	31.8215	29.5189	27.2163	24.9137	22.6112	20.3086	18.0060	15.7034	13.4008	11.0982	8.7957	6.4939	4.1990	1.9711	.2840	.00002162
8.6	31.8098	29.5072	27.2046	24.9020	22.5995	20.2969	17.9943	15.6917	13.3891	11.0865	8.7840	6.4822	4.1874	1.9604	.2790	.00001936
8.7	31.7982	29.4957	27.1931	24.8905	22.5879	20.2853	17.9827	15.6801	13.3776	11.0750	8.7725	6.4707	4.1759	1.9498	.2742	.00001733
8.8	31.7868	29.4842	27.1816	24.8790	22.5765	20.2739	17.9713	15.6687	13.3661	11.0635	8.7610	6.4592	4.1646	1.9393	.2694	.00001552
8.9	31.7755	29.4729	27.1703	24.8678	22.5652	20.2626	17.9600	15.6574	13.3548	11.0523	8.7497	6.4480	4.1534	1.9290	.2647	.00001390
9.0	31.7643	29.4618	27.1592	24.8566	22.5540	20.2514	17.9488	15.6462	13.3437	11.0411	8.7386	6.4368	4.1423	1.9187	.2602	.00001245
9.1	31.7533	29.4507	27.1481	24.8455	22.5429	20.2404	17.9378	15.6352	13.3326	11.0300	8.7275	6.4258	4.1313	1.9087	.2557	.00001115
9.2	31.7424	29.4398	27.1372	24.8346	22.5320	20.2294	17.9268	15.6243	13.3217	11.0191	8.7166	6.4148	4.1205	1.8987	.2513	.000009988
9.3	31.7315	29.4290	27.1264	24.8238	22.5212	20.2186	17.9160	15.6135	13.3109	11.0083	8.7058	6.4040	4.1098	1.8888	.2470	.000008948
9.4	31.7208	29.4183	27.1157	24.8131	22.5105	20.2079	17.9053	15.6028	13.3002	10.9976	8.6951	6.3934	4.0992	1.8791	.2429	.000008018
9.5	31.7103	29.4077	27.1051	24.8025	22.4999	20.1973	17.8948	15.5922	13.2896	10.9870	8.6845	6.3828	4.0887	1.8695	.2387	.000007185
9.6	31.6998	29.3972	27.0946	24.7920	22.4895	20.1869	17.8843	15.5817	13.2791	10.9765	8.6740	6.3723	4.0784	1.8599	.2347	.000006439
9.7	31.6894	29.3868	27.0843	24.7817	22.4791	20.1765	17.8739	15.5713	13.2688	10.9662	8.6637	6.3620	4.0681	1.8505	.2308	.000005717
9.8	31.6792	29.3766	27.0740	24.7714	22.4688	20.1663	17.8637	15.5611	13.2585	10.9559	8.6534	6.3517	4.0579	1.8412	.2269	.000005173
9.9	31.6690	29.3664	27.0639	24.7613	22.4587	20.1561	17.8535	15.5509	13.2483	10.9458	8.6433	6.3416	4.0479	1.8320	.2231	.000004637

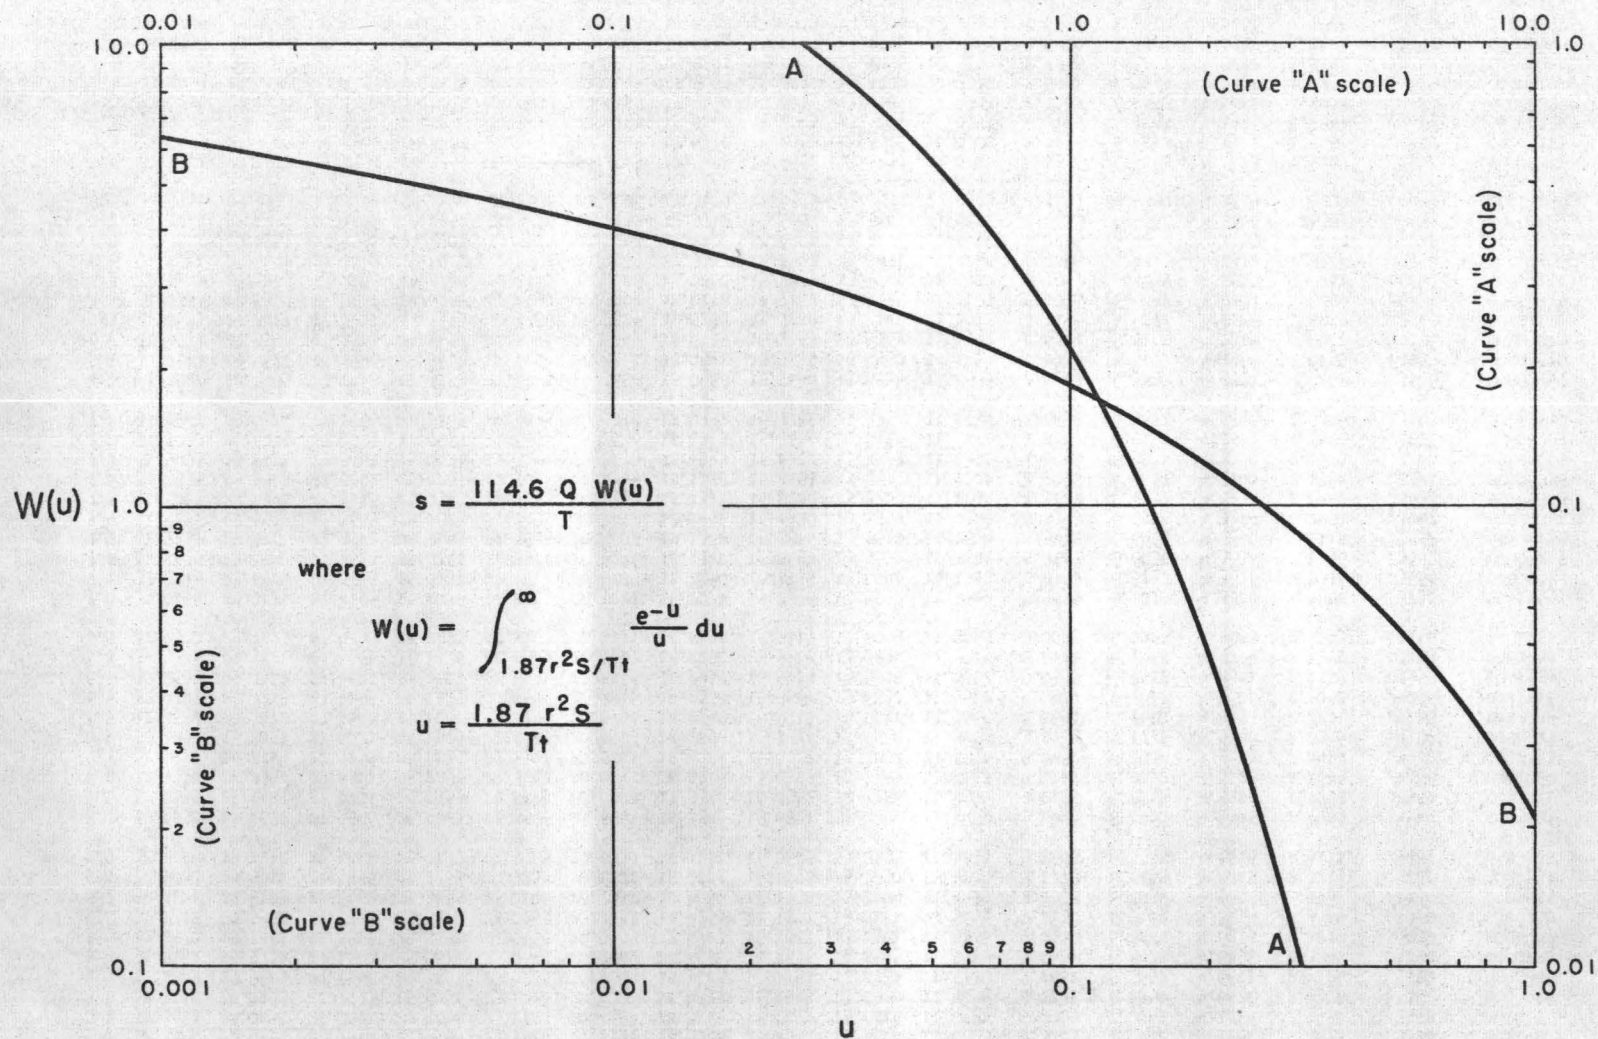


Figure 7 --Logarithmic graph of the well-function type curve

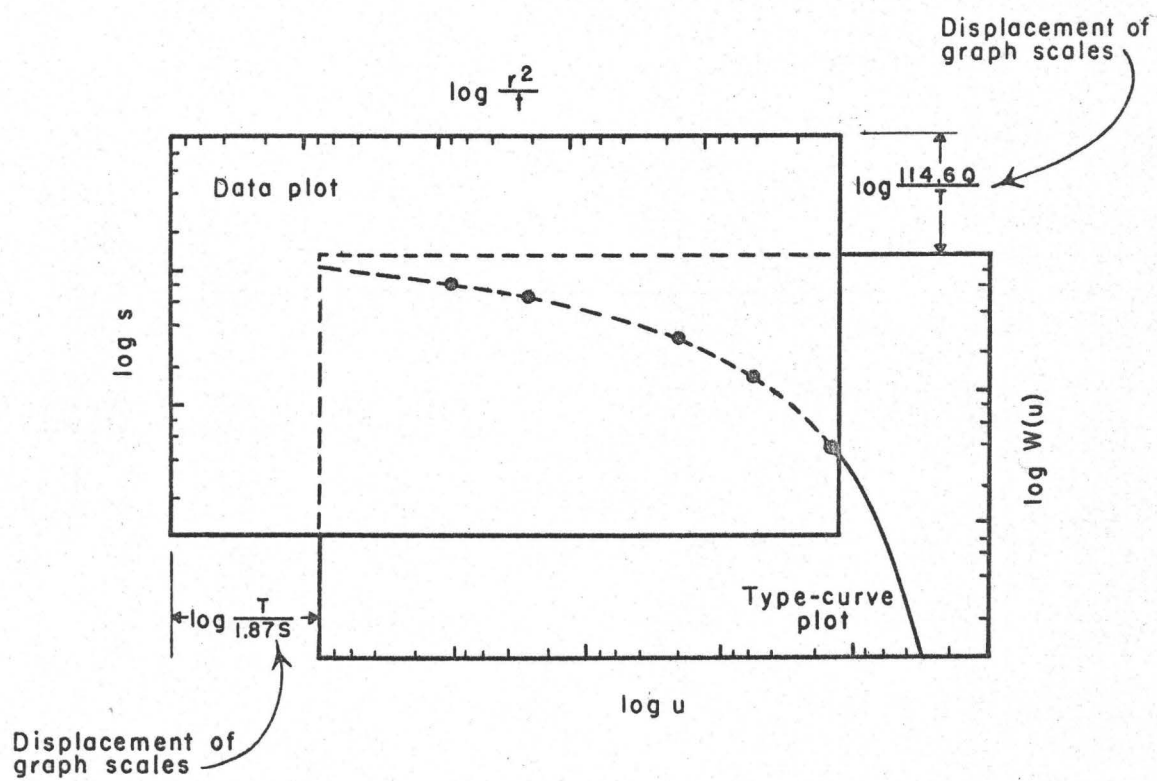


Figure 8 --Relation of $W(u)$ and u to s and r^2/t

Modified nonequilibrium formula.--It was recognized by Jacob (1950) that in the series of equation 7 the sum of the terms beyond $\log_e u$ is not significant when u becomes small. The value of u decreases as the time, t , increases, and as r decreases. Therefore, for large values of t , and reasonably small values of r , the terms beyond $\log_e u$ in equation 7 may be neglected. When r is large, t must be very large before the terms beyond $\log_e u$ in equation 7 can be neglected. Thus the Theis equation in its abbreviated or modified non-dimensional form is written as

$$\begin{aligned} s &= \frac{Q}{4\pi T} \left(\log_e \frac{4Tt}{r^2 S} - 0.5772 \right) \\ &= \frac{Q}{4\pi T} \log_e \frac{2.25Tt}{r^2 S} \end{aligned}$$

which is obviously identical with equation 3 (see p. 23). In the usual Survey units, then, this equation will be identical with equation 4, all terms being as previously defined.

In applying equation 4 to measurements of the drawdown or recovery of water level in a particular observation well, the distance r will be constant and it follows that

$$\begin{aligned} \text{at time } t_1, s_1 &= \frac{264 Q}{T} \left(\log_{10} \frac{0.3Tt_1}{r^2 S} \right) \\ \text{at time } t_2, s_2 &= \frac{264 Q}{T} \left(\log_{10} \frac{0.3Tt_2}{r^2 S} \right) \end{aligned}$$

and the change in drawdown or recovery from time t_1 to t_2 is

$$s_2 - s_1 = \frac{264 Q}{T} \left(\log_{10} \frac{t_2}{t_1} \right)$$

Rewriting this equation in form suitable for direct solution of T there follows

$$T = \frac{264 Q (\log_{10} t_2/t_1)}{s_2 - s_1} \quad (11)$$

where Q and T are as previously defined, t_1 and t_2 are two selected times, in any convenient units, since pumping started or stopped, and s_1 and s_2 are the respective drawdowns or recoveries at the noted times, in feet.

The most convenient procedure for application of equation 11 is to plot the observed data for each well on the semilogarithmic coordinate paper, plotting values of t on the logarithmic scale and values of s on the arithmetic scale. After the value of u becomes small (generally less than 0.01) and the value of time, t , becomes great, the observed data should fall on a straight line. From this straight line make an arbitrary choice

of t_1 and t_2 and record the corresponding values of s_1 and s_2 . Equation 11 can then be solved for T . For convenience, t_1 and t_2 are usually chosen one log cycle apart because then

$$\log_{10} \frac{t_2}{t_1} = 1$$

and equation 11 reduces to

$$T = \frac{264 Q}{\Delta s} \quad (12)$$

where Δs is the change, in feet, in the drawdown or recovery over one log cycle of time.

The coefficient of storage also can be determined from the same semilog plot of the observed data. When $s = 0$, equation 3 becomes

$$s = 0 = \frac{Q}{4\pi T} \log_e \frac{2.25Tt}{r^2 S}$$

Solving for the coefficient of storage, S , the equation in its final form becomes

$$S = \frac{2.25Tt}{r^2} \quad (13)$$

or in the usual Survey units

$$S = \frac{0.3Tt_0}{r^2} \quad (14)$$

where S , T , and r are as previously defined and t_0 is the time intercept on the zero-drawdown axis, in days. If any other units were used for the time, t , on the semilog plot, then obviously t_0 must be converted to days before using equation 14.

Theis recovery formula.—A useful corollary to the nonequilibrium formula was devised by Theis (1935) for the analysis of the recovery of a pumped well. If a well is pumped, or allowed to flow, for a known period of time and then shut down and allowed to recover, the residual drawdown (see example in Parr 2) at any instant will be the same as if the discharge of the well had been continued but a recharge well with the same flow had been introduced at the same point at the instant the discharge stopped. The residual drawdown at any time during the recovery period is the difference between the observed water level and the non-pumping water level extrapolated from the observed trend prior to the pumping period. The residual drawdown, s' , at any instant will then be

$$s' = \frac{114.6 Q}{T} \left[\int_{1.87r^2 S/Tt}^{\infty} \frac{e^{-u}}{u} du - \int_{1.87r^2 S/Tt'}^{\infty} \frac{e^{-u}}{u} du \right] \quad (15)$$

where Q , T , S , and r are as previously defined, t is the time since pumping started, and t' is the time since pumping stopped. The quantity $1.87r^2S/Tt'$ will be small when t' ceases to be small because r is very small and therefore the value of the integral will be given closely by the first two terms of the infinite series of equation 7. Equation 15 can therefore be written, in modified form, in the usual Survey units, as

$$T = \frac{264 Q}{s'} \log_{10} \frac{t}{t'} \quad (16)$$

The above formula is similar in form to, and is based on the same assumptions as, the modified nonequilibrium formula developed by Jacob and permits the computation of the coefficient of transmissibility of an aquifer from the observation of the rate of recovery of water level in a pumped well or in a nearby observation well where r is sufficiently small to meet the above assumptions.

The Theis recovery formula is applied in much the same manner as the modified nonequilibrium formula. The most convenient procedure is to plot the residual drawdown, s' , against t/t' on semilogarithmic coordinate paper, s' being plotted on the arithmetic scale and t/t' on the logarithmic scale. After the value of t' becomes sufficiently large, the observed data should fall on a straight line. The slope of this line gives the value of the quantity $\log_{10} (t/t')/s'$ in equation 16. For convenience, the value of t/t' is usually chosen over one log cycle because its logarithm is then unity and equation 16 then reduces to

$$T = \frac{264 Q}{\Delta s'} \quad (17)$$

where $\Delta s'$ is the change in residual drawdown, in feet, per log cycle of time. It is not possible to determine the coefficient of storage from the observation of the rate of recovery of a pumped well unless the effective radius, r_w , which is usually difficult to determine, is known. The Theis recovery formula should be used with caution in areas where it is suspected that boundary conditions exist. If a geologic boundary has been intercepted by the cone of depression during pumping, it may be reflected in the rate of recovery of the pumped well, and the value of T determined by using the Theis recovery formula could be in error. With reasonable care the recovery in an observation well can be used, of course, to determine both transmissibility and storage, whether or not boundaries are present.

Applicability of methods to artesian and water-table aquifers.--

The methods previously discussed have been used successfully for many years in determining aquifer constants and in predicting the performance of both water-table and artesian aquifers. The derivations of the equations are based, in part, on the assumptions that the coefficient of transmissibility is constant at all times and places and that water is released from storage instantaneously with decline in head. It should be recognized, however, that these and many other idealizations are necessary before mathematical models can be used to analyze the physical phenomena associated with groundwater movement. Thus the hydrologist cannot blindly select a model, turn a crank, and accept the answers. He must devote considerable time and thought to judging how closely his real aquifer resembles the ideal. If enough data

are available he will always find that no ideal aquifer, of the type postulated in the theory, could reproduce the data obtained in an actual pumping test. He should understand that the dispersion of the data is a measure of how far his aquifer departs from the ideal. Therefore, he must plan his test procedures so that they will conform as closely as possible to the theory and thus give results that can safely be applied to his aquifer. He must be prepared to find out, however, that his aquifer is too complex to permit a clear evaluation of its coefficients of transmissibility and storage. He must not tell himself or the reader that "the coefficient of storage changed" during the test but must realize that he got different values when he tried to apply his data, inconsistently, to an ideal theoretical aquifer.

Thus there is little justification for the premise that the storage coefficient of a water-table aquifer varies with the time of pumping inasmuch as such anomalous data are merely the results of trying to apply a two-dimensional flow formula to a three-dimensional problem. The nonequilibrium formula was derived on the basis of strictly radial flow in an infinite aquifer and its application to situations where vertical flow components occur is not justified except under certain limiting conditions. As the time of pumping becomes large, however, the rate of water-level decline decreases rapidly so that eventually the effect of vertical-flow components in water-table aquifers are minimized.

If the drawdowns are large compared to the initial depth of flow, it is necessary to adjust the observed drawdown in a pumping test of a water-table aquifer before the nonequilibrium formula is applied. According to Jacob (1944, p. 4) if the observed drawdowns are adjusted (reduced) by the factor $s^2/2m$, where s is the observed drawdown and m is the initial depth of flow, the value of T will correspond to equivalent confined flow of uniform depth, and the value of S will more closely approximate the true value. He adds that when the drawdowns are adjusted the nonequilibrium formula can be used with fair assurance even when the dewatering is as much as 25 percent of the initial depth of flow.

Where the discharging well only partially penetrates the aquifer it may also be necessary to adjust the observed drawdowns. Procedures for accomplishing this have been described by Jacob (1945).

Instantaneous Discharge or Recharge

"Bailer" method.--Skibitzke (1950) has developed a method for determining the coefficient of transmissibility from the recovery of the water level in a well that has been bailed. At any given point on the recovery curve the following equation applies

$$s' = \frac{V}{4\pi Tt \left[e^{-r_w^2 S/4Tt} \right]} \quad (18)$$

where

- s' = residual drawdown
- V = volume of water removed in one bailer cycle
- T = coefficient of transmissibility
- S = coefficient of storage
- t = length of time since the bailer was removed
- r_w = effective radius of the well.

The effective radius, r_w , of the well is very small in comparison to the extent of the aquifer. As r_w is small, the term in brackets in equation 18 approaches unity as t increases. Therefore for large values of t , equation 18 may be modified and rewritten, in the usual Survey units, as

$$s' = \frac{V}{4\pi T t} = \frac{V}{12.57 T t} \quad (19)$$

where s' , T , and t have units and significance as previously defined, and where V represents the volume of water, in gallons, removed during one bailer cycle. If the residual drawdown is observed at some time after completion of n bailer cycles then the following expression applies

$$s' = \frac{1}{12.57 T} \left[\frac{V_1}{t_1} + \frac{V_2}{t_2} + \frac{V_3}{t_3} + \dots + \frac{V_n}{t_n} \right] \quad (20)$$

where the subscripts merely identify each cycle of events in sequence. Thus V_3 represents the volume of water removed during the third bailer cycle and t_3 is the elapsed time from the instant that water was removed from storage to the instant at which the observation of residual drawdown was made.

If approximately the same volume of water is removed by the bailer during each cycle then equation 20 becomes

$$s' = \frac{V}{12.57 T} \left[\frac{1}{t_1} + \frac{1}{t_2} + \frac{1}{t_3} + \dots + \frac{1}{t_n} \right] \quad (21)$$

The "bailer" method is thus applied to a single observation of the residual drawdown after the time since bailing stopped becomes large. The transmissibility is computed by substituting in equation 21 the observed residual drawdown, the volume of water V considered to be the average amount removed by the bailer in each cycle, and the summation of the reciprocal of the elapsed time, in days, between the time each bailer of water was removed from the well and the time of observation of residual drawdown.

"Slug" method.—Ferris and Knowles (1954) discuss a convenient method for estimating the coefficient of transmissibility, under certain conditions. This is done by injecting a given quantity or "slug" of water into a well. Their equation for determining the coefficient of transmissi-

bility is the same as the equation derived by Skibitzke for the bailer method, inasmuch as the effects of injecting a slug of water into a well are identical, except for sign, with the effects of bailing out a slug of water. Thus equation 19 has direct application only so now represents residual head, in feet, at the time t , in days, following injection of V gallons of water.

As used in the field this method requires the sudden injection of a known volume of water into a well and the collection thereafter of a rapid series of water-level observations to define the decay of the head that was built up in the well. An arithmetic plot of residual head values versus the reciprocals of the times of observation should produce a straight line whose slope, appropriately substituted in equation 19, permits computation of the transmissibility.

Suggested equipment for use in injecting a slug of water into a well, and for making the rapid series of water-level observations required immediately thereafter, is shown schematically in figure 9.

The duration of a "slug test" is very short and the estimated transmissibility determined from the test will be representative only of the water-bearing material close to the well. Serious errors will be introduced unless the observation well is fully developed and completely penetrates the aquifer. Use of the "slug test" should probably be restricted to artesian aquifers of small to moderate transmissibility (less than 50,000 gallons per day per foot).

Constant Head without Vertical Leakage

Controlled pumping tests have proved to be an effective tool in determining the coefficients of storage and transmissibility. In the usual test the discharge rate of the pumped well is held constant while the drawdown varies with time. The resulting data are analyzed graphically as previously described. Jacob and Lohman (1952) derived a formula for determining the coefficients of storage and transmissibility from a test in which the discharge varies with time and the drawdown is held constant. The formula, based on the assumptions that the aquifer is of infinite areal extent, that the coefficients of transmissibility and storage are constant at all times and all places, is developed from the analogy between the hydrologic conditions in an aquifer and the thermal conditions in an equivalent thermal system. The formula is written as


$$Q = 2\pi T s_w G(\alpha) \quad (22)$$

where


$$G(\alpha) = \frac{4\alpha}{\pi} \int_0^{\infty} x e^{-\alpha x^2} \left[\frac{\pi}{2} + \tan^{-1} \frac{Y_0(x)}{J_0(x)} \right] dx \quad (23)$$

and

$$\alpha = \frac{Tt}{r_w^2 S} \quad (24)$$

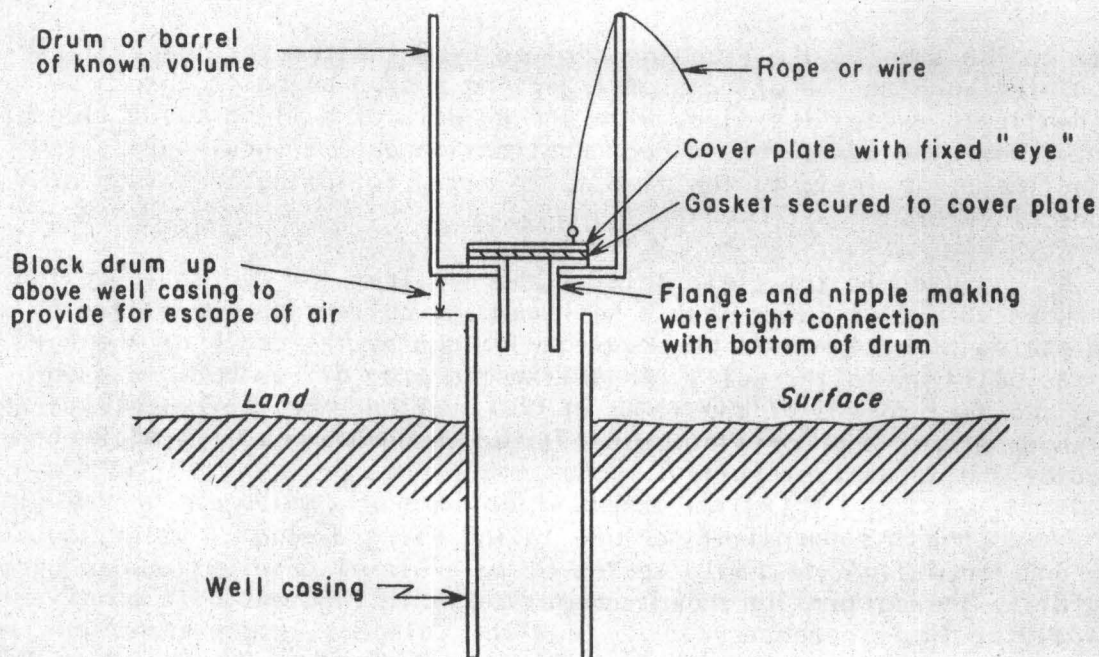

A. APPARATUS FOR MAKING "SLUG" TEST

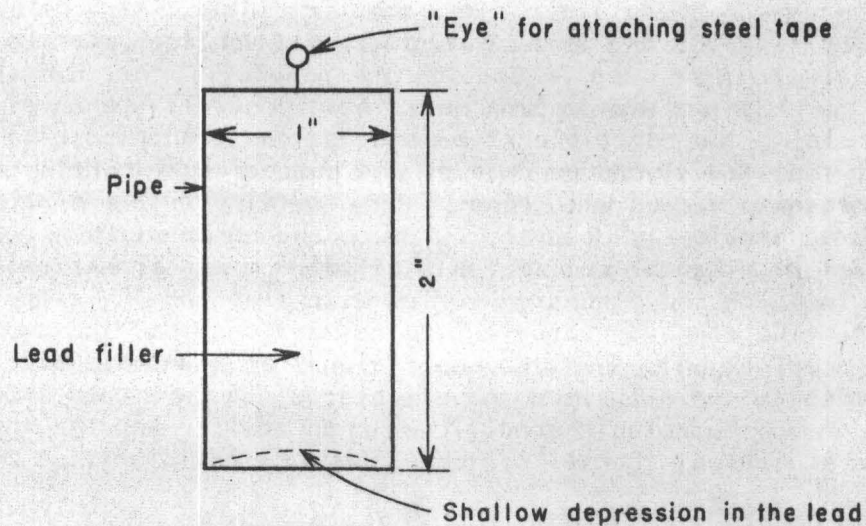

B. PLAN FOR PERCUSSION INSTRUMENT FOR RAPID MEASUREMENT OF WATER LEVELS

Figure 9 -- Suggested equipment for use in making a "slug" test

Using the customary Survey units equations 22 and 24 are rewritten in the form

$$Q = \frac{T s_w G(a)}{229} \quad (25)$$

and

$$a = \frac{0.134 T t}{r_w^2 S} \quad (26)$$

where Q , T , and t have the units and meaning previously defined and where

s_w = constant drawdown, in feet, in the discharging well

r_w = effective radius, in feet, of the discharging well.

The terms $J_0(x)$ and $Y_0(x)$ are Bessel functions of zero order of the first and second kinds respectively.

The integration required in equation 23 cannot be accomplished directly so it is necessary to replace the integral with a summation and solve it by numerical methods. In this fashion values of $G(a)$ * for values of a from 10^{-4} to 10^{12} , have been tabulated by Jacob and Lohman, (1952), and are given herewith in table 3. This table is used in the same manner as table 2 which gives values of $W(u)$ versus u .

It is seen from equations 25 and 26 that if Q can be measured for several values of t and if the constant drawdown, s_w , and the effective radius, r_w , are known, S and T can be determined. It is not possible to determine S and T directly, however, since T occurs both in the argument of the function and as a multiplier of $G(a)$. A convenient graphical method, similar to that used in solving the nonequilibrium formula, makes it possible to obtain a simple solution.

The first step in this method is the plotting of a type curve on logarithmic coordinate paper. From table 3 values of $G(a)$ were plotted against the argument a to form the type curve shown in figure 10. It is shown in several segments in order that the entire type curve may be plotted on a sheet of convenient size.

Rearranging equations 25 and 26 there follows:

$$Q = \frac{T s_w}{229} G(a)$$

or

$$\log Q = \left[\log \frac{T s_w}{229} \right] + \log G(a) \quad (27)$$

and

$$t = \frac{r_w^2 S}{0.134 T} a$$

or

$$\log t = \left[\log \frac{r_w^2 S}{0.134 T} \right] + \log a \quad (28)$$

* It is here proposed to designate this term as the "well function of a , constant head situation"

Table 3.-- Values of $G(a)$ for values of a between 10^{-4} and 10^{12}

	10^{-4}	10^{-3}	10^{-2}	10^{-1}	1	10	10^2	10^3
1	56.9	18.34	6.13	2.249	0.985	0.534	0.346	0.251
2	40.4	13.11	4.47	1.716	0.803	0.461	0.311	0.232
3	33.1	10.79	3.74	1.477	0.719	0.427	0.294	0.222
4	28.7	9.41	3.30	1.333	0.667	0.405	0.283	0.215
5	25.7	8.47	3.00	1.234	0.630	0.389	0.274	0.210
6	23.5	7.77	2.78	1.160	0.602	0.377	0.268	0.206
7	21.8	7.23	2.60	1.103	0.580	0.367	0.263	0.203
8	20.4	6.79	2.46	1.057	0.562	0.359	0.258	0.200
9	19.3	6.43	2.35	1.018	0.547	0.352	0.254	0.198
10	18.3	6.13	2.25	0.985	0.534	0.346	0.251	0.196
	10^4	10^5	10^6	10^7	10^8	10^9	10^{10}	10^{11}
1	0.1964	0.1608	0.1360	0.1177	0.1037	0.0927	0.0838	0.0764
2	0.1841	0.1524	0.1299	0.1131	0.1002	0.0899	0.0814	0.0744
3	0.1777	0.1479	0.1266	0.1106	0.0982	0.0883	0.0801	0.0733
4	0.1733	0.1449	0.1244	0.1089	0.0968	0.0872	0.0792	0.0726
5	0.1701	0.1426	0.1227	0.1076	0.0958	0.0864	0.0785	0.0720
6	0.1675	0.1408	0.1213	0.1066	0.0950	0.0857	0.0779	0.0716
7	0.1654	0.1393	0.1202	0.1057	0.0943	0.0851	0.0774	0.0712
8	0.1636	0.1380	0.1192	0.1049	0.0937	0.0846	0.0770	0.0709
9	0.1621	0.1369	0.1184	0.1043	0.0932	0.0842	0.0767	0.0706
10	0.1608	0.1360	0.1177	0.1037	0.0927	0.0838	0.0764	0.0704

(From Jacob and Lohman, 1952, p. 561)

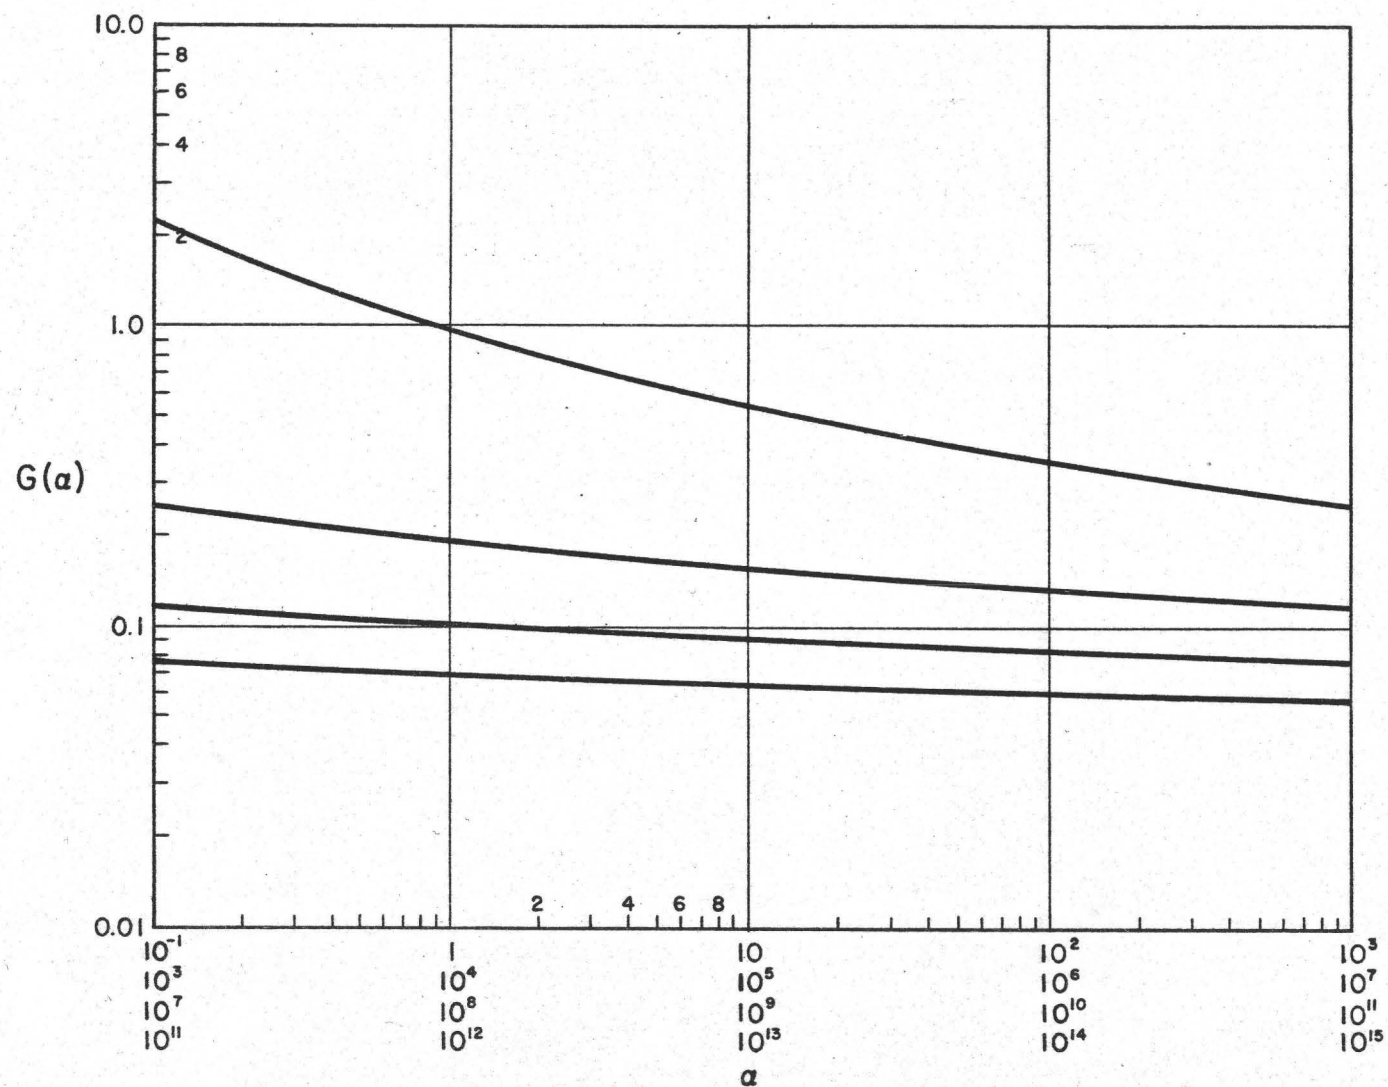


Figure 10-- Type curve for values of α from 10^{-1} to 10^{14} plotted against corresponding values of $G(\alpha)$

If the drawdown, s_w , is held constant, the bracketed parts of equations 27 and 28 are constant for any given test and $\log G(a)$ is related to $\log a$ in the same manner that $\log Q$ is related to $\log t$. (Note the similarity in form between equations 27 and 28 and equations 9 and 10.) Therefore if values of the discharge, Q , are plotted against corresponding values of time, t , on logarithmic tracing paper to the same scale as the type curve, the curve of observed data will be similar to the type curve. The data curve may then be superposed on the type curve, the coordinate axes of the two curves being held parallel, and translated to a position that represents the best fit of the data to the type curve. An arbitrary point is selected on the overlapping portion of the sheets and the coordinates of this common point on both sheets are used with equations 25 and 26 to solve for T and S . This graphical solution is similar to that used with the Theis nonequilibrium formula.

Jacob and Lohman (1952) showed that for large values of t , the function $G(a)$ can be replaced by $2/W(u)$ and it has already been shown (see discussion, p.30) that the approximate form of $W(u)$ is given by $2.30 \log_{10} (2.25Tt/Sr_w^2)$. Making this substitution for $G(a)$ in equation 22 there follows

$$Q = \frac{4\pi Ts_w}{2.30} \log_{10} \left[\frac{2.25Tt}{r_w^2 S} \right]$$

or rearranging terms

$$\frac{s_w}{Q} = \frac{2.30}{4\pi T} \log \frac{t}{r_w^2} + \frac{2.30}{4\pi T} \log \frac{2.25T}{S} \quad (29)$$

It should be evident from the form of equation 29, that if arithmetic values of the variable s_w/Q are plotted against logarithmic values of the variable t/r_w^2 the points will define a straight line. The slope of this line is observed, in equation 29, to be the prefix of the variable term $\log (t/r_w^2)$. In other words

$$\text{Slope of straight-line plot} = \frac{\Delta (s_w/Q)}{\Delta \log (t/r_w^2)} = \frac{2.30}{4\pi T}$$

Once the slope of the graph is determined, therefore, the coefficient of transmissibility may be computed from the relation

$$T = \frac{2.30 \Delta (\log t/r_w^2)}{4\pi \Delta (s_w/Q)} \quad (30)$$

If the slope is measured over one log cycle then the term $\Delta \log (t/r_w^2)$ equals unity and equation 30 is further simplified to the form

$$T = \frac{2.30}{4\pi \Delta (s_w/Q)} \quad (31)$$

The coefficient of storage could then be found by substituting in equation 29 the computed value of T and the coordinates of any convenient point on the straight-line plot. However, the computation is greatly simplified by

noting that for the point where the straight-line plot intersects the logarithmic time axis (i.e., where $s_w/Q = 0$), equation 29 becomes

$$S = 2.25T (t/r_w^2)_0 \quad (32)$$

In the usual Survey units, equations 31 and 32 are written

$$T = \frac{264}{\Delta(s_w/Q)} \quad (33)$$

and

$$S = 0.3 T(t/r_w^2)_0 \quad (34)$$

Thus equations 33 and 34 are applied through the simple device of a semilogarithmic plot where values of s_w/Q are plotted on the arithmetic scale against corresponding values of t/r_w^2 on the logarithmic scale.

The methods that have been outlined in this section are useful in determining the coefficient of transmissibility but should be used with caution in determining the coefficient of storage because it is often difficult to determine the effective radius of the pumped well.

Constant Discharge with Vertical Leakage

Leaky aquifer formula.--A problem of practical interest is that of an elastic artesian aquifer that is replenished by vertical leakage through overlying or underlying semipermeable confining beds. In most places the confining beds only impede or retard the movement of ground water rather than prevent it. It is often true that this retardation of ground-water movement is sufficient so that the Theis equation (which assumes impermeable confining beds) can be applied. Nevertheless there will be occasions when departure of the test data from the predictions of the Theis equation will require investigation of the ability of the confining beds to transmit water.

As an example of the magnitude of flow through material of low permeability, consider a semipermeable confining bed, 50 feet thick, consisting of silty clay that has a permeability of 0.2 gallon per day per square foot. Such a material is listed by Wenzel (1942, p. 13, lab. no. 2,278) as including about 49 percent (by weight) clay and about 45 percent silt. Assume that the confining bed is saturated and that in some manner there is established and maintained a head differential of 25 feet between the top and bottom surfaces of the bed. The rate of percolation, related to this head differential, through the confining bed is computed from the previously given (see p. 3) variant of Darcy's law

$$Q_d = P'IA$$

where, in this example,

Q_d = discharge in gallons per day through specified area of confining bed

P' = vertical permeability of confining bed = 0.2 gallon per day per square foot

I = hydraulic gradient imposed on confining bed = $25/50 = 0.5$
foot per foot

A = specified area of confining bed through which percolation occurs.

Thus through a confining bed area of one square foot

$$Q_d = 0.2 \times 0.5 \times 1 = 0.1 \text{ gallon per day}$$

or through a confining bed area of one square mile

$$Q_d = 0.2 \times 0.5 \times 5,280 \times 5,280 = 2,800,000 \text{ gallons per day}$$

It is known that the cone of depression created by pumping a well in an artesian aquifer grows rapidly and thus in a relatively short time encompasses a large area. As shown by the above computations, the total amount of vertical seepage through confining beds may be quite large even though the permeability of these formations is relatively small. If the confining bed in turn is overlain by an aquifer of appreciable storage and transmitting capacity, the radius of the cone of influence developed by a well pumping from the artesian aquifer will be determined by the hydrologic regimen of the artesian aquifer, the confining bed, and the leakage-source aquifer.

The first detailed analysis and solution of the leaky-aquifer problem was developed by DeGlee (1930) and later supplemented by Steggewentz and Van Nes (1939).

In these analyses, assumptions related to the physical flow system are: (1) the artesian aquifer is bounded above or below by a semipermeable confining bed, (2) the aquifer, when pumped is supplied by leakage through the confining bed, the leakage being proportional to the drawdown, and (3) the aquifer and confining bed are independently homogeneous and isotropic. It is also assumed that the water level in the aquifer supplying water to the semipermeable bed is maintained at or very near static level through the interval of pumping. The solution developed is for the steady-state condition wherein it is assumed that the drawdown is zero at $r = \infty$.

Jacob (1946) also analyzed this problem, verifying the solution for steady flow and also developing a solution for the transient state. His final steady-state equation, in non-dimensional form, for the drawdown in an infinite artesian aquifer has the form

$$s = \frac{Q}{2\pi T} K_0(x) \quad (35)$$

or in the usual Survey units

$$s = \frac{229 Q K_0(x)}{T} \quad (36)$$

where

$$x = \frac{br}{a} \quad (37)$$

and

$$a = \sqrt{T/S}$$

$$b = \sqrt{P'/m'S}$$

T = coefficient of transmissibility of the artesian aquifer in gallons per day per foot

P' = coefficient of vertical permeability of the semipermeable confining bed, in gallons per day per square foot

S = coefficient of storage of the artesian aquifer

Q = rate of withdrawal by the pumped well, in gallons per minute

m' = thickness of the semipermeable confining bed, in feet

r = distance from the pumped well to the observation well, in feet

s = drawdown in the observation well, in feet.

The symbol $K_0(x)$ is a notation widely but not universally used to identify the modified Bessel function of the second kind of the zero order. In order to avoid any misunderstanding of its present usage it is identified as follows:

$$\begin{aligned} K_0(x) = & - \left[0.5772 + \log_e (x/2) \right] I_0(x) \\ & + (1/1!)^2 (x/2)^2 + (1/2!)^2 (x/2)^4 (1 + 1/2) \\ & + (1/3!)^2 (x/2)^6 (1 + 1/2 + 1/3) + \dots \end{aligned} \quad (38)$$

where

$$I_0(x) = 1 + (x/2)^2 (1!)^2 + (x/2)^4 (2!)^2 + (x/2)^6 (3!)^2 + \dots \quad (39)$$

The notation $I_0(x)$ is used to represent the modified Bessel function of the first kind of zero order. Values of the function $K_0(x)$ over the range of interest for most ground-water problems are given in table 4.

Equations 36 and 37 may be rewritten in the following form:

$$\log s = \log \left[\frac{229 Q}{T} \right] + \log K_0(x) \quad (40)$$

$$\log r = \log \left[\frac{a}{b} \right] + \log x \quad (41)$$

The bracketed portions of equations 40 and 41 include all the terms that have been assumed constant in the derivation. It follows then that the variable s is related to r in the same manner that $K_0(x)$ is related to x . Thus the form of equations 40 and 41 once again suggests the same, convenient method of graphical solution that has already been described for resolving the Theis formula. A type curve for use in solving equations 36 and 37 is prepared by plotting on logarithmic graph paper the values given in table 4. In figure 11 curve AA is in part a duplication of the lower part of curve BB and in part an extension of that curve into the next lower log cycle.

Table 4.--Values of $K_0(x)$, the modified Bessel function of the second kind of zero order, for values of x between 10^{-2} and 9.9 a/

N	$x = N(10^0)$	$x = N(10^{-1})$	$x = N(10^{-2})$	N	$x = N(10^0)$	$x = N(10^{-1})$	$x = N(10^{-2})$
1.0	0.4210	2.4271	4.7212 <u>b/</u>	3.5	0.01960	1.2327	
1.1	.3656			3.6	.01750		
1.2	.3185			3.7	.01563		
1.3	.2782			3.8	.01397		
1.4	.2437			3.9	.01248		
1.5	.2138	2.0300		4.0	.01116	1.1145	3.3365
1.6	.1880			4.1	.009980		
1.7	.1655			4.2	.008927		
1.8	.1459			4.3	.007988		
1.9	.1288			4.4	.007149		
2.0	.1139	1.7527	4.0285	4.5	.006400	1.0129	
2.1	.1008			4.6	.005730		
2.2	.08927			4.7	.005132		
2.3	.07914			4.8	.004597		
2.4	.07022			4.9	.004119		
2.5	.06235	1.5415		5.0	.003691	.9244	3.1142
2.6	.05540			5.1	.003308		
2.7	.04926			5.2	.002966		
2.8	.04382			5.3	.002659		
2.9	.03901			5.4	.002385		
3.0	.03474	1.3725	3.6235	5.5	.002139	.8466	
3.1	.03095			5.6	.001918		
3.2	.02759			5.7	.001721		
3.3	.02461			5.8	.001544		
3.4	.02196			5.9	.001386		

N	$x = N(10^0)$	$x = N(10^{-1})$	$x = N(10^{-2})$	N	$x = N(10^0)$	$x = N(10^{-1})$	$x = N(10^{-2})$
6.0	0.001244	0.7775	2.9329	8.0	0.0001465	0.5653	2.6475
6.1	.001117			8.1	.0001317		
6.2	.001003			8.2	.0001185		
6.3	.0009001			8.3	.0001066		
6.4	.0008083			8.4	.00009588		
6.5	.0007259	.7159		8.5	.00008626	.5242	
6.6	.0006520			8.6	.00007761		
6.7	.0005857			8.7	.00006983		
6.8	.0005262			8.8	.00006283		
6.9	.0004728			8.9	.00005654		
7.0	.0004248	.6605	2.7798	9.0	.00005088	.4867	2.5310
7.1	.0003817			9.1	.00004579		
7.2	.0003431			9.2	.00004121		
7.3	.0003084			9.3	.00003710		
7.4	.0002772			9.4	.00003339		
7.5	.0002492	.6106		9.5	.00003006	.4524	
7.6	.0002240			9.6	.00002706		
7.7	.0002014			9.7	.00002436		
7.8	.0001811			9.8	.00002193		
7.9	.0001629			9.9	.00001975		

Data for plotting type curve (see fig. 11) used in solving equations 36 and 37, p. 42 and 43.

a/ Values of $K_0(x)$ in the interval $0.01 \leq x \leq 1.00$ taken from tables in Commerce Dept. (1952, p. 36-60).
Values of $K_0(x)$ in the interval $1.0 \leq x \leq 9.9$ taken from Gray, Mathews, and MacRobert (1931, p. 313-315).

b/ When $x = 0$, $K_0(x) = \infty$.

The solution of equations 36 and 37 thus requires plotting the field observations of s and r , at some particular time t , on logarithmic graph paper, using the same size of logarithmic scale adopted for the type curve. The data curve is superposed on the type curve, the coordinate axes of the two curves being held parallel, and translated to the position that represents the best fit of the field data to the type curve. When the match position is found, the amount of shift or translation from the s scale to the $K_0(x)$ scale is measured by the bracketed term of equation 40 and the translation between the r scale and the x scale is represented by the bracketed member of equation 41. An arbitrary point is selected on the data curve and the coordinates of this common point on both the data curve and the type curve are recorded. These coordinates, when substituted in equations 36 and 37 permit computation of the coefficient of transmissibility, T , of the artesian bed, and the value of x , which has inherent in it the coefficient of vertical permeability of the leaky confining bed.

In application it is not possible to determine either a or b from field observation of steady flow, but their ratio can be determined from the definition of x .

$$x = r(b/a) = r \sqrt{\frac{P'/m' S}{T/S}} = r \sqrt{P'/Tm'} \quad (42)$$

The vertical permeability of the leaky bed can thus be determined from equation 42 if the bed thickness, m' , is known. However, S , the coefficient of storage for the artesian aquifer cannot be determined as it is removed from the b/a ratio by cancellation.

Because the use of equations 36, 37 and 42 is obviously dependent on observation of the profile shape of the piezometric surface near the pumped well (data plot of $\log s$ versus $\log r$), it is imperative that the field measurements defining that shape be made at essentially the same value of t .

The foregoing steady-state solution applies with sufficient accuracy to observations of the transient state only if the water levels in the observation wells are changing at a uniform rate over all the segment of the profile of the piezometric surface that is being observed. This requirement is generally fulfilled at large values of t . Although the position, in profile, of the piezometric surface may continue to change with increasing time, the slope of the profile becomes constant near the pumping well after a comparatively short interval of pumping.

The earliest observations of drawdown in each observation well, when s is small, should conform to the Theis nonequilibrium type curve for the infinite (non-leaky) aquifer if the rate of leakage from the confining bed is comparatively small. The coefficient of storage for the artesian aquifer can thus be determined under these conditions from the earliest observations of drawdown (Jacob, 1946, p. 204). The computed coefficient of transmissibility should be checked by comparing the value obtained from matching the earliest data to the nonequilibrium type curve with the value

obtained by matching the later data to the leaky-aquifer type curve. If consistency of the T values is not obtained, then the leakage may be causing too much deviation at the smaller values of t to permit application of the Theis nonequilibrium formula.

It was recognized by Ferris (1952a) that the sum of the terms in the series of equation 38 beyond $\log_e (x/2)$ is not appreciable for small values of x (say smaller than 0.02) and that the value of the function $I_0(x)$ may then be approximated as unity. Therefore, for small values of x , which means either small values of the ratio b/a or small values of r , the bracketed portion of equation 38 satisfactorily approximates the value of $K_0(x)$ and equation 36 may be written

$$s = - \frac{229 Q}{T} \left[0.5772 + \log_e \left(\frac{br}{2a} \right) \right] \quad (42)$$

with the terms as previously defined.

Inasmuch as it has been assumed that ample recharge is available to maintain the head in the leaky confining bed, and to satisfy the withdrawal of water from the artesian aquifer, the cone of depression of a discharging well will reach a finite radius, r_e . If the drawdown, s , is assumed to be zero at r_e then equation 42 may be reduced to

$$\log_e \left(\frac{br_e}{2a} \right) = - 0.5772$$

or

$$\frac{b}{a} = \frac{1.12}{r_e} \quad (43)$$

Equation 43 is convenient for computing the b/a ratio in an ideal leaky aquifer, using data collected at large t values, that is, when the cone of depression has extended over a fairly sizeable area. In this type of application, however, since the values of r_e may tend to be large, the requirement that x shall be small will obviously be met only if the computed ratio of b/a proves to be small.

Variable Discharge Without Vertical Leakage

Continuously varying discharge.—The rate at which water is pumped from a well or well field commonly varies with time in response to seasonal changes in demand. In other words, the pumping rate, as reflected say by records of daily or monthly discharge, is often found to be varying continuously. Where this element of variability is recognized in ground-water problems, the analytical methods that are described in the preceding sections of this report are not applicable without some modification or approximation. Exact equations could perhaps be developed for the case of continuously varying discharge, but the cost of analysis, in terms of time and effort, would likely be prohibitive considering that a separate and specific solution would be required for each problem. It is considered more expedient, therefore, to utilize the existing analytical methods, rendering them applicable to the field situation by introducing tolerable approximations of the

field conditions. As an example, consider a situation where the pumping rate in a well (which may also represent a well field), tapping an artesian aquifer, varies continuously with time in the manner indicated by the smooth curve shown in figure 12A. This smooth curve may be approximated by the series of steps shown, and the analysis of each step may be undertaken starting with conventional theory and equations. Thus the Theis nonequilibrium formula (eq. 6) can be used to construct a type curve for analyzing the observed drawdowns caused by the stepped pumping rates indicated in figure 12A and 12B. The drawdown, s , at distance r from the pumped well, at any time t , is

$$s = s_1 + s_2 + s_3 \dots\dots + s_n \quad (44)$$

where the subscripts refer to the ΔQ values of figure 12B. The zero reference time t_0 is chosen arbitrarily so that the effects of the antecedent rate of pumping, Q_0 , are established as a regular trend which can be projected or extrapolated with certainty, as shown in figure 12C, over the time span occupied by the stepped pumping rates. Applying the Theis nonequilibrium formula to define each of the drawdown components given in equation 44, there follows

$$s = \frac{114.6}{T} \left[\Delta Q_1 W(u)_1 + \Delta Q_2 W(u)_2 + \Delta Q_3 W(u)_3 \dots\dots + \Delta Q_n W(u)_n \right] \quad (45)$$

The corresponding u values are

$$u_1 = \frac{1.87 r^2 s}{T(t - t_1)} ; \quad u_2 = \frac{1.87 r^2 s}{T(t - t_2)} ;$$

$$u_3 = \frac{1.87 r^2 s}{T(t - t_3)} ; \quad \dots ; \quad u_n = \frac{1.87 r^2 s}{T(t - t_n)} \quad (46)$$

Therefore

$$u_2 = u_1 \left[\frac{t - t_1}{t - t_2} \right] ; \quad u_3 = u_1 \left[\frac{t - t_1}{t - t_3} \right] ; \quad \dots\dots ; \quad u_n = u_1 \left[\frac{t - t_1}{t - t_n} \right] \quad (47)$$

Inspection of equations 46 and 47 should indicate that virtually an infinite number of type curves can be constructed for solving equation 45. For practical purposes, however, only a family of curves need be constructed.

It can be seen from equations 46 that the relation between the u values is dependent on the value of t selected. For any given value of t , the values of u are proportional to the constant $1.87 r^2 s / T$. Therefore the family of curves must be constructed using t and $1.87 r^2 s / T$ as independent variables and $\sum_1^n \Delta Q W(u)$ as the dependent variable. This is accomplished by first assuming several values of $1.87 r^2 s / T$ for a particular value of t . Values of u_1 are then computed for that t for the assumed values of $1.87 r^2 s / T$ using the first of equations 46. Equations 47 are then used to compute


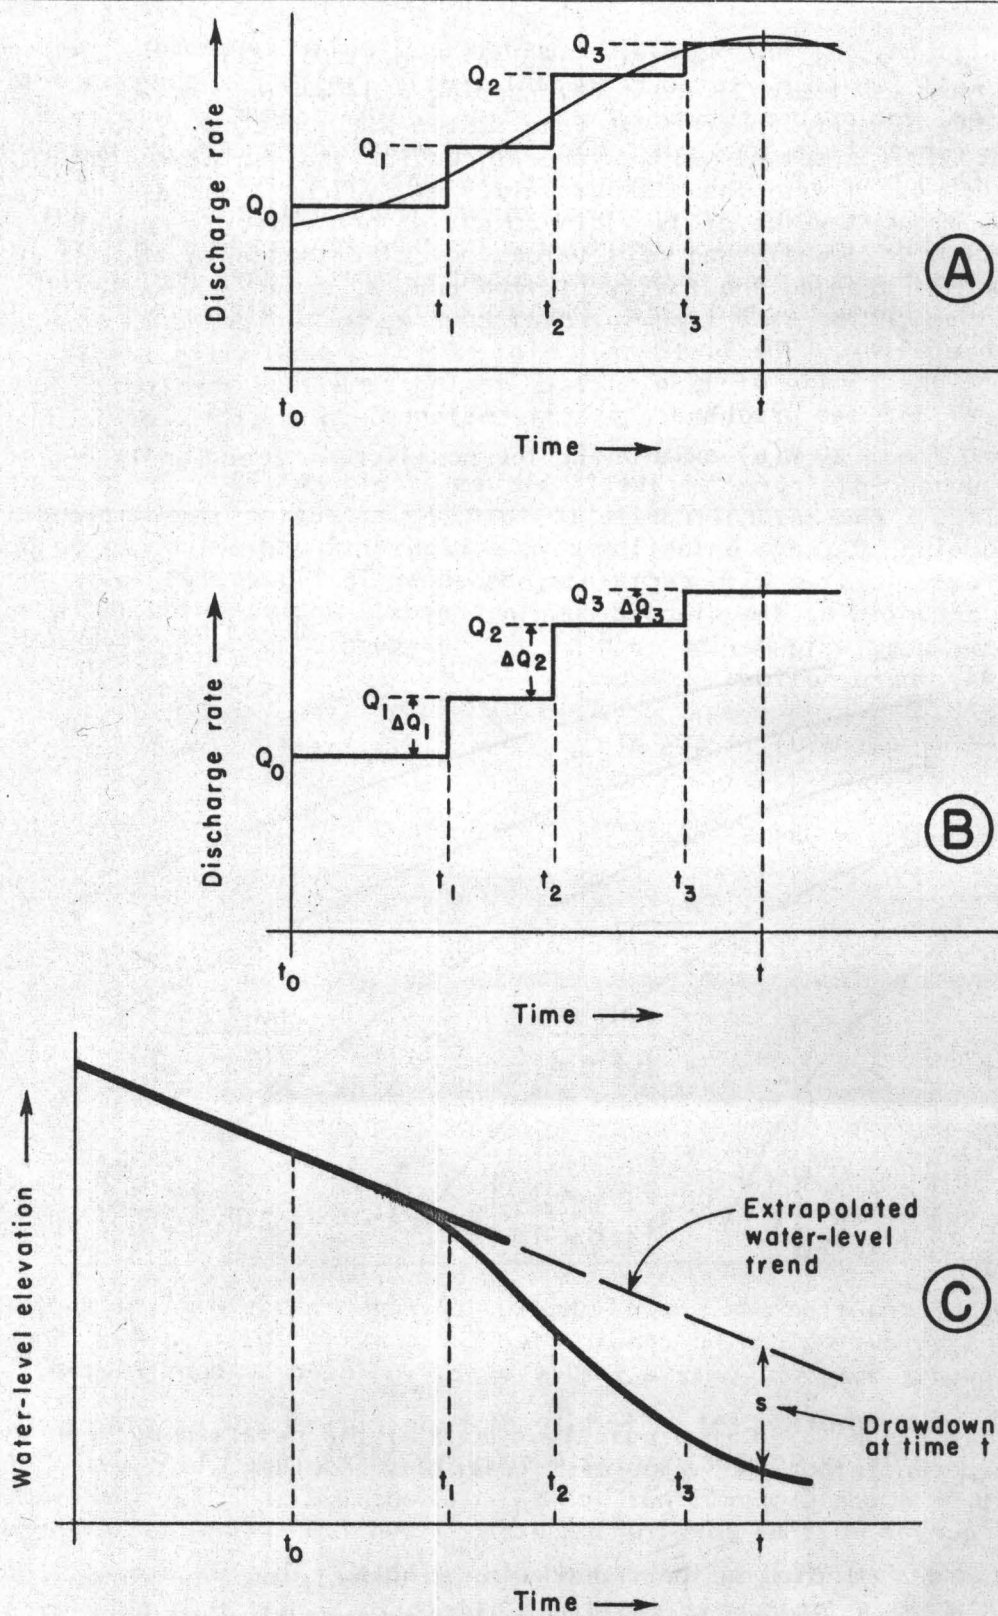


Figure 12--Nomenclature for a problem involving continuously varying discharge

values of $u_2, u_3 \dots u_n$ for each assumed value of $1.87r^2S/T$. These in turn determine (see table 2) the corresponding $W(u)$ values, which are used to compute the quantity in brackets (the sum of all the $\Delta Q W(u)$ terms) in equation 45. Thus a set of values is produced for the sum of the $\Delta Q W(u)$ terms, corresponding with the assumed values of $1.87r^2S/T$ and all are related to one assumed value of t . This computing procedure is repeated for each value of t in a whole set of t values selected to span a time range that will permit drawing the family of type curves, shown schematically in figure 13, through the same time interval covered by the drawdown observations in the aquifer. The field-data plot of $\log s$ versus $\log 1/t$ is superposed on the family of type curves, taking care that the logarithmic time scales of the two graphs are exactly matched. The data plot is then shifted along the $\sum \Delta Q W(u)$ axis until the position is found where the

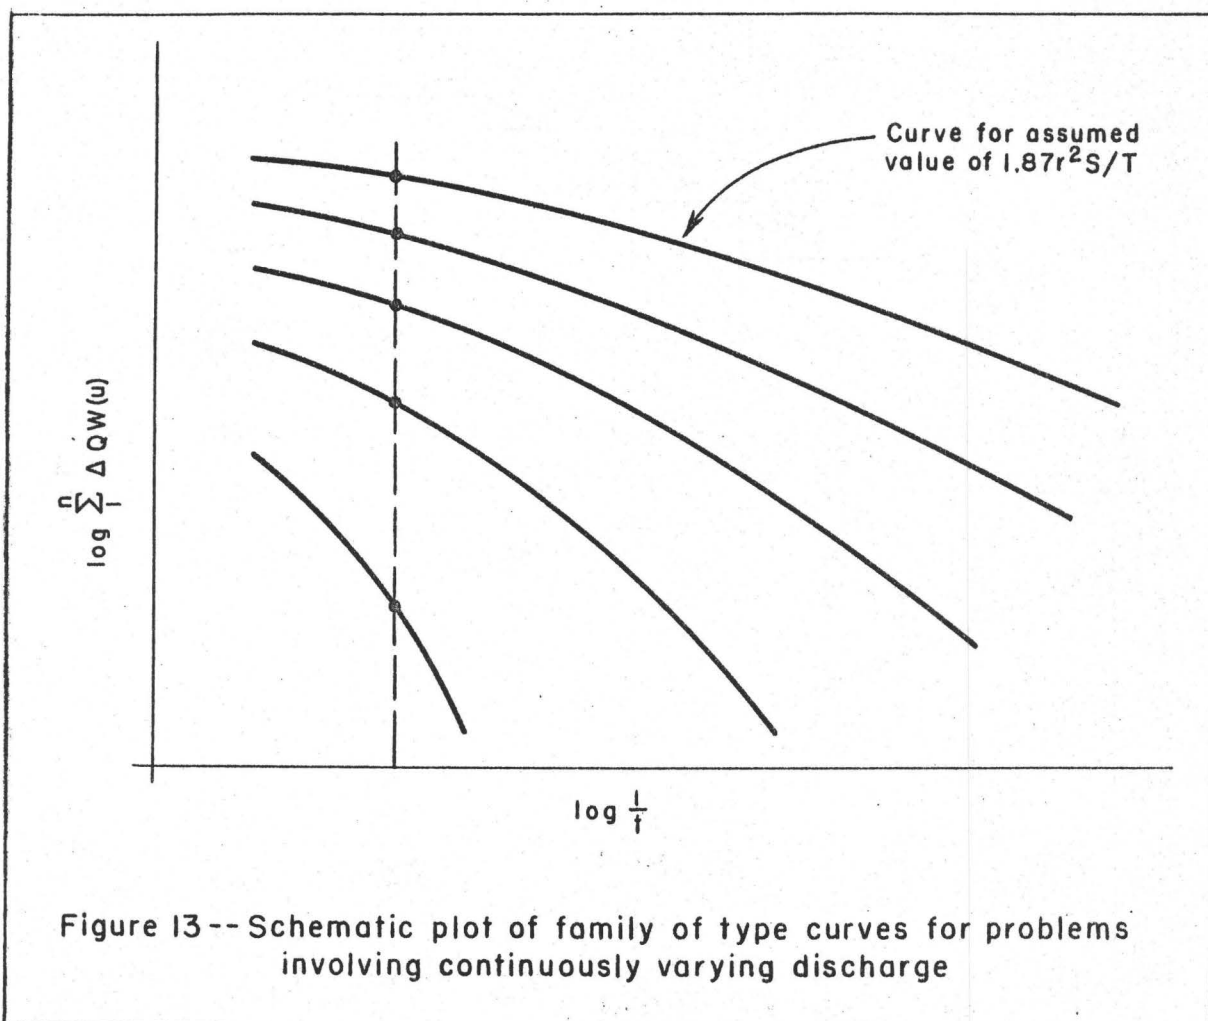

curvature of the data plot is identical with an underlying type curve or with an interpolated type curve position. It follows that this serves to identify the data curve with a specific value of $1.87r^2S/T$. Values of s and $\sum \Delta Q W(u)$ are read from a point common to both graphs and entered in

equation 45 to solve for T . The computed value of T can then be used with the value of $1.87r^2S/T$ to solve for S . Should several observation wells at different radii be available, it may be more convenient to construct a type curve suitable for matching with the observed drawdown profile. For a selected observation time, values of $\sum_{i=1}^n \Delta Q W(u)$ and $1.87r^2S/T$ are taken from figure 13 and used to construct a new type curve by plotting $\log \sum_{i=1}^n \Delta Q W(u)$ against $\log (1.87r^2S/T)$. This new logarithmic type curve, drawn for a selected time, t , can be matched with a logarithmic data plot of s versus r^2 , drawn for the same time t .

Intermittent or cyclic discharge.--Analysis of drawdown data by means of the methods described in the preceding section is likely to require a large amount of calculation. However, for certain specific kinds of discharge variations the analysis can be simplified considerably. The detailed solutions of two specific cases have been described by Theis and Brown (1954). One of the problems solved was that of computing the drawdown occurring in a well being operated in a regular cycle of pumping at a constant rate for a given time interval, then resting for a given time interval. Their final equation, in the usual Survey units, for drawdown in the pumped well after n cycles of operation is

$$s_n = \frac{264Q}{T} \log_{10} \frac{1 \cdot 2 \cdot 3 \cdot \dots \cdot n}{(1-p)(2-p)(3-p) \dots (n-p)} \quad (48)$$

where p is the fractional part of the cycle during which the well is pumped. In part, the simple form of equation 48 was obtained by utilizing the semilog approximation (eq. 4) of the Theis nonequilibrium formula. Many regular operational cycles are easily generalized and analysis may lead to a final expression comparable, in simplicity, to equation 48.

Channel Methods -- Line Sink or Line Source

Constant Discharge

Non-steady state, no recharge.--As early as 1938 Theis (Wenzel and Sand, 1942, p. 45) had developed a formula for determining the decline in artesian head at any distance from a drain discharging water at a uniform rate. In 1949 Ferris (1950) derived a formula that can be shown to be identical with the one derived by Theis. The development is based on the following assumptions: (1) The aquifer is homogeneous, isotropic, and of semi-infinite (bounded on one side only by the stream) areal extent; (2) the discharging drain completely penetrates the aquifer; (3) the aquifer is bounded by impermeable strata above and below; (4) the flow is laminar and unidimensional; (5) the release of water from storage is instantaneous and in proportion to the decline in head; and (6) the drain discharges water at a constant rate.

Slightly modifying the form used by Ferris, the drain formula can be written non-dimensionally, as

$$s = \frac{Q_b x}{2T} \left[\frac{e^{-u^2}}{u \sqrt{\pi}} - 1 + \frac{2}{\sqrt{\pi}} \int_0^{\frac{x}{2\sqrt{Tt/S}}} e^{-u^2} du \right] \quad (49)$$

where

$$u = x \sqrt{\frac{S}{4Tt}}$$

or

$$u^2 = \frac{x^2 S}{4Tt} \quad (50)$$

Ferris suggested that the quantity in brackets be written symbolically, for convenience, as $D(u)$ which is to be read "drain function of u ," and in this report the subscript q will identify it with the constant discharge situation. Equations 49 and 50 can therefore be rewritten in abbreviated form, in the usual Survey units, as

$$s = \frac{720 Q_b x}{T} D(u)_q \quad (51)$$

and

$$u^2 = \frac{1.87 x^2 S}{Tt} \quad (52)$$

where

- s = drawdown, in feet, at any point in the vicinity of the drain discharging at a constant rate
- Q_b = constant discharge (i.e., base flow) of the drain, in gallons per minute per lineal foot of drain
- x = distance, in feet, from the drain to the point of observation
- t = t_{mc} , in days, since the drain began discharging

and S and T have the meaning and units already defined.

From inspection of equations 51 and 52 it follows that if s can be measured at several values of t , and if x and Q_b are known, then S and T can be determined. However, the occurrence of two unknowns and the nature of the drain function make an exact analytical solution impossible and trial solution most laborious. A graphical solution of superposition, similar to the one devised by Theis for solution of his nonequilibrium formula, affords a simple solution of equation 51.

The first step in constructing the type curve is to assume values of u and compute the corresponding values for $D(u)_q$ from equation 49, which can be done easily with the aid of published tables (Commerce Dept., 1954). Values of $D(u)_q$ and u^2 for values of u from 0.0510 to 1.0000 are given in table 5. These data are then used to prepare a type curve on logarithmic coordinate paper by plotting values of u or u^2 against values of $D(u)_q$.

Table 5.--Values of $D(u)_q$, u , and u^2 for channel
method-constant discharge formula. a/

u	u^2	$D(u)_q$
0.0510	0.0026	10.091
.0600	.0036	8.437
.0700	.0049	7.099
.0800	.0064	6.097
.0900	.0081	5.319
.1000	.010	4.698
.1140	.013	4.013
.1265	.016	3.531
.1414	.020	3.069
.1581	.025	2.657
.1732	.030	2.355
.1871	.035	2.120
.2000	.040	1.933
.2236	.050	1.648
.2449	.060	1.440
.2646	.070	1.280
.3000	.090	1.047
.3317	.110	.8847
.3605	.130	.7641
.4000	.160	.6303
.4359	.190	.5327
.4796	.230	.4370
.5291	.280	.3516
.5745	.330	.2895
.6164	.380	.2426
.6633	.440	.1996
.7071	.500	.1666
.7616	.580	.1333
.8124	.660	.1084
.8718	.760	.08503
.9487	.900	.06207
1.0000	1.000	.05026

[Data for plotting type curve (see fig. 14) for equation 51, p. 53.]

a/ After Ferris (1950). Recomputed by Betty J. Newel; checked by R. H. Brown.

Such a type curve is shown in figure 14 and, for convenience in subsequent computation, values of $D(u)_q$ have been plotted against values of u^2 .

Rearranging equations 51 and 52 and taking the log of both sides there follows

$$\log s = \left[\log \frac{720 Q_b x}{T} \right] + \log D(u)_q \quad (53)$$

and

$$\log \frac{x^2}{t} = \left[\log \frac{T}{1.87 S} \right] + \log u^2 \quad (54)$$

For a given test, the bracketed parts of equations 53 and 54 are constant and $\log D(u)_q$ is related to $\log u^2$ in the manner that $\log s$ is related to $\log (x^2/t)$. Therefore, if values of the drawdown, s , are plotted versus x^2/t on logarithmic tracing paper having the same log scale as the type curve for the drain formula, the curve of observed data will be similar to the type curve. The data curve may thus be superposed on the type curve, with the coordinate axes held parallel, and translated to the position where the observed data coincide or make the best fit with the type curve. When this matching position has been found, an arbitrary point is selected, common to both curves, and the coordinates of this common point are used to solve equations 53 and 54 for T and S .

Despite the restrictive assumptions upon which it is based, the drain formula, as it has been called, has been applied successfully in determining the coefficients of transmissibility and storage of an aquifer and in estimating the pick-up by or leakage from drains.

Discussion and comparison of various ways of plotting the type curves (see figures 14 and 7) for the drain function $D(u)_q$ and the well function $W(u)$ are given in an article by M. A. Warren in the August 1952 issue of the Water Resources Bulletin.

Constant Head

Non-steady state, no recharge.--The decline in artesian head at any distance from a stream or drain, whose course may be approximated by an infinite straight line, subsequent to a sudden change in stream stage, can be found by borrowing the solution to an analogous heat-flow problem (Ingersoll, Zobel, and Ingersoll, 1948, p. 88). It is assumed that (1) the stream occurs along an infinite straight line and fully penetrates the artesian aquifer, (2) the aquifer is semi-infinite in extent (bounded on one side only by the stream), (3) the head in the stream is abruptly changed from zero to s_0 at time $t = 0$, (4) the direction of ground-water flow is perpendicular to the direction of the stream, and (5) the change in the rate of discharge from the aquifer is derived from changes in storage by drainage after $t = 0$. Substituting ground-water nomenclature in the heat-flow equation, the distribution of drawdown in the artesian aquifer is found to be

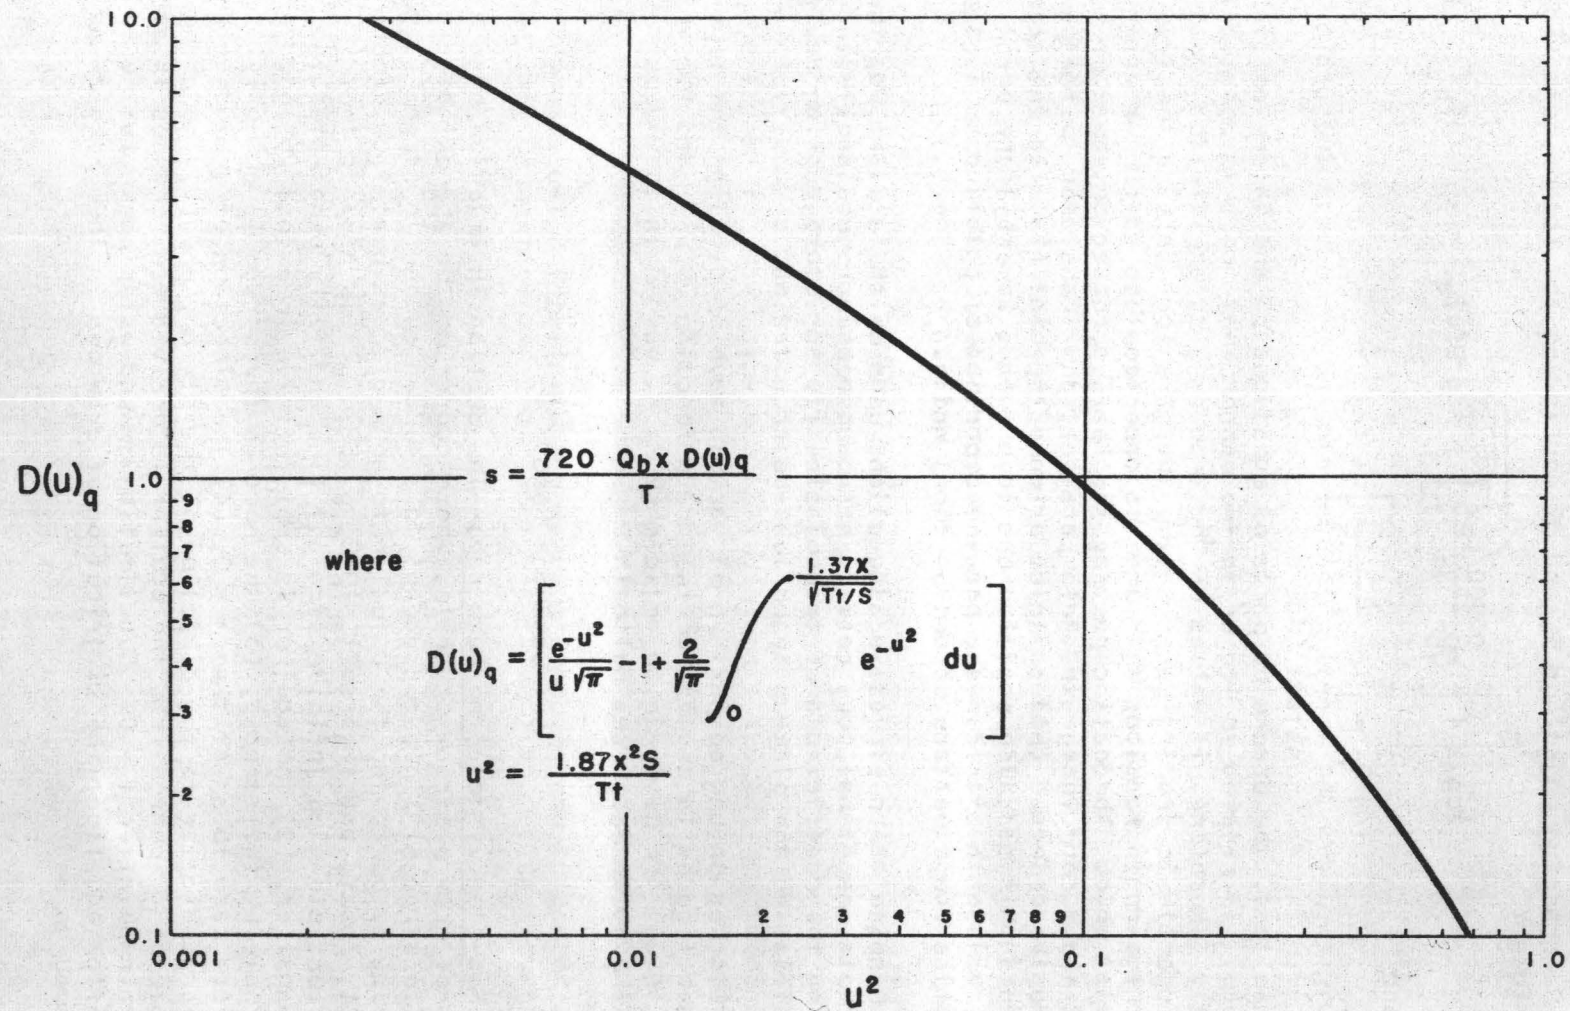


Figure 14--Logarithmic graph of the drain-function for channel method --- constant discharge

$$s_0 - s = \frac{2s_0}{\sqrt{\pi}} \int_0^{\frac{x}{2\sqrt{Tt/S}}} e^{-u^2} du$$

or

$$s = s_0 \left[1 - \frac{2}{\sqrt{\pi}} \int_0^{\frac{x}{2\sqrt{Tt/S}}} e^{-u^2} du \right] = s_0 D(u)_h \quad (55)$$

where $D(u)_h$ replaces the quantity in brackets and represents the drain function of u for the constant head situation, and where

$$u^2 = \frac{x^2 S}{4Tt} \quad (56)$$

In the foregoing expressions x is the distance from the stream or drain to the point at which the decline in artesian head, s , is observed or known, and s_0 is the abrupt change in stream stage at $t = 0$. Other symbols are as previously defined. (Note: In equation 55 the integral expression and its coefficient constitute what mathematicians have labelled the error function, written as "erf". The bracketed portion of equation 55 is identified as the complimentary error function, written as "cerf".)

The relation expressing the discharge from the aquifer, per unit length of stream channel, Q_b , resulting from the change in stream stage, can also be found in texts on heat flow (Ingersoll, Zobel, and Ingersoll, 1948, p. 90). When written using ground-water notation, and multiplying by 2 to account for the water contributed from both sides of the stream, the equation has the form

$$Q_b = \frac{2s_0}{\sqrt{\pi t}} \sqrt{ST} \quad (57)$$

Equations 56 and 57 now afford a means for evaluating the two unknowns T and S , inasmuch as the ratio S/T is determined from equation 56 and the product ST is obtained from equation 57.

Comparing equations 55 and 56 the use of the method of superposed graphs, described in previous sections, is again indicated as the most logical means of solution because $\log s$ will evidently vary with $\log x^2/t$ in the same manner that $\log D(u)_h$ varies with $\log u^2$. Thus the solution of equation 56 for the ratio S/T will evidently require matching a logarithmic data plot of values of s versus corresponding values of x^2/t (or simply $1/t$ if only one observation well is available) to a logarithmic type curve prepared by plotting values of $D(u)_h$ versus corresponding values of u^2 . Such a type curve is shown in figure 15, prepared from the drain function values given in table 6.

If equations 56 and 57 are rewritten using the usual Survey units (except for Q_b which is the base flow in gallons per minute per foot of stream length) they become

Table 6.--Values of $D(u)_h$, u , and u^2 for channel
method-constant head formula a/

u	u^2	$D(u)_h$
.03162	.0010	.9643
.04000	.0016	.9549
.05000	.0025	.9436
.06325	.0040	.9287
.07746	.0060	.9128
.08944	.0080	.8994
.1000	.010	.8875
.1265	.016	.8580
.1581	.025	.8231
.2000	.040	.7730
.2449	.060	.7291
.2828	.080	.6892
.3162	.10	.6548
.4000	.16	.5716
.5000	.25	.4795
.6325	.40	.3711
.7746	.60	.2733
.8944	.80	.2059
1.000	1.00	.1573
1.140	1.30	.1069
1.265	1.60	.0736
1.378	1.90	.0513
1.483	2.20	.0359
1.581	2.50	.0254
1.643	2.70	.0202
1.732	3.00	.0143
1.789	3.20	.0114

Data for plotting type curve (see fig. 15) for equation 55, p. 57.

a/ Prepared by R. W. Stallman

Note: Values of $D(u)_h$, for selected values of u^2 or u , were computed with the aid of tables in Commerce Dept., (1954).

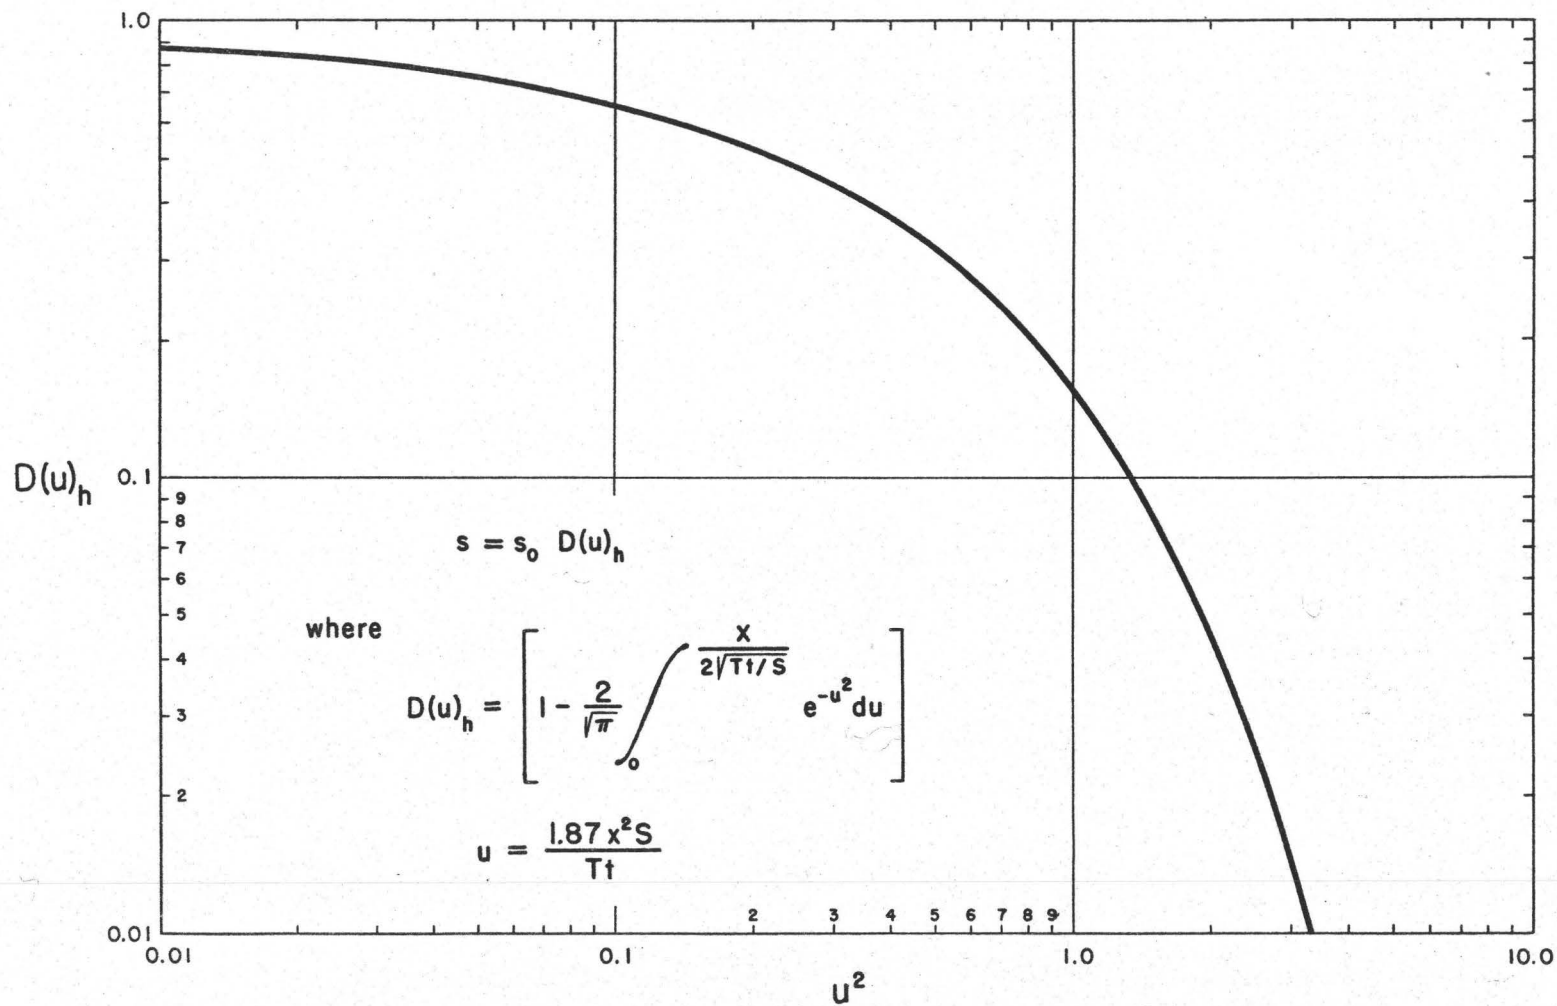


Figure 15--Logarithmic graph of the drain - function for channel method --- constant head

$$u^2 = \frac{1.87 x^2 S}{Tt} \quad (58)$$

and

$$Q_b = 2.15 \times 10^{-3} s_o \sqrt{\frac{ST}{t}} \quad (59)$$

Equations 55 and 57 define the changes (artesian head and flow) which occur in the aquifer if the stream stage is abruptly changed. Therefore the stipulation of no recharge implies only that the rate of recharge must be constant for a sufficient interval of time so that the regional water-level trends can be extrapolated with accuracy throughout the period in which the changes in the aquifer are being observed.

Water-level data from wells located near the stream may, in some field situations, yield erratic results, depending on the flow pattern in the aquifer in the vicinity of the stream. For example, if the stream only partially penetrates the aquifer the flow lines in the aquifer will obviously bend upward as they approach the stream, thereby producing vertical components of flow. Thus the smaller the distance x , between observation well and stream, the greater the errors inherent in the observed water levels. This in turn means that as x decreases, the error in the computed value of S/T increases. It should also be realized that instantaneous or abrupt lowering of stream stage is seldom possible which means that the determination of a reference or zero time is difficult. Thus observations made a short time after the stream stage is lowered may be somewhat unreliable. In general, therefore, it would seem prudent to favor the data collected at comparatively large values of x and large values of t to provide the most reliable basis for analysis.

Where it is known that the stream or drain penetrates only a part of the aquifer thickness the following adjustment procedure, although not yet proven by field trial, may offer a means for determining more realistic values for T and S . It should be evident that in a field situation of this kind the change in head in the stream channel is not as effective in producing head changes throughout the aquifer as when the stream is fully penetrating. Near the stream, ground-water levels adjust quickly to changes in stream stage but part of the adjustment is caused by the bending of the flow lines. It can be assumed, however, that at some relatively short distance x_0 away from the stream the bending of the flow lines in the aquifer will be small enough so that the effects on the head values may be neglected. Thus, for distances greater than x_0 the flow lines may be considered parallel, that is, flow is essentially one-dimensional. The change in head in the aquifer, at the distance x_0 , may therefore be considered as an effective value of s_0 and it is related to the changes in head throughout the aquifer, for all distances greater than x_0 , in the manner described by equations 55 and 56.

In effect this reasoning means that the real partially-penetrating stream, in which the stage was abruptly changed an amount s_0 , is being replaced (at the distance x_0) by a theoretical fully penetrating stream in which the stage change may be regarded as essentially abrupt but of a lesser magnitude which shall be termed an effective value of s_0 .

This so-called effective value of s_0 can be computed from equation 55 after superposing the data and type curves in the manner already described. The critical distance x_0 can also be computed, using the coordinates for a point common to the matched data and type curves, if more than one observation well is available. For each observation well the ratio S/T is computed using the distance from the well to the real stream channel as a first estimate in equation 56. If the S/T values thus determined are not alike, the equation for u^2 is adjusted to read as follows:

$$u^2 = \frac{1.87 (x - x_0)^2 S}{Tt}$$

An estimate of x_0 is then made, and S/T values for each observation well are recomputed using the effective distance to the stream $(x - x_0)$. If the data and field conditions are sufficiently ideal to permit an accurate analysis, several assumed values of x_0 will indicate the one that will produce the closest agreement in the computed values of S/T .

It is pointed out that it is difficult to assess the true value of these adjustment procedures inasmuch as the opportunity for applying them to a specific field problem has not yet been afforded.

Steady state, uniform recharge.—A problem of considerable practical interest is that of estimating the base flow of streams, or the effective average rate of ground-water recharge, from the shape of the water table. Consider the case of an aquifer bounded on two sides by fully penetrating parallel streams of infinite length as shown in figure 16A. It is assumed that the aquifer is homogeneous and isotropic, and that the aquifer is recharged at a rate of accretion, W , that is constant with respect to time and space. Flow is therefore one-dimensional and a ground-water divide is created at distance " a " midway between the streams (see figure 16B). Jacob (1943, p. 566) has given the equation of steady-state profile as

$$h_0 = \left(\frac{a^2 W}{2T} \right) \left(\frac{2x}{a} - \frac{x^2}{a^2} \right)$$


or

$$\frac{T}{W} = \frac{ax}{h_0} - \frac{x^2}{2h_0} \quad (60)$$


where

- W = constant rate of recharge to the water table
- a = distance from the stream to the ground-water divide
- x = distance from the stream to an observation well
- h_0 = elevation of the water table, at the observation well, above the mean stream level.

It is frequently convenient to express the rate of recharge, W , in inches per year, while a , x , and h_0 are expressed in feet, and T is in the usual Survey units. Equation 60 is then rewritten in the form

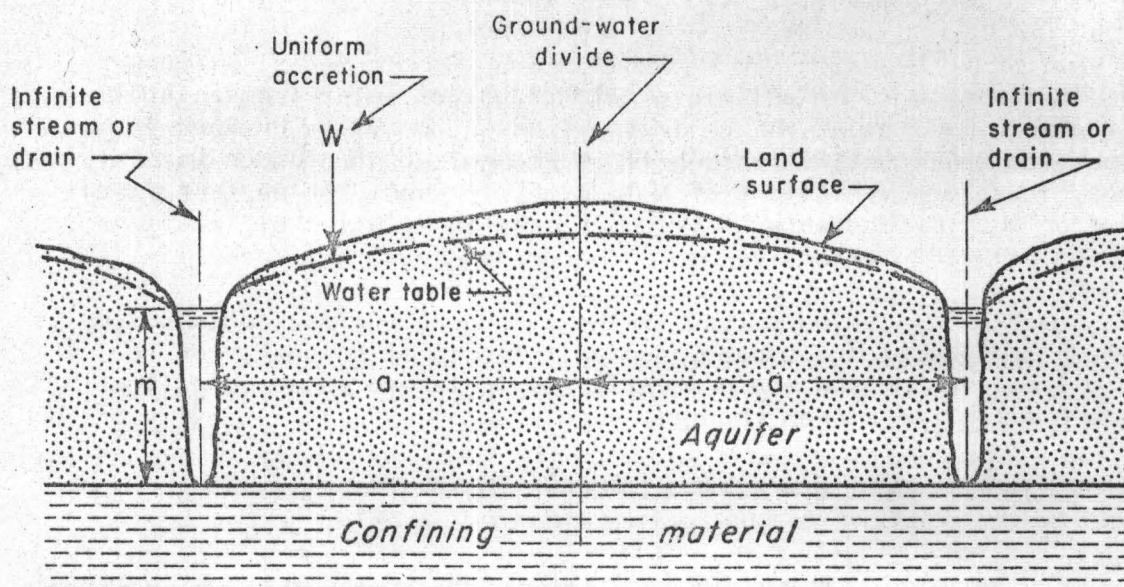

A. SECTION VIEW OF IDEAL AQUIFER SUBJECT TO UNIFORM ACCRETION, BOUNDED BY PARALLEL STREAMS

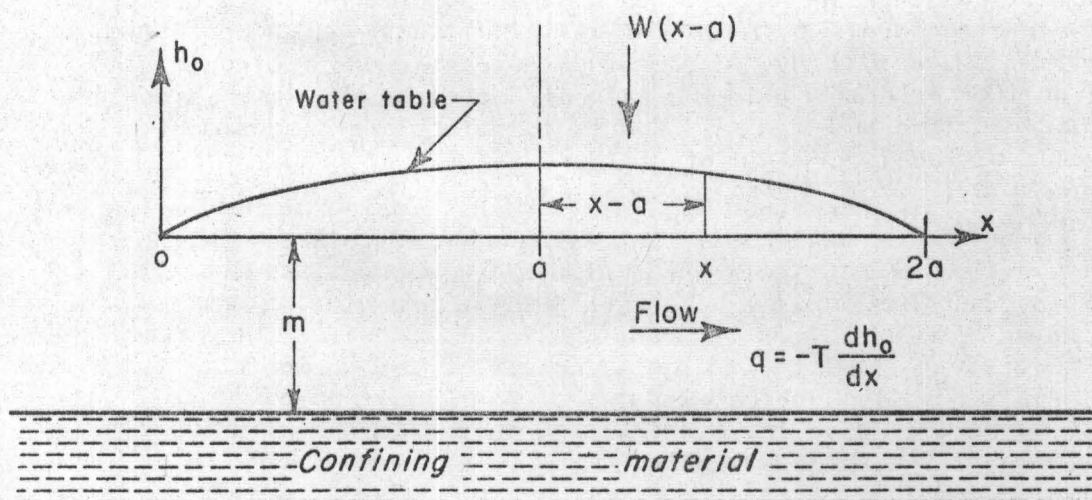

(After Jacob 1943)

B. NOMENCLATURE FOR MATHEMATICAL ANALYSIS OF PROFILE SHOWN IN SKETCH "A"

Figure 16--Section views for analyzing steady-state flow in hypothetical aquifer of large thickness with uniform accretion from precipitation

$$T = 1.71 (10^{-3}) W \left(\frac{\partial x}{\partial t} - \frac{x^2}{2h_0} \right) \quad (61)$$

In the absence of artificial withdrawal of water from an aquifer, the net recharge must equal the natural discharge, provided changes in storage are insignificant. Although it is recognized that under natural conditions, there are variations of W in time, it should be apparent that if average or mean ground-water levels are used in equation 61, a figure for W equivalent to an effective average accretion rate will result.

Equation 61 can be solved if the average (in time) contribution, Q_b , to the base flow of the stream, per unit length of channel, can be determined from stream-flow measurements. If Q_b is expressed in gallons per minute per foot of stream channel, then

$$W = 8.44 (10^5) \frac{Q_b}{2a}$$

or

$$W = 4.22 (10^5) \frac{Q_b}{a} \quad (62)$$

Equation 62 permits determination of W which can be used in equation 61 in computing the value of T .

In many field situations, of the type postulated here, general appraisal of the occurrence of ground water may indicate that the ground-water divide is parallel to the stream course, although the distance a will be unknown. If two observation wells are available, it is possible to compute a value for a and a value for the ratio $586 T/W$. If a larger number of observation wells is available, a graphical solution may be used to solve for the values of a and $586 T/W$. The procedure requires observation of the distances, x , from the stream to the individual observation wells and the corresponding values of h_0 . Using the data from one observation well, and arbitrarily selecting several values of a , the corresponding values of $586 T/W$ are computed after appropriate substitution in equation 61. The computed values of $586 T/W$ are plotted against the corresponding assumed values of a and a smooth curve is drawn through the plotted points. In similar fashion a curve is drawn on the same graph for each observation well. The coordinates of the single point at which all the curves intersect give the particular values of a and of $586 T/W$ which will satisfy all the available data.

Sinusoidal Head Fluctuations

Werner and Noren (1951) and later Ferris (1952b) independently analyzed the problem of fluctuations of water levels in wells in response to sinusoidal changes in stage of nearby surface-water bodies. The solution to this general type of problem has long been available in other fields of science and as Ferris indicates it may conveniently be found in reference works on heat flow such as the text by Ingersoll, Zobel, and Ingersoll (1948, p. 46-47). Translated into ground-water terms, the solu-

tion requires an isotropic semi-infinite artesian aquifer of uniform thickness in full contact, along its one boundary, with a surface-water body that may be considered an infinite line source. Within the aquifer the change in water storage is assumed to occur instantaneously with, and at a rate proportional to, the change in pressure. Ferris (1952b, p. 3) shows that the equation for the range of ground-water fluctuation in an observation well, a distance x from the aquifer contact with the surface-water body, whose stage is changing sinusoidally, has the non-dimensional form

$$s_r = 2s_0 e^{-x \sqrt{\pi S/t_0 T}} \quad (63)$$

or in the usual Survey units

$$s_r = 2s_0 e^{-4.8 x \sqrt{S/t_0 T}} \quad (64)$$

where

- s_r = range of ground-water stage, in feet
- s_0 = amplitude or half range of the surface-water stage, in feet
- x = distance from the observation well to the surface-water contact with the aquifer ("suboutcrop"), in feet
- t_0 = period of the stage fluctuation, in days
- S = coefficient of storage
- T = coefficient of transmissibility, in gallons per day, per foot.

For convenience equation 64 can be written

$$2.1 \sqrt{S/t_0 T} = \frac{-\log_{10} (s_r/2s_0)}{x} \quad (65)$$

The form of equation 65 suggests a semilogarithmic plot of the log of the range ratio, $s_r/2s_0$, for each observation well, versus the corresponding distance, x , as an expedient method of analyzing the observed data. The right-hand member of equation 65 represents the slope of the straight line that should be defined by the plotted data. If the change in the logarithm of the range ratio is selected over one log cycle of the plot equation 65 becomes

$$2.1 \sqrt{S/t_0 T} = - \frac{1}{\Delta x}$$

or

$$T = \frac{4.4 (\Delta x)^2 S}{t_0} \quad (66)$$

If the field conditions fulfill the assumptions made in deriving equation 66, the straight line drawn through the data on the semilog plot should pass through the origin of the coordinate axes, that is, should intercept a value of $r/2s_0 = 1$ at a value of $x = 0$. For the case of a stream of substantial width, partially penetrating the artesian aquifer, this intercept will usually be found at negative values of x , indicating an "effective" distance offshore to the suboutcrop. This effective distance may or may not have physical significance depending on the nature of the flow field in the vicinity of the stream. For example, if the stream does not cut through the upper confining bed, stage changes in the surface-water body may still provide, through the changes in loading that are involved, a source of sinu-

solidal head fluctuation in the artesian aquifer along the stream location. Unless the loading changes are completely effective (100 percent tidal efficiency) in producing a stage range of $2s_0$ at $x = 0$ in the aquifer, the straight-line intercept with the x axis will again be at some negative value of x , and will in part be an indication of the efficiency with which the aquifer skeleton accepts the changes in loading. However, it should be observed that regardless of the exact value of s_0 in the aquifer, at $x = 0$, the slope of the data plot described is unaffected. Therefore the T value computed by means of equation 66 will be correct regardless of the actual value in the aquifer of s_0 .

It is seen from equation 66 that it is necessary to know S in order to solve for T . Frequently, when the coefficient of storage is not known, it is possible to make a reasonable estimate of its value by studying the well logs and water-level records.

The lag in time of occurrence of a given maximum or minimum ground-water stage, following the occurrence of a similar surface-water stage, is given by Ferris (1952b) as

$$t_l = \frac{x}{2} \sqrt{\frac{t_0 S}{\pi T}} \quad (67)$$

where t_l is the lag in time. Solving this equation for the coefficient of transmissibility, and rewriting in terms of the usual Survey units, there follows

$$T = 0.60 t_0 S \left(\frac{x}{t_l} \right)^2 \quad (68)$$

The only variables in equation 68 are evidently x and t_l . Thus an arithmetic plot is suggested with the value of the distance, x , for each observation well, plotted against the corresponding value of the time lag, t . The slope of the straight line that should be defined by these plotted points will then give the value of x/t_l , which appears to the second power in equation 68. If the straight line that is drawn through the plotted points should intersect the zero-time-lag axis at a negative value of x it may be an indication of the effective distance offshore to the suboutcrop.

In those situations where the aquifer is not fully penetrated or where it is under water-table (unconfined) conditions the methods of analysis described in this section will be satisfactory if (1) the observation wells are far enough from the suboutcrop so that they are unaffected by vertical components of flow and (2) the range in fluctuations is only a small fraction of the saturated thickness of the formation.

Areal Methods

Numerical Analysis

The equations presented in the preceding sections of this paper were derived by means of the calculus. Darcy's law, combined with the equation of continuity (Rouse, 1950, p. 326) yielded the basic differential equations which described states of flow. In turn, solutions to these differential equations were found which satisfy the boundary conditions of a particular problem. Certain generalizations were made in regard to the boundary conditions so as to provide rather specific equations which can be used with convenience to obtain a solution to the field problem. Among these generalizations are the assumptions of a constant head or discharge at some point or line, homogeneity of the aquifer, simple geometric form or shape of the aquifer, and complete penetration of the well or stream. Certainly for many field problems these conditions are fulfilled to a sufficient degree so that the available formulas can be used to obtain a reliable approximation of the values of T , S , or W . However, the ground-water hydrologist frequently encounters problems for which the complicated boundary conditions cannot be expressed by simple mathematical relations. Furthermore, the complicated boundary conditions related to a given field problem seldom recur in nature in the same combination. Thus it could be poor economy to spend a large amount of time and energy deriving complicated analytical equations whose application might be limited to one problem. Under such circumstances it may be found more expedient to use numerical methods of analysis for the quantitative investigation. Numerical methods have been used in other sciences for some time for the same purpose. Basic formulas and procedures have been described by Southwell (1946, 1940) and many of his colleagues (Shaw, 1953). Scarborough (1950) and Milne (1953) have written extensively on the same subject and a condensed version of the numerical methods particularly useful in ground-water investigations is in preparation (Stallman, 1955). The following is adapted from the latter work.

The formula derivation of analytical equations for describing ground-water movement involves application of the rules of calculus for integrating, or summing, an infinite set of infinitesimal changes in head between two or more points in the flow region under study. In lieu of application of the rules of calculus to perform this addition conveniently, it would be possible to accomplish the same thing simply by addition of the infinite set of infinitesimals. The latter method is, of course, impractical unless approximations are introduced. Thus an area may be calculated by considering that it is composed of small but finite parts, each having an area $\Delta x \Delta y$. By this more coarse subdivision of the area the problem is reduced to the addition of a sensibly small and finite set of component parts instead of the infinite set of infinitesimal areas $dx dy$ postulated by the orthodox calculus. In brief this constitutes the basis of numerical analysis as applied in finding solutions to differential equations: the substitution of finite entities for the differential forms that appear in the fundamental differential equations.

Consider, for example, the differential equation describing two-dimensional flow in a homogeneous and isotropic aquifer, subject to re-

charge at a rate of accretion W . It can be shown (Stallman, 1955) that this equation has the form

$$\frac{\partial^2 h}{\partial x^2} + \frac{\partial^2 h}{\partial y^2} = \left(\frac{S}{T} \right) \frac{\partial h}{\partial t} - \frac{W}{t} \quad (69)$$

where h is the head at any point whose coordinates are x, y . Let the differential lengths dx and dy be expanded so that each can be considered equivalent to a finite length w , and similarly let dt be considered equivalent to Δt . A plan representation of the region of flow to be studied may then be subdivided by two systems of equally spaced parallel lines at right angles to each other. One system is oriented in the x direction and the other in the y direction and the spacing of the lines equals the distance w (see fig. 17). A set of 5 grid-line intersections or nodes, selected in the manner shown on figure 17, is called an array. According to Southwell (1946, p. 19) the first two differentials in equation 69 can be expressed, in terms of the head values at the nodes in the array, in the following fashion

$$\frac{\partial^2 h}{\partial x^2} \approx \frac{h_1 + h_3 - 2h_0}{w^2}$$

and


$$\frac{\partial^2 h}{\partial y^2} \approx \frac{h_2 + h_4 - 2h_0}{w^2}$$

where the subscripts of h refer to the numbered nodes of figure 17. Substituting these equivalent expressions for the first two differentials in equation 69, and letting $\partial h / \partial t$ be considered equivalent to $\Delta h_{0t} / \Delta t$, there follows

$$h_1 + h_2 + h_3 + h_4 - 4h_0 = \left[\frac{S}{T} \left(\frac{\Delta h_{0t}}{\Delta t} \right) - \frac{W}{T} \right] w^2 \quad (70)$$

where Δh_{0t} is the change in head which occurs at node 0 (fig. 17) through the time interval Δt . Depending on the type of data available, equation 70 can be used to compute the hydraulic constants, S , T , and W , or the head distribution in time and space, in an aquifer of given size and shape. Furthermore, the calculations involve only the use of simple arithmetic.

In working out a solution where a finite difference equation, such as equation 70 is being applied to a specific flow problem, the primary aim of the computing methods is to find the particular distribution of head values at all the nodal points (like points 0-4 of figure 17) such that the finite difference equation is satisfied at all nodes simultaneously. This head distribution can be found either by relaxation or iteration methods of numerical analysis. The computations are begun by assuming head values for all the nodes in the flow system. These initial estimates will not ordinarily satisfy the finite difference equation and will require revision so that a better application of the equation can be made.

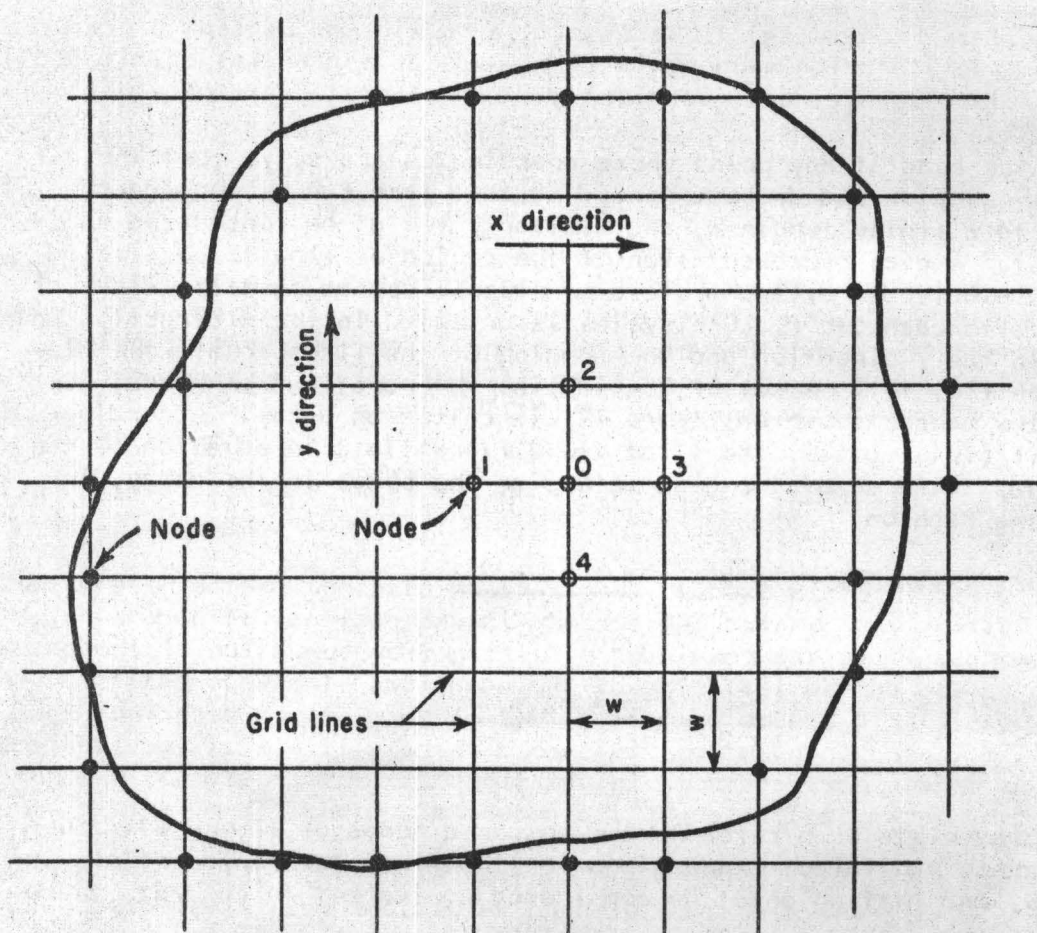

NOTES:

Filled circles indicate boundary nodes selected to approximate irregular boundary of the area

The grid spacing "w" is an approximation of the differential distances "dx" and "dy"

The five numbered nodes constitute an "array"

Figure 17-- Finite grid and nomenclature used in numerical analysis

Refinement of the head values is continued until accuracy is considered to be sufficient for the needs of the problem.

If the refinement is made using a routine adjustment procedure, it is termed an iteration method; if it is made by approximation, it is termed a relaxation method. Consider the steady-state form of equation 70, which is

$$h_1 + h_2 + h_3 + h_4 - 4h_0 + \left(\frac{W}{T}\right)w^2 = 0 \quad (71)$$

Assume that it is desired to find the head distribution in an aquifer of known size and shape, the flow conditions (and/or head values) being known along its perimeter, and the values of W and T , or their ratio, being known. Substituting in equation 71 the initial set of assumed head values for nodes 0-4, and the known value of $(W/T)w^2$ there follows

$$h_{1i} + h_{2i} + h_{3i} + h_{4i} - 4h_{0i} + \left(\frac{W}{T}\right)w^2 = R_0 \quad (72)$$

where the subscript i is used to set apart or distinguish the head values that are initially assumed. The term R_0 is the residual at node zero, or in other words, it is the remainder resulting from summation of the assumed and known values on the left side of the equation. Inasmuch as it is virtually impossible to assume an initial set of head values such that the summation indicated in equation 71 is zero there will almost inevitably be a remainder or residual as shown in equation 72. This residual, R_0 , may be thought of as an indication of the amount and direction of excess curvature on the piezometric surface defined by the assumed heads. The value of R_0 is also an indication of the amount by which h_{0i} must be changed so that in the next trial summation of head values the result will more closely approach the zero value required for complete satisfaction of equation 71.

It can easily be shown that if the head at the zero node is changed by an amount $\Delta h_0 = -R_0/4$ the residual at that node will be reduced to zero. However, it should be kept in mind that equation 71 is to be tried on each array in the grid net and that residuals will appear at many if not all of the other nodes. Thus a head adjustment at one node will affect residuals at other nodes, and conversely subsequent head adjustments at adjacent nodes will affect the residual at the first zero node. Accordingly, several circuits must be made through the net before the residual values are reduced to zero or nearly zero. Successive circuits of nodal head adjustments amounting to $-R_0/4$, applied regularly over the net, constitute an iterative process. With practice the computer will recognize that the distribution of residuals can be improved more efficiently by either a larger or smaller head adjustment than indicated by $-R_0/4$. Applying such improvement tempered by judgment gained from experience is a relaxation method.

Flow-net Analysis

In analyzing problems of ground-water flow, a graphical representation of the flow pattern is of considerable assistance and often provides the only means of solving those problems for which a mathematical solution is not practicable. The first significant development in graphical analysis of flow patterns was made by Forchheimer (1930).

A "flow net", which is a graphical solution of a flow pattern, is composed of two families of lines or curves. One family of curves represents the streamlines or flow lines, where each curve indicates the path followed by a particle of water as it moves through the aquifer in the direction of decreasing head. Intersecting the streamlines at right angles is a family of curves termed equipotential lines which represent contours of equal head in the aquifer.

Although the real flow pattern contains an infinite number of flow lines and equipotential lines, it may be conveniently represented by constructing a net that uses only a few of those lines. The flow lines are selected so that the total quantity of flow is divided equally between adjacent pairs of flow lines; similarly the equipotential lines are selected so that the total drop in head across the system is evenly divided between adjacent pairs of potential lines.

The change in potential or drop in head between two equipotential lines in an aquifer, divided by the distance traversed by a particle of water moving from the higher to the lower potential, determines the hydraulic gradient. Recognizing that this movement of a water particle is governed in part by the proposition that the flow path adopted will be the one involving the least work (i.e., the shortest possible path between the two equipotential lines in question), it follows that the direction of water movement is everywhere synonymous with paths that are normal to the equipotential lines. Hence the system of flow lines must be drawn orthogonal to the system of equipotential lines.

A flow net constructed with the foregoing principles in mind is a pattern of "rectangles" in which the ratio of the mean dimensions of each "rectangle" is constant. If the net is constructed so that the sides of each rectangle are equal, then the net is a system of "squares". It should be recognized, however, that in flow fields involving curved paths of flow, the elemental geometric forms in the net are curvilinear and thus are not true squares; however, the corners of each "square" are right angles and the mean distances between the two pairs of opposite sides are equal. If any one of these elemental curvilinear "squares" is repeatedly subdivided into four equal parts the subdivisions will progressively approach the shape of true squares.

The proper sketching of a flow net, by the graphical method, is something of an art that is learned by experience; however, the following points summarized from a paper by Casagrande (1937, p. 136-137) may be helpful to the beginner:


1. Study the appearance of well constructed flow nets and try to duplicate them by independently re-analyzing the problems they represent.
2. In the first attempts at sketching use only four or five flow channels.
3. Observe the appearance of the entire flow net; do not try to adjust details until the entire net is approximately correct.
4. Frequently parts of a flow net consist of straight and parallel lines, which result in uniformly-sized true squares. By starting the sketching in such areas, the solution can be obtained more readily.
5. In flow systems having symmetry (for example, nets depicting radial flow into a well) only a section of the net need be constructed as the other part or parts are images of that section.
6. During the sketching of the net, keep in mind that the size of the square changes gradually; all transitions are smooth and, where the paths are curved, are of elliptical or parabolic shape.

Taylor (1948) recommends a somewhat different procedure for sketching flow nets. This procedure, called the procedure of explicit trials, has been found to have value in developing intuition for flow-net characteristics. In this method a trial equipotential or flow line is established and the entire net completed as if that trial line were correct. If the completed net is not correct the initial trial line is resketched and a new net is constructed. The adjustment of the trial line is judged from the appearance of the entire net and how well it conforms to the boundary conditions of the system.

For steady flow, with a particular set of boundary conditions, only one flow net exists. If at some subsequent time the boundary conditions are altered, then after sufficient time has elapsed to reestablish the steady state, a different flow pattern would be developed and again there would be only one possible solution for the new set of boundary conditions. Thus before attempting to construct a flow net, it is important that the boundary conditions be established and carefully described. For example, consider the aquifer shown in figure 18, bounded by an impervious barrier paralleling a perennial stream. Line AB, designating the stream, is obviously an equipotential line along which the head is equal; line CD marking the impervious barrier is evidently coincident with the limiting or boundary flow line. Accordingly, the equipotential lines will adjoin the barrier at right angles. The discharge through any channel or path of the flow net may be obtained with the aid of Darcy's law, one variation of which, as has been previously shown (see p. 3), may be written in the form

$$Q = PIA$$

For convenience in applying this variation of Darcy's law consider a unit width or thickness of the aquifer, measured normal to the direc-

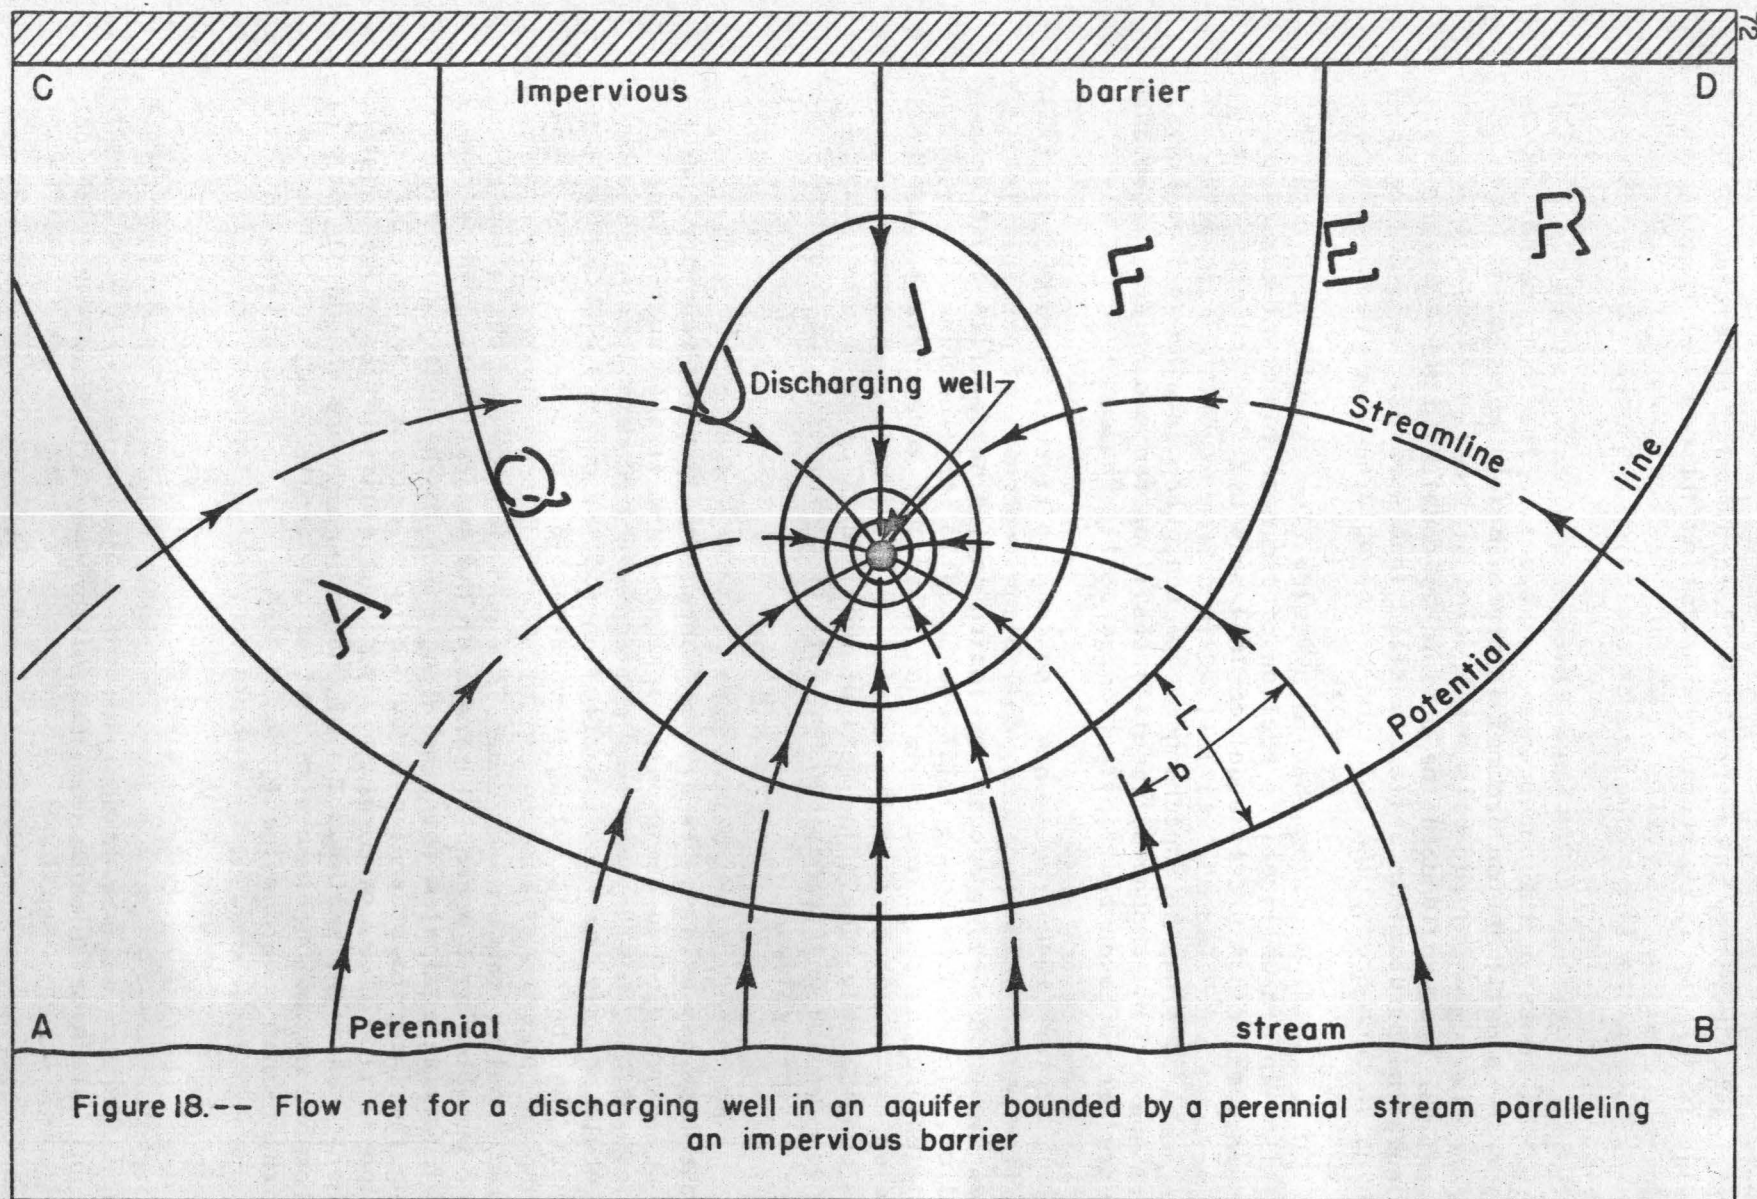

tion of flow indicated by L in figure 18 (i.e., normal to the plane of the diagram). The preceding equation may then be rewritten for this unit thickness (in this example), of aquifer, and for one flow channel through the net as

$$\Delta q = P I b \quad (73)$$

where Δq represents the flow occurring between a pair of adjacent flow lines (one flow channel) and b is the spacing of the flow lines. If L represents the spacing, and Δh the drop in head, between the equipotential lines, equation 73 becomes

$$\Delta q = P \Delta h \frac{b}{L} \quad (74)$$

Inasmuch as the flow net (figure 18) was constructed to comprise a system of "squares" the ratio b/L is equal to unity and the same potential drop occurs across each "square". It follows then from equation 74 that the same incremental flow, Δq , occurs between each pair of adjacent flow lines. If there are n_f flow channels, the total flow, q , through a unit thickness of the aquifer, is given by

$$q = n_f \Delta q \quad (75)$$

If there are n_d potential drops, the total drop in head, h , is given by

$$h = n_d \Delta h \quad (76)$$

Substituting in equation 75 the values of Δq and Δh given by equations 74 and 76 respectively, there follows

$$q = \frac{n_f}{n_d} P h \quad (77)$$

Noting that q represents the total flow through a unit thickness of the aquifer, the equation for total flow through the full thickness of the aquifer becomes

$$Q = \frac{n_f}{n_d} P h m \quad (78)$$

where Q = flow through full thickness of the aquifer in gallons per day
 n_f = number of flow channels
 n_d = number of potential drops
 P = coefficient of permeability of the aquifer material, in gallons per day per square foot
 m = saturated thickness of aquifer, in feet
 h = total potential drop, in feet
 Pm = transmissibility of the aquifer, in gallons per day per foot.

The preceding discussion of the graphical construction of flow nets concerns flow fields of a two-dimensional nature in homogeneous and isotropic media. The graphical construction of flow nets for three-dimensional problems generally is impracticable; however, many ground-water problems of a three-dimensional nature can be reduced to two dimensions

without introducing serious errors.

For two-dimensional problems involving simple anisotropy, such as a constant difference between the vertical and horizontal permeability, or a directional areal transmissibility, the flow net can be constructed by the conventional graphical procedure (system of squares) provided the flow field is first transformed to account for the anisotropy. If the values of maximum or minimum permeability (or transmissibility) are designated P_{\max} and P_{\min} , all the dimensions in the direction of P_{\max} must be reduced by the factor $\sqrt{P_{\min}/P_{\max}}$; or, all dimensions in the direction of P_{\min} must be increased by the factor $\sqrt{P_{\max}/P_{\min}}$. After the flow field is transformed, the net is constructed by graphical methods. Then the net is projected back to the original dimensions of the field. It will be found that the projected net generally will no longer be a system of squares, and the equipotential and stream lines will not intersect at right angles.

For areally nonhomogeneous aquifers, that is, those comprising subareas of homogeneous and isotropic media but of different transmissibility, the flow pattern cannot, according to theory, be represented by a single system of squares. If the flow net were constructed so that each flow path conducted the same quantity of water, one subarea could be represented by a system of squares but the nets in the other subareas would consist of rectangles in which the ratio of the lengths of the sides would be proportional to the differences in transmissibility. If the flow lines from one subarea enter another subarea at an angle, the flow lines (and equipotential lines) would be refracted according to the tangent law. The graphical construction of a flow net under such conditions is extremely difficult and, with the data that are available for most ground-water problems, is generally impossible. However, Bennett and Meyer (1952, p. 54-58) have shown that by generalizing the flow net for such an area into a system of squares and determining the quantity of flow by making an inventory of pumpage in each of the subareas, the approximate transmissibility of the subareas may be determined. Although such an application of the method departs somewhat from theory, it is likely that for many areas it provides more realistic areal transmissibilities than could be obtained by use of pumping test methods alone. Whereas pumping tests may provide accurate values of transmissibilities they generally represent only a small "sample" of the aquifer. Flow-net analysis on the other hand may include large parts of the aquifer, and hence provide an integrated and more realistic value of the areal transmissibility. Moreover, by including comparatively large parts of the aquifer, the local irregularities that may appreciably affect some pumping-test analyses generally have an insignificant effect on the overall flow patterns.

The application of flow-net analysis to ground-water problems has not received the attention it deserves; however as the versatility of flow-net analysis becomes more widely known, its use will become more common. Such a method of analysis greatly strengthens the hydrologist's insight into ground-water flow systems, and provides quantitative procedures for analyzing and interpreting contour maps of the water-table and piezometric surfaces.

For other illustrations of flow-net construction, see figures 20 and 22.

Theory of Images and Hydrologic Boundary Analysis

The development of the equilibrium and nonequilibrium formulas discussed in the preceding sections was predicated in part on the assumption of infinite areal extent of the aquifer, although it is recognized that few if any aquifers completely satisfy this assumption. Frequently the existence of boundaries serves to limit the continuity of the aquifer, in one or more directions, to distances ranging from a few hundred feet to as much as tens of miles. Thus where an aquifer is recognized as having finite dimensions, direct analysis of the test data by the equations previously given is often precluded. It is often possible, however, to circumvent the analytical difficulties posed by the aquifer boundary. The method of images, widely used in the theory of heat conduction in solids, provides a convenient tool for the solution of boundary problems in ground-water flow. Imaginary wells or streams, usually referred to as images, can sometimes be used at strategic locations to duplicate hydraulically the effects on the flow regime caused by the known physical boundary. Use of the image thus is equivalent to removing a physical entity and substituting a hydraulic entity. The finite flow system is thereby transformed by substitution into one involving an aquifer of infinite areal extent, in which several real and imaginary wells or streams can be studied by means of the formulas already given. Such substitution often results in simplifying the problem of analysis to one of adding effects of imaginary and real hydraulic systems in an infinite aquifer.


An aquifer boundary formed by an impervious barrier, such as a tight fault or the impermeable wall of a buried stream valley that cuts off or prevents ground-water flow, may be termed a negative boundary. A line at or along which the water levels in the aquifer are controlled by a surface body of water such as a stream, or by an adjacent segment of aquifer having a comparatively large transmissibility or water-storage capacity, may be termed a positive boundary.

Although most geologic boundaries do not occur as abrupt discontinuities, it is often possible to treat them as such. When conditions permit this practical idealization, it is convenient for the purpose of analysis to substitute a hypothetical image system for the boundary conditions of the real system.

In this section, where the analysis of pumping test data is considered, several examples are given of image systems required to duplicate, hydraulically, the boundaries of certain types of areally restricted aquifers. It should be apparent that similar methods can be used to analyze flow to streams or drains through areally limited aquifers.

Perennial Stream -- Line Source at Constant Head


An idealized section through a discharging well in an aquifer hydraulically controlled by a perennial stream is shown in figure 19A. For thin aquifers the effects of vertical-flow components are small at relatively short distances from the stream, and if the stream stage is not


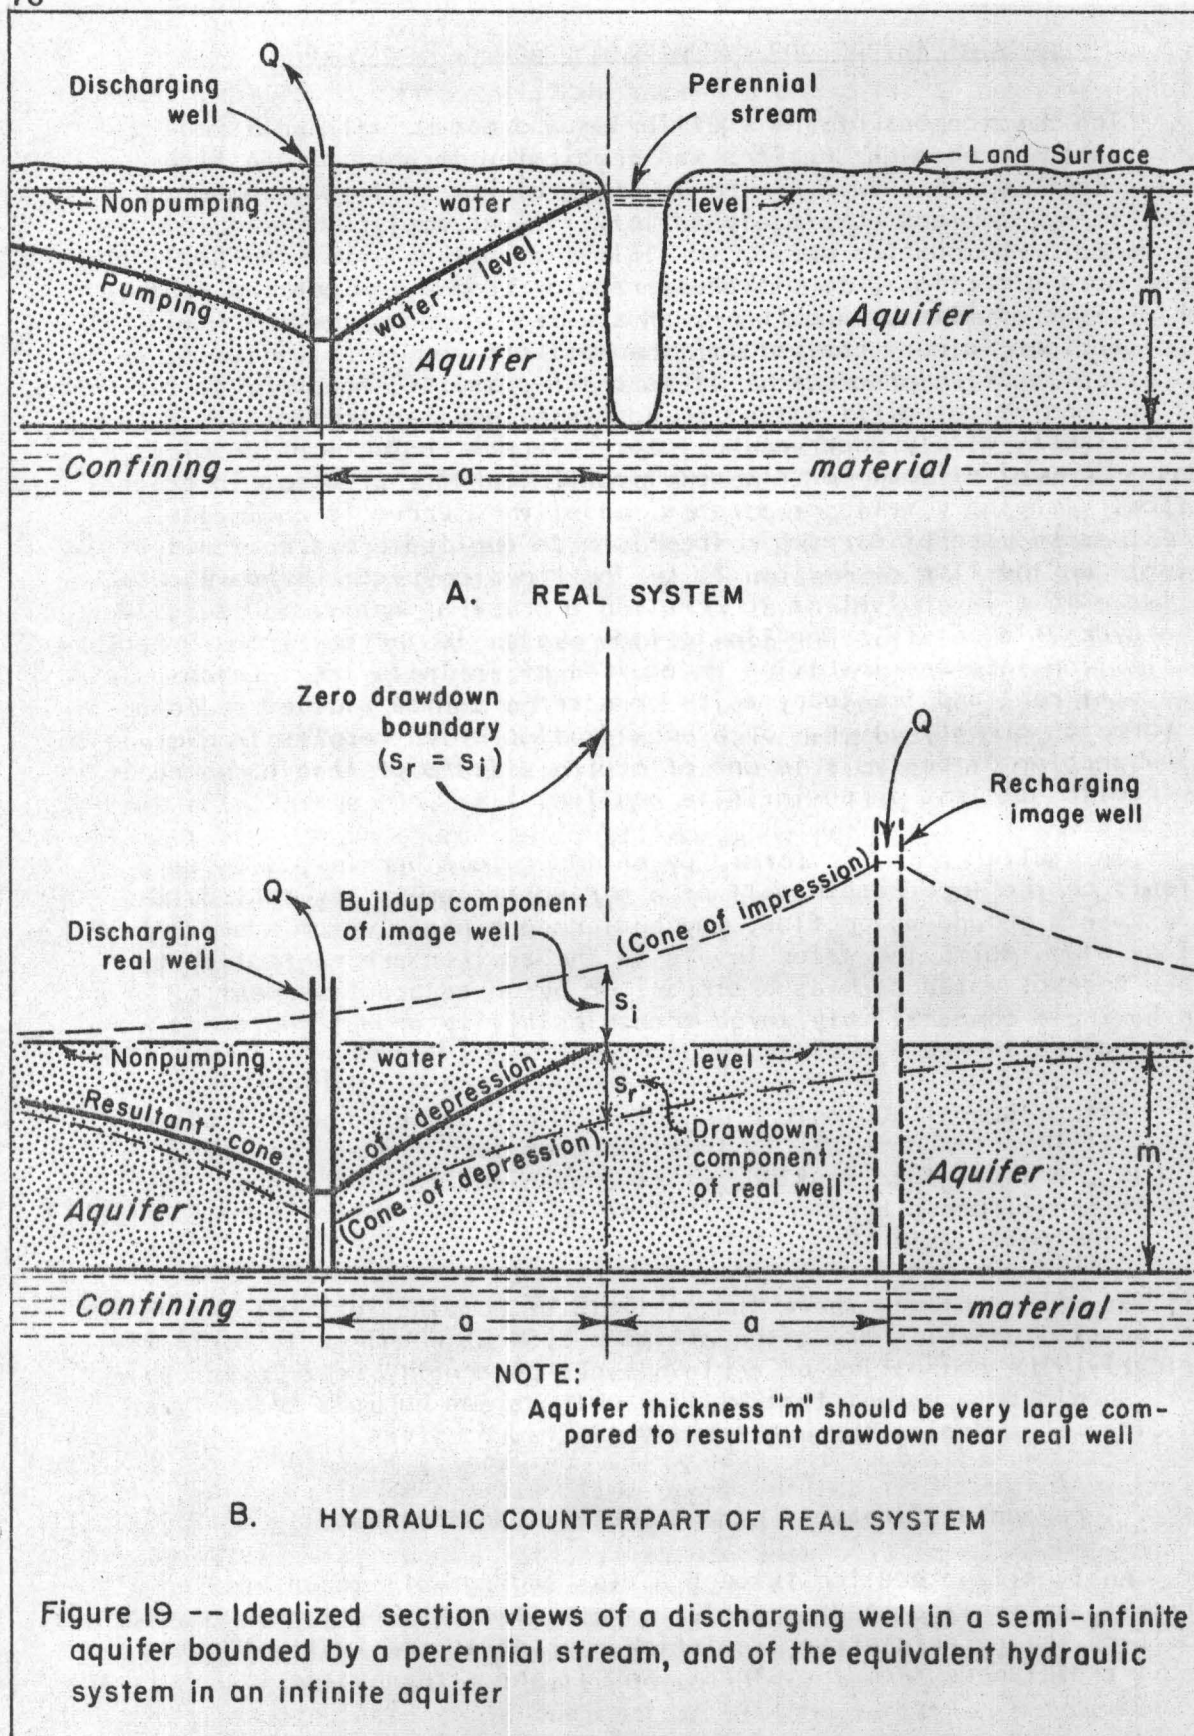


lowered by the flow to the real well there is established the boundary condition that there shall be no drawdown along the stream position. Therefore, for most field situations it can be assumed for all practical purposes that the stream is fully penetrating and equivalent to a line source at constant head. An image system that satisfies the foregoing boundary condition, as shown in figure 19B, allows a solution of the real problem through use, in this example, of the Theis nonequilibrium formula. Note in figure 19B that an imaginary recharging well has been placed at the same distance as the real well from the line source but on the opposite side. Both wells are situated on a common line perpendicular to the line source. The imaginary recharge well operates simultaneously with the real well and returns water to the aquifer at the same rate that it is withdrawn by the real well. It can be seen that this image well produces a buildup of head everywhere along the position of the line source that is equal to and cancels the drawdown caused by the real well which satisfies the boundary condition of the real problem. The resultant drawdown at any point on the cone of depression in the real region is the algebraic sum of the drawdown caused by the real well and the buildup produced by its image. The resultant profile of the cone of depression, shown in figure 19B, is flatter on the landward side of the well and steeper on the riverward side, as compared with the shape it would have if no boundary were present. Figure 20 is a generalized plan view of a flow net for the situation given in figure 19A. The distribution of stream lines and potential lines about the real discharging well and its recharging image, in an infinite aquifer, is shown. If the image region is omitted, the figure represents the stream lines and potential lines as they might be observed in the vicinity of a discharging well obtaining water from a river by induced infiltration.

Impervious Barrier

An idealized section through a discharging well in an aquifer, bounded on one side by an impervious barrier is shown in figure 21A. It is assumed that the irregularly sloping boundary can, for practical purposes, be replaced by a vertical boundary, occupying the position shown by the vertical dashed line, without sensibly changing the nature of the problem. The hydraulic condition imposed by the vertical boundary is that there can be no ground-water flow across it, for the impervious material, cannot contribute water to the pumped well. The image system that satisfies this condition and permits a solution of the real problem by the Theis equation is shown in figure 21B. An imaginary discharging well has been placed at the same distance as the real well from the boundary but on the opposite side, and both wells are on a common line perpendicular to the boundary. At the boundary the drawdown produced by the image well is equal to the drawdown caused by the real well. Evidently, therefore, the drawdown cones for the real and the image wells will be symmetrical and will produce a ground-water divide at every point along the boundary line. Because there can be no flow across a divide, the image system satisfies the boundary condition of the real problem and analysis is simplified to consideration of two discharging wells in an infinite aquifer. The resultant drawdown at any point on the cone of depression in the real region is the algebraic sum of the drawdowns produced at that point by the real well and its image. The resultant profile of the cone of depression, shown in

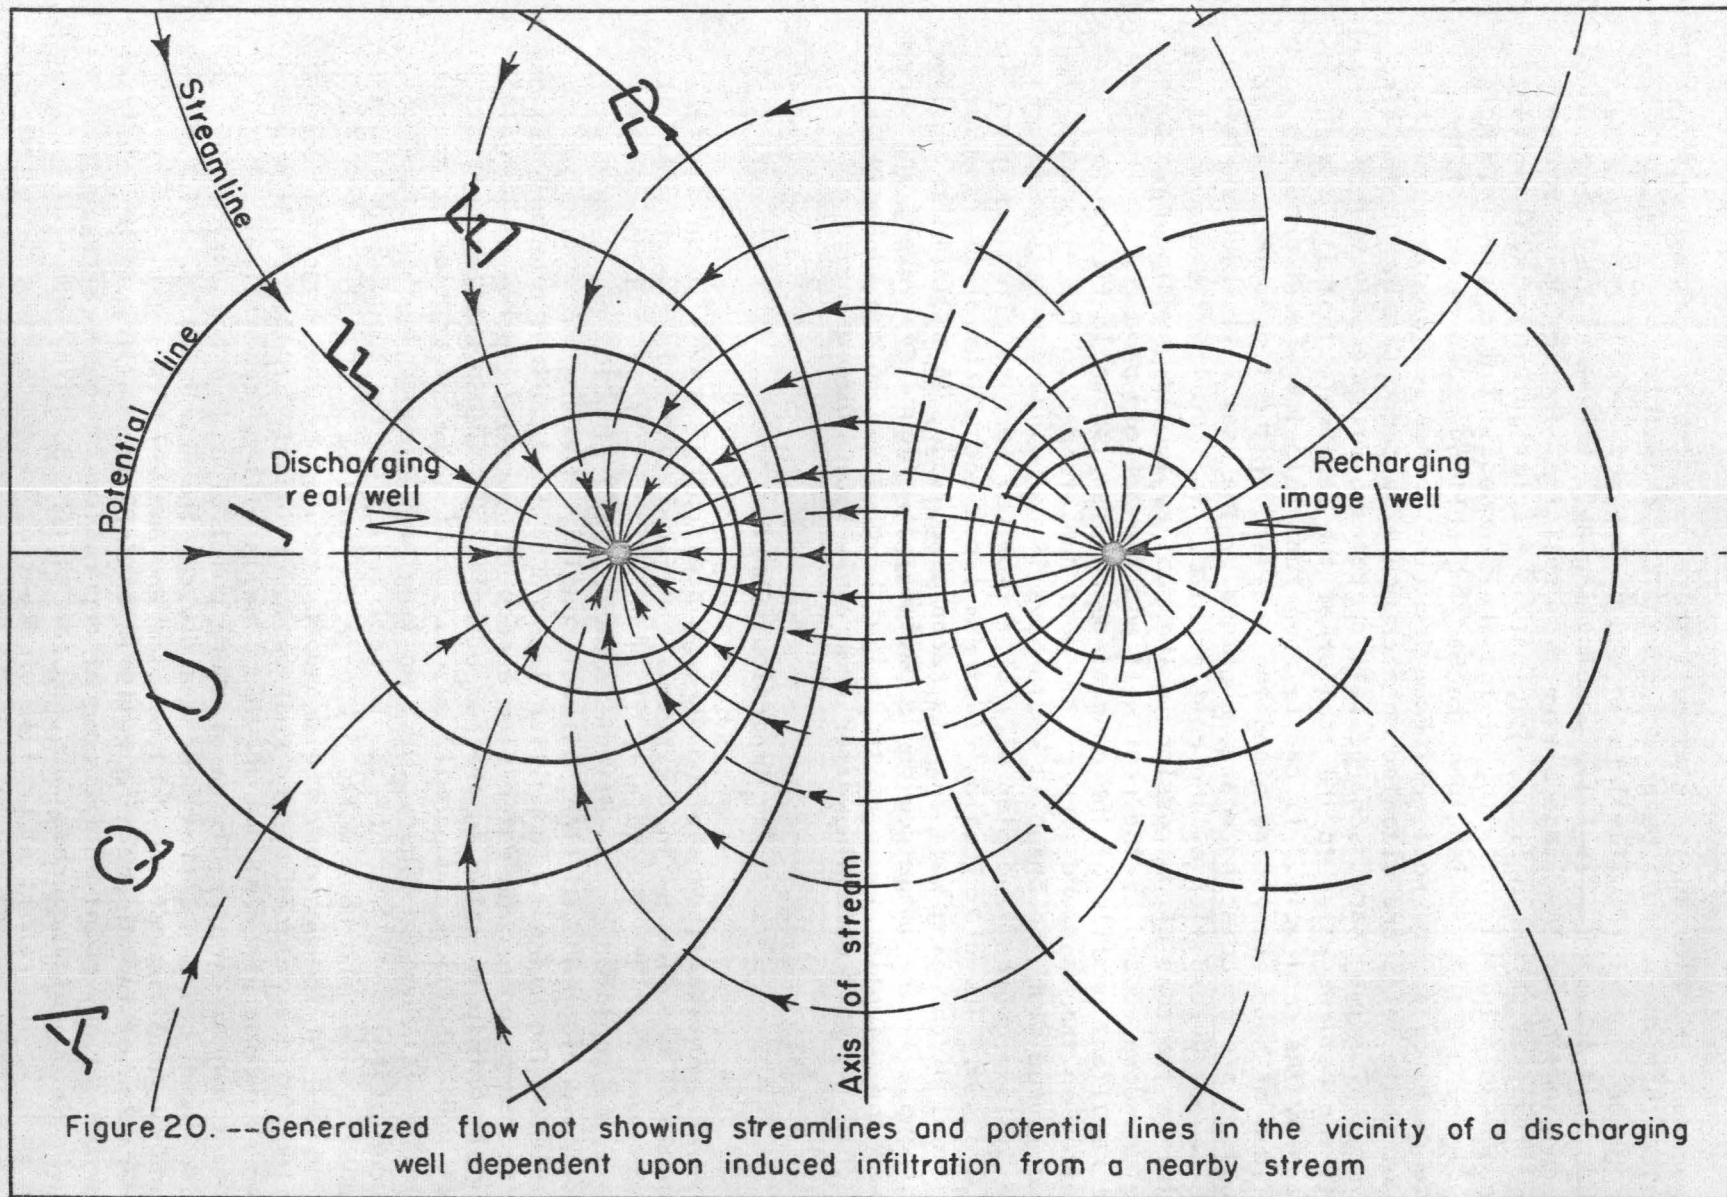

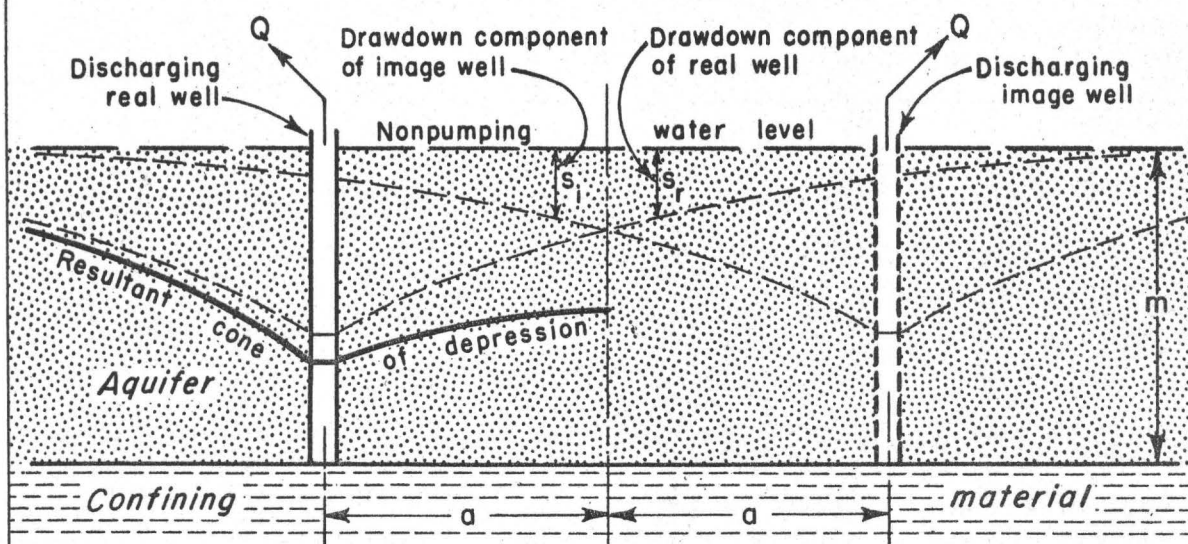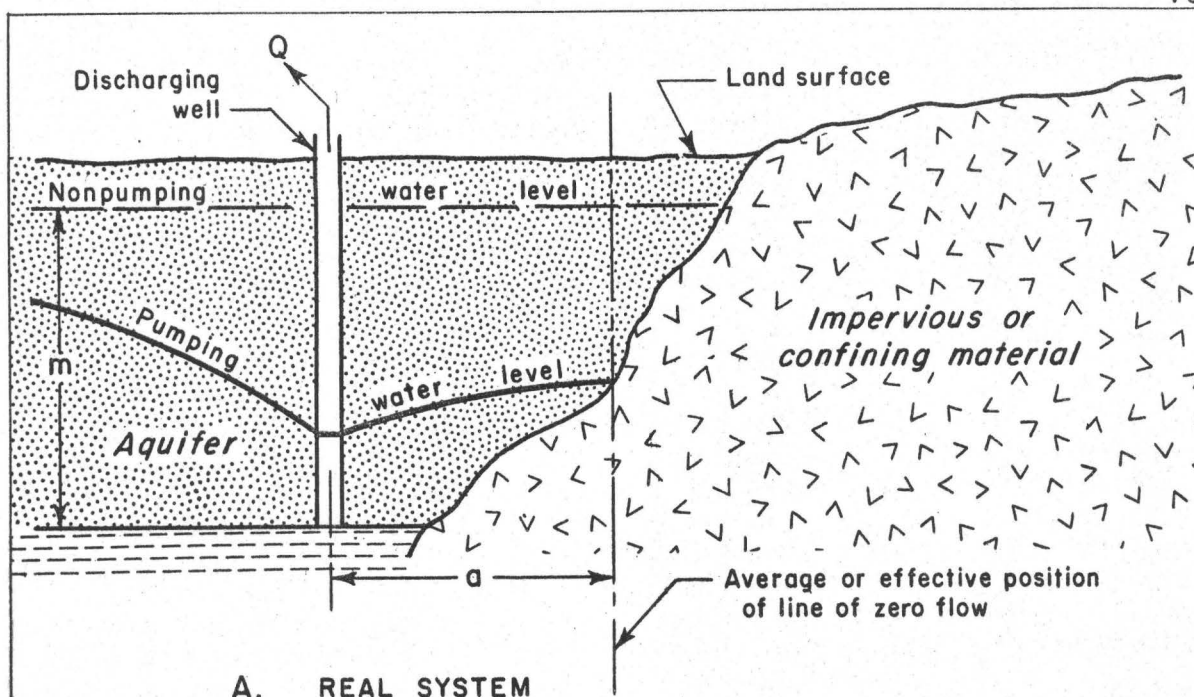

NOTE:

Aquifer thickness " m " should be very large compared to resultant drawdown near real well.

B. HYDRAULIC COUNTERPART OF REAL SYSTEM

Figure 21 -- Idealized section views of a discharging well in a semi-infinite aquifer bounded by an impervious formation, and of the equivalent hydraulic system in an infinite aquifer

figure 21B, is flatter on the side of the well toward the boundary and steeper on the opposite side away from the boundary than it would be if no boundary were present. Figure 22 is a generalized plan view of a flow net for the situation given in figure 21A. The distribution of stream lines and potential lines about the real discharging well and its discharging image, in an infinite aquifer, is shown. If the image region is omitted, the diagram represents the flow net as it might be observed in the vicinity of a discharging well located near an impervious boundary.

Two Impervious Barriers Intersecting at Right Angles

The image-well system for a discharging well in an aquifer bounded on two sides by impervious barriers that intersect at right angles is shown in figure 23. Although the drawdown effects of the primary image wells, I_1 and I_2 , combine in the desired manner with the effect of the real well at their respective boundaries, each image well produces an unbalanced drawdown at the extension (reflection) of the other boundary. These unbalanced drawdowns at the boundaries produce a hydraulic gradient, with consequent flow across the extension of each boundary, and therefore do not completely satisfy the requirement of no flow across the boundaries of the real system. It is necessary, therefore, to use a secondary image well, I_3 , which balances the residual effects of the two primary image wells at the two extensions of the boundaries. The image system is then hydraulically in complete accord with the physical boundary conditions. The problem thereby has been simplified to consideration of four discharging wells in an infinite aquifer.

Impervious Barrier and Perennial Stream Intersecting at Right Angles

The image-well system for a discharging well in an aquifer bounded on two sides by an impervious barrier and a perennial stream which intersect at right angles is shown in figure 24. The perennial stream of figure 24 might also represent a canal, drain, lake, sea, or any other line source of recharge sufficient to maintain a constant head at this boundary. As before, the drawdown effects of the primary images, I_1 and I_2 , combine in the desired manner with the effects of the real well at their respective boundaries. However, discharging image well I_1 produces a drawdown at the extension of the line source, which is a no-drawdown boundary, and recharging image well I_2 causes flow across the extension of the impervious barrier, which is a no-flow boundary. By placing a secondary recharging image well, I_3 , at the appropriate distance from the extension of each boundary, the system is balanced so that no flow occurs across the impervious barrier and no drawdown occurs at the perennial stream. Thus again the problem has been simplified to consideration of an infinite aquifer in which there operate simultaneously two discharging and two recharging wells.

The simplest way to analyze any multiple-boundary problem is to consider each boundary separately and determine how best to meet the condition of no flow or no drawdown, as the case may be, at that boundary. After the positions of the primary image wells have been established, the


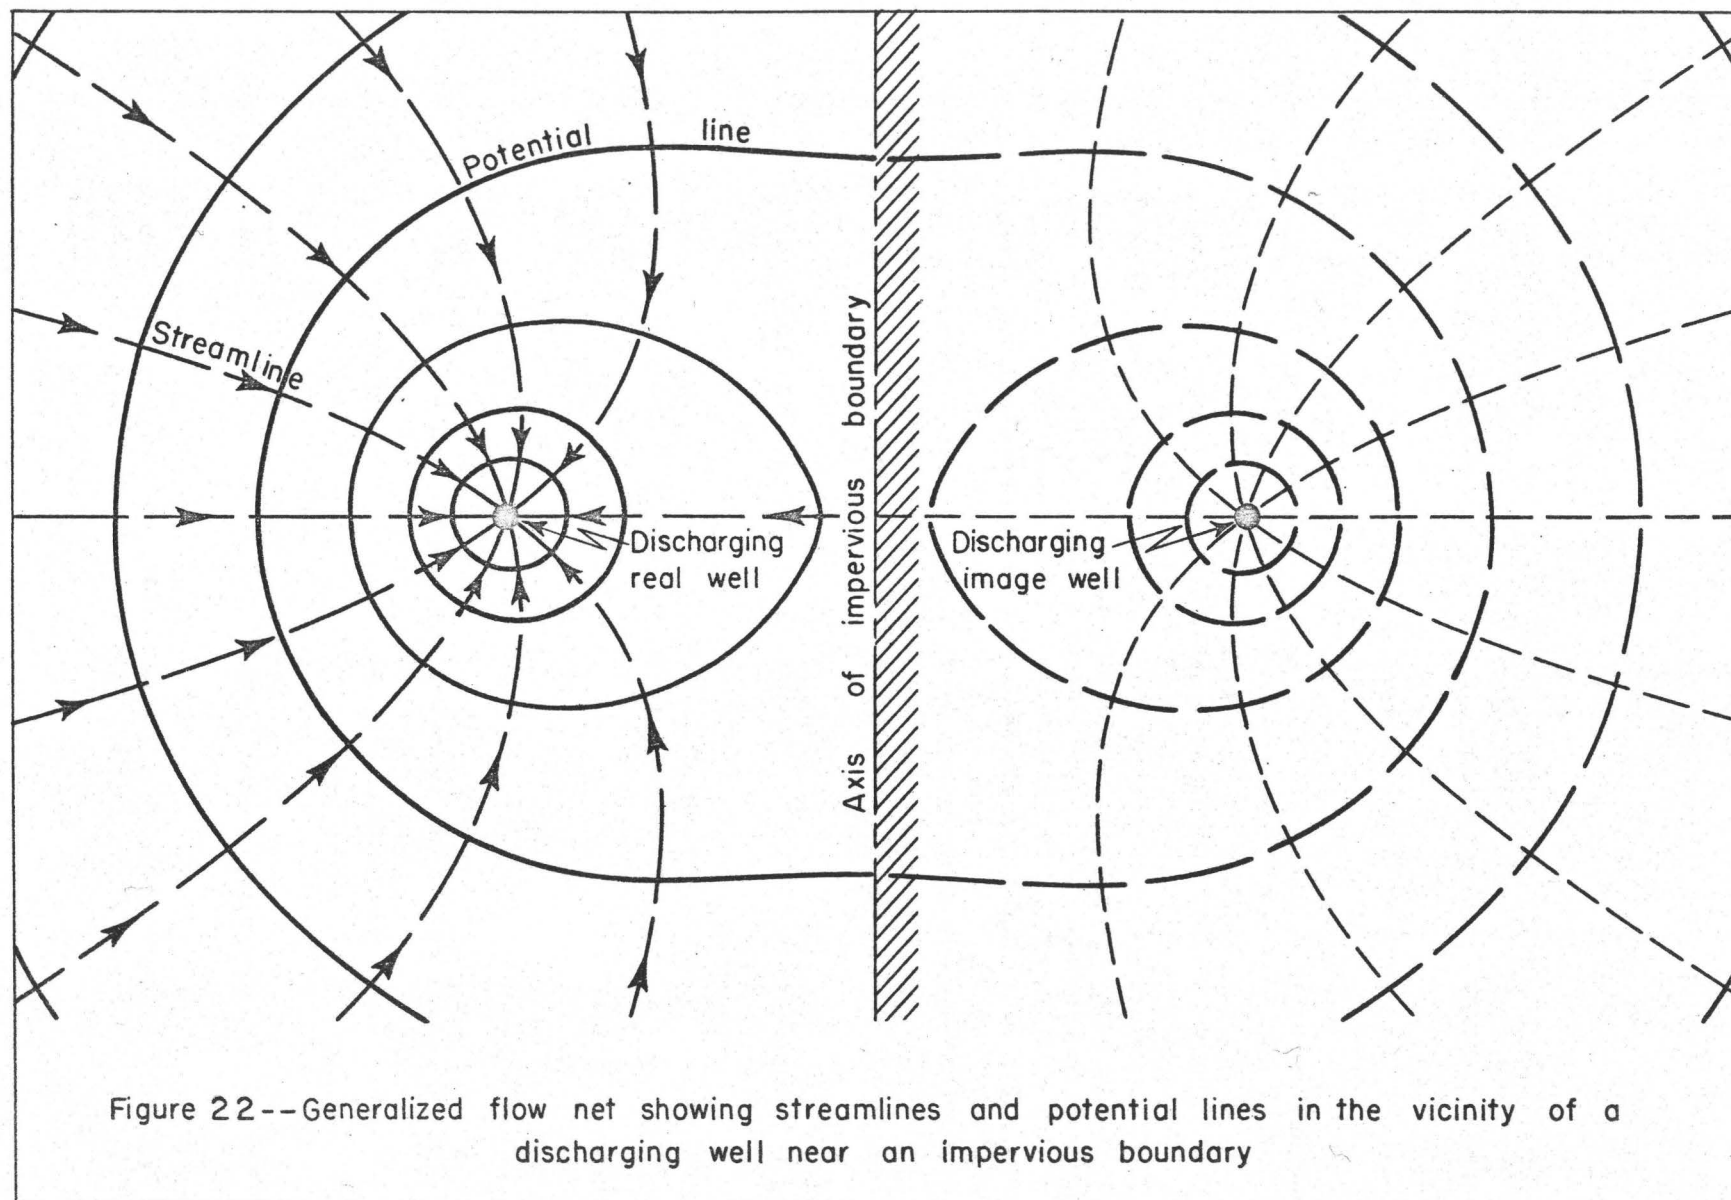


Figure 22--Generalized flow net showing streamlines and potential lines in the vicinity of a discharging well near an impervious boundary

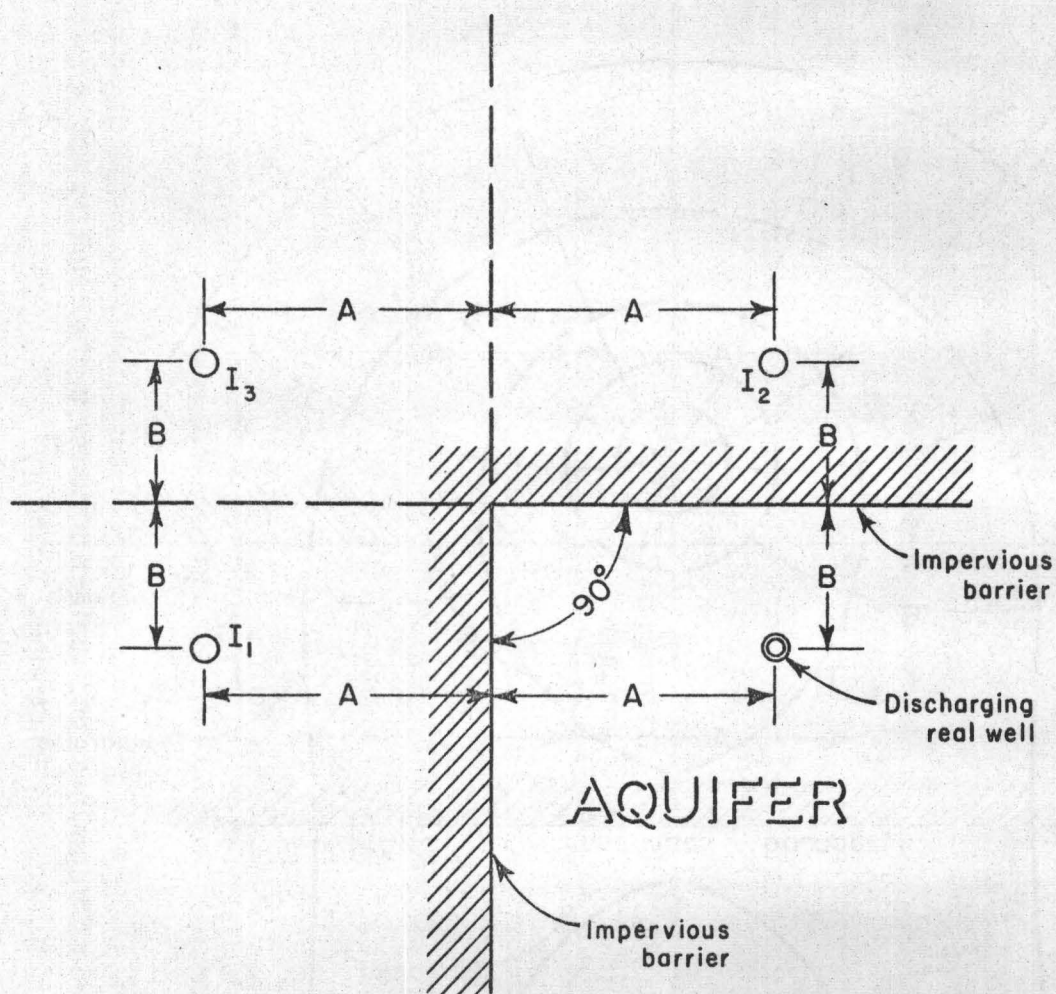


NOTES:

Image wells, I, are numbered in the sequence in which they were considered and located

Open circles signify discharging wells

Figure 23-- Plan of image-well system for a discharging well in an aquifer bounded by two impervious barriers intersecting at right angles

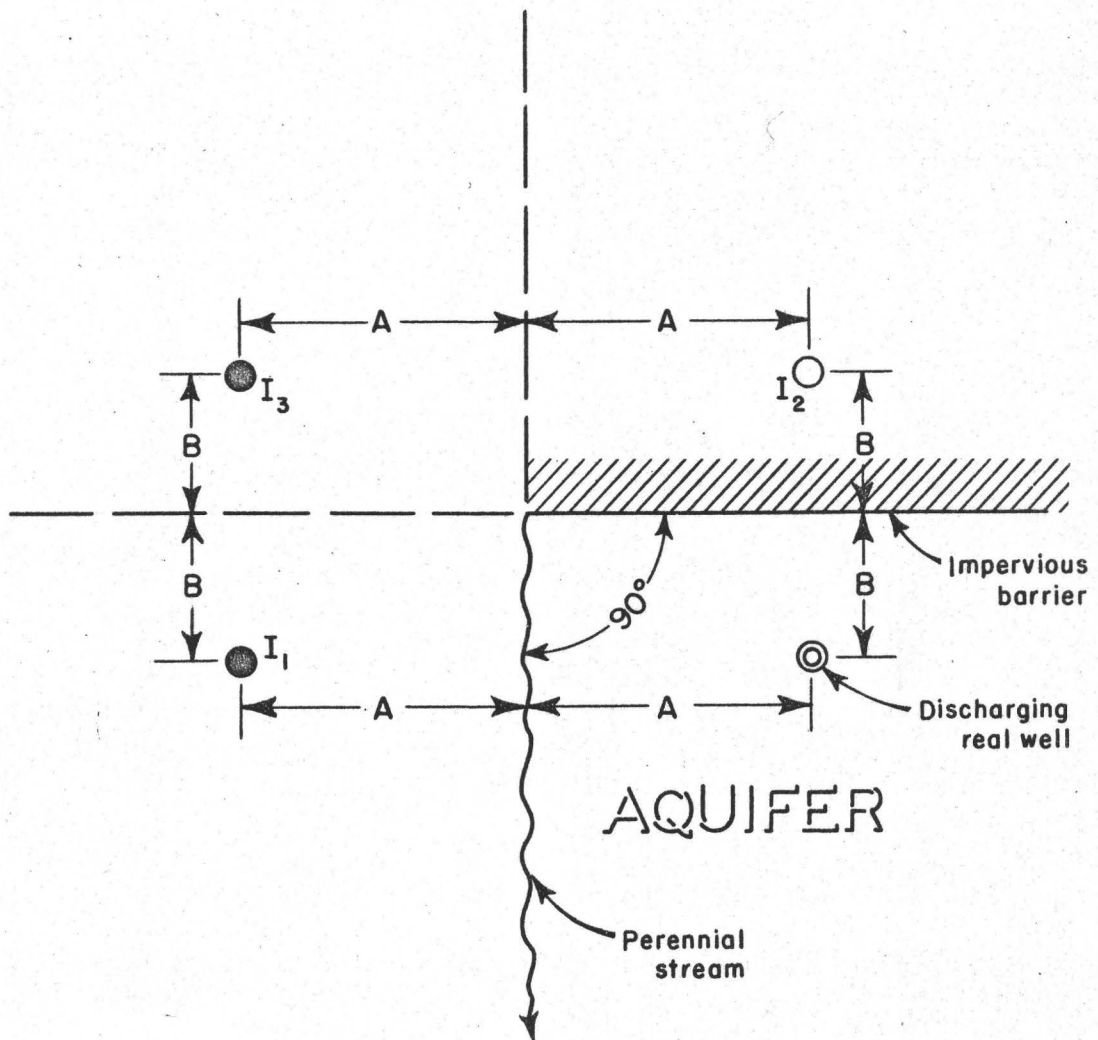

NOTES:

Image wells, I , are numbered in the sequence in which they were considered and located

Open circles signify discharging wells

Filled circles signify recharging wells

Figure 24 -- Plan of image-well system for a discharging well in an aquifer bounded by an impervious barrier intersected at right angles by a perennial stream

boundary positions should be reexamined to see if the net drawdown effects of the primary image wells satisfy all stipulated conditions of no flow or no drawdown. For each primary image causing an unbalance at a boundary position, or extension thereof, it is necessary to place a secondary image well at the same distance from the boundary but on the opposite side, both wells occupying a common line perpendicular to the boundary. When the combined drawdown (or buildup) effects of all image wells are found to produce the desired effect at this boundary the same procedure is executed with respect to the second boundary. Thus, the inspection and balancing process is repeated around the system until everything is in balance and all boundary conditions are satisfied, or until the effects of additional image wells are negligible compared to the total effect.

Two Impervious Barriers Intersecting at an Angle of 45 Degrees

Although it is intended here to consider the particular image-well system required for analyzing flow to a well in a 45° wedge-shaped aquifer it is appropriate first to comment briefly on some general aspects of image-well systems in wedge-shaped aquifers. By analogy with similar heat flow situations it is possible to analyze the flow to a well in a wedge-shaped aquifer, and equivalent image systems can be constructed regardless of the wedge angle involved. However, closed image systems that are the simplest to construct and analyze occur when the aquifer wedge angle, θ , equals (or can be approximated as equal to) one of certain aliquot parts of 360° . These particular values of θ may be specified as follows (after Walton, 1953, p. 17), keeping in mind that it is required to analyze flow to a single pumped well situated anywhere in the aquifer wedge:


If the aquifer wedge boundaries are of like character, θ must be an aliquot part of 180° . If the boundaries are not of like character, θ must be an aliquot part of 90° .

Other simple solutions not covered by the above rule appear possible when θ is an odd aliquot part of 360° , the pumped well is on the bisector of the wedge angle, and the boundaries are similar and impermeable. For any of the foregoing special situations it can be shown, with the aid of geometry, that the number of image wells, n , required in analyzing the flow toward the single real pumping well is given by the relation

$$n = \frac{360^\circ}{\theta} - 1 \quad (79)$$

It can also be shown that the locus of all image well locations, for a given aquifer wedge problem, is a circle whose center is at the wedge apex and whose radius equals the distance from the apex to the real discharging well (see figure 29).

The image-well system for a discharging well in a wedge-shaped aquifer bounded by two impervious barriers intersecting at an angle of 45 degrees is shown in figure 25. The real discharging well is reflected across each of the two boundaries which results in location of the two primary image wells I_1 and I_2 as shown. Considering boundary 1 only, the effects of the real well and image well I_1 , are seen to combine so that, as desired, no flow occurs across that boundary. However, image well I_2 will produce flow across boundary 1 unless image well I_3 is added at the

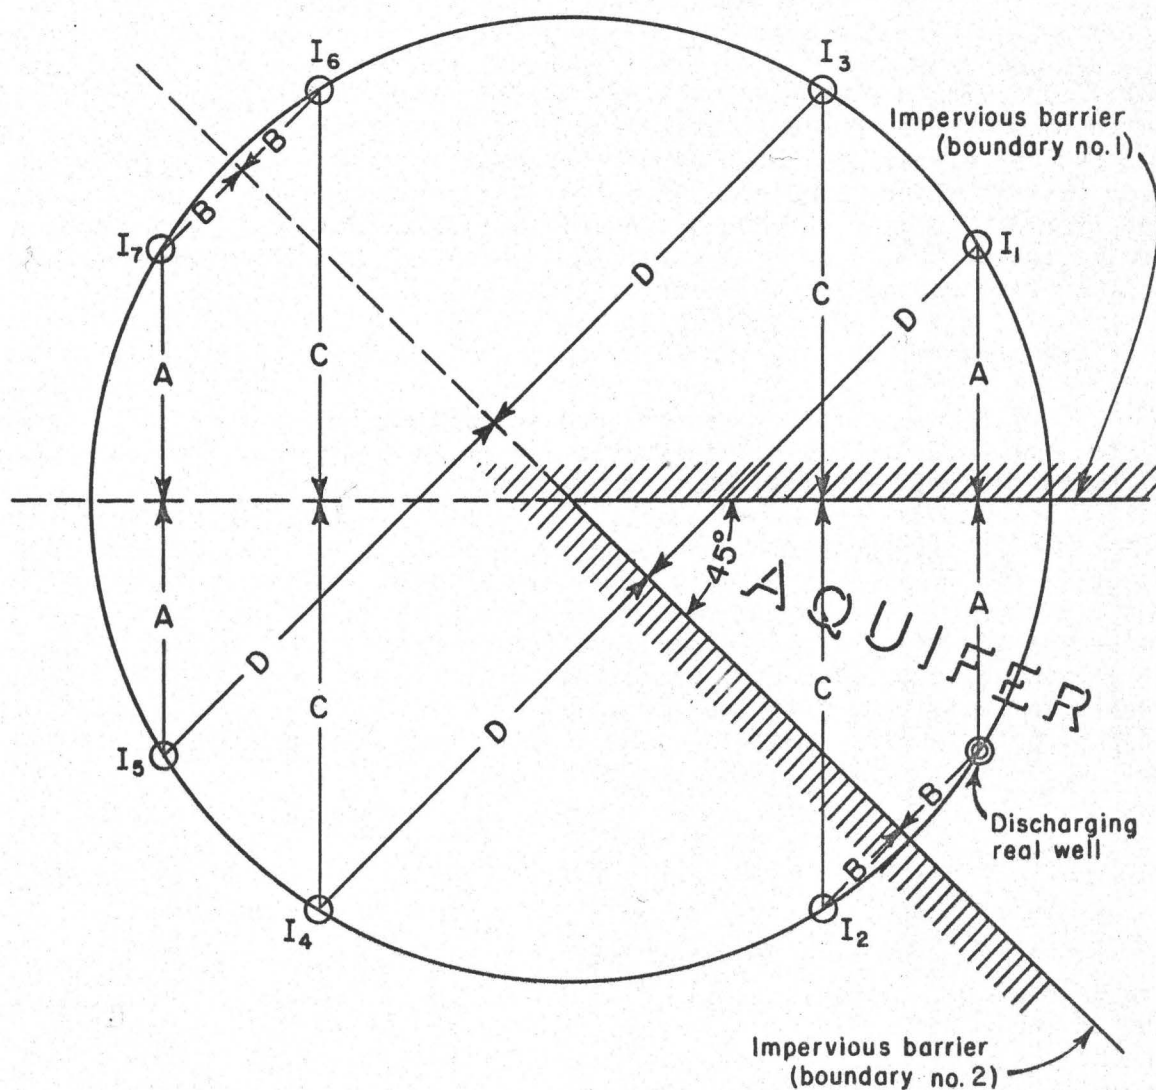

NOTES:

Image wells, I, are numbered in the sequence
in which they were considered and located

Open circles signify discharging wells


Figure 25-- Plan of image-well system for a discharging well in an aquifer bounded by two impervious barriers intersecting at an angle of 45 degrees

location shown. The system now satisfies the condition of no flow across boundary 1. Repeating this examination process for boundary 2 only, it is seen that the effects of the real well and image well I_2 combine, as desired, to produce no flow across boundary 2. However, image wells I_1 and I_3 will produce flow across this boundary unless image wells I_4 and I_5 are added as shown. The image system now satisfies the condition of no flow across boundary 2. Reexamining, it is seen that image wells I_4 and I_5 will produce flow across boundary 1 unless image wells I_6 and I_7 are added as shown. A final appraisal of the effects at boundary 2, shows that the entire system of image wells, plus the real well, satisfies the requirement of no flow across the boundary. Thus the flow field caused by a discharging well in this wedge-shaped aquifer can be simulated by a total of eight discharging wells in an infinite aquifer. The seven image wells have replaced the two barriers. The drawdown at any point between the two barriers can then be computed by adding the effects produced at that point by the real well and the seven image wells. Each image well begins discharging at the same rate and at the same time as the real well.

Impervious Barrier Paralleling a Perennial Stream

Shown in figure 26 is the image-well system for a discharging well in an aquifer bounded by an impervious barrier and cut by a fully penetrating perennial stream parallel to the barrier. A recharging image well, I_1 , and a discharging image well, I_2 , are placed as shown to satisfy respectively the conditions that no drawdown can occur along the line source, and no flow can occur across the impervious barrier. Although these two primary image wells produce, in conjunction with the real well, the desired effects at their respective boundaries, each image well produces a residual effect at the opposite boundary which conflicts with the stipulated boundary conditions. It is therefore necessary to add a secondary set of image wells, I_3 and I_4 , as shown, to produce effects that will combine properly with the residual effects of the primary images. Each image well in the secondary set will again produce residual effects at the opposite boundary, and similarly with each successively added image pair there will be residual effects at the boundaries. It should be evident, however, that as more pairs of image wells are added the effects of adding a new pair have lesser influence on the cumulative effect at each boundary. In other words it is only necessary to add pairs of image wells until the residual effects associated with addition of the next pair can be considered to have negligible influence on the cumulative effect at each boundary. It is seen in figure 26 that there is a repeating pattern in the locations of the image wells. Therefore, after the positions of the first images have been determined, it is possible to locate by inspection as many more as are needed for the practical solution of the problem. Once the required number of image pairs has been determined the aquifer boundaries can be ignored and the problem analyzed like any other multiple-well problem in an infinite aquifer.

If the two parallel boundaries are of like character, that is, if the perennial stream in figure 26 were replaced by an impervious barrier or if the impervious barrier were replaced by a perennial stream, the positions of the image wells would not be changed. If the first case, however, all the images would be discharging wells and in the second case all the images would be recharging wells.

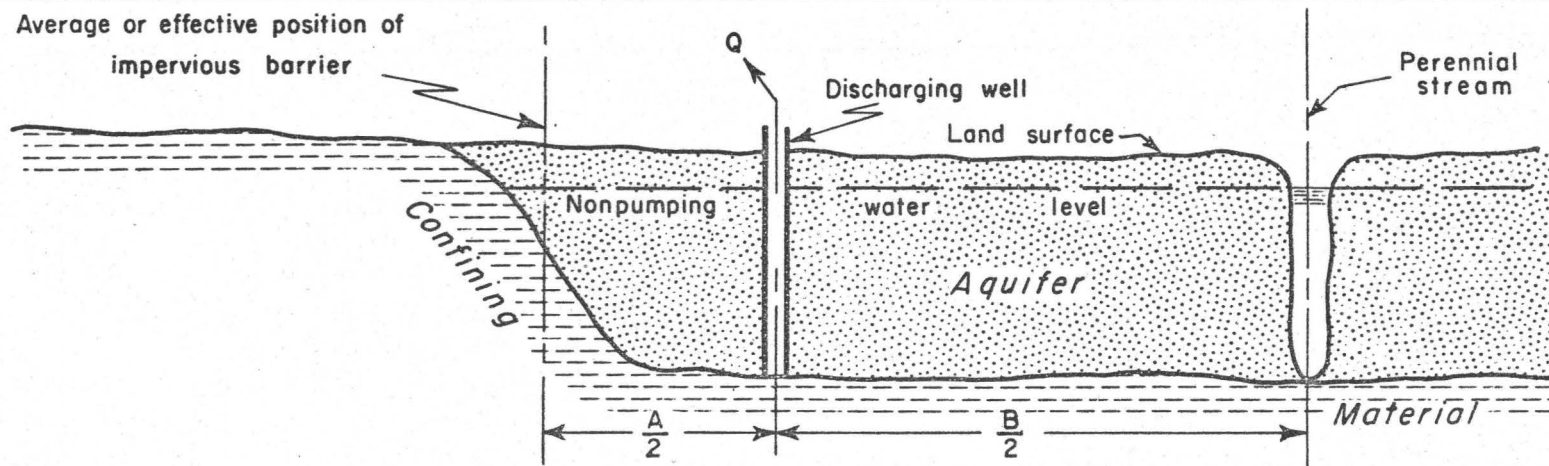


Notes:

Image wells, I, are numbered in the sequence in which they were considered and located

Open circles signify discharging wells

Filled circles signify recharging wells

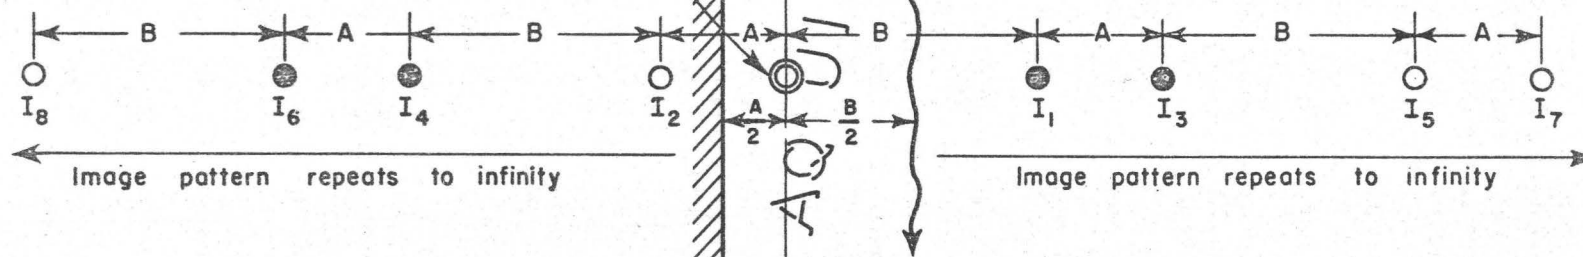

REDUCED PLAN VIEW OF HYDRAULIC COUNTERPART OF REAL SYSTEM

Figure 26--Image-well system for a discharging well in an aquifer bounded by an impervious barrier paralleling a perennial stream

Two Parallel Impervious Barriers Intersected at Right Angles by a Third Impervious Barrier

The image-well system for a discharging well in this type of areally restricted aquifer is shown in figure 27. The positions of the images are determined as before by adding imaginary discharging wells so that, in combination with the real discharging well, there is established the condition of no ground-water flow across any of the three boundaries. As shown in the figure two parallel lines of discharging image wells are required, separated by twice the distance between the real well and the barrier that intersects the two parallel barriers. Theoretically the two lines of image wells extend to infinity in both directions from the real well. The practical analysis of a problem of this kind, however, requires the addition of only enough images so that the effect of adding the next image, in any of the directions involved, has a negligible influence on the cumulative effect at each of the boundaries. It is seen from figure 27 that there is a repeating pattern in the positions of the image wells, so that the locations of only the first few images are required to determine the locations of as many succeeding image wells as are needed. For the case of two parallel impervious barriers intersected at right angles by a perennial stream, the image system would be the same as shown by figure 27 except that all images on the line reflected across the stream would be recharging wells.


Rectangular Aquifer Bounded by Two Intersecting Impervious Barriers Paralleling Perennial Streams

The image-well system for a discharging well in such an aquifer is shown by figure 28. The positions of the images are determined in the manner previously described. It is seen from figure 28 that there is again a repeating pattern which extends to infinity in all directions from the real well. Thus only the first few images need be located to determine the positions of as many succeeding images as are required in the practical solution of the problem. If the four boundaries in figure 28 were all impervious barriers, all images would be discharging wells; and if the four boundaries were all perennial streams, all images would be recharging wells.

Applicability of image theory involving infinite systems of image wells

Referring to the three problems discussed in the three preceding sections it will be observed that in each situation there is involved an aquifer limited in areal extent by two or more boundaries. Furthermore, the arrangement of the boundaries is such that at least two are parallel to each other, which means that analysis by the image theory requires use of an image-well system extending to infinity.

It has been stated, in discussing the practical aspects of using an infinite image-well system, that the individual effects of image wells need be added only out to the point where the effect associated with the addition of the next more distant well (or wells, depending on the symmetry of the array) can be considered to have negligible influence on the cumula-

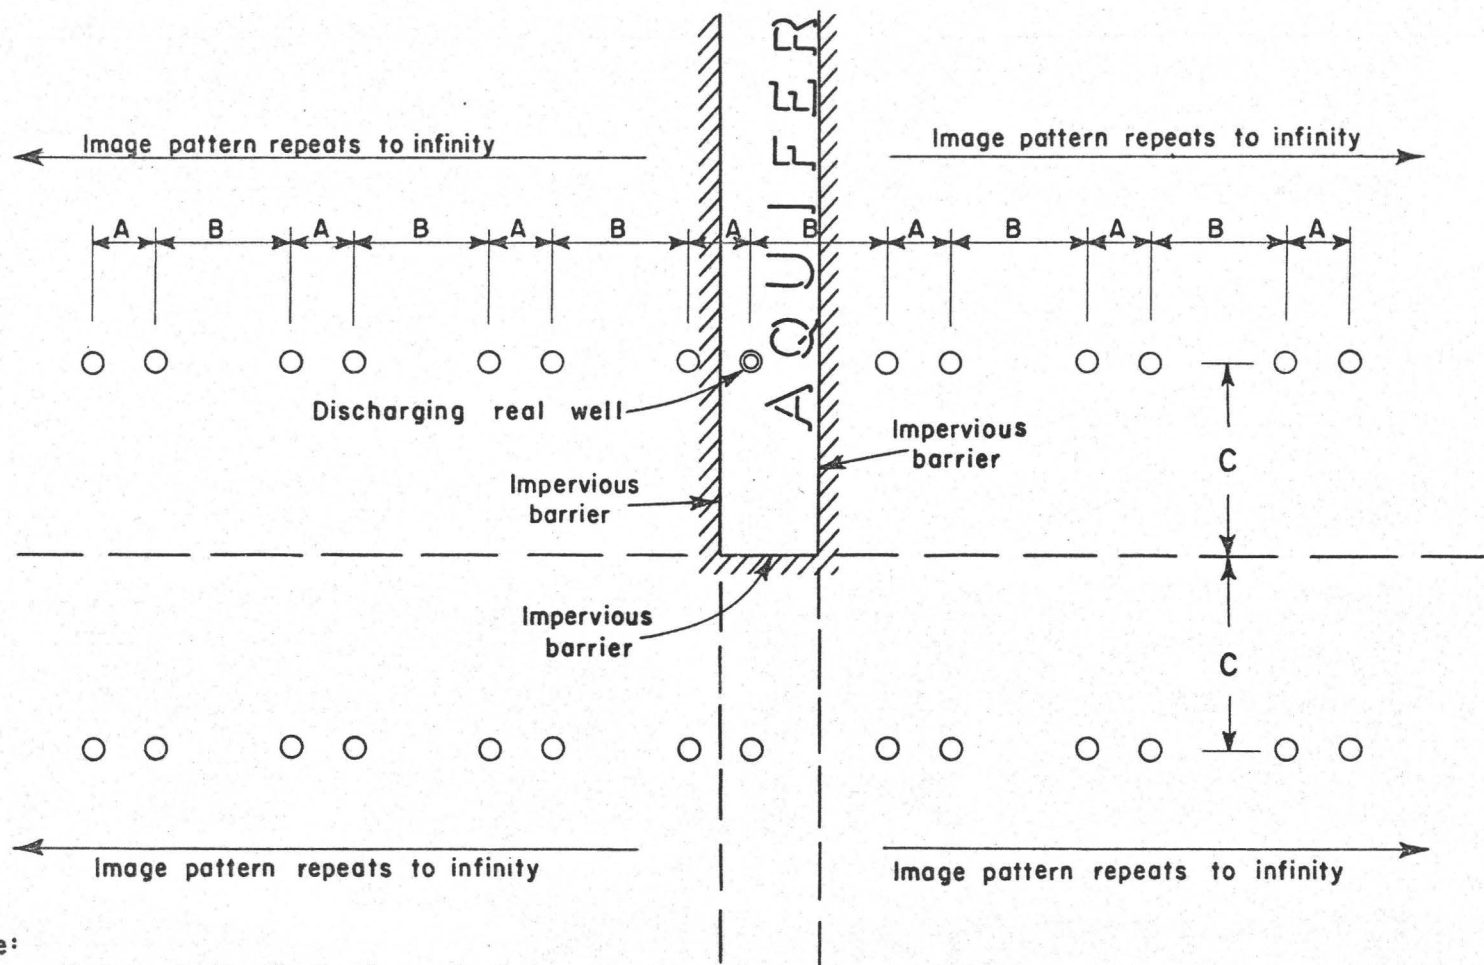

Note:
Open circles signify discharging wells

Figure 27-- Plan of image-well system for a discharging well in an aquifer bounded by two parallel impervious barriers intersected at right angles by a third impervious barrier

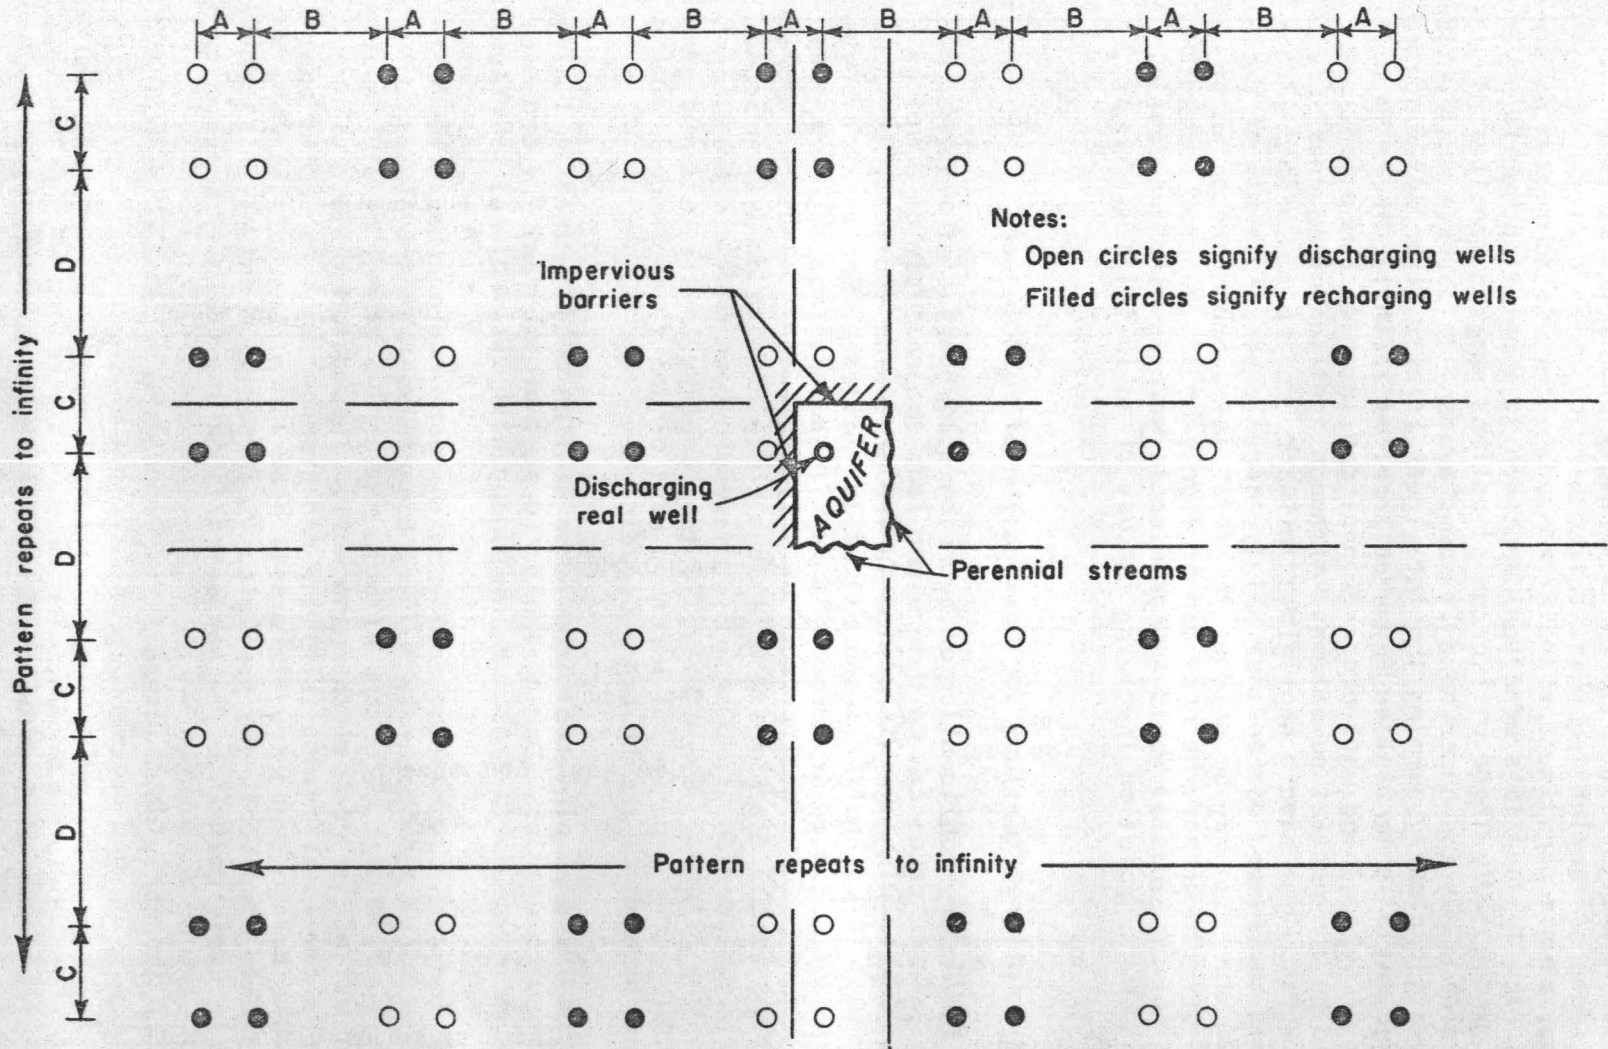


Figure 28--Plan of image-well system for a discharging well in a rectangular aquifer enclosed by two intersecting impervious barriers and two intersecting perennial streams

tive effect. Although this criterion ostensibly provides a reliable and practical means of terminating what would otherwise be an endless analytical process, closer scrutiny appears warranted. There is no reason to suggest categorically that this practical approach to a solution should never be tried. Undoubtedly there will occur situations wherein sensible results can be obtained. On the other hand it seems prudent to observe that if the process of algebraically summing the individual effects of an infinite system of image wells is terminated anywhere short of infinity, there is no simple way of determining what proportion of the infinite summation is represented by the partial summation. Although addition of the next image well (or wells) might have a negligible influence on the sum of all image-well effects considered out to that point, there is no simple way of deciding whether the same may be said of the total influence represented by adding the effects of say the next ten or twenty or one hundred more distant image wells. Thus it would appear wise to keep in mind the possible limitations of any solution involving the use of an infinite system of image wells.

Corollary Equations for Application of Image Theory

The nature and location of hydrologic boundaries of water-bearing formations in some cases can be determined from the analysis of pumping-test data. Considering the discussion in the preceding sections, it should be evident that in an aquifer whose extent is limited by one or more boundaries a plot of drawdown or recovery data will depart from the form that would be expected if the aquifer were of infinite extent. Thus, in a problem involving, say, a discharging well in a semi-infinite aquifer bounded by an impervious barrier, some part of a time-drawdown plot may be steepened by the boundary effects. Conversely, if the boundary involved in the same type of problem were a perennial stream a part of the time-drawdown plot may be flattened because of the boundary effects.

Imagine a pumping test made in an aquifer whose extent is limited by one or more boundaries. During the early part of the test the drawdown data for observation wells close to the pumped well will reflect principally the pumping effects. As the test continues, however, there will very likely come a time for each observation well when the measured drawdowns reflect the net effect of the pumped well and any boundaries that are present. At distant observation wells boundary effects may arrive almost simultaneously with the effect of the real discharging well. Thus determination of the aquifer coefficients of transmissibility and storage should be based on the early drawdown data, as observed in a well near the pumped well, before the boundary effects complicate the analysis. Superposition and matching of a plot of these early data (i.e., s versus r^2/t) on the Theis type curve, permits drawing in the type-curve trace. Extension or extrapolation of this trace, beyond the early data indicates the trend the drawdowns would have taken if the pumping had occurred in an infinite aquifer. The departure, s_i , of the later observed data from this type-curve trace, represents effects of the boundaries on the drawdown. The subscript i refers to the image-well system substituted as the hydraulic equivalent of the boundaries. Usually it is convenient to note values of s_i at a number of points along the data

curve and to replot these departures versus values of r_r^2/t on the same graph sheet that was used in determining the coefficient of storage and transmissibility from the early data. The subscript r refers to the real discharging well. The latter part of the replotted departure data may again deviate from the type-curve trace if the cone of depression has intercepted a second boundary. As before, the departures can be replotted against corresponding values of r_r^2/t to form a second departure curve. This process should be repeated until the last departure curve shows no deviation from the type curve. The observed data array will then have been separated into its component parts which can be used to compute the distances between the observation wells and the image wells..

Inasmuch as the aquifer is assumed to be homogeneous (i.e., the coefficients of transmissibility and storage are constant throughout the aquifer) it follows from equation 8 that

$$\frac{1.87 S}{T} = \frac{u_r}{r_r^2/t} = \frac{u_i}{r_i^2/t} \quad (80)$$

where the subscripts of r and i have the significance previously given. If on the plots of early drawdown data and first departure curve a pair of points is selected so that the drawdown component caused by the real well, s_r , and the drawdown component caused by the image well, s_i , are equal, it follows that $u_r = u_i$. On the plots of observed early drawdowns and first departures just described, s_r and s_i obviously occur at different elapsed times which can be labelled t_r and t_i respectively. Equation 80 can therefore be rewritten as follows:

$$\frac{r_i^2}{t_i} = \frac{r_r^2}{t_r} \quad (81)$$

$$\text{or} \quad r_i = r_r \sqrt{\frac{t_i}{t_r}} \quad (82)$$

Equation 81, known as the "law of times" in the physics of heat conduction, shows that at a given observation well location the times of occurrence of equal drawdown components vary directly and only as the squares of the distances from the observation well to the pumped well and to its image.

Referring to the data plots mentioned earlier in this section, note, for the pair of points selected, that values of s_r and r_r^2/t_r will be read from the early drawdown data while values of s_i and r_r^2/t_i will be read from the first departure curve. Equation 82 can be made more useful, therefore, if it is rewritten in the form

$$r_i = r_r \sqrt{\frac{r_r^2/t_r}{r_r^2/t_i}} \quad (83)$$

Equation 83 now affords a ready means of computing the distance from an observation well to an image well. Similar analysis may be made of each departure curve constructed from the original drawdown data.

Stallman (1952) has described a convenient method for computing r_i when the observed drawdown in the aquifer represents the algebraic sum of the drawdown effects from one real well and one image well. If equation 6 is used to provide expressions for s_r and s_i , and $W(u)$ is substituted as a symbolic form of the exponential integral, it is seen that the drawdown at the observation well is

$$s = s_r \pm s_i = \frac{114.6 Q}{T} [W(u)_r \pm W(u)_i] \quad (84)$$

From equation 80

$$\frac{r_i}{r_r} = \sqrt{\frac{u_i}{u_r}}$$

or

$$r_i = r_r \sqrt{\frac{u_i}{u_r}} \quad (85)$$

From equations 84 and 85, it can be seen that r_i and the sum of the $W(u)$ terms in equation 84 can be expressed in terms of r_r and the ratio u_i/u_r . Thus for any given values of $\sqrt{u_i/u_r} = K$, a type curve can be constructed by plotting assumed values of u_r against corresponding computed values of the bracketed portion of equation 84 [which may be written in abbreviated form as $\sum_i W(u)_i$]. The data plot, s versus t , will match this constructed type curve if the observation well is located so that the ratio r_i/r_r equals the given value of K . However, if a family of type curves is drawn for a number of given values of K , the observed data plot, s versus t , for any observation well, can be compared with the set of type curves. Once the best matching curve is found any convenient matchpoint is selected and the coordinate values, s , t , u_r , $\sum_i W(u)_i$, and K are noted. These values, substituted in equations 80, 84, and 85 provide the means for computing T , S , and r_i .

Stallman's set of curves is the familiar type-curve u versus $W(u)$, used in conjunction with the Theis formula, with a series of appendage curves (two for each value of K) asymptotic to it. The trend of the appendage curve for a recharging image well is below, and for a discharging image above, the Theis curve. Appendage curves could have been constructed by assuming values of u_i instead of u_r . In this event, however, the matching process would not be as direct inasmuch as the parent type curve, instead of occupying a single position, would shift along the u axis with each pair of appendage (K) curves.

The appendage curves, computed by Stallman, are for ideal image wells -- those which are pumped or recharged at the same rate as the real well. The hydro-geologic structure which gives rise to the hypothetical image is not always ideal; therefore the hypothetical images are not always ideal. For this case the method of plotting departures may yield an erroneous and misleading analysis. On the other hand, the deviations from ideality can be seen immediately if the observed data plot s versus t is matched to Stallman's set of type curves. Furthermore, for non-ideal

images, the most accurate selection of k is made by utilizing that portion of the appendage curve nearest the parent or Theis type curve.

If little is known of the possible location of a local hydraulic boundary a minimum of three observation wells is required to fix the position of an image well, which in turn permits location of the boundary. After the distances from the individual observation wells to the image well have been computed, arcs are scribed with their centers at the observation wells and their radii equal to the respective computed distances to the image well. The intersection of the arcs at a common point fixes the image well location and the strike of the boundary is represented by the perpendicular bisector of a line connecting the pumped well and the image well.

Another graphical method for locating a hydraulic boundary in the vicinity of a discharging well was devised by E. A. Moulder (1951, p. 61-62). The geometry is shown in figure 29. A circle is scribed whose center is at a nearby observation well, O , and whose radius, r_i , is equal to the computed distance from the observation well to the image well. The image well lies somewhere on this circle, say, at point I . Lines are drawn from the selected point I to the observation well and to the real discharging well, P . If point I is the image-well location and if A is the midpoint of the line IP , then point A lies on the boundary. It can be proved, by geometry, that the locus of all point A 's determined in this manner is a circle, of radius BA or $r_i/2$, with its center, B , located midway between the discharging well and the observation well. Moulder's method is particularly useful in aquifer-test situations where data from only one or two observation wells are available for locating a boundary position. If the approximate position of a suspected boundary is known before a pumping test begins, it is desirable to locate most of the observation wells along a line parallel with the boundary and passing through the pumped well. If feasible the range of distances from the observation wells to the pumped well should be distributed logarithmically to assure well-defined arc intersections in the graphics of locating a point on that boundary. At least one observation well should be located close enough to the pumped well so that the early drawdown data, unaffected by the boundary, can be used in computing the aquifer coefficients of storage and transmissibility.

Concluding Observations on Applicability of Analytical Equations

The assumptions used in developing the equations presented in this report include the stipulation that the aquifer is homogeneous and isotropic. Even though most naturally deposited sediments do not satisfy this condition, the equations may still be applied and the results qualified according to the extent of non-homogeneity. It should be realized that homogeneity is a relative term with respect to time and space. As an illustration, consider an aquifer composed of two types of material -- a fine sand and a very coarse sand. Assume that these materials occur individually in deposits having the shape of cubes 1/8 mile on a side, and that alternate rows of cubes (squares in plan view) are offset a distance equal to 1/2 the length of one side of the cube (i.e., 1/16th of a mile).

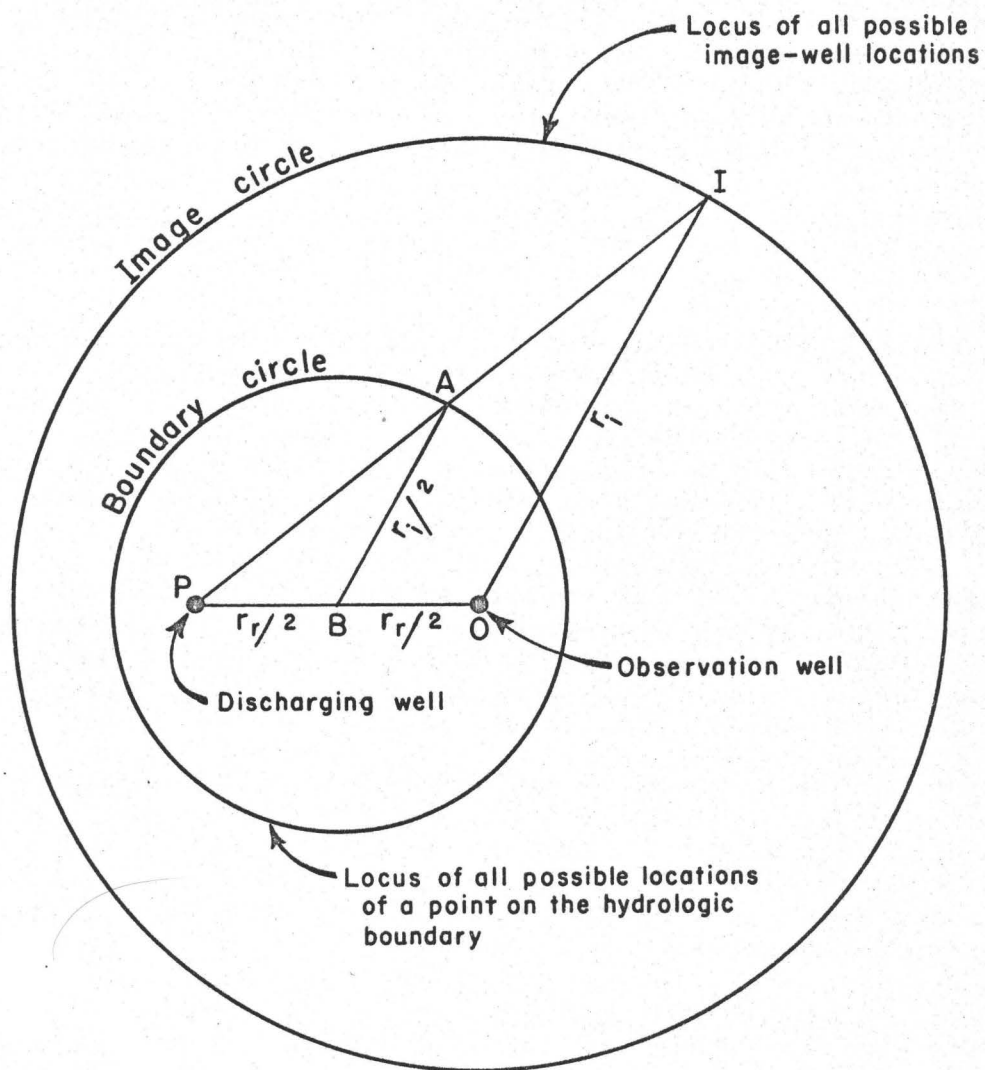


Figure 29 -- Geometry for locating a point on a hydrologic boundary with reference to the locations of a discharging well and a nearby observation well

Let the fine and coarse sand occur in alternate cubes along the continuous rows, and assume that water occurs, in the aquifer thus created, under water-table conditions. Strictly speaking, this aquifer, of infinite extent, would now be described as nonhomogeneous. However, the areal extent of the portion of the aquifer sampled in a test would be significant in judging this element of the aquifer's description. For example if a discharging well test is conducted in the center of one of the squares and if the test is terminated before the area of influence reaches the perimeter of the square, the test results probably would be considered excellent and the aquifer described as homogeneous. The results would in no way differ from the results to be expected if a similar test were made on an infinite "homogeneous" aquifer, composed of material identical to that occurring in the limited area here tested. As another example again consider an aquifer test using a discharging well in the center of one of the squares of the hypothetical aquifer. The nearest of several observation wells is at a radius of 5 miles from the pumped well and the test is run until the area of influence is described by a circle 10 miles in radius. Coefficients of transmissibility computed from data collected at all the observation wells should be in close agreement (although not equal to the values obtained from the previously described test) and again the hypothetical aquifer, even on the larger scale represented in this sample, would be adjudged homogeneous. This judgment relies upon the reasoning that, for the distances involved, the slightly meandering path of water, as it moves toward the well, may be described statistically as conforming to the concept of radial flow. For any case in which nonhomogeneity is so distributed that the flow field statistically fits the geometry of the mathematical model, the mathematical solution will provide a sound analysis. Conversely, when the flow field or a portion thereof is significantly distorted in the area of observation, the assumption of homogeneity is incorrect. Thus for the hypothetical aquifer considered in the two preceding examples the distorted condition is seen to exist if the area of influence of the discharging well were to extend to a radius of say 1/4 to 1 mile (i.e., a little beyond the limits of one cube of the aquifer material).

Often the field situation is encountered where a zone of relatively impermeable material, such as a clay lens, of limited thickness and extent, occurs in an aquifer. It should be evident from the foregoing examples and discussion, however, that the presence of this clay lens in the flow field will have less influence on aquifer test results when the effects of the test encompass an area of large radius than when the area affected is of small radius.

An important criterion, therefore, regarding the applicability of the equations discussed in this report, is the amount the flow field is distorted, as compared with the flow field that would have been observed in an ideal aquifer.

It should be understood that the numerical results obtained by substituting aquifer test data in an appropriate mathematical model indicate the transmissibility and storage coefficients for an ideal aquifer. The hydrologist must judge how closely the real aquifer resembles this particular ideal. It is usually recognized, for example, that in short pumping tests under water-table conditions the water does not drain from

the smaller openings in the unwatered portion of the aquifer in any manner even approximating the instantaneous release assumed in devising the mathematical model (say, the Theis nonequilibrium formula). Similarly, in testing artesian aquifers it is recognized that the aquifer skeleton does not adjust instantaneously to the change in head, that considerable water is often contributed by intercalated clay beds, and furthermore that water leaks through the confining beds which, in the mathematical model, have been assumed to be impermeable. These recognized departures from the ideal however do not constitute grounds for abandoning, or rarely using, available analytical equations. Such departures simply add emphasis to the admonition that mere substitution of aquifer-test data in an equation will not of itself assure anyone of establishing the correct hydraulic properties for that aquifer. The mechanics of applying any of the analytical equations in this report, must be accomplished with sound professional judgment followed by critical evaluation and testing of the results.

REFERENCES

- Andreasen, G. E., and Brookhart, J. W., 1952, Reverse water-level fluctuations: U. S. Geol. Survey Water Res. Bull., p. 26-30, Feb. 10.
- Barksdale, H. C., Sundstrom, R. W., and Brunstein, M. S., 1936, Supplementary report on the ground-water supplies of the Atlantic City region: New Jersey State Water Policy Comm. Spec. Rept. 6, p. 87-91.
- Bennett, R. R., and Meyer, R. R., 1952, Geology and ground-water resources of the Baltimore area: Maryland Dept. Geology, Mines and Water Res. Bull. 4, p. 54-58.
- Brown, R. H., and Ayer, G. R., 1948, Upstate New York, p. 193-195, in Paulsen, C. G., and others, Water levels and artesian pressure in observation wells in the United States in 1945: U. S. Geol. Survey Water-Supply Paper 1023, Part 1, Northeastern States.
- Casagrande, Arthur, 1937, Seepage through dams: Harvard Graduate School Eng., Pub. 209.
- Commerce Dept., 1952, Tables of the Bessel functions $Y_0(x)$, $Y_1(x)$, $K_0(x)$, $K_1(x)$, $0 \leq x \leq 1$: Natl. Bur. Standards, September.
- _____, 1954, Table of the error function and its derivative: Natl. Bur. Standards, Applied Math. Series 41, Oct. 22.
- Darcy, Henri, 1856, Les fontaines publique de la ville de Dijon (The water supply of Dijon): Paris.
- DeGlee, G. J., 1930, Over grondwaterstroomingen bij wateronttrekking door middel van putten (On ground-water flow to discharging drains): Delft.
- Dupuit, Jules, 1848, Etudes theoretiques et pratiques sur le mouvement des eaux courantes (Theoretical studies on the movement of water): Paris, 275 p.
- Ferris, J. G., 1950, A quantitative method for determining ground-water characteristics for drainage design: Agr. Eng., v. 31, no. 6, p. 285-291, June.
- _____, 1952a, The analysis of pumping test data for the leaky artesian aquifer: U. S. Geol. Survey unpub. rept., February.
- _____, 1952b, Cyclic fluctuations of water level as a basis for determining aquifer transmissibility: U. S. Geol. Survey Ground Water Note No. 1, April.
- Ferris, J. G., and Knowles, D. B., 1954, The slug test for estimating transmissibility: U.S. Geol. Survey Ground Water Note No. 26, November.
- Forchheimer, Philipp, 1901, Wasserbewegung durch Boden (Ground-water motion): Zietschr. Ver. Deutscher Ing., v. 45, p. 1736-41, 1781-88, Berlin.

- Forchheimer, Philipp, 1930, *Hydraulik*: Leipzig and Berlin, Teubner, 3rd ed.
- Gray, Andrew, Mathews, C. B., and MacRobert, T. M., 1931, *A treatise on Bessel functions and their applications to physics*: London, Macmillan and Co., Ltd.
- Hagen, G., 1839, Ueber die Bewegung des Wassers in engen cylindrischen Rohren (Movement of water in a narrow cylindrical tube): *Annalen der Physik u. Chemie*, v. 46, p. 423-442, Leipzig.
- Ingersoll, L. R., Zobel, O. J., and Ingersoll, A. C., 1948, *Heat conduction*: McGraw-Hill Book Co., Inc.
- Israelsen, O. W., 1950, *Irrigation principles and practices*: New York, John Wiley and Sons, 2nd ed.
- Jacob, C. E., 1939, Fluctuations in artesian pressure produced by passing railroad trains as shown in a well on Long Island, New York: *Am. Geophys. Union Trans.*, pt. 4, p. 666-674, August. (See also U. S. Geol. Survey Ground Water Note No. 16, Oct. 1953.)
- _____, 1940, On the flow of water in an elastic artesian aquifer: *Am. Geophys. Union Trans.*, p. 574-586, July. (See also U. S. Geol. Survey Ground Water Note No. 8, Feb. 1953.)
- _____, 1941, Notes on the elasticity of the Lloyd sand on Long Island, N. Y.: *Am. Geophys. Union Trans.*, p. 783-787, August. (See also U. S. Geol. Survey Ground Water Note No. 8, Feb. 1953.)
- _____, 1943, Correlation of ground-water levels and precipitation on Long Island, N. Y.: *Am. Geophys. Union Trans.*, Pt. 1, Theory, p. 564-573 (pub. in Jan. 1944).
- _____, 1944, Notes on determining permeability by pumping tests under water-table conditions: U. S. Geol. Survey mimeo. rept.
- _____, 1945, Partial penetration of pumping well, adjustments for: U. S. Geol. Survey Water Res. Bull., p. 169-175, August. 10.
- _____, 1946, Radial flow in a leaky artesian aquifer: *Am. Geophys. Union Trans.*, v. 27, no. 2, p. 198-205. (See also U. S. Geol. Survey Ground Water Note No. 13, Aug. 1953.)
- _____, 1950, Flow of ground water, Ch. 5 in Hunter Rouse, "Engineering hydraulics": New York, John Wiley and Sons.
- Jacob, C. E., and Lohman, S. W., 1952, Nonsteady flow to a well of constant drawdown in an extensive aquifer: *Am. Geophys. Union Trans.*, v. 33, no. 4, p. 559-569, August.
- Klonne, F. W., 1880, Die periodische Schwankungen in der inundierten Kohlienschachten von Dux (The periodical fluctuations in the flooded coal shafts of Dux): *Proc. Imp. Acad. Sci. in Wien*, v. 81, p. 101.

- Krul, W. F. J. M., and Lieftrinck, F. A., 1946, Present ground-water investigations in the Netherlands: New York and Amsterdam, Elsevier Pub. Co., Inc.
- LaRocque, G. A., Jr., 1941, Fluctuations of water level in wells in the Los Angeles basin, Calif.: *Am. Geophys. Union Trans.*, pt. 2, p. 374-386.
- Leggette, R. M., and Taylor, G. H., 1935, Earthquakes instrumentally recorded in artesian wells: *Seismol. Soc. America Bull.*, v. 25, p. 169-175.
- Meinzer, O. E., and Fishel, V. C., 1934, Tests of permeability with low hydraulic gradients: *Am. Geophys. Union Trans.*, p. 405-409, June.
- Meinzer, O. E., and Hard, H. A., 1925, The artesian water supply of the Dakota sandstone in North Dakota, with special reference to the Edgeley quadrangle: *U. S. Geol. Survey Water-Supply Paper 520E*, p. 73-95, pls. 6-7.
- Milne, W. E., 1953, Numerical solution of differential equations: New York, John Wiley and Sons.
- Moulder, E. A., 1951, Locus circles for a hydrogeologic boundary and its corresponding image well: *Water Res. Bull.*, p. 61-62, Aug. 10.
- Parker, G. G., and Stringfield, V. T., 1950, Effects of earthquakes, trains, tides, winds, and atmospheric pressure changes on water in the geologic formations of southern Florida: *Econ. Geology*, v. 45, no. 5, August.
- Piper, A. M., 1933, Fluctuations of water surface in observation wells and at stream-gaging stations in the Mokelumne area, Calif., during the earthquakes of December 20, 1932: *Am. Geophys. Union Trans.*, v. 14, p. 471-475.
- Poiseuille, J. L. M., 1846, Experimental investigations on the flow of liquids in tubes of very small diameter: *Royal Acad. Sci. Inst. France, Math. Phys. Sci. Mem.*, v. 9, p. 433-543. (Translated by W. H. Herschel, in *Rheological Memoirs*, v. 1, no. 1, 101 p., Easton, Pa., Jan. 1940.)
- Robinson, T. W., 1939, Earth tides shown by fluctuations of water levels in wells in New Mexico and Iowa: *Am. Geophys. Union Trans.*, pt. 4, p. 656-666, August.
- Rouse, Hunter, 1950, Engineering hydraulics: John Wiley and Sons.
- Scarborough, J. B., 1950, Numerical mathematical analysis: The Johns Hopkins Press, 2nd ed.
- Shaw, F. S., 1953, An introduction to relaxation methods: New York, Dover Publications, Inc.

- Skibitzke, H. E., 1950, An equation for potential distribution about a well being bailed: U. S. Geol. Survey unpub. typed rept.
- Slichter, C. S., 1899, Theoretical investigation of the motion of ground waters: U. S. Geol. Survey 19th Annual Rept. (See also U. S. Geol. Survey Ground Water Note No. 22, June 1954.)
- Southwell, R. V., 1940, Relaxation methods in engineering science: London, Oxford Univ. Press.
- _____, 1946, Relaxation methods in theoretical physics: London, Oxford Univ. Press.
- Stallman, R. W., 1952, Nonequilibrium type curves modified for two-well systems: U. S. Geol. Survey Ground Water Note No. 3, April.
- _____, 1955, Notes on the application of numerical analysis to ground-water hydrology: U. S. Geol. Survey rept. in preparation.
- Stearns, H. T., 1928, Record of earthquake made by automatic recorders on wells in California: Seismol. Soc. America Bull., v. 18, p. 9-15.
- Stearns, N. D., 1928, Laboratory tests on physical properties of water-bearing materials: U. S. Geol. Survey Water-Supply Paper 596F, p. 121-176, pls. 11-13.
- Steggewentz, J. H., and Van Nes, B. A., 1939, Calculating the yield of a well, taking account of replenishment of the ground-water from above: Water and Water Eng., p. 561-563.
- Taylor, D. W., 1948, Fundamentals of soil mechanics: John Wiley and Sons, Inc., p. 156-198.
- Theis, C. V., 1935, The relation between the lowering of the piezometric surface and the rate and duration of discharge of a well using ground-water storage: Am. Geophys. Union Trans., pt. 2, p. 519-524, August. (See also U. S. Geol. Survey Ground Water Note No. 5, Aug. 1952.)
- _____, 1939, Earth tides expressed in fluctuations of water level in artesian wells in New Mexico: U. S. Geol. Survey unpub. dup. rept.
- Theis, C. V., and Brown, R. H., 1954, Drawdown in wells responding to cyclic pumping: U. S. Geol. Survey Ground Water Note No. 23, June.
- Thiem, Gunther, 1906, Hydrologische methoden (Hydrologic methods): Leipzig, U. S. Gebhardt, 56 p.
- Turneure, F. E., and Russell, H. L., 1901, Public water supplies: New York, John Wiley and Sons, Inc.
- Veatch, A. C., 1906, Fluctuation of the water level in wells, with special reference to Long Island, New York: U. S. Geol. Survey Water-Supply Paper 155.
- Vorhis, R. C., 1953, Milwaukee "hydroseismograms" and their interpretation: U. S. Geol. Survey Water Res. Bull., p. 25-29, May 10.

- Walton, W. C., 1953, The hydraulic properties of a dolomite aquifer underlying the village of Ada, Ohio: Ohio Dept. Natural Res., Div. of Water, Tech. Rept. No. 1.
- Warren, M. A., 1952, Graphical short cuts in applying the nonequilibrium formula to ground-water problems: U. S. Geol. Survey Water Res. Bull., p. 69-74, Aug. 10.
- Wenzel, L. K., 1942, Methods for determining permeability of water-bearing materials with special reference to discharging-well methods: U. S. Geol. Survey Water-Supply Paper 887.
- Wenzel, L. K., and Sand, H. H., 1942, Water supply of the Dakota sandstone in the Ellentown-Jamestown area, North Dakota: U. S. Geol. Survey Water-Supply Paper 889A.
- Werner, P. W., and Noren, Daniel, 1951, Progressive waves in non-artesian aquifers: Am. Geophys. Union Trans., v. 32, no. 2, p. 238-244.
- Wyckoff, R. D., Botset, H. G., and Muskat, M., 1932, Flow of liquids through porous media under the action of gravity: Physics, v. 3, no. 2, p. 90-113, August.
- Young, Andrew, 1913, Tidal phenomena at inland boreholes near Cradock: Trans. Royal Soc. South Africa, v. 3, pt. 1, p. 61-105.

NOMENCLATURE

The following symbols are listed in alphabetical order. Each symbol indicates the basic term usually represented with no attempt to show the many and unavoidable duplicate uses. It will be found in the text that various subscripts are used in conjunction with these symbols to denote specific applications of the basic terms. A few of the more important combinations of this type are given; others are as defined where they appear in the text. The page reference accompanying each symbol usually indicates the first place in the text where the term is defined.

<u>Symbol</u>	<u>Explanation</u>	<u>Page</u>
A	= area of cross section through which flow occurs	3
a	= distance from stream or drain to ground-water divide	61
e	= base of natural (Napierian) logarithms, numerically equal to 2.7182818	22
g	= local acceleration due to gravity	19
h	= head of water with respect to some reference datum	61
I	= hydraulic gradient	3
L	= length (width) of cross section through which flow occurs	3
m	= saturated thickness of an aquifer	3
m'	= saturated thickness of relatively impermeable bed confining an aquifer	43
P	= coefficient of permeability of the material comprising an aquifer	3
P'	= coefficient of vertical permeability of the material comprising a relatively impermeable bed that confines an aquifer	41
Q	= rate of discharge, or recharge	22
r	= radial distance from discharge or recharge well to point of observation	22
r _e	= external radius of cone of depression	48

<u>Symbol</u>	<u>Explanation</u>	<u>Page</u>
r_w	= effective radius of discharge or recharge well	34
S	= coefficient of storage of an aquifer	5
s	= change in head of water, usually expressed as drawdown, or recovery, or buildup	22
s'	= residual change in head of water, usually reserved for use in conjunction with the term, drawdown	31
T	= coefficient of transmissibility of an aquifer	3
t	= elapsed time with respect to an initial reference	24
t'	= elapsed time with respect to a second reference	32
V	= volume	19
W	= rate of accretion or recharge to an aquifer	61
w	= spacing of grid lines used to subdivide a region into finite squares	67
x	= distance from stream or drain to point of observation	53
B.E.	= barometric efficiency of an aquifer	16
T.E.	= tidal efficiency of an aquifer	17
$D(u)_h$	= drain function of u , constant head situation	57
$D(u)_q$	= drain function of u , constant discharge situation	53
$G(a)$	= well function of a , constant head situation	37
$W(u)$	= well function of u , constant discharge situation	24

<u>Symbol</u>	<u>Explanation</u>	<u>Page</u>
$J_0(x)$	= Bessel function of first kind, zero order	37
$I_0(x)$	= <u>modified</u> Bessel function of first kind, zero order	43
$Y_0(x)$	= Bessel function of second kind, zero order	37
$K_0(x)$	= <u>modified</u> Bessel function of second kind, zero order	43
α	= bulk modulus of compression or vertical compressibility (reciprocal of the bulk modulus of elasticity) of the aquifer skeleton	17
β	= bulk modulus of compression, or compressibility of water; approximate value for average ground-water temperature is $3.3 \times 10^{-6} \text{ in}^2/\text{lb.}$	17
γ	= specific weight of a substance	19
γ_0	= specific weight of water at a stated reference temperature; numerically equal to 62.4 lbs/ft^3 at 4° C. or 39° F.	19
θ	= porosity of an aquifer	17
ρ	= density of a substance	19