

EXPLANATION

- 25
- 30
- ISOPACHS—Showing thickness of coal bed, in feet. Dashed where inferred. Isopach interval 100 feet.
- 16
- DRILL HOLE—Showing thickness of coal bed, in feet. Drill holes which do not intersect the coal bed or from which a coal bed thickness could not be determined are not shown.
- 25+
- H2
- TRACE OF COAL BED OUTCROP—Showing the name of the coal bed. Thickness of coal bed, in feet, measured at triangle.
- 0
- FAULT—Dashed where approximately located. U, upthrown side; D, downthrown side.



STRIP MINE



UNDERGROUND MINE WORKINGS
Thickness of coal bed, in feet, measured at triangle.


To convert feet to meters,
multiply feet by 0.3048.

OPEN FILE REPORT

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

ELMO QUADRANGLE
WYOMING—CARBON CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)
NE 1/4 HANNA 15' QUADRANGLE

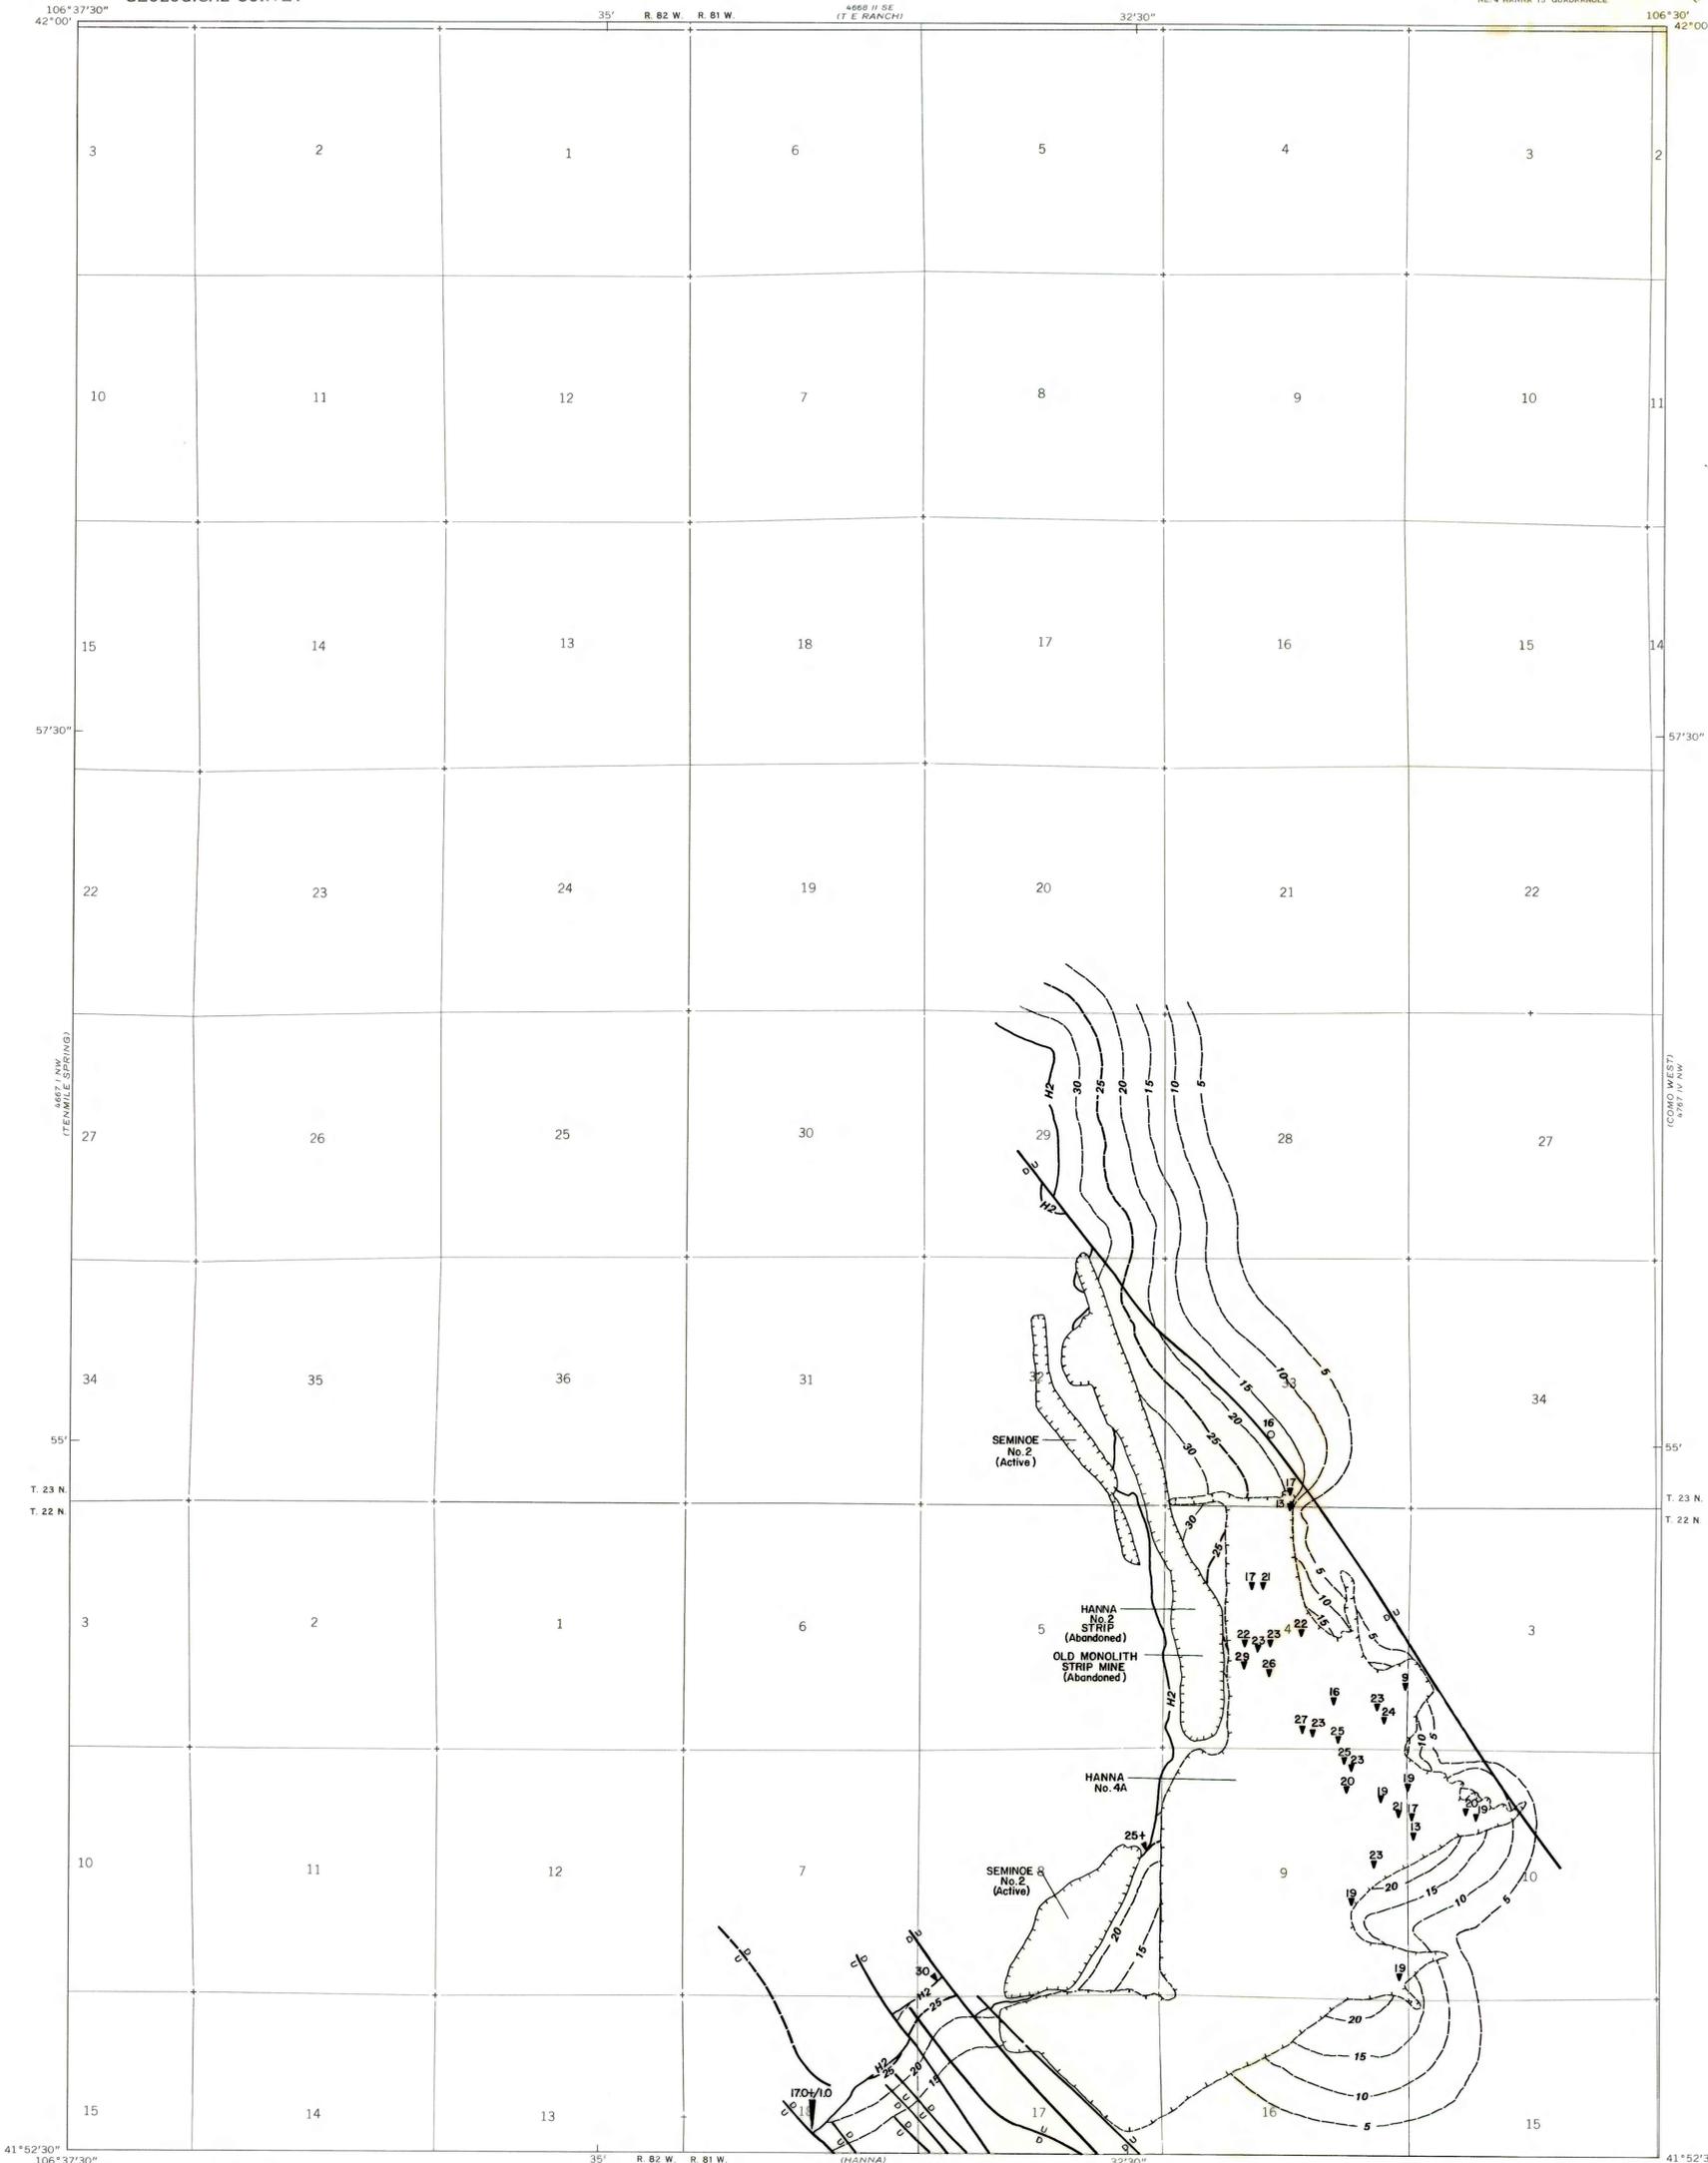

Base map from U.S. Geological Survey, 1971

Compiled in 1977 by TEXAS INSTRUMENTS INCORPORATED



COAL RESOURCE OCCURRENCE MAP OF THE ELMO QUADRANGLE,
CARBON COUNTY, WYOMING

BY
TEXAS INSTRUMENTS INCORPORATED
1978

PLATE 13
ISOPACH MAP
OF THE HANNA 2 COAL BED