


UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

WYOMING-CARBON CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)

EXPLANATION




OVERBURDEN ISOPACH—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 200 feet (61 m). Dashed where inferred.

250




DRILL HOLE—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Drill holes which do not intersect top of coal bed or from which bed elevation could not be determined are not shown.

To convert feet to meters,
multiply feet by 0.3048.

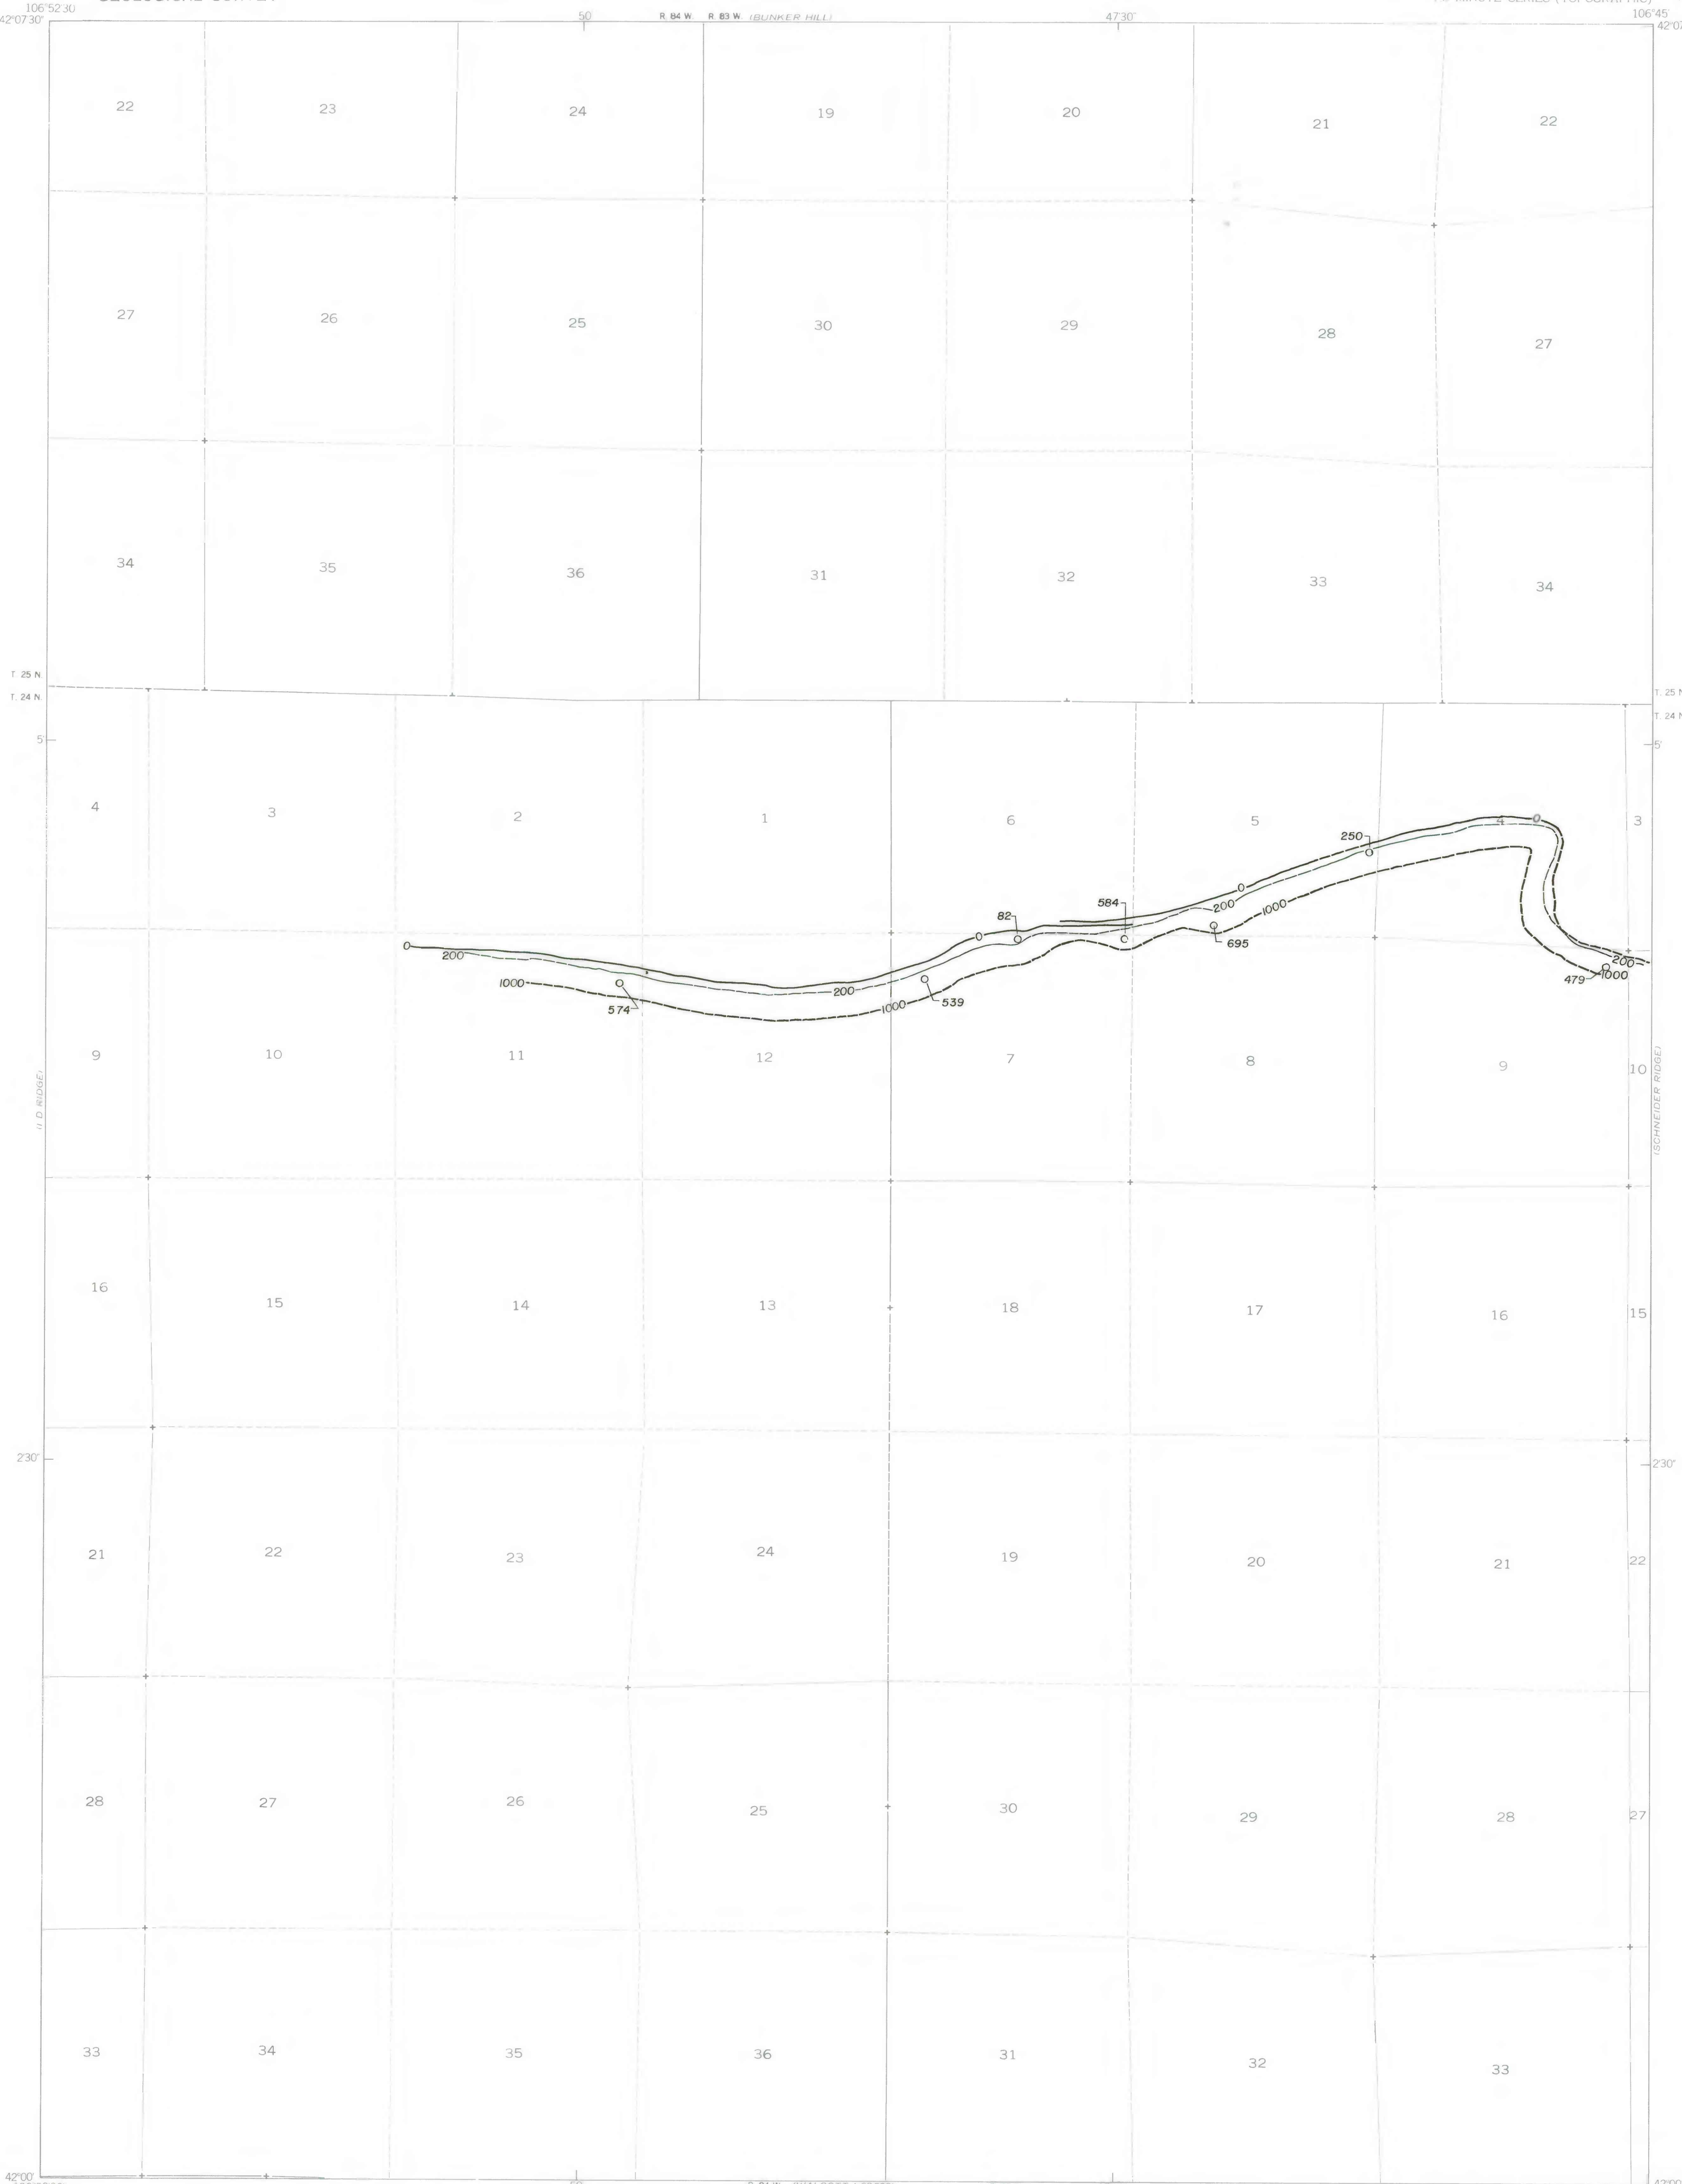

Base map from U.S. Geological Survey, 1953

Compiled in 1977 by TEXAS INSTRUMENTS INCORPORATED

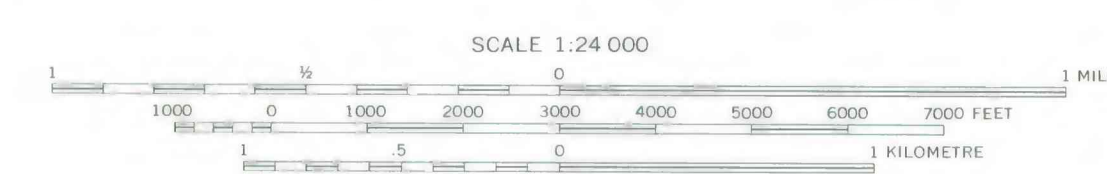

**COAL RESOURCE OCCURRENCE MAP OF THE SEMINOE DAM SE QUADRANGLE,
CARBON COUNTY, WYOMING
BY
TEXAS INSTRUMENTS INCORPORATED
1978**

OPEN FILE REPORT
This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

PLATE 6
OVERBURDEN ISOPACH MAP
OF COAL BED
118-118-A