

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

WYOMING-CARBON CO.
7.5 MINUTE SERIES (TOPOGRAPHIC)


EXPLANATION

0
100
OVERBURDEN ISOPACH—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 100 feet (30.4 m). Dashed where inferred.
o 129

DRILL HOLE—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Drill holes which do not intersect top of coal bed or from which bed elevation could not be determined are not shown.

FAULT—Dashed where approximately located. U, upthrown side; D, downthrown side.


To convert feet to meters, multiply feet by 0.3048.

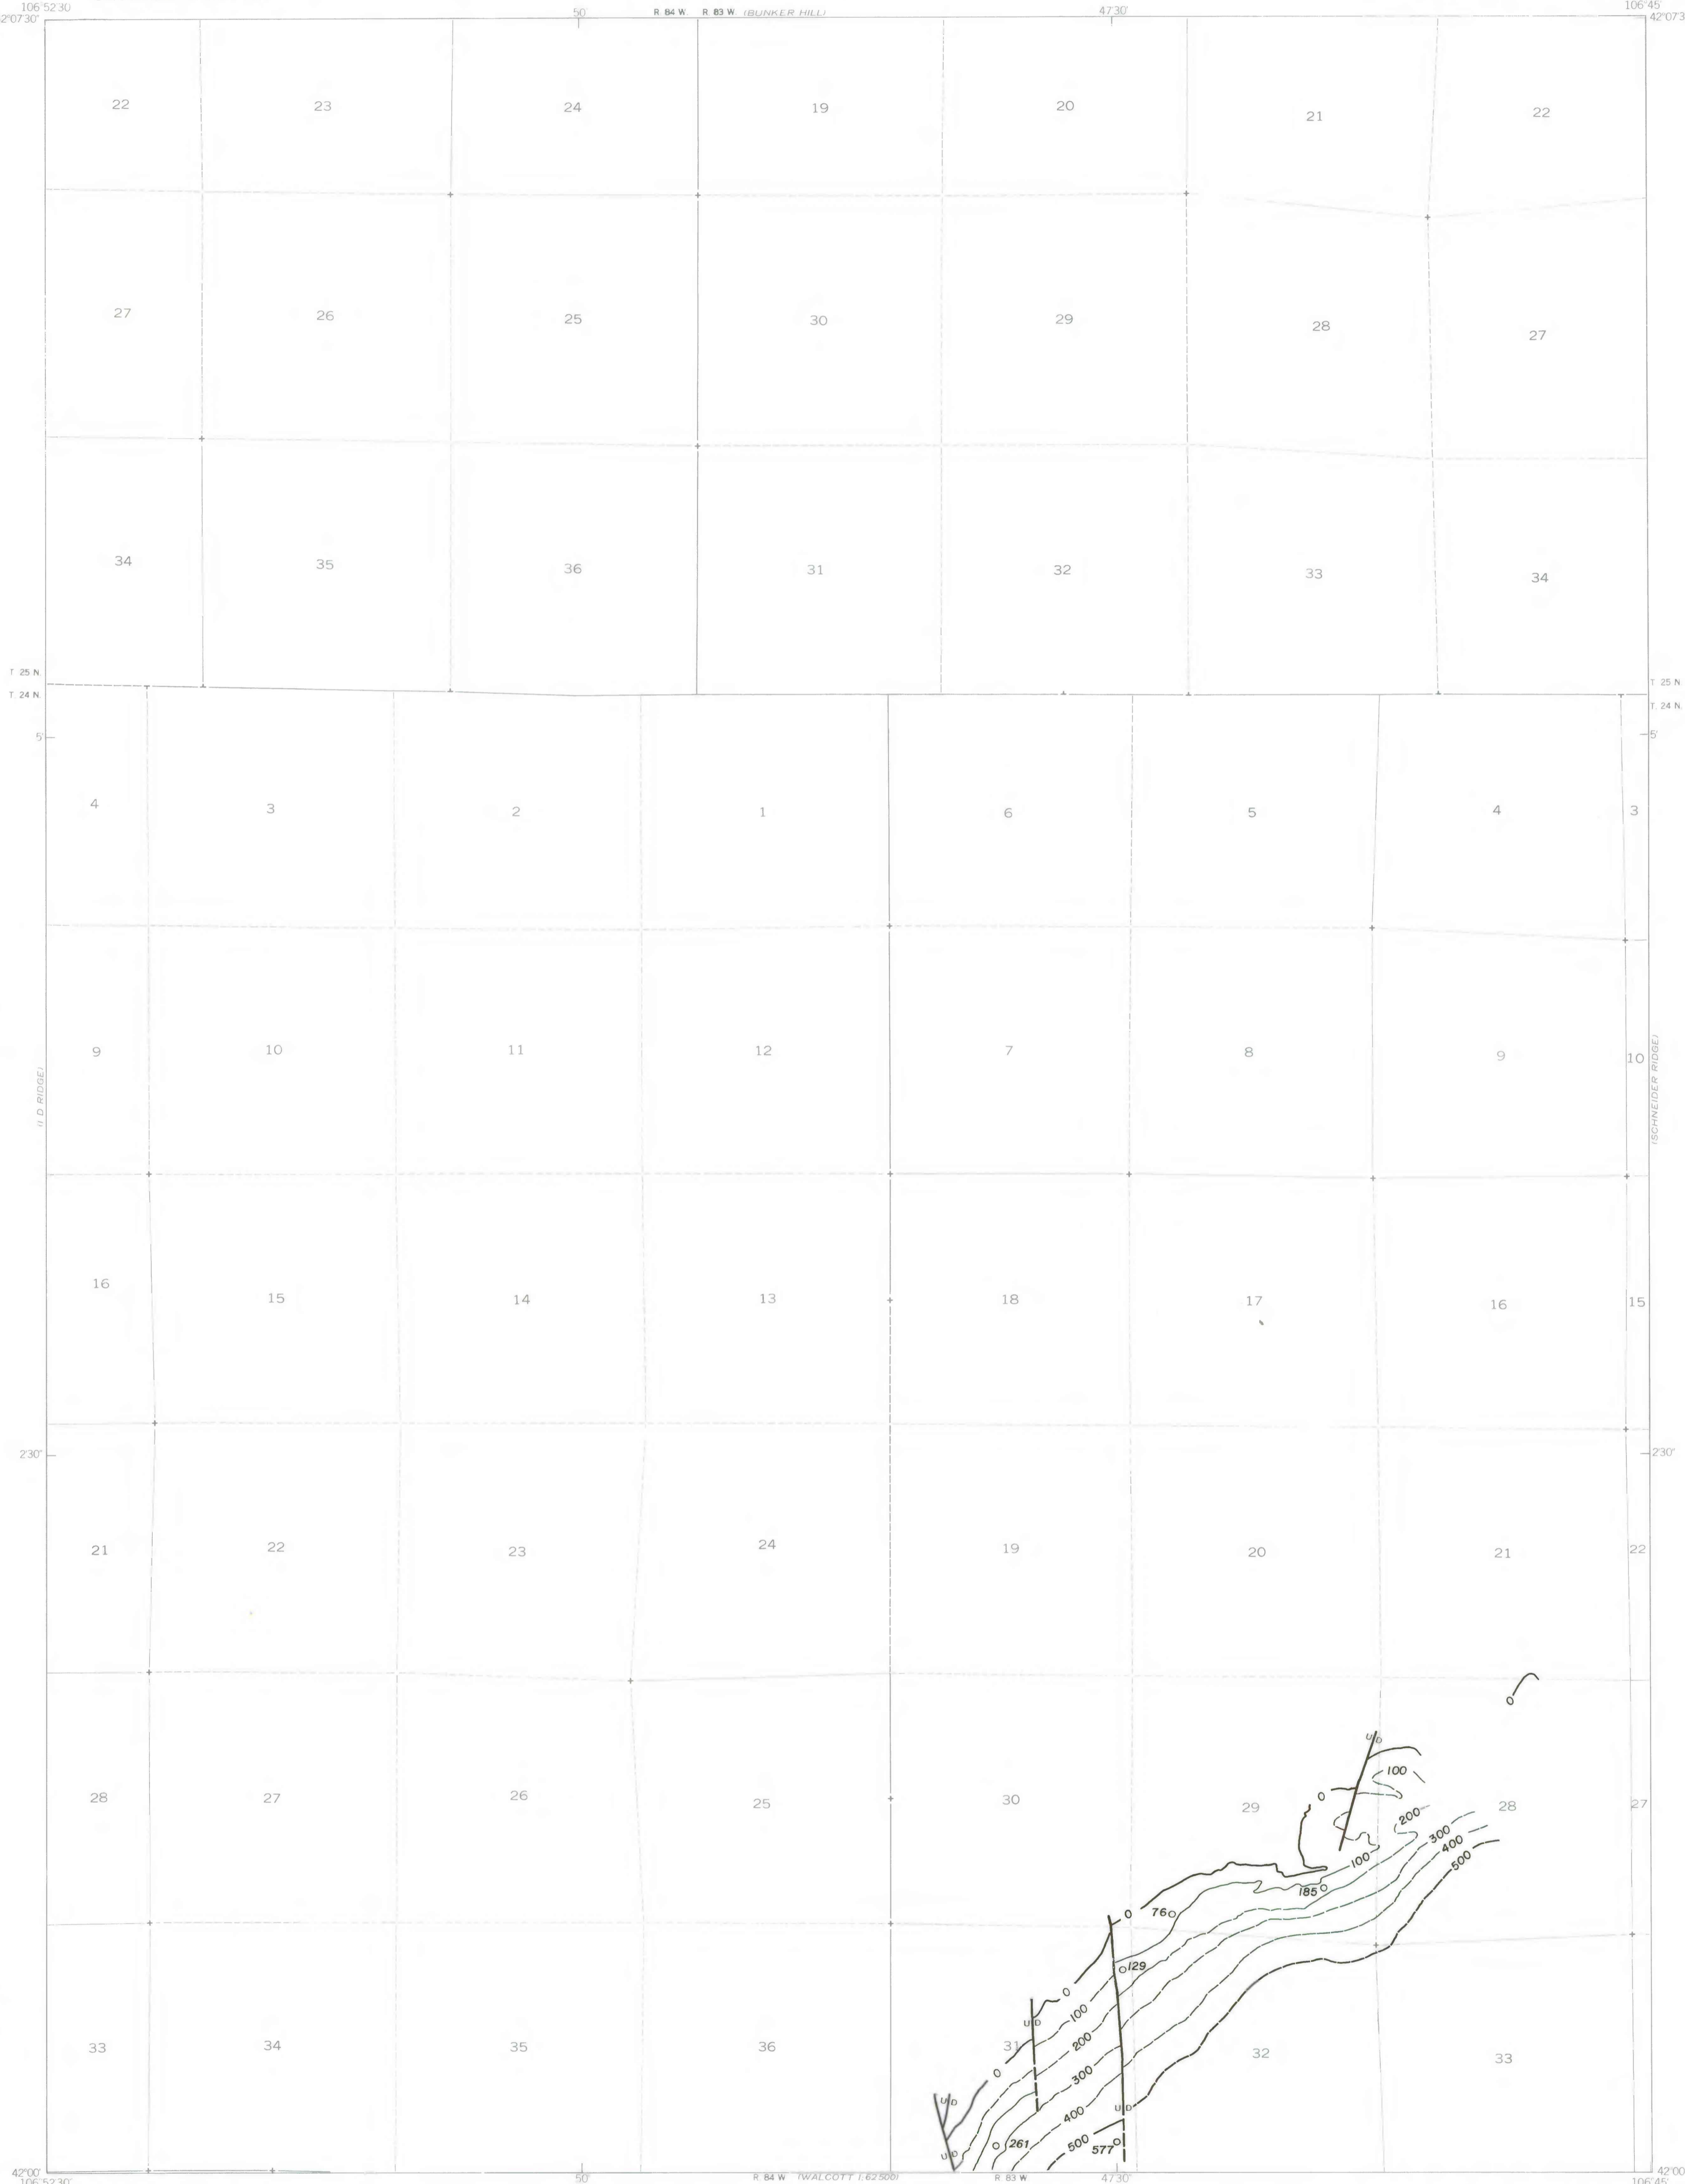


Base map from U.S. Geological Survey, 1953

Compiled in 1977 by TEXAS INSTRUMENTS INCORPORATED

SCALE 1:24 000



TRUE NORTH
MAGNETIC NORTH
APPROXIMATE MEAN DECLINATION, 1953



OPEN FILE REPORT
This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

PLATE 19
OVERBURDEN ISOPACH MAP
OF COAL BED
128

COAL RESOURCE OCCURRENCE MAP OF THE SEMINOE DAM SE QUADRANGLE,
CARBON COUNTY, WYOMING
BY
TEXAS INSTRUMENTS INCORPORATED
1978