

TITUSVILLE SW QUADRANGLE, FLORIDA
1953, PHOTOREVISED 1970.
7.5-minute series, 1:24000

INTRODUCTION

Brevard County is an area of some 1,300 square miles located on the east coast of central Florida. The Titusville SW quadrangle, in northern Brevard, includes part of the St. Johns River channel and valley with extensive areas of relatively low marshlands. Approximately one half of the quadrangle area lies in Orange, Seminole, and Volusia Counties (Sheet 1).

PURPOSE AND SCOPE

The purpose of this report is to present ground-water data in a usable, readily available format for county planning needs. The scope includes a complete inventory of wells, water-level measurements in selected wells, sampling selected wells for water-quality analysis, literature search, and storage of all data in the U.S. Geological Survey computer bank or manual data library. Wells shown on sheet 1 are those used in the preparation of this report.

Brevard Water Well Survey

This report was prepared by the U.S. Geological Survey and the Brevard Water Well Survey team in cooperation with the Brevard County Board of County Commissioners. The Brevard Water Well Survey is funded through the Comprehensive Education and Training Act and sponsored by Brevard County through the development division, Brevard County Planning Department. Primary supervision of the Brevard Water Well Survey was under the U.S. Geological Survey as principal investigator. The following Brevard Water Well Survey team members were instrumental in the production of this report:

Grady Brown, Ann Edwards, Steven Frasure, Charles Marple, Robert McConnell, Samuel Reyna, and Richard Wheeler. The Brevard Water Well Survey consisted of as many as 19 members during the course of the investigation.


ACKNOWLEDGMENTS

The authors wish to acknowledge the assistance of the Brevard County Planning Department, County Engineers Office, Cartography Department, North Brevard Water Board, Agricultural Extension Service, the well drillers of Brevard County, and the cooperation of local residents.

WELL-NUMBERING SYSTEM

The well-numbering system used in this report is based on latitude and longitude coordinates derived from a grid of 1-minute parallels of latitude and meridians of longitude (sheet 1). Wells within these minute grids are assigned numbers that consist of the last digit of the degree and the two digits of the minute of the line of latitude on the south side of the grid, the last digit of the degree and the two digits of the minute of the line of longitude on the east side of the grid, and a sequence number assigned in the order in which the well within the minute grid was inventoried. For example, well number 832-053-001 was the first well inventoried in the 1-minute grid north of latitude 28°32' and west of longitude 80°53'.


In order to conserve space on sheet 1, only the well sequence number is shown. The well number can be reconstructed if necessary by gridding off the maps according to the latitude and longitude tick marks in sheet 1 and observing the methodology in the preceding paragraph.

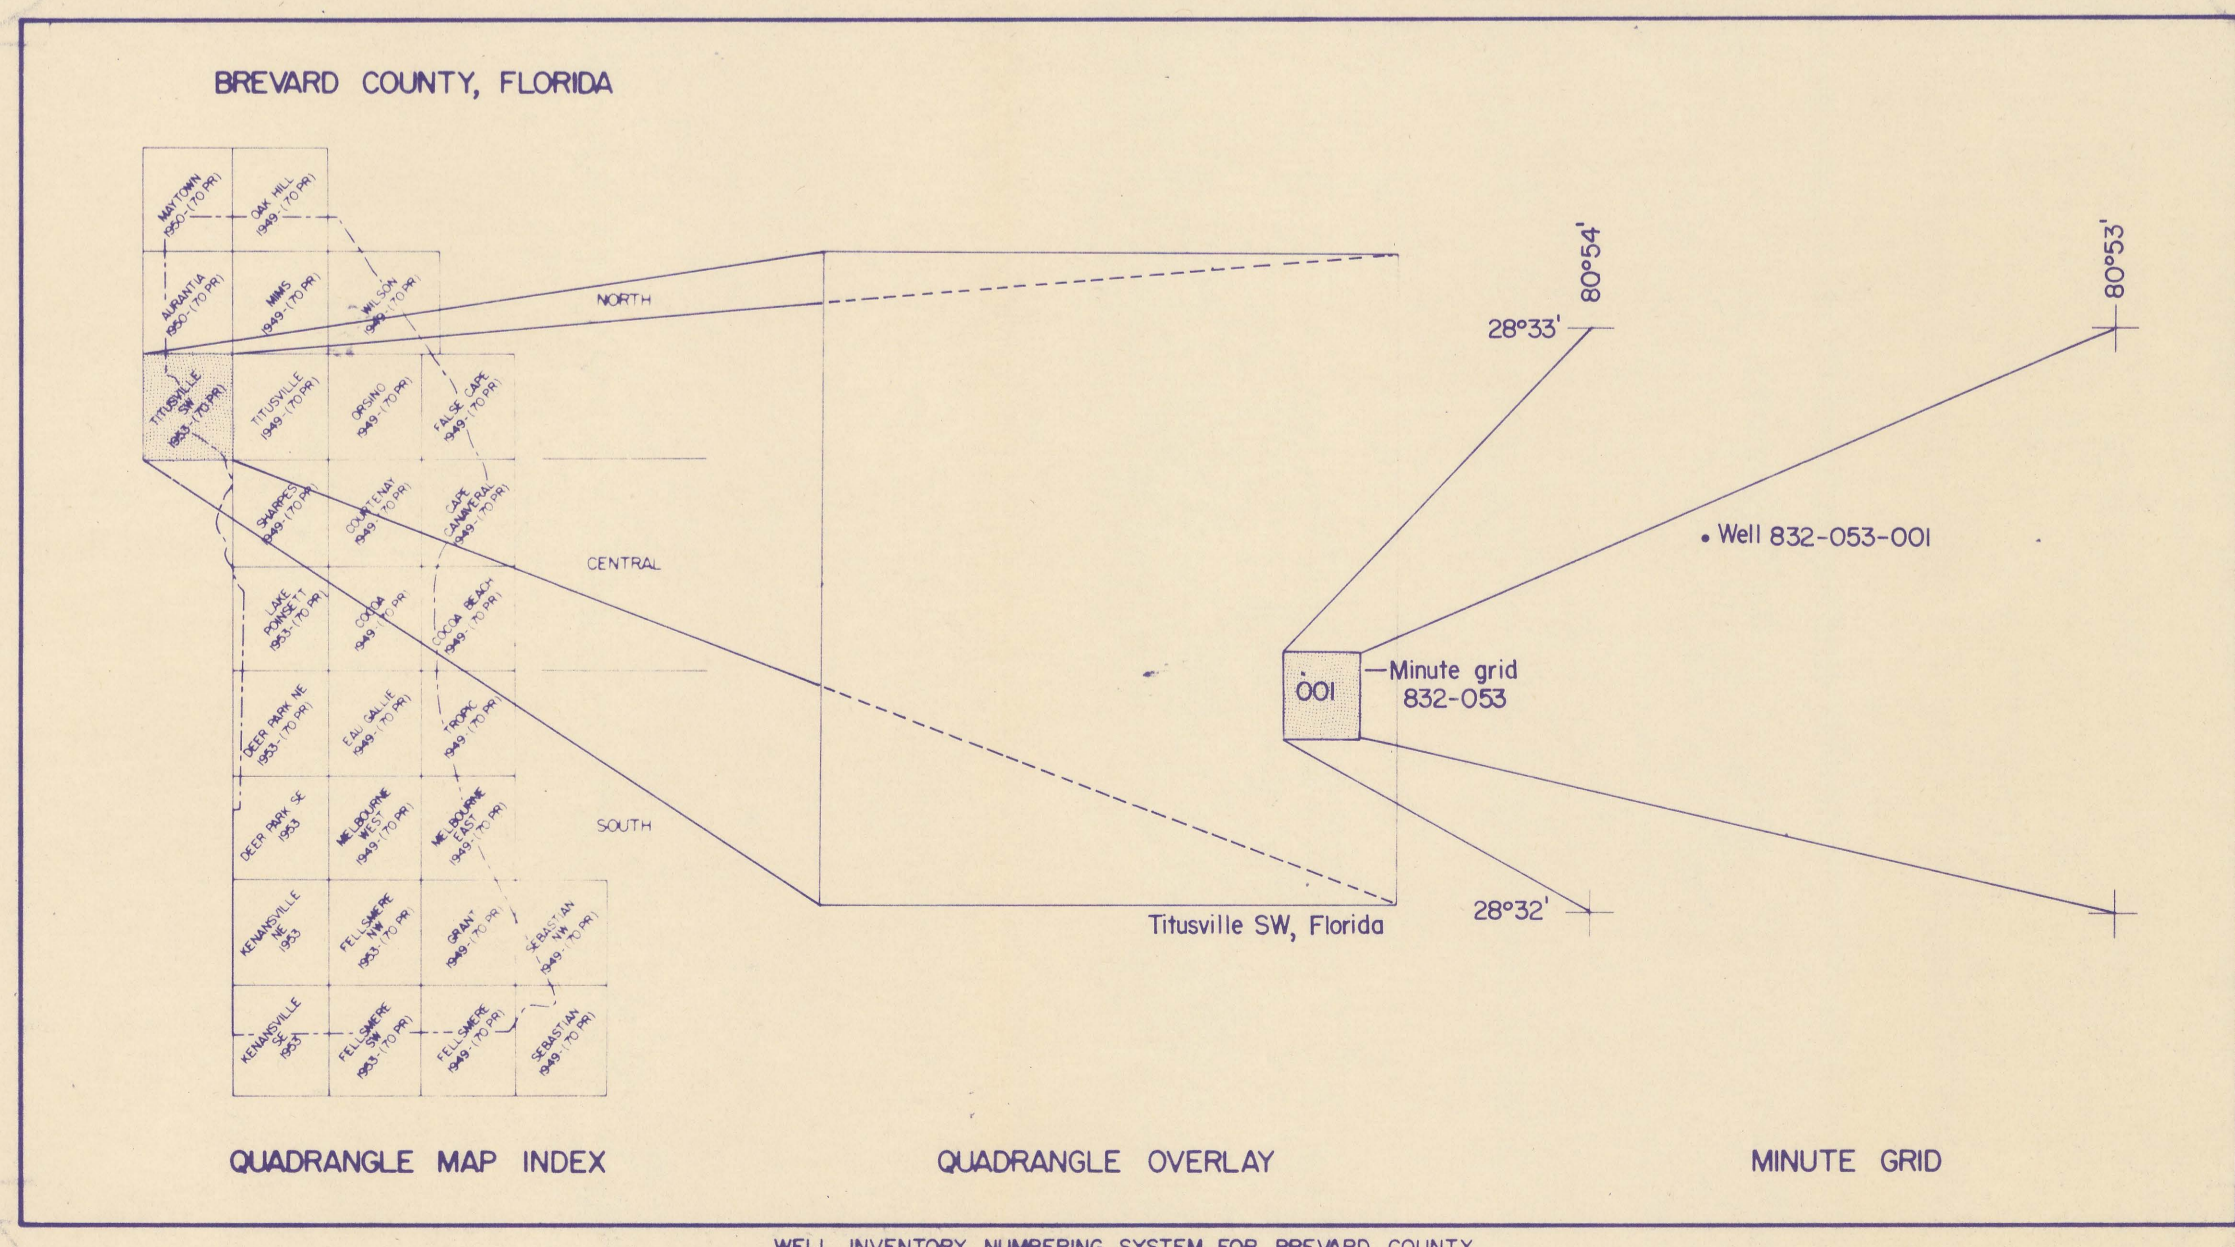

WELL INVENTORY NUMBERING SYSTEM FOR BREVARD COUNTY

OVERLAY MAP OF THE TITUSVILLE SW QUADRANGLE, FLORIDA; WELL LOCATIONS AND NUMBERING SYSTEM AND QUADRANGLE MAP INDEX, BREVARD COUNTY

By
James M. Frazee, Jr.,
and
C. P. Laughlin
1978

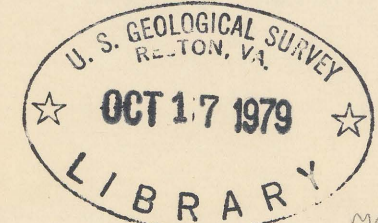

17(239)49
75/114
sheet 1
96-190m

M(200)
R290
78-190
Sheet 1
C.1