


80°52'30" 28°52'30" 80°45' 28°45'

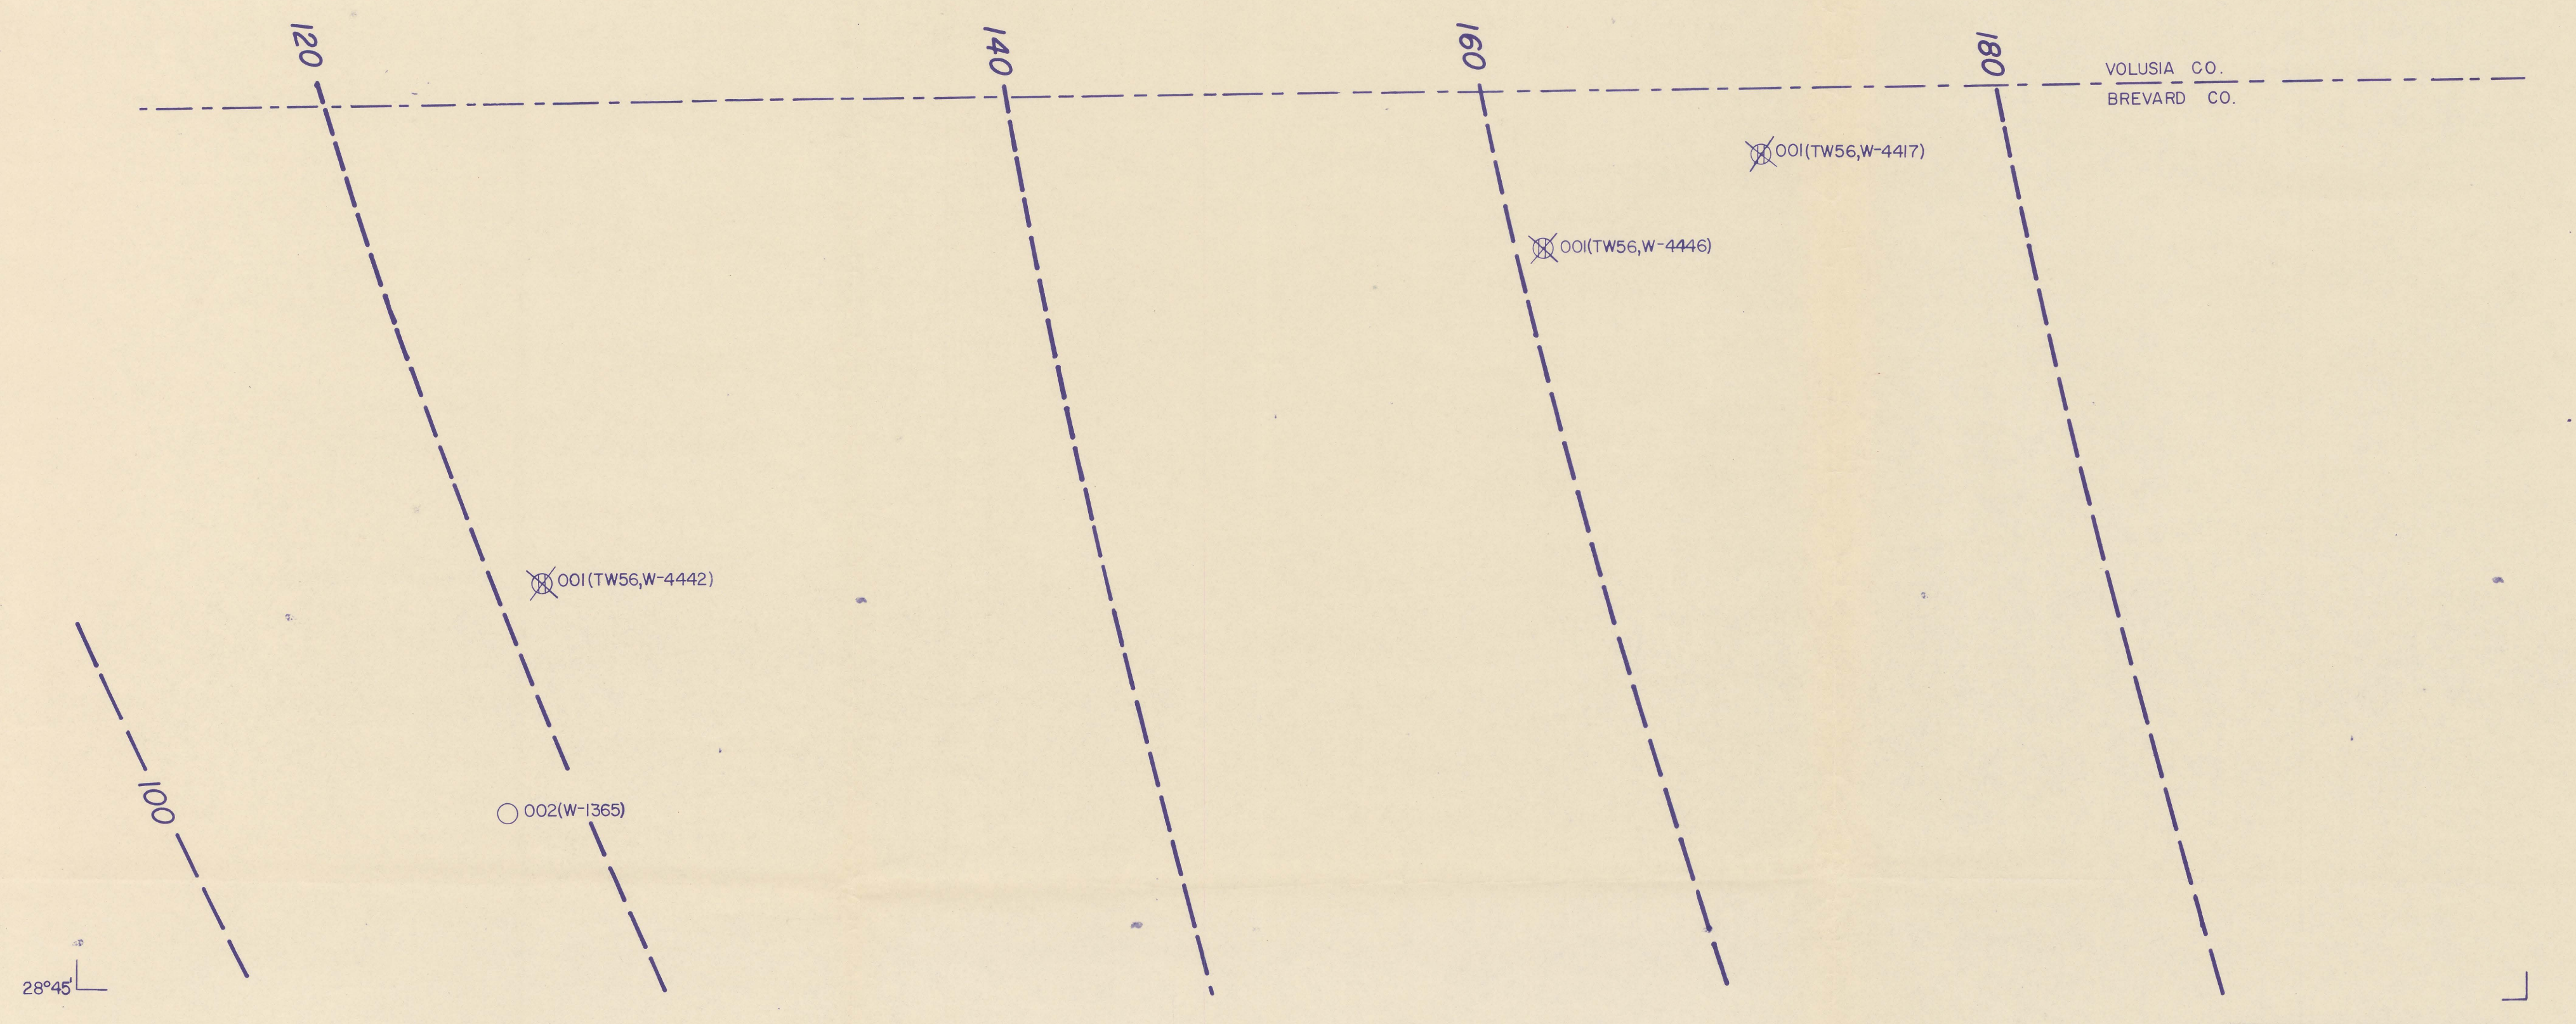

GEOHYDROLOGY

The Oak Hill quadrangle consists in Brevard County of citrus groves and pine-palmetto flatwoods on the higher areas; scrub lowlands with marsh areas; and some urbanized land with varying infiltration characteristics. Surface drainage is through the marshes and constructed drainage outlets which ultimately drain the higher areas to the Indian River and Mosquito Lagoon estuaries.

Ground water occurs under nonartesian and artesian conditions. Nonartesian conditions occur where the upper surface of the zone of saturation (water table) is free to rise and fall in direct response to local rainfall (recharge) and to discharge. Artesian conditions occur where the water in an aquifer is confined by a bed of less permeable material and will rise in a tightly cased well above the base of the confining bed. The level to which the water will rise defines the altitude of the aquifer's potentiometric surface at that location. If the potentiometric surface is above land surface, the well will flow (sheet 1). Water-level measurements in many artesian wells are used to define the configuration of the potentiometric surface over broad areas (sheet 3).

Unconsolidated sediments of Holocene, Pleistocene, and late Miocene age constitute the nonartesian (shallow) aquifer. These sediments lie above the consolidated limestone formations of Eocene age known as the Floridan aquifer. The altitude of the top of the Floridan aquifer is shown on sheet 2. The middle Miocene deposits (Hawthorn Formation) overlie and tend to confine the Floridan aquifer. Where the confining beds are discontinuous and limestones of Miocene age are present, there is usually a hydraulic connection between the middle Miocene and the Eocene deposits.

The Floridan (sheet 4) and shallow aquifers contain potable water in the western part of the quadrangle area, in Brevard County, where land surface altitudes are greater than about 10 feet. To the east, the remaining area is a discharge area, except for part of the barrier island between the Indian River and Mosquito Lagoon, and the Floridan contains brackish water. Small supplies of freshwater from the shallow aquifer may be developed from shallow wells in the higher dune areas along the barrier island.

Ground-water use is moderate and concentrated along the southwestern edge of the quadrangle where wells tap both the Floridan and shallow aquifers for domestic and irrigation use.

SELECTED REFERENCES

This report is 1 of 29 similar map reports prepared on the 7½-minute topographic quadrangle base to cover all of Brevard County (see index, sheet 1). A complete list of references used in preparation of the 29 reports is given below. Individual abbreviated references are noted on the various sheets, as applicable; the user may refer to the following list to obtain the formal reference.

- Anderson, K. E., ed., 1973, Water well handbook: Missouri Water Well and Pump Contractors Association., 80 p.
- Bostwick, Inc., 1950, Analysis and recommendations for the improvement of the water supply, City of Titusville, Florida: Bostwick, Inc., Daytona Beach, Florida, 52 p.
- Brown, D. W., Kenner, W. E., and Brown, Eugene, 1957, Interim report on the water resources of Brevard County, Florida: Florida Geological Survey Information Circular 11, 111 p.

OAK HILL QUADRANGLE, FLORIDA, 1949, PHOTOREVISED 1970 7.5-minute series, 1:24000

Brown, D. W., Kenner, W. E., Crooks, J. R., and Foster, J. B., 1962a, Water resources of Brevard County, Florida: Florida Geological Survey Report of Investigation 28, 104 p.

1962b, Water resources records for Brevard County, Florida: Florida Geological Survey Information Circular 32, 180 p.

Crain, L. J., Hughes, G. B., and Snell, L. J., 1975, Water resources of Indian River County, Florida: Florida Bureau of Geology Report of Investigation 80, 75 p.

Florida Department of Natural Resources, 1970, Florida water and related land resources, St. Johns River basin: Florida Department of Natural Resources, 205 p.

Healy, H. C., 1971, Water levels in artesian and nonartesian aquifers of Florida, 1967-68: Florida Bureau of Geology Information Circular 68, 61 p.

Knochenmus, D. D., and Beard, N. E., 1971, Evaluation of the quantity and quality of the water resources of Volusia County, Florida: Florida Bureau of Geology Report of Investigation 57, 59 p.

Laughlin, C. P., 1976, Potentiometric surface map of the Floridan aquifer in east-central Florida, May 1976: U.S. Geological Survey Open-File Report 76-811.

Lichtler, W. F., and Anderson, Warren, 1968, Water resources of Orange County, Florida: Florida Geological Survey Report of Investigation 50, 150 p.

(References continued to sheet 3.)


EXPLANATION

- 100 — Altitude of top of Floridan aquifer, in feet below mean sea level. Contour interval 20 feet. Dashed where inferred.
- 001 (TW-56) U.S. Geological Survey test well. Number is last three digits of local well number (sheet 1). Letter-number combination in parentheses is field or agency identifier; final two digits denote year drilled.
- 002 (W-1365) Well with Florida Geological Survey well log. Letter-number combination in parentheses is agency file identifier.
- ⊙ Test hole
- ⊗ Destroyed

Note: The overlay shows altitude of top of Floridan aquifer and is based on the shallowest known occurrence of limestones of Eocene age. The contours were originally defined in 1953 (Neill 1955), and refined in 1955-57 (Brown and others 1962a) and 1974-76 (references, sheets 2 and 3).

OVERLAY MAP OF THE OAK HILL QUADRANGLE, FLORIDA; ALTITUDE OF TOP OF FLORIDAN AQUIFER AND LOCATION OF WELLS FOR WHICH GEOLOGIC DATA ARE AVAILABLE

By
James M. Frazee, Jr.,
and
C. P. Laughlin
1978

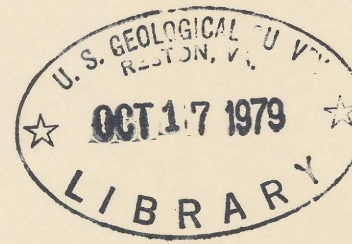

78-191m
172349
Sheet 2
C.1

M(200)
R290
78-191
Sheet 2
C.1