





EXPLANATION

- 50
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal bed. Isopach interval 50 feet (15.2 m).
 - 90
DRILL HOLE - Showing thickness of overburden, in feet, from surface to top of coal bed.
 - 15
MINING-RATIO CONTOURS - Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas underlain by coal of Reserve Base thickness within the stripping-limit (in this quadrangle, the 200-foot-overburden isopach).
- To convert feet to meters, multiply feet by 0.3048.
- To convert mining ratio to cubic meters of overburden per metric ton of recoverable coal, multiply mining ratio by 0.8428.

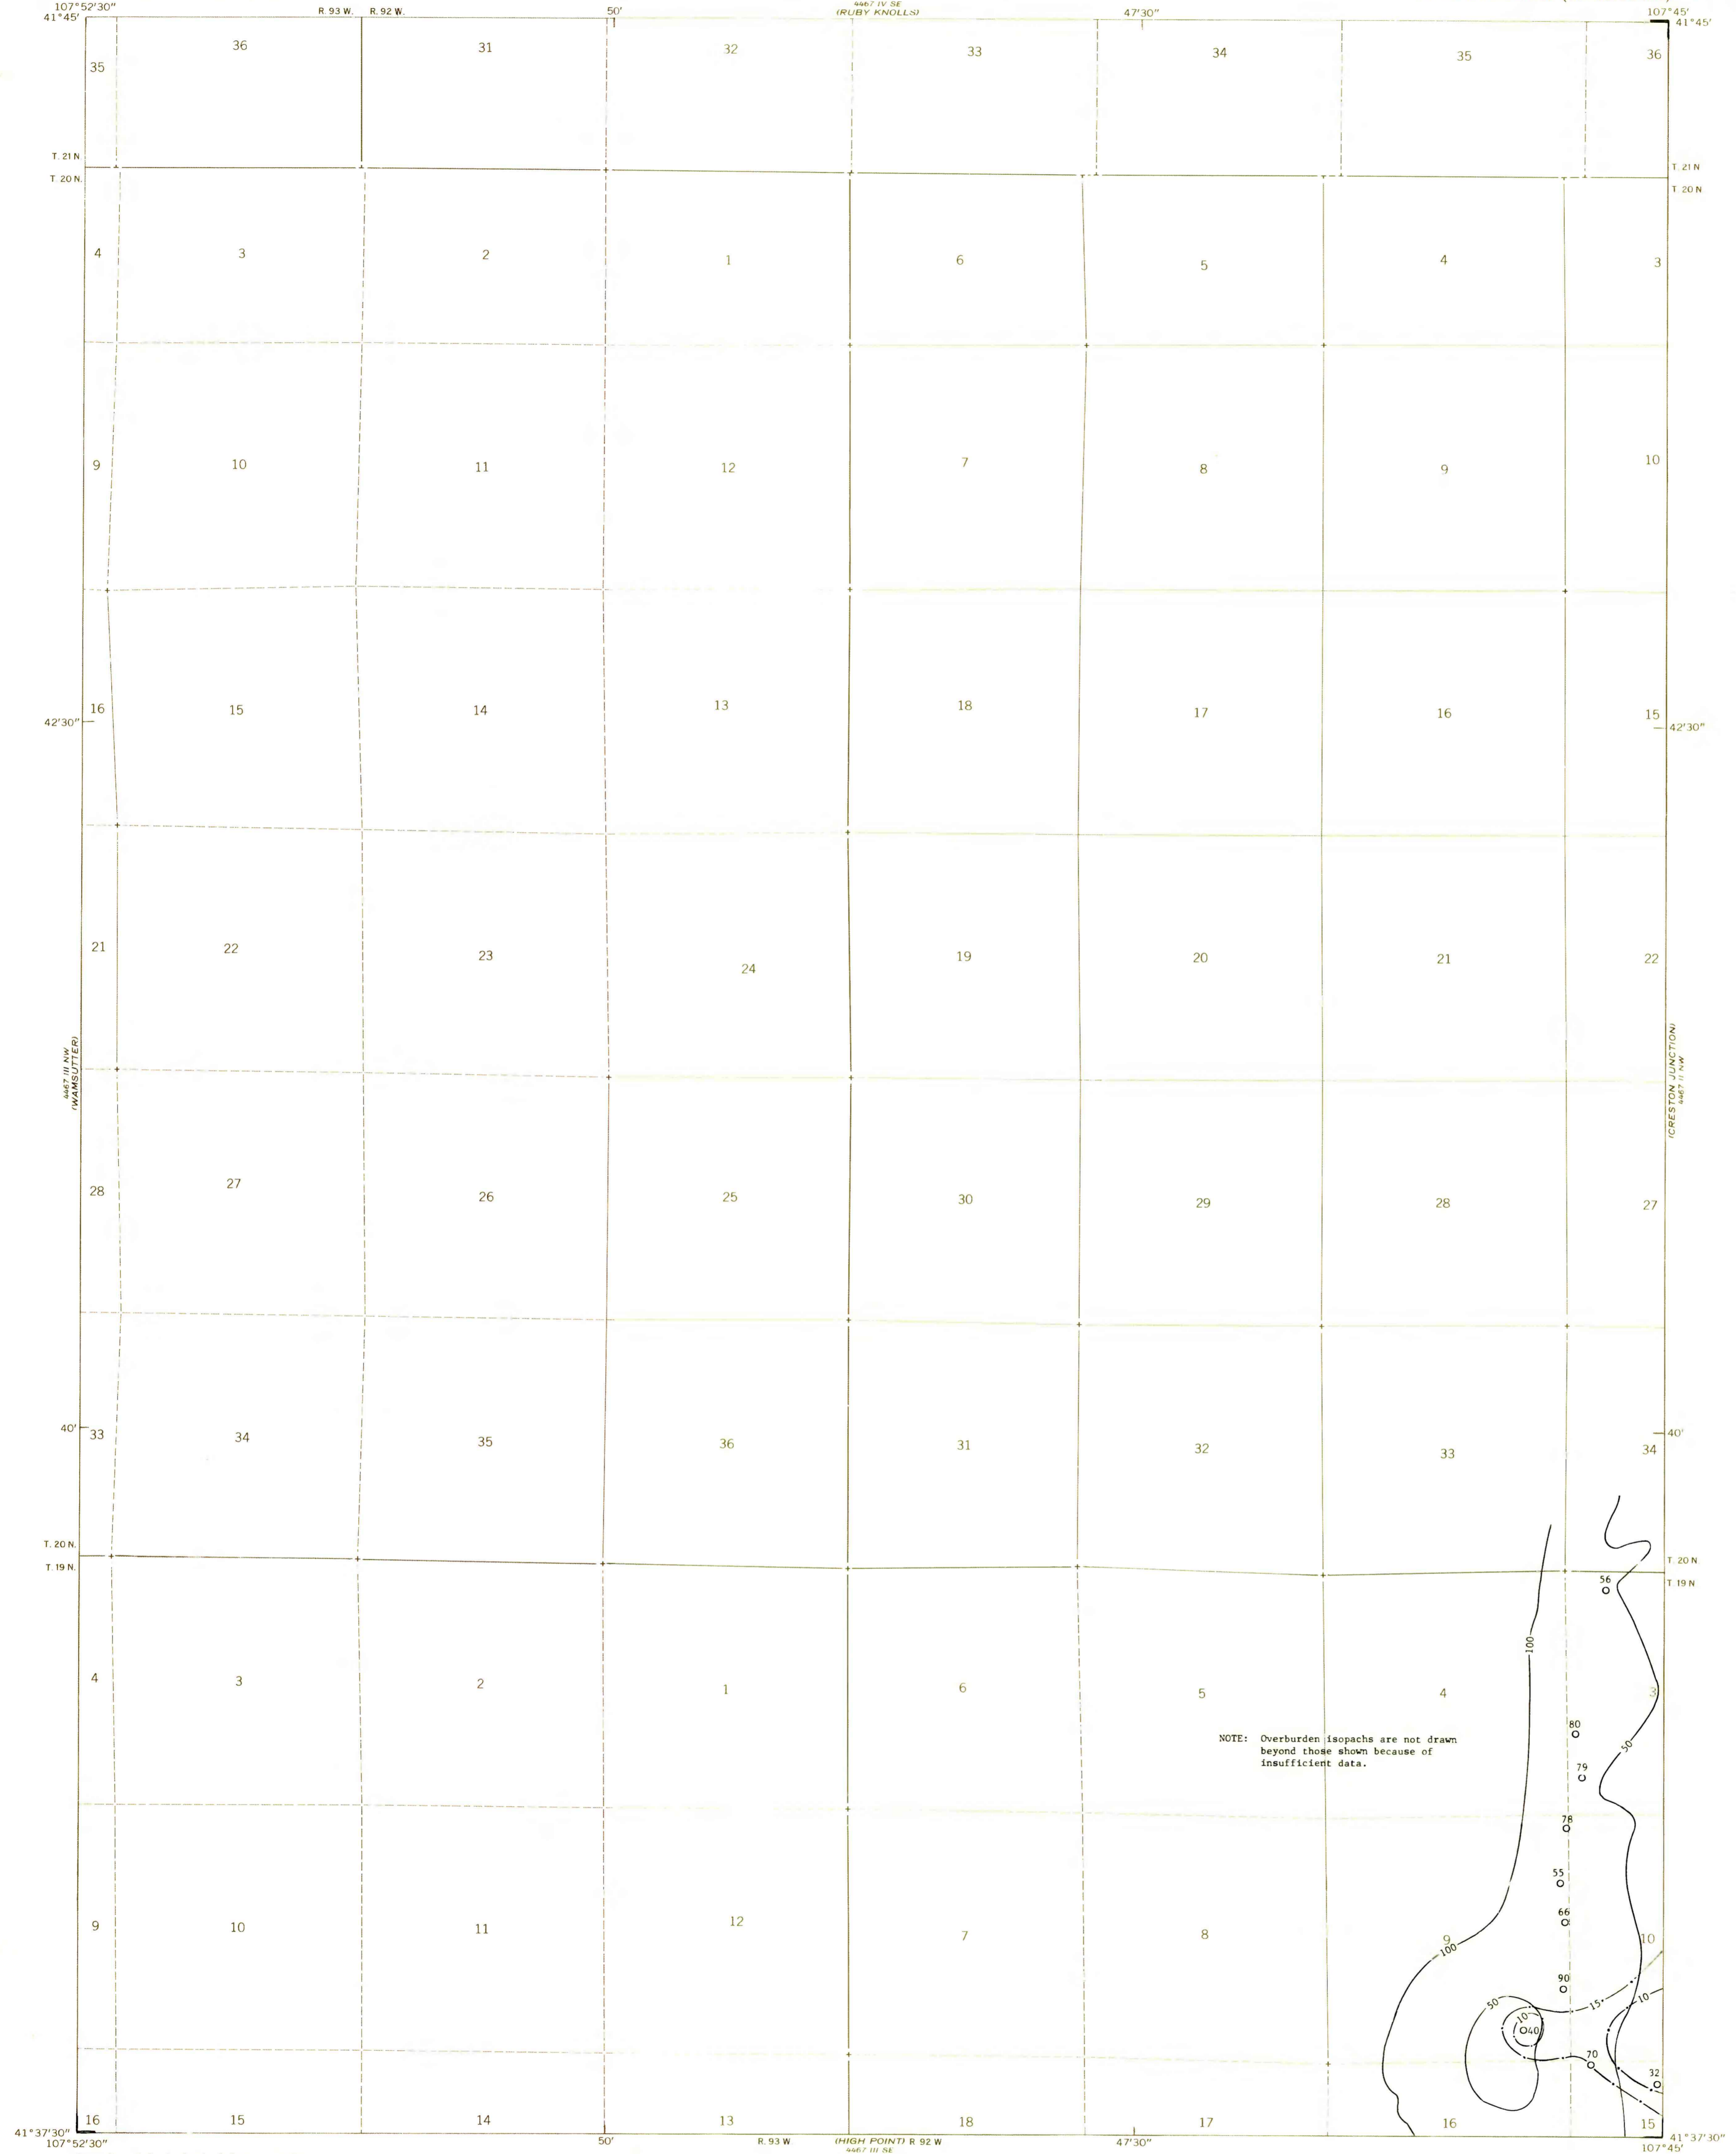

NOTE: Overburden isopachs are not drawn beyond those shown because of insufficient data.

Compiled in 1977/1978

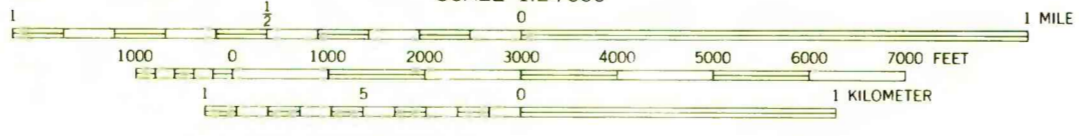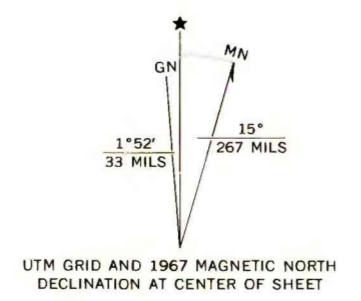

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

**COAL RESOURCE OCCURRENCE MAP OF THE CRESTON QUADRANGLE,
SWEETWATER AND CARBON COUNTIES, WYOMING**
BY
DAMES & MOORE
1978