

**OPEN-FILE REPORT**  
This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

OPEN FILE REPORT 78-651

PLATE 16 OF 64

**EXPLANATION**

**200**  
OVERBURDEN ISOPACHS--Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 200 feet (61 m).


**10**  
MINING RATIO CONTOUR--Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas within the stripping limit.

**SL**  
STRIPPING LIMIT LINE--Boundary for surface mining of the coal bed (in this quadrangle, the 200-foot-overburden isopach). Arrows point toward the area suitable for surface mining.

**B**  
BOUNDARY OF RESERVE BASE COAL--Drawn along the outcrop of coal bed or the contact between burned and unburned coal, and the 5-foot (1.5-m) coal isopach. Arrows point toward area of Reserve Base coal.

**334**  
DRILL HOLE--Showing thickness of overburden, in feet, from the surface to the top of the coal bed.



To convert feet to meters, multiply feet by 0.3.

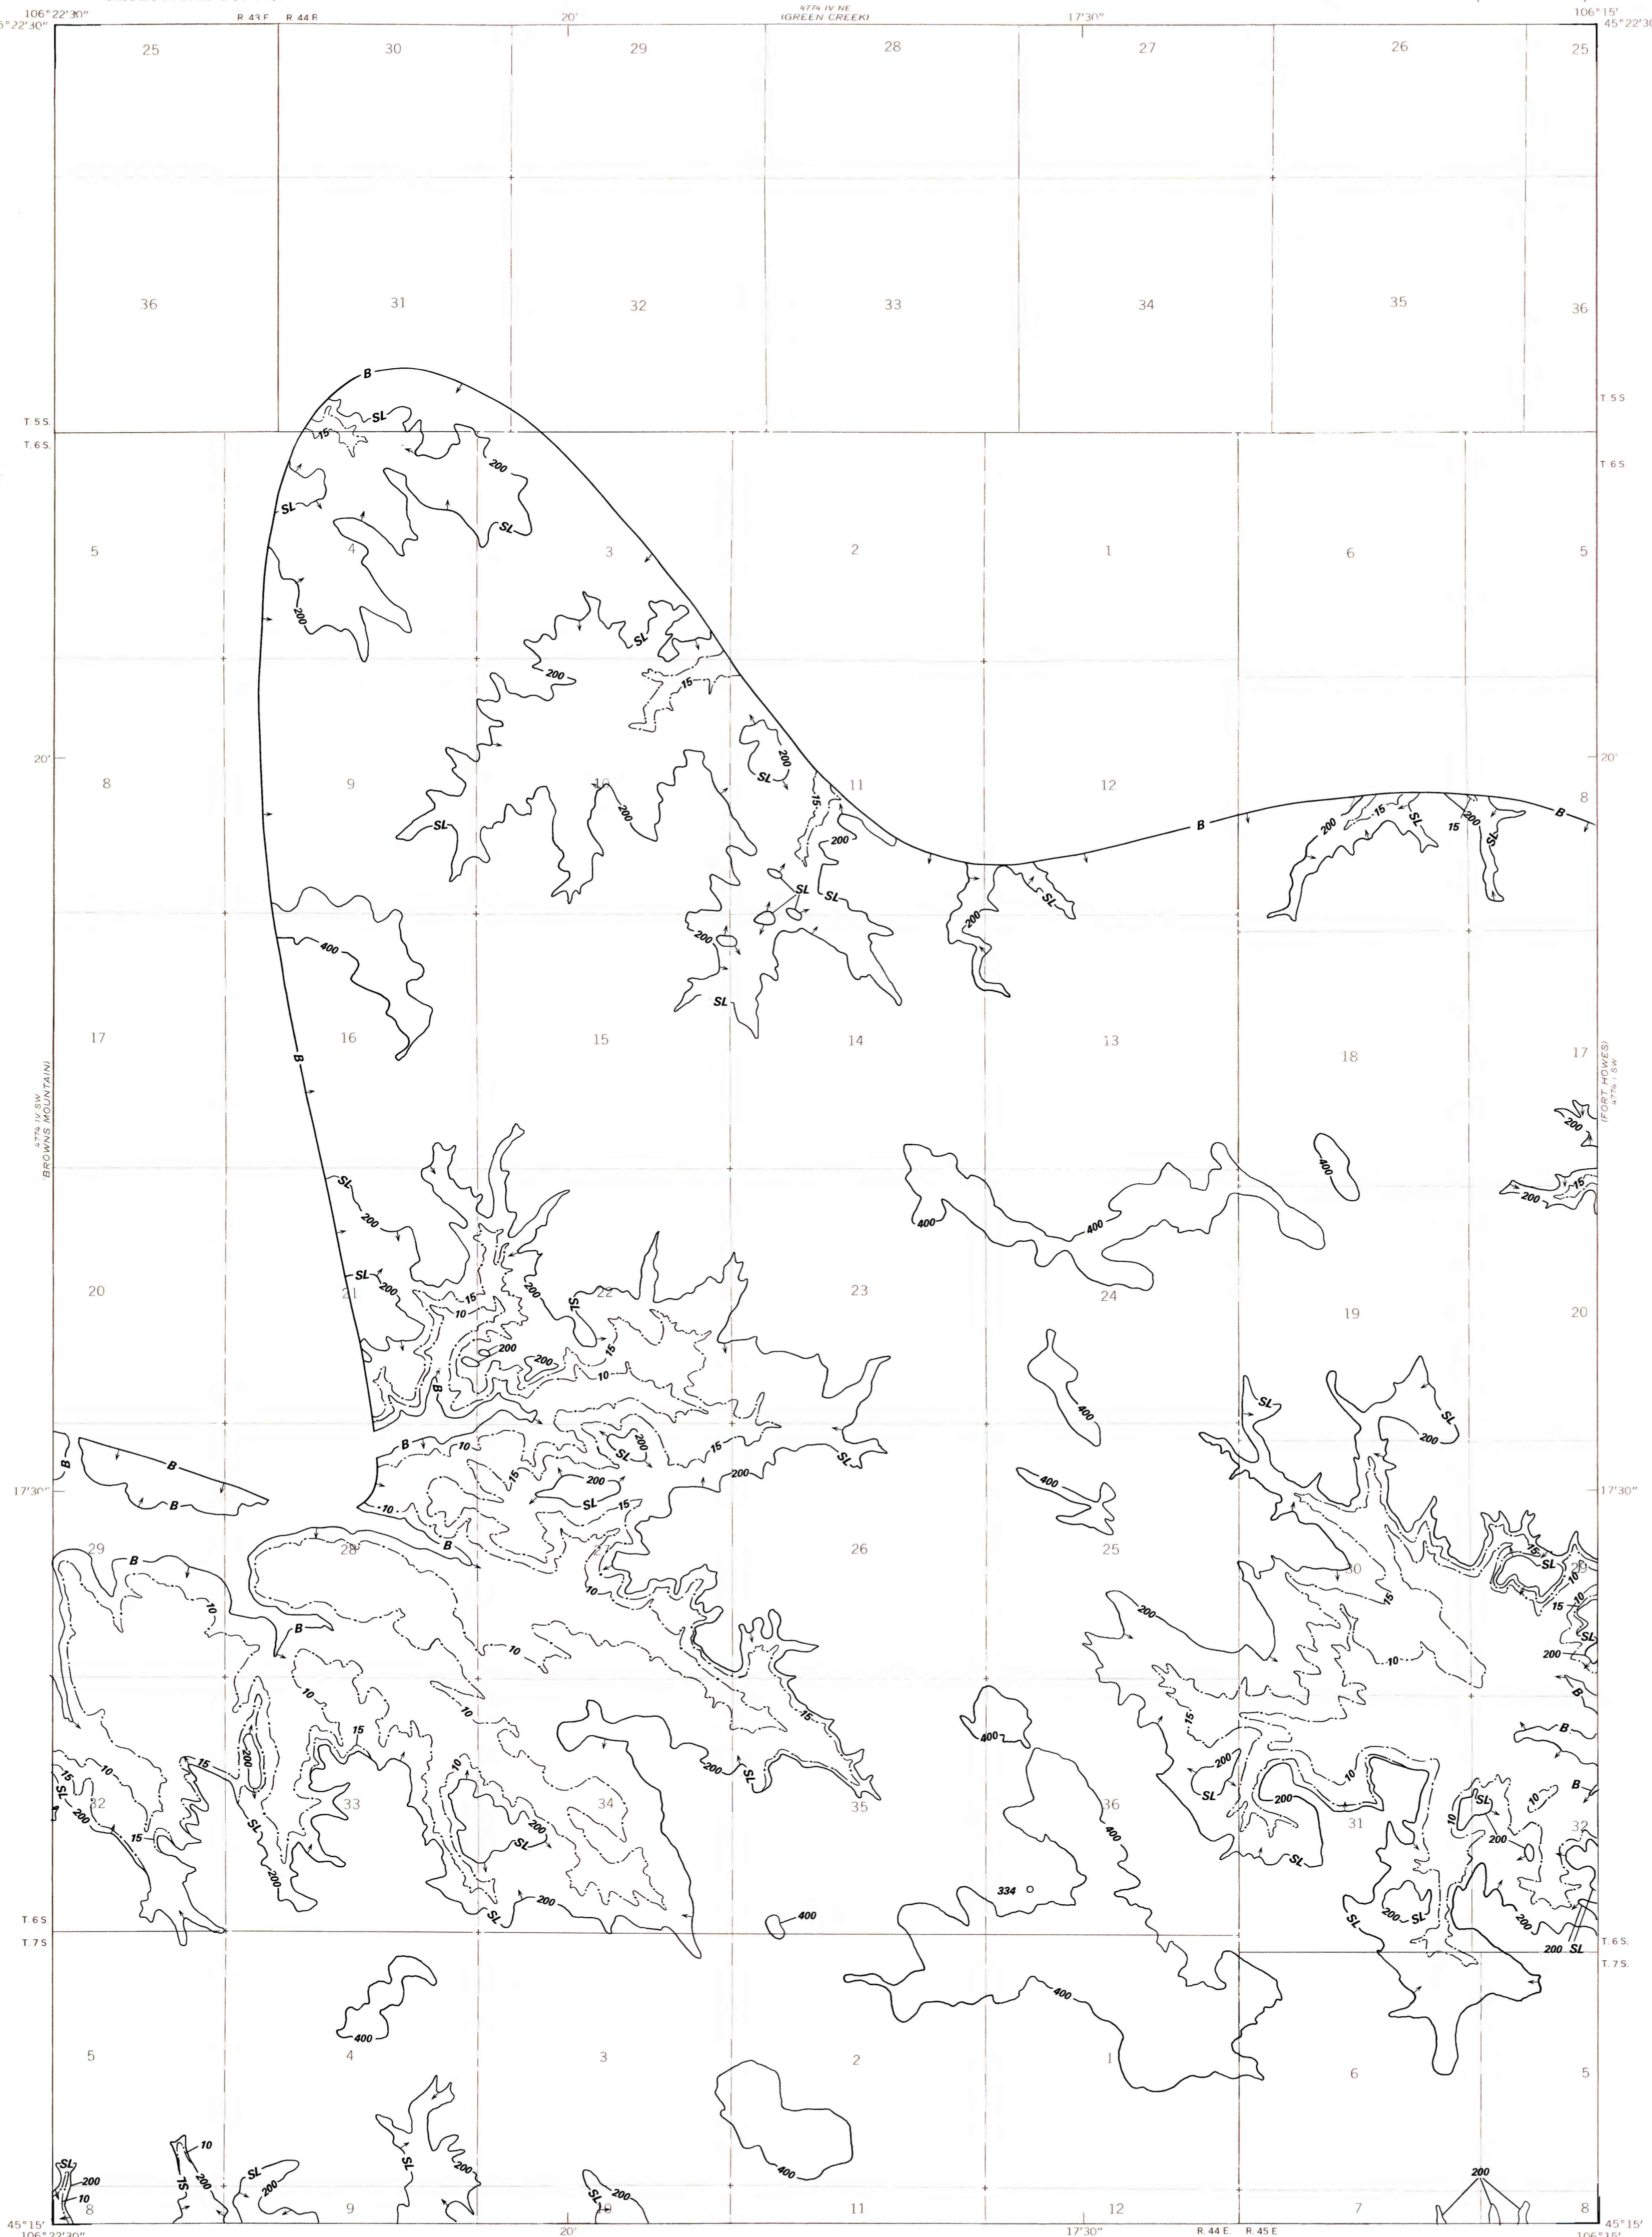

Base from U.S. Geological Survey, 1966

SCALE 1:24 000

Compiled in 1977



**COAL RESOURCE OCCURRENCE AND COAL DEVELOPMENT POTENTIAL MAPS OF THE POKER JIM BUTTE QUADRANGLE, ROSEBUD AND POWDER RIVER COUNTIES, MONTANA**

BY  
**W. J. MAPEL, B. K. MARTIN, AND B. A. BUTLER**  
1978

PLATE 16  
OVERBURDEN ISOPACH AND MINING RATIO MAP OF THE UPPER CANYON COAL BED