

EXPLANATION

— 25 —
— 30 —

ISOPACHS OF COAL BED—Showing thickness in feet, interval 5 feet. Dashed where coal is burned or eroded.

— 10UC —
— 10LC —

ISOPACHS OF SPLIT COAL BEDS—Solid line indicates upper bed. Dashed line indicates lower bed.

● 29 ● 7UC
● 23LC

DRILL HOLE—Showing coal thickness in feet.

9.0
C

TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Arrow points toward the coal-bearing area. "V" symbol indicates burned rock with dotted line showing limit of burning.


SL

STRIPPING LIMIT LINE—500 foot overburden isopach boundary for surface mining of coal. Arrow indicates area suitable for surface mining.


15

MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.

To convert feet to meters, multiply feet by 0.3048.



MAP SHOWING LOCATION OF THE HOMESTEAD DRAW SW QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

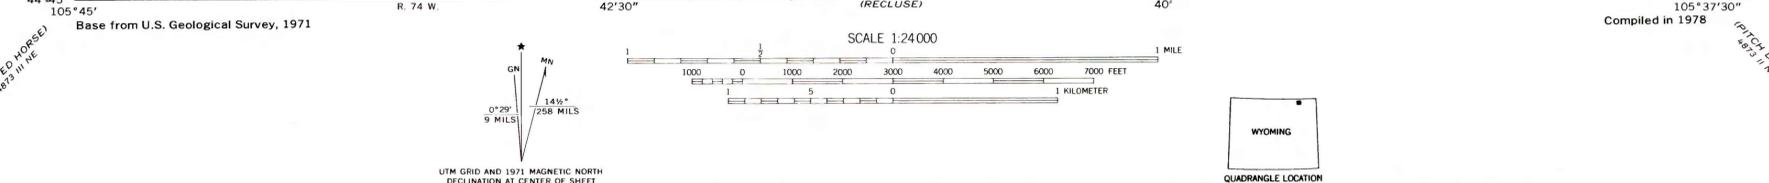

COAL RESOURCE OCCURRENCE MAP OF THE HOMESTEAD DRAW SW QUADRANGLE, CAMPBELL COUNTY, WYOMING

BY
IntraSearch
1978