


This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

R. 95 W. R. 94 W.

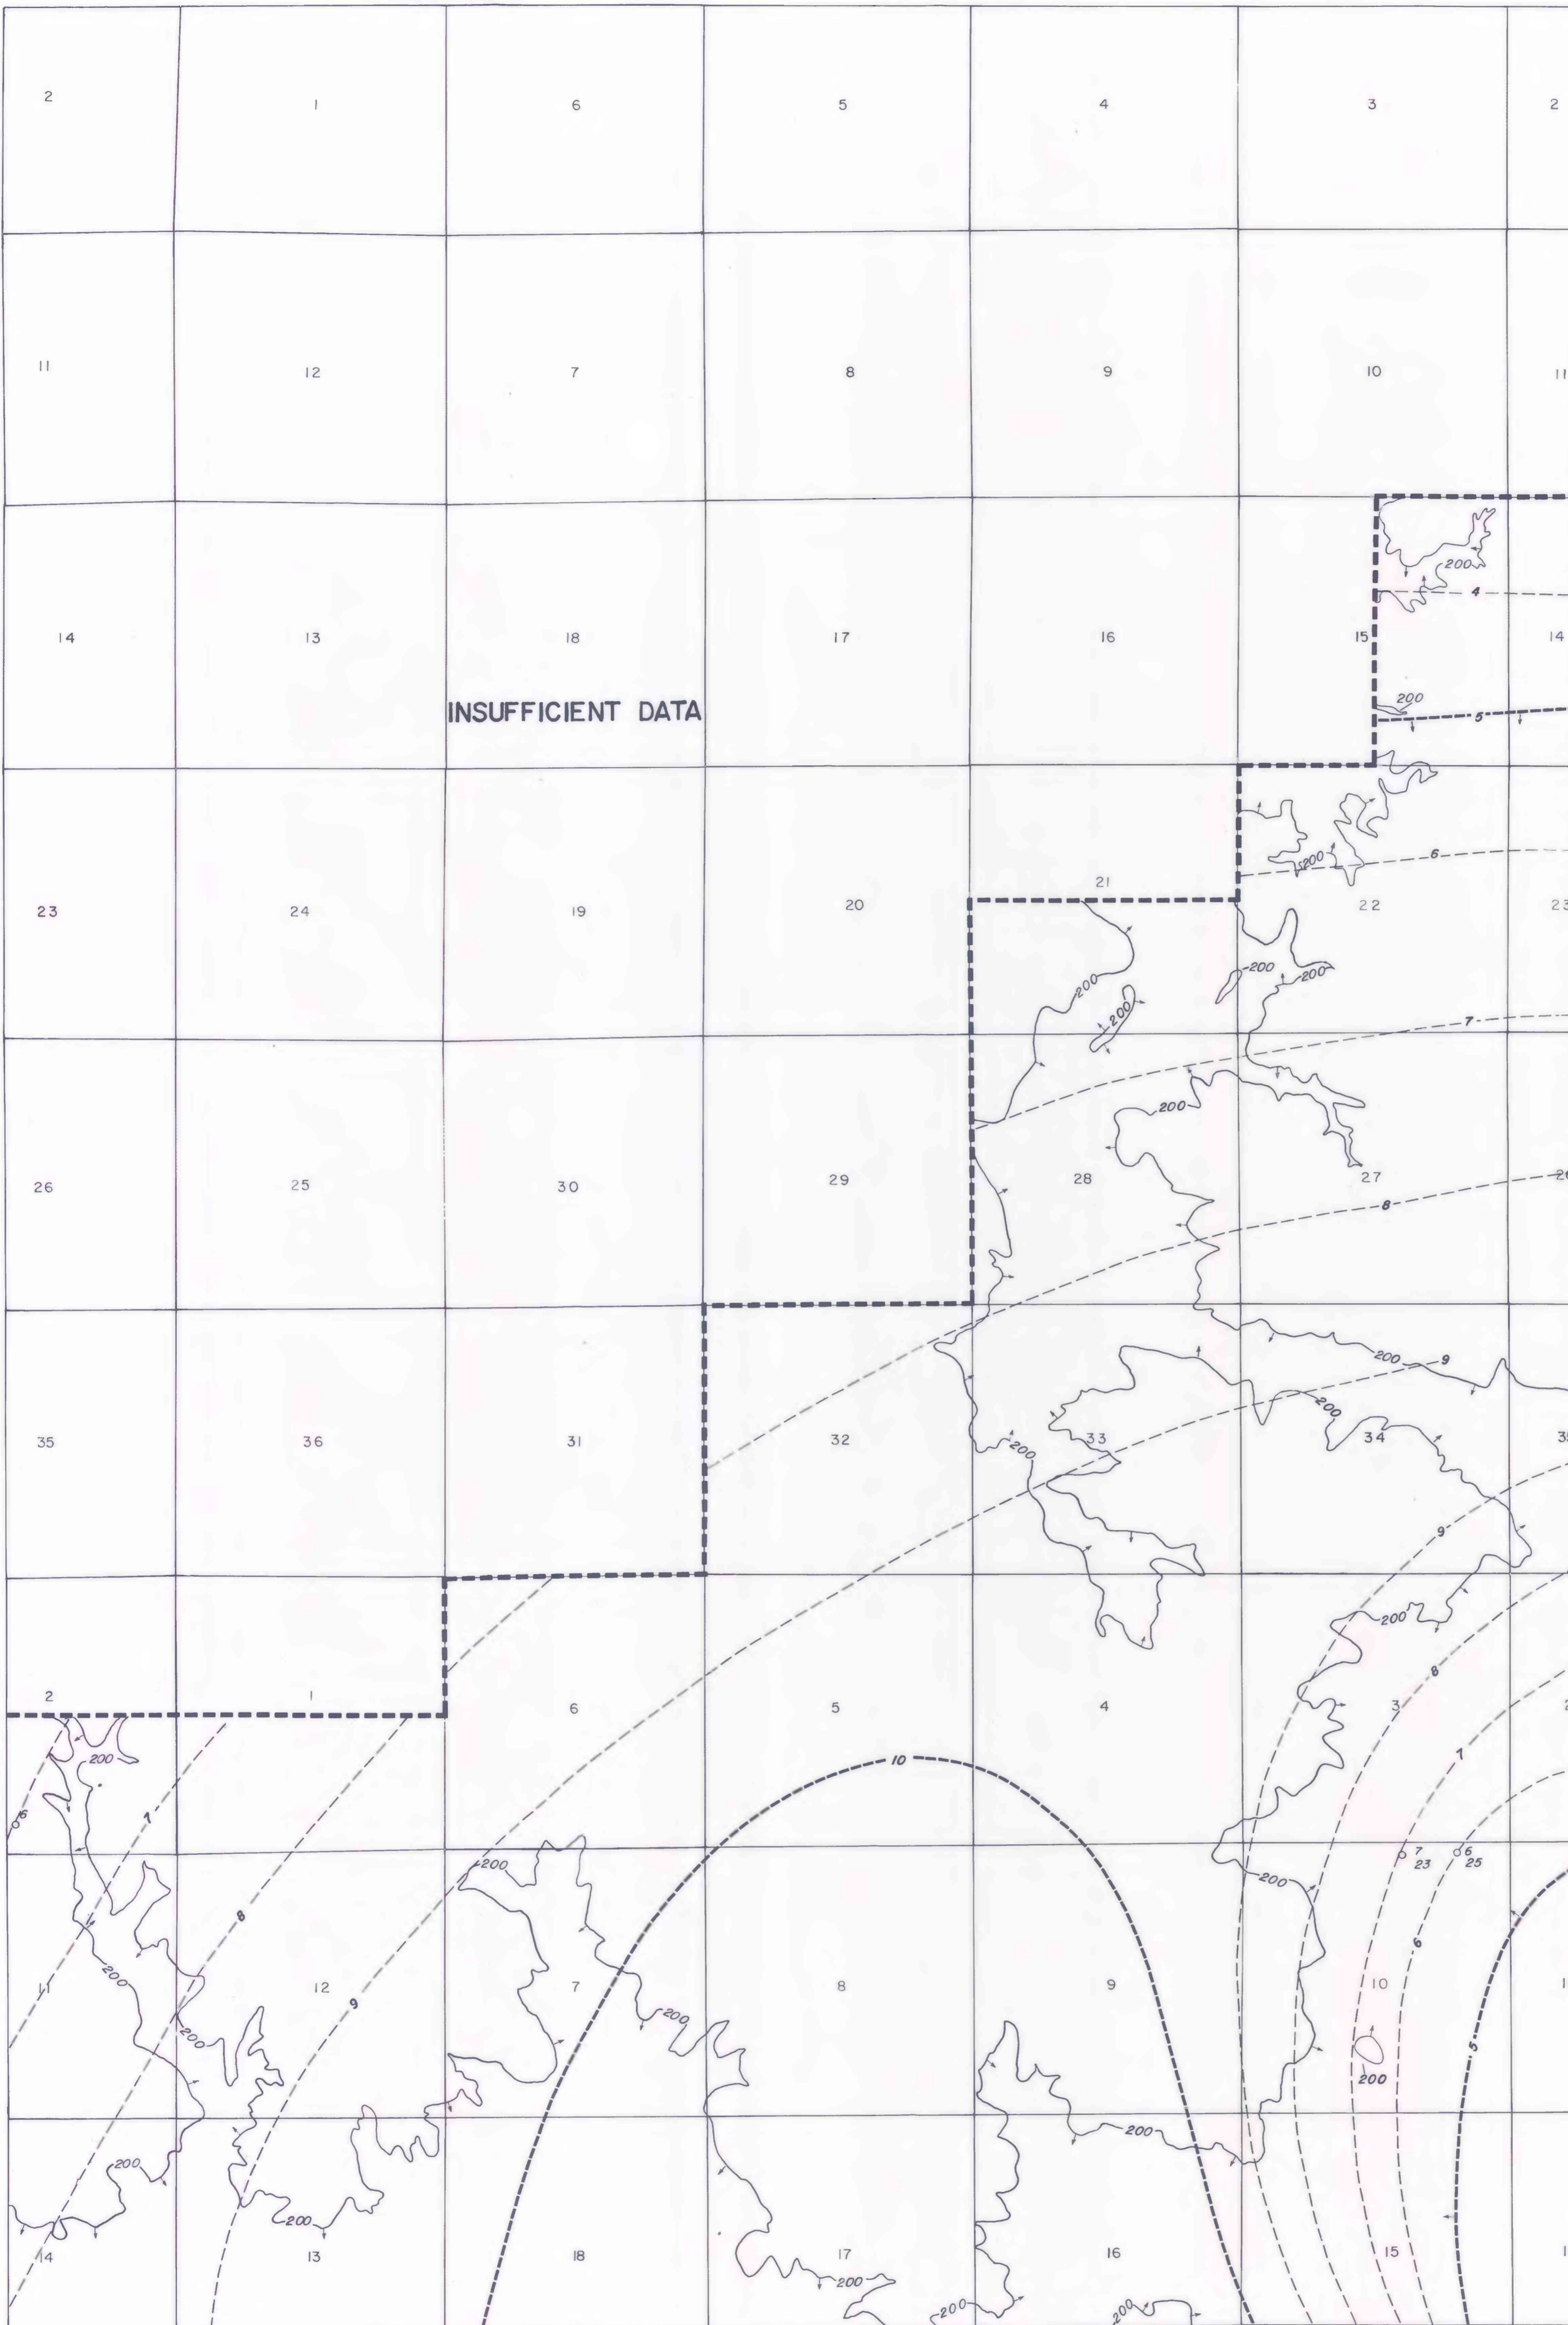

EXPLANATION

-----+-----
5
-----+-----
4

ISOPACH OF COAL BED--Showing thickness in feet. Isopach interval 1 foot (0.3m). Arrow points toward reserve base coal.

○⁷/₂₃

DRILL HOLE--Showing elevation of the top of the coal bed in feet. (upper number). Showing thickness of overburden, in feet, from the surface to the top of the coal bed (lower number).

-----+-----
200

200 FOOT OVER BURDEN ISOPACH--Used as boundary for surface mining. Arrows point toward area suitable for surface mining.


To convert feet to meters, multiply feet by 0.3048.
To convert cubic yards/short ton to cubic meters/metric ton, multiply by 0.842.

BASE FROM U.S. GEOLOGICAL SURVEY, 1970

R. 95 W. R. 94 W.

SCALE 1:24,000

COMPILED IN 1978

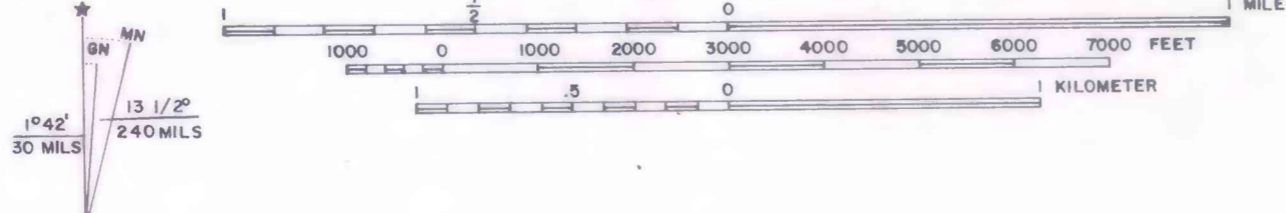

COAL RESOURCE OCCURRENCE MAP OF THE DUNN CENTER NW QUADRANGLE,
DUNN COUNTY, NORTH DAKOTA
BY
WOODWARD-CLYDE CONSULTANTS
1978