

**EXPLANATION**

— 18 —  
— 20 —

ISOPACHS OF COAL BED—Showing thickness in feet, interval 2 feet. Dashed where coal is burned or eroded.

• 25

DRILL HOLE—Showing coal thickness in feet.

17.6\*

— T-Pa —

TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Asterisk indicates measured section was not honored due to localized attenuation. Arrow points toward the coal-bearing area. "V" symbol indicates baked rock with dotted line showing limit of burning. Coal bed dashed where inferred.


— 5 —

MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton or recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.

— D —


FAULT—D indicates downthrown side. Fault dashed where inferred.

To convert feet to meters multiply feet by 0.3048.



MAP SHOWING LOCATION OF THE TRUMAN DRAW QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

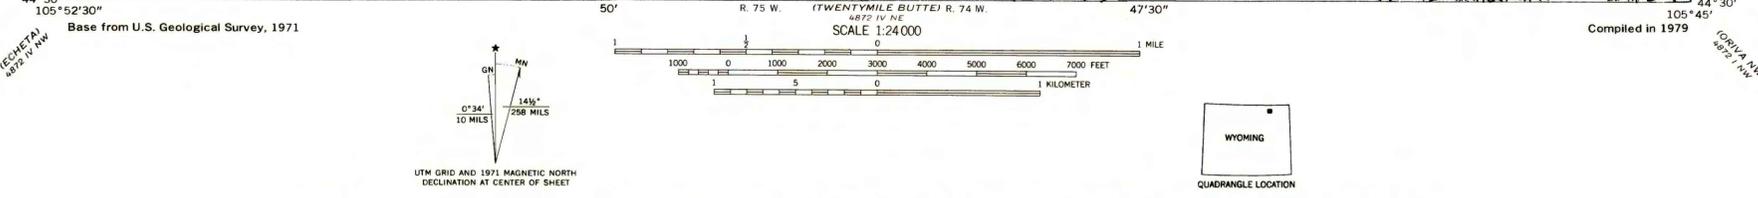

**COAL RESOURCE OCCURRENCE MAP OF THE TRUMAN DRAW QUADRANGLE, CAMPBELL COUNTY, WYOMING**

BY  
**IntraSearch**  
1979

PLATE 4  
ISOPACH AND MINING RATIO  
MAP OF  
TRUMAN-PARNELL COAL ZONE