


EXPLANATION

- 100
OVERBURDEN ISOPACH—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 100 feet.
 - 250
INTERBURDEN ISOPACH—Showing thickness of interburden, in feet, between the splits of the coal bed. Isopach interval 50 feet.
 - 224
195
249
164
DRILL HOLE—Showing thickness of overburden, in feet, from the surface to top of coal bed. Lower number indicates interburden thickness, in feet, between upper and lower splits of coal bed.
 - TRACE OF COAL BED OUTCROP—Arrow points toward the coal-bearing area. "W" symbol indicates baked rock with dotted line showing limit of burning. Coal bed dashed where inferred.
 - D
FAULT—D indicates downthrown side. Fault dashed where inferred.
- convert feet to meters
multiply feet by 0.3048.

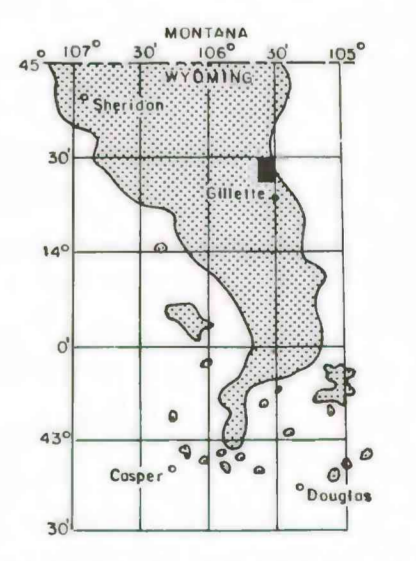

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

COAL RESOURCE OCCURRENCE MAP OF THE RAWHIDE SCHOOL QUADRANGLE, CAMPBELL COUNTY, WYOMING

BY
IntraSearch
1978

Base from U.S. Geological Survey, 1971

Compiled in 1978

