

EXPLANATION

DRILL HOLE—Showing coal thickness in feet.

20
10

ISOPACHS OF COAL BED—Showing thickness in feet, interval 2 feet. Dashed where coal is burned or eroded.



6.34

TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Asterisk indicates measured section was not honored due to localized attenuation. Arrow points toward the coal-bearing area. "W" symbol indicates baked rock with dotted line showing limit of burning. Coal bed dashed where inferred.

5

MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.

To convert feet to meters multiply feet by 0.3048.

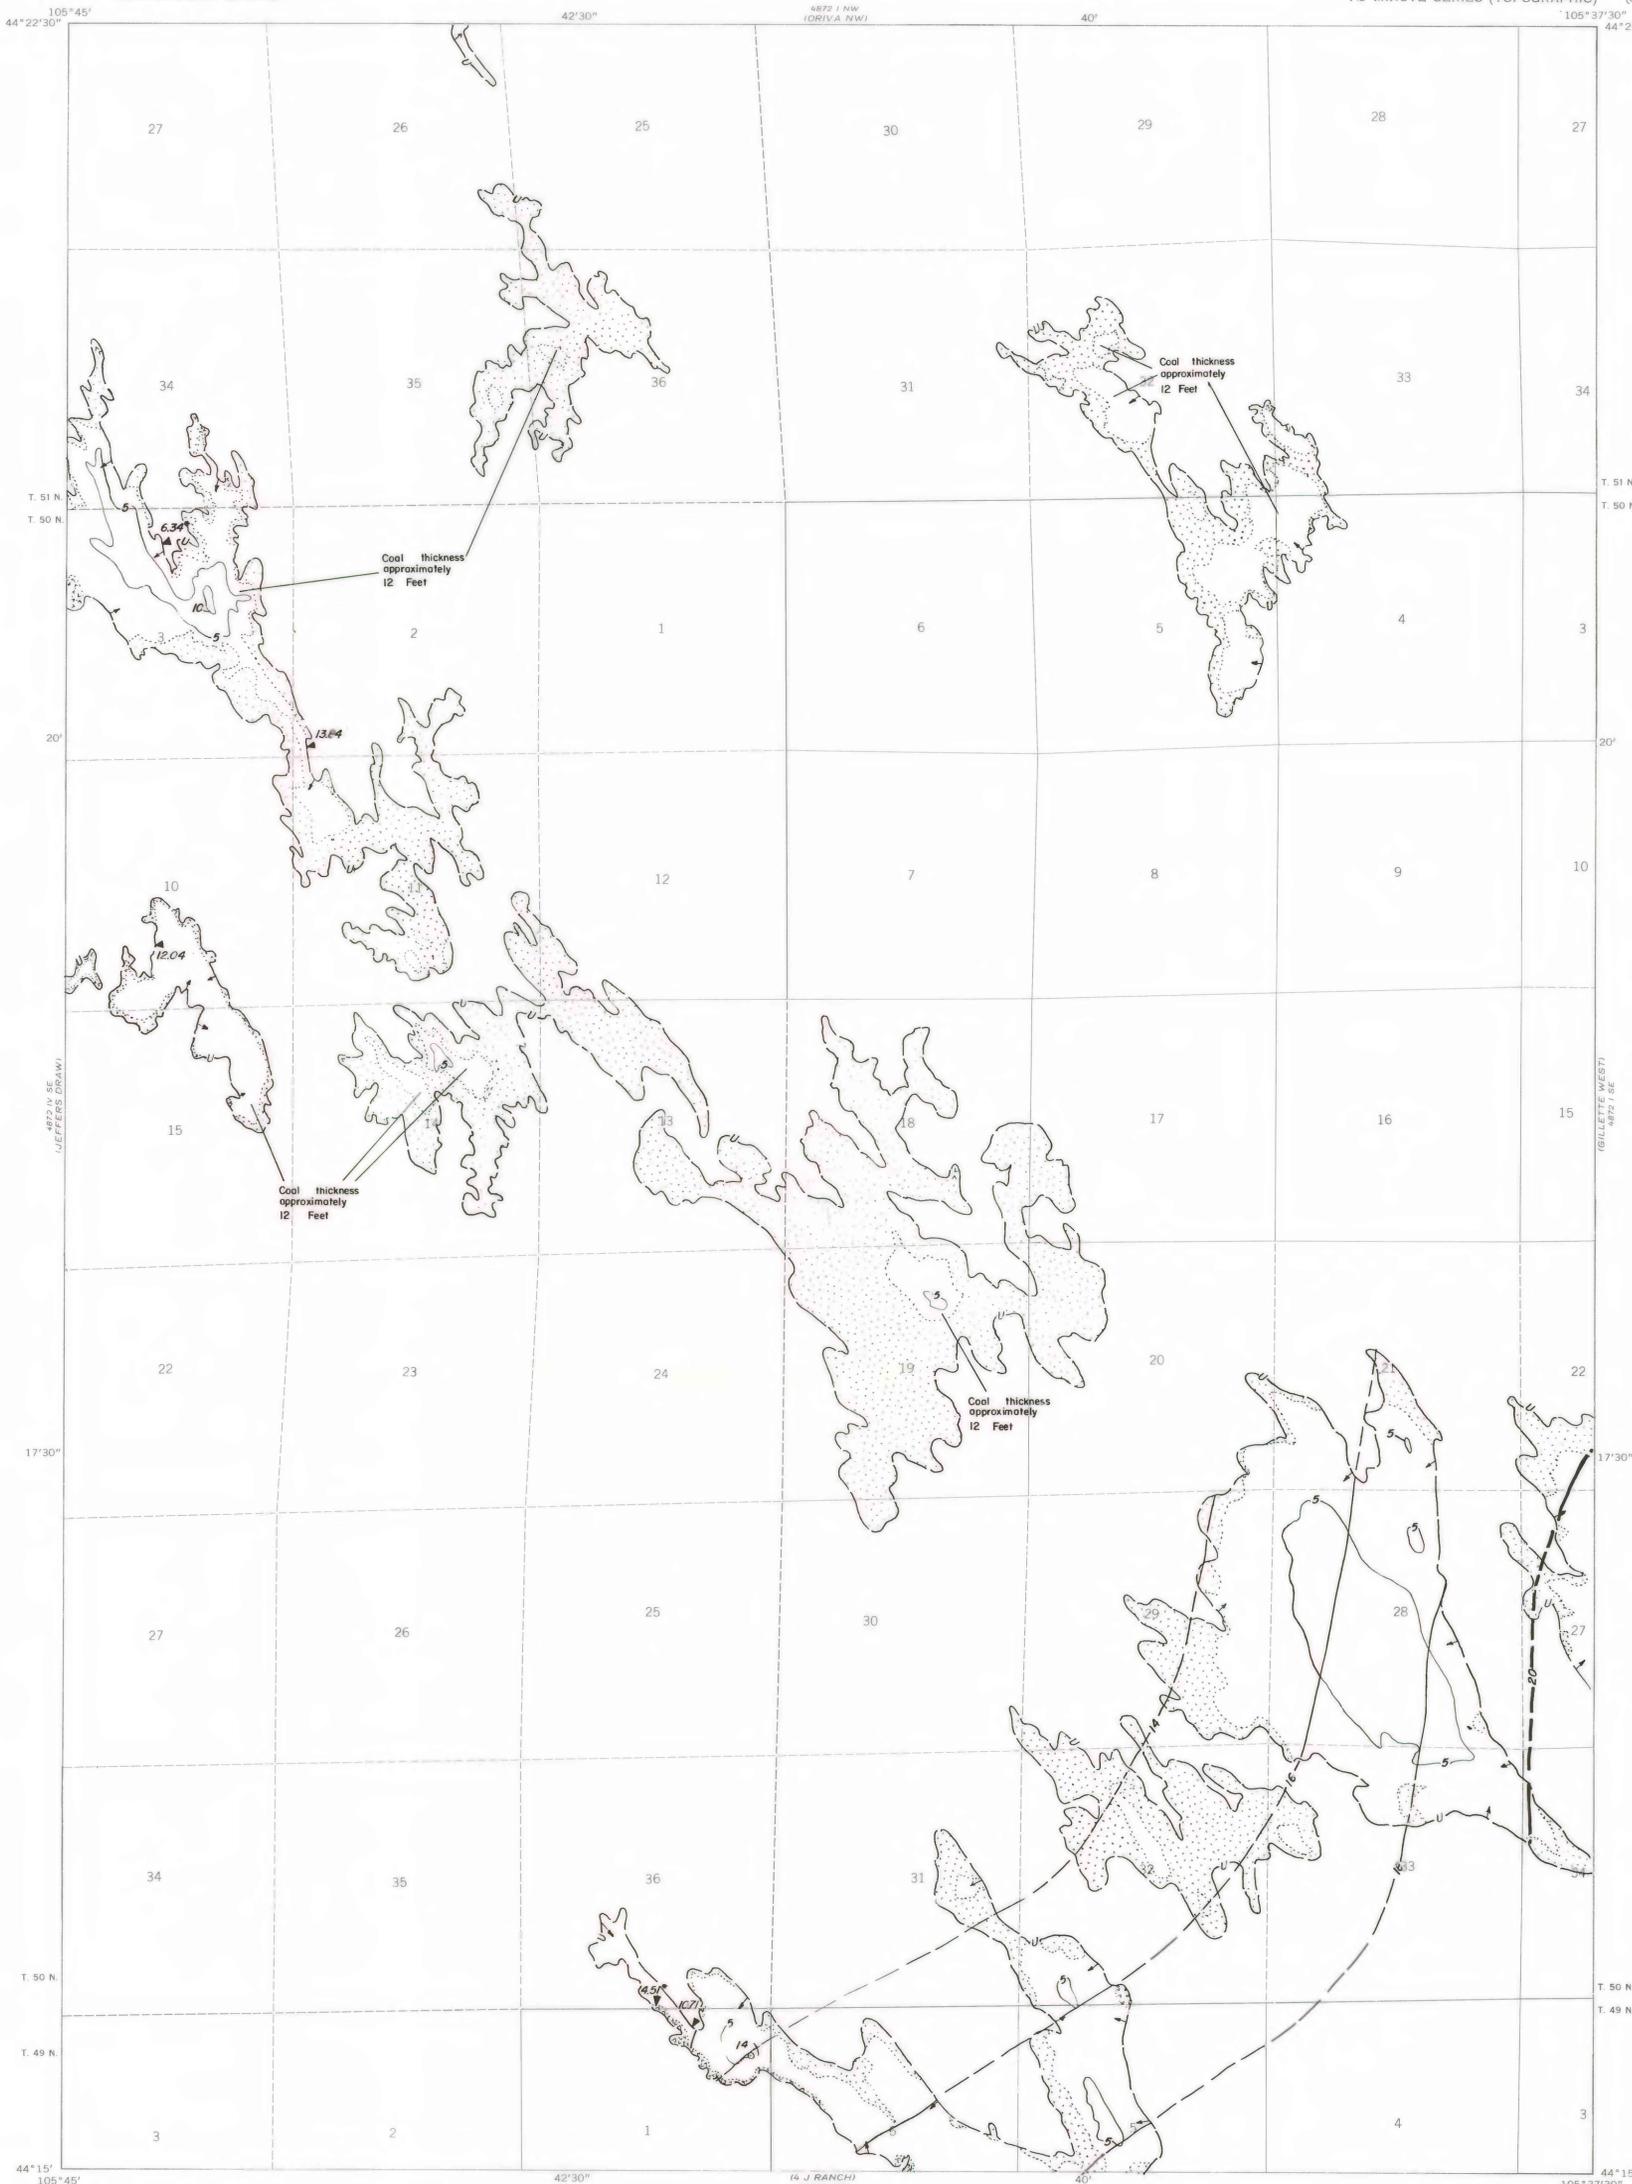


MAP SHOWING LOCATION OF THE ORIVA QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

Base from U.S. Geological Survey, 1971

SCALE 1:24,000



COAL RESOURCE OCCURRENCE MAP OF THE ORIVA QUADRANGLE, CAMPBELL COUNTY, WYOMING

BY
IntraSearch
1979

PLATE 4
ISOPACH AND MINING RATIO
MAP OF
ULM COAL BED