
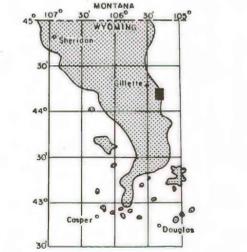


EXPLANATION

- 50 —
— 40 —
ISOPACHS OF COAL BED—Showing thickness in feet, interval 10 feet. Dashed where coal is burned or eroded.
 - DRILL HOLE—Showing coal thickness in feet.
 - ▲
TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Arrow points toward the coal-bearing area. "v" symbol indicates burned rock with dotted line showing limit of burning.
 - 7 —
MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.
- To convert short tons to metric tons multiply short tons by 0.9072.

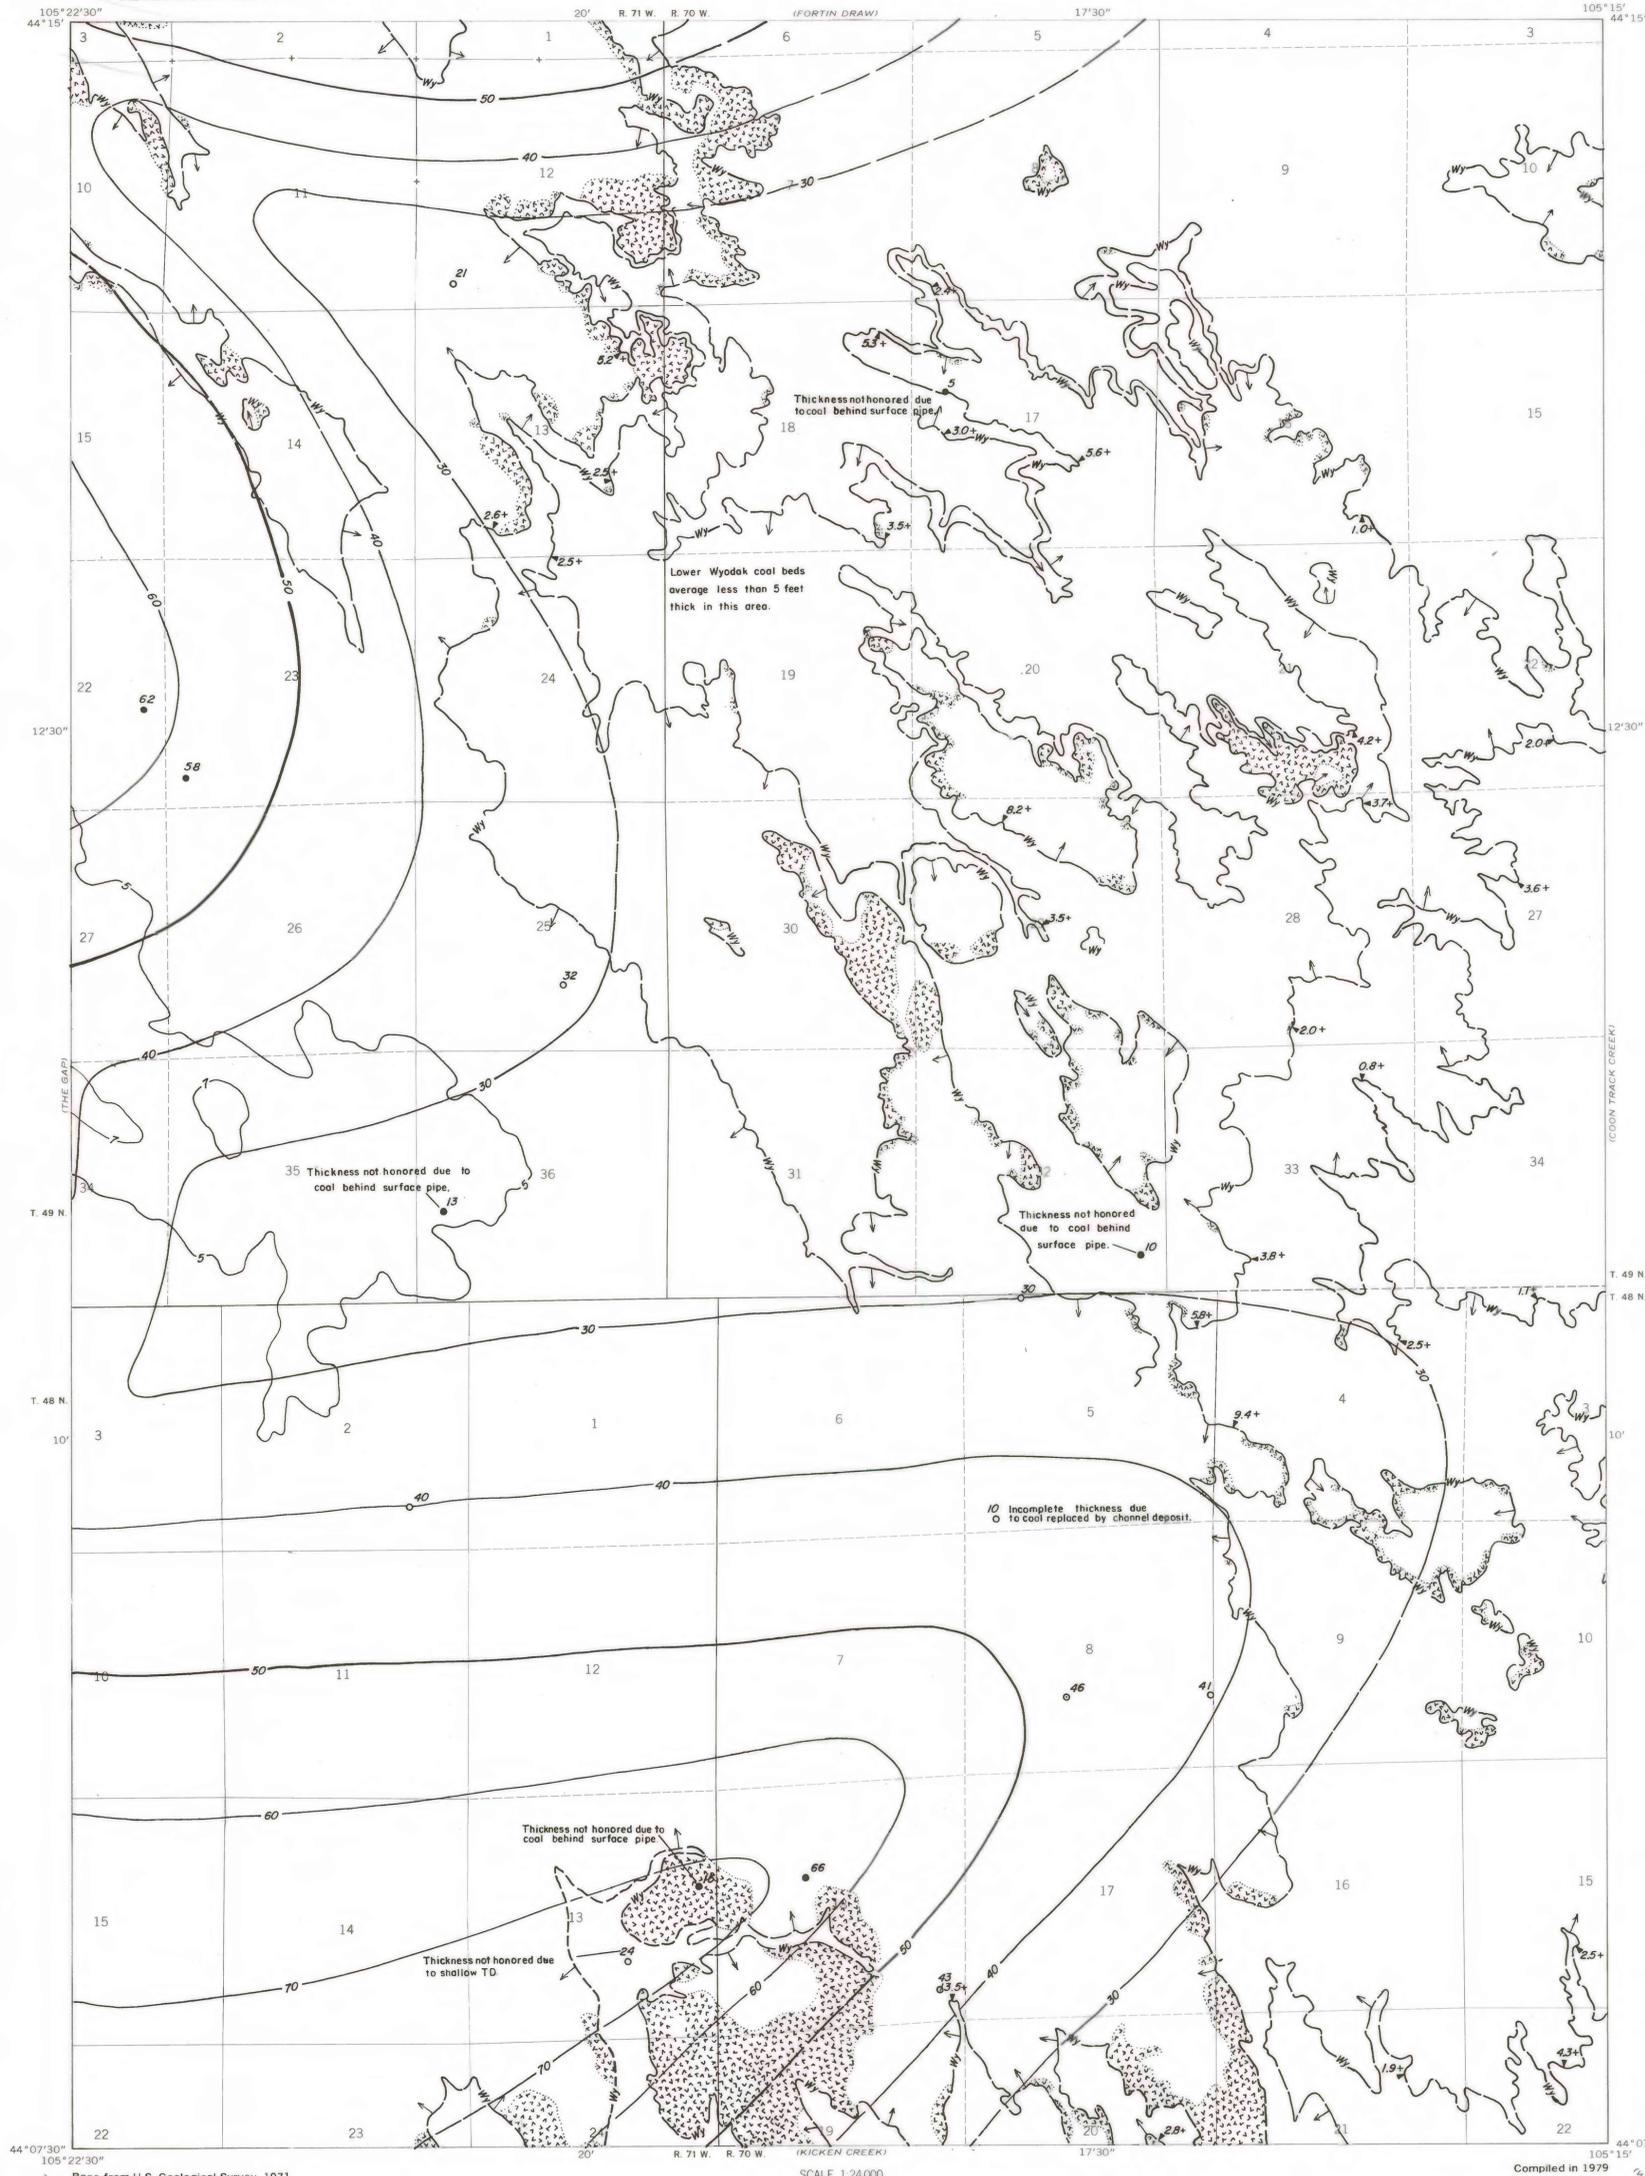


This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

COAL RESOURCE OCCURRENCE MAP OF THE COYOTE DRAW QUADRANGLE, CAMPBELL COUNTY, WYOMING

BY
IntraSearch
1979

PLATE 4
ISOPACH AND MINING RATIO
MAP OF
WYODAK COAL ZONE

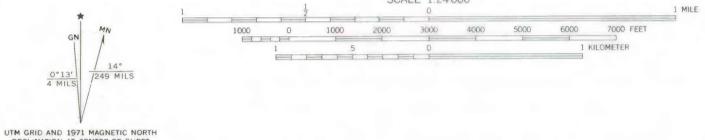

Base from U.S. Geological Survey, 1971

Compiled in 1979