

OPEN-FILE REPORT
This report has not been edited for conformity with
U.S. Geological Survey editorial standards or
stratigraphic nomenclature.

EXPLANATION

100
OVERBURDEN ISOPACH—Showing thickness of overburden, in feet, from the surface to the top of the coal bed. Isopach interval 100 feet (30.5 m).

B
BOUNDARY OF COAL 5 FEET OR MORE THICK—
Drawn along the outcrop of coal bed and/or the inferred contact between burned and unburned coal, and/or the 5-foot coal isopach, and/or the fault boundary of coal. Arrows point toward area of coal 5 feet or more thick.


43
DRILL HOLE—Showing thickness of overburden, in feet, from the surface to the top of the coal bed.

U
D
FAULT—Dashed where approximately located. U, up-thrown side; D, downthrown side.

10
MINING-RATIO CONTOUR—Number indicates cubic yards of overburden per short ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the stripping limits.

To convert feet to meters, multiply feet by 0.3048.



To convert yds³/ton to m³/metric ton, multiply yds³/ton by 0.842.

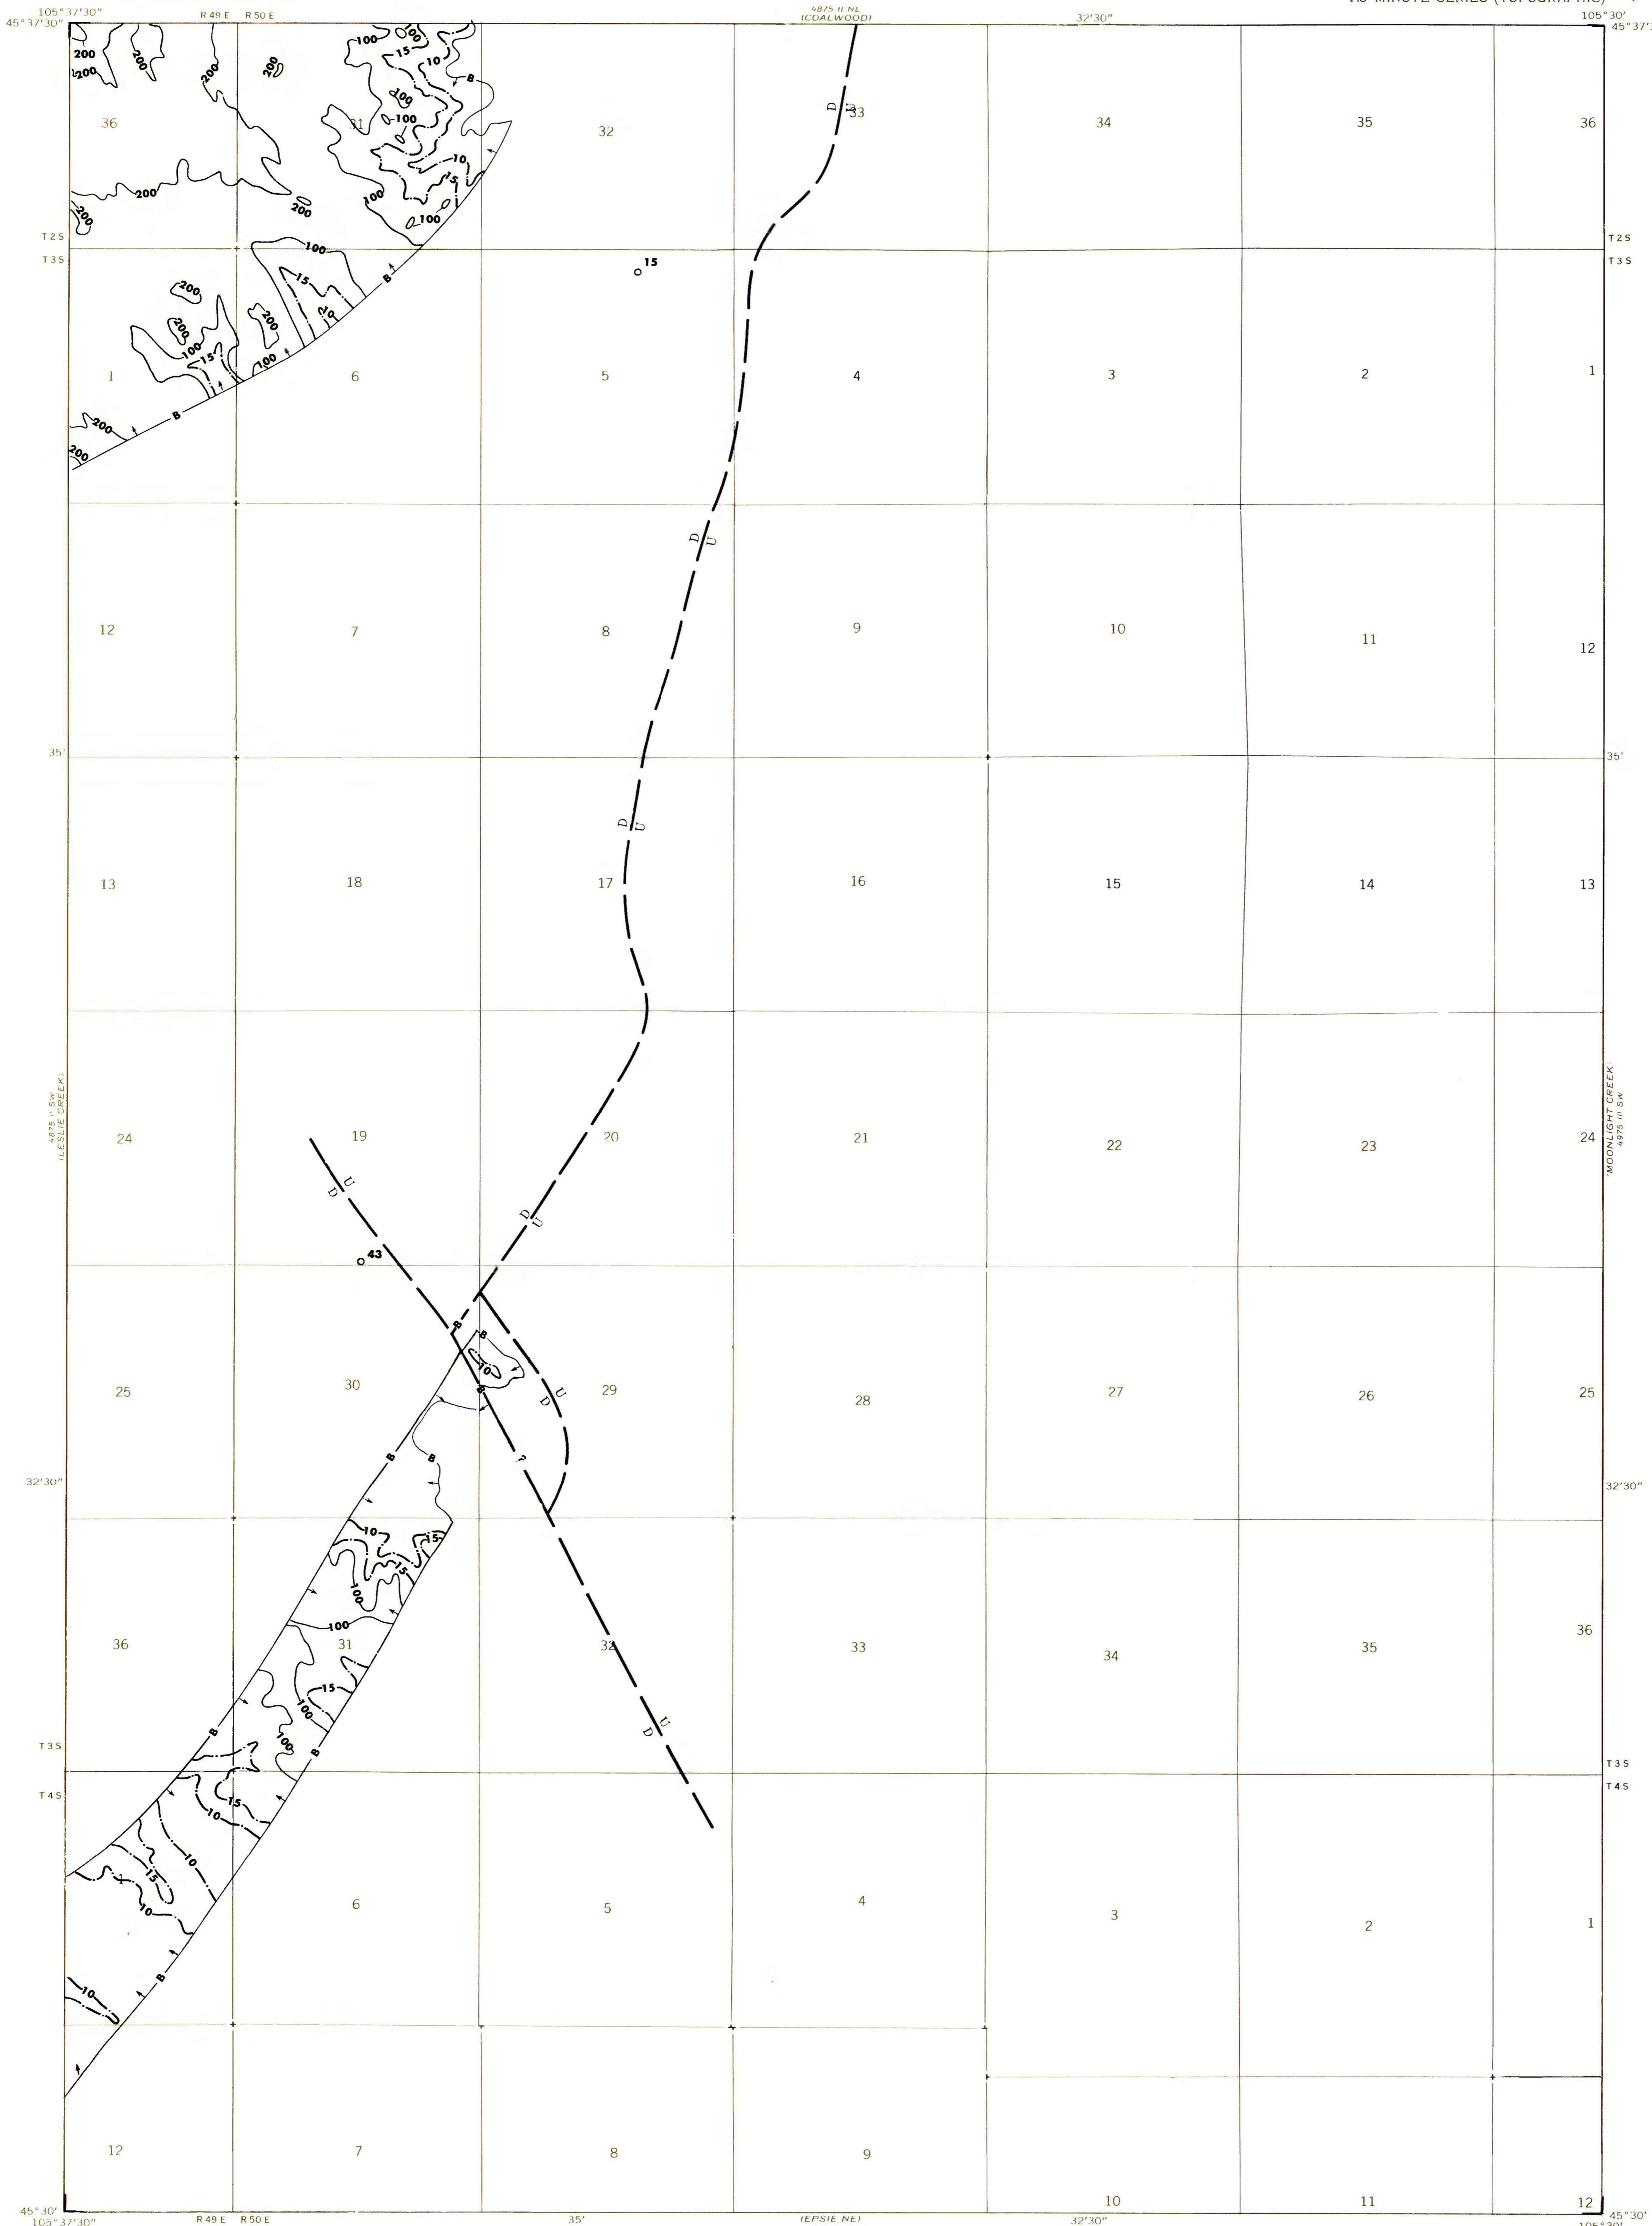

Base map from U.S. Geological Survey, 1973

Compiled in 1977

SCALE 1:24 000

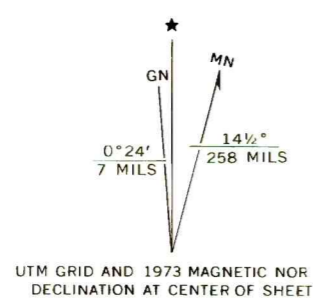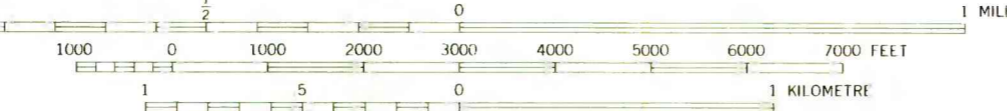

**COAL RESOURCE OCCURRENCE MAP OF THE OLIVE QUADRANGLE,
POWDER RIVER COUNTY, MONTANA
BY
COLORADO SCHOOL OF MINES RESEARCH INSTITUTE
1979**