

EXPLANATION

1600
OVERBURDEN ISOPACHS - Showing thickness of overburden, in feet, from surface to top of coal bed. Dashed where vertical accuracy possibly not within 40 feet. Isopach interval is 100 feet (31 m) for the RS[21] bed and 200 feet (61 m) for the RS[29] bed.


○ 1983

DRILL HOLE - Showing thickness of overburden, in feet, from surface to top of coal bed.

RS - Rock Springs, undifferentiated

COAL BED SYMBOL AND NAME - Coal beds identified by bracketed numbers are not formally named, but are numbered for identification purposes in this quadrangle only.

To convert feet to meters, multiply feet by 0.3048.

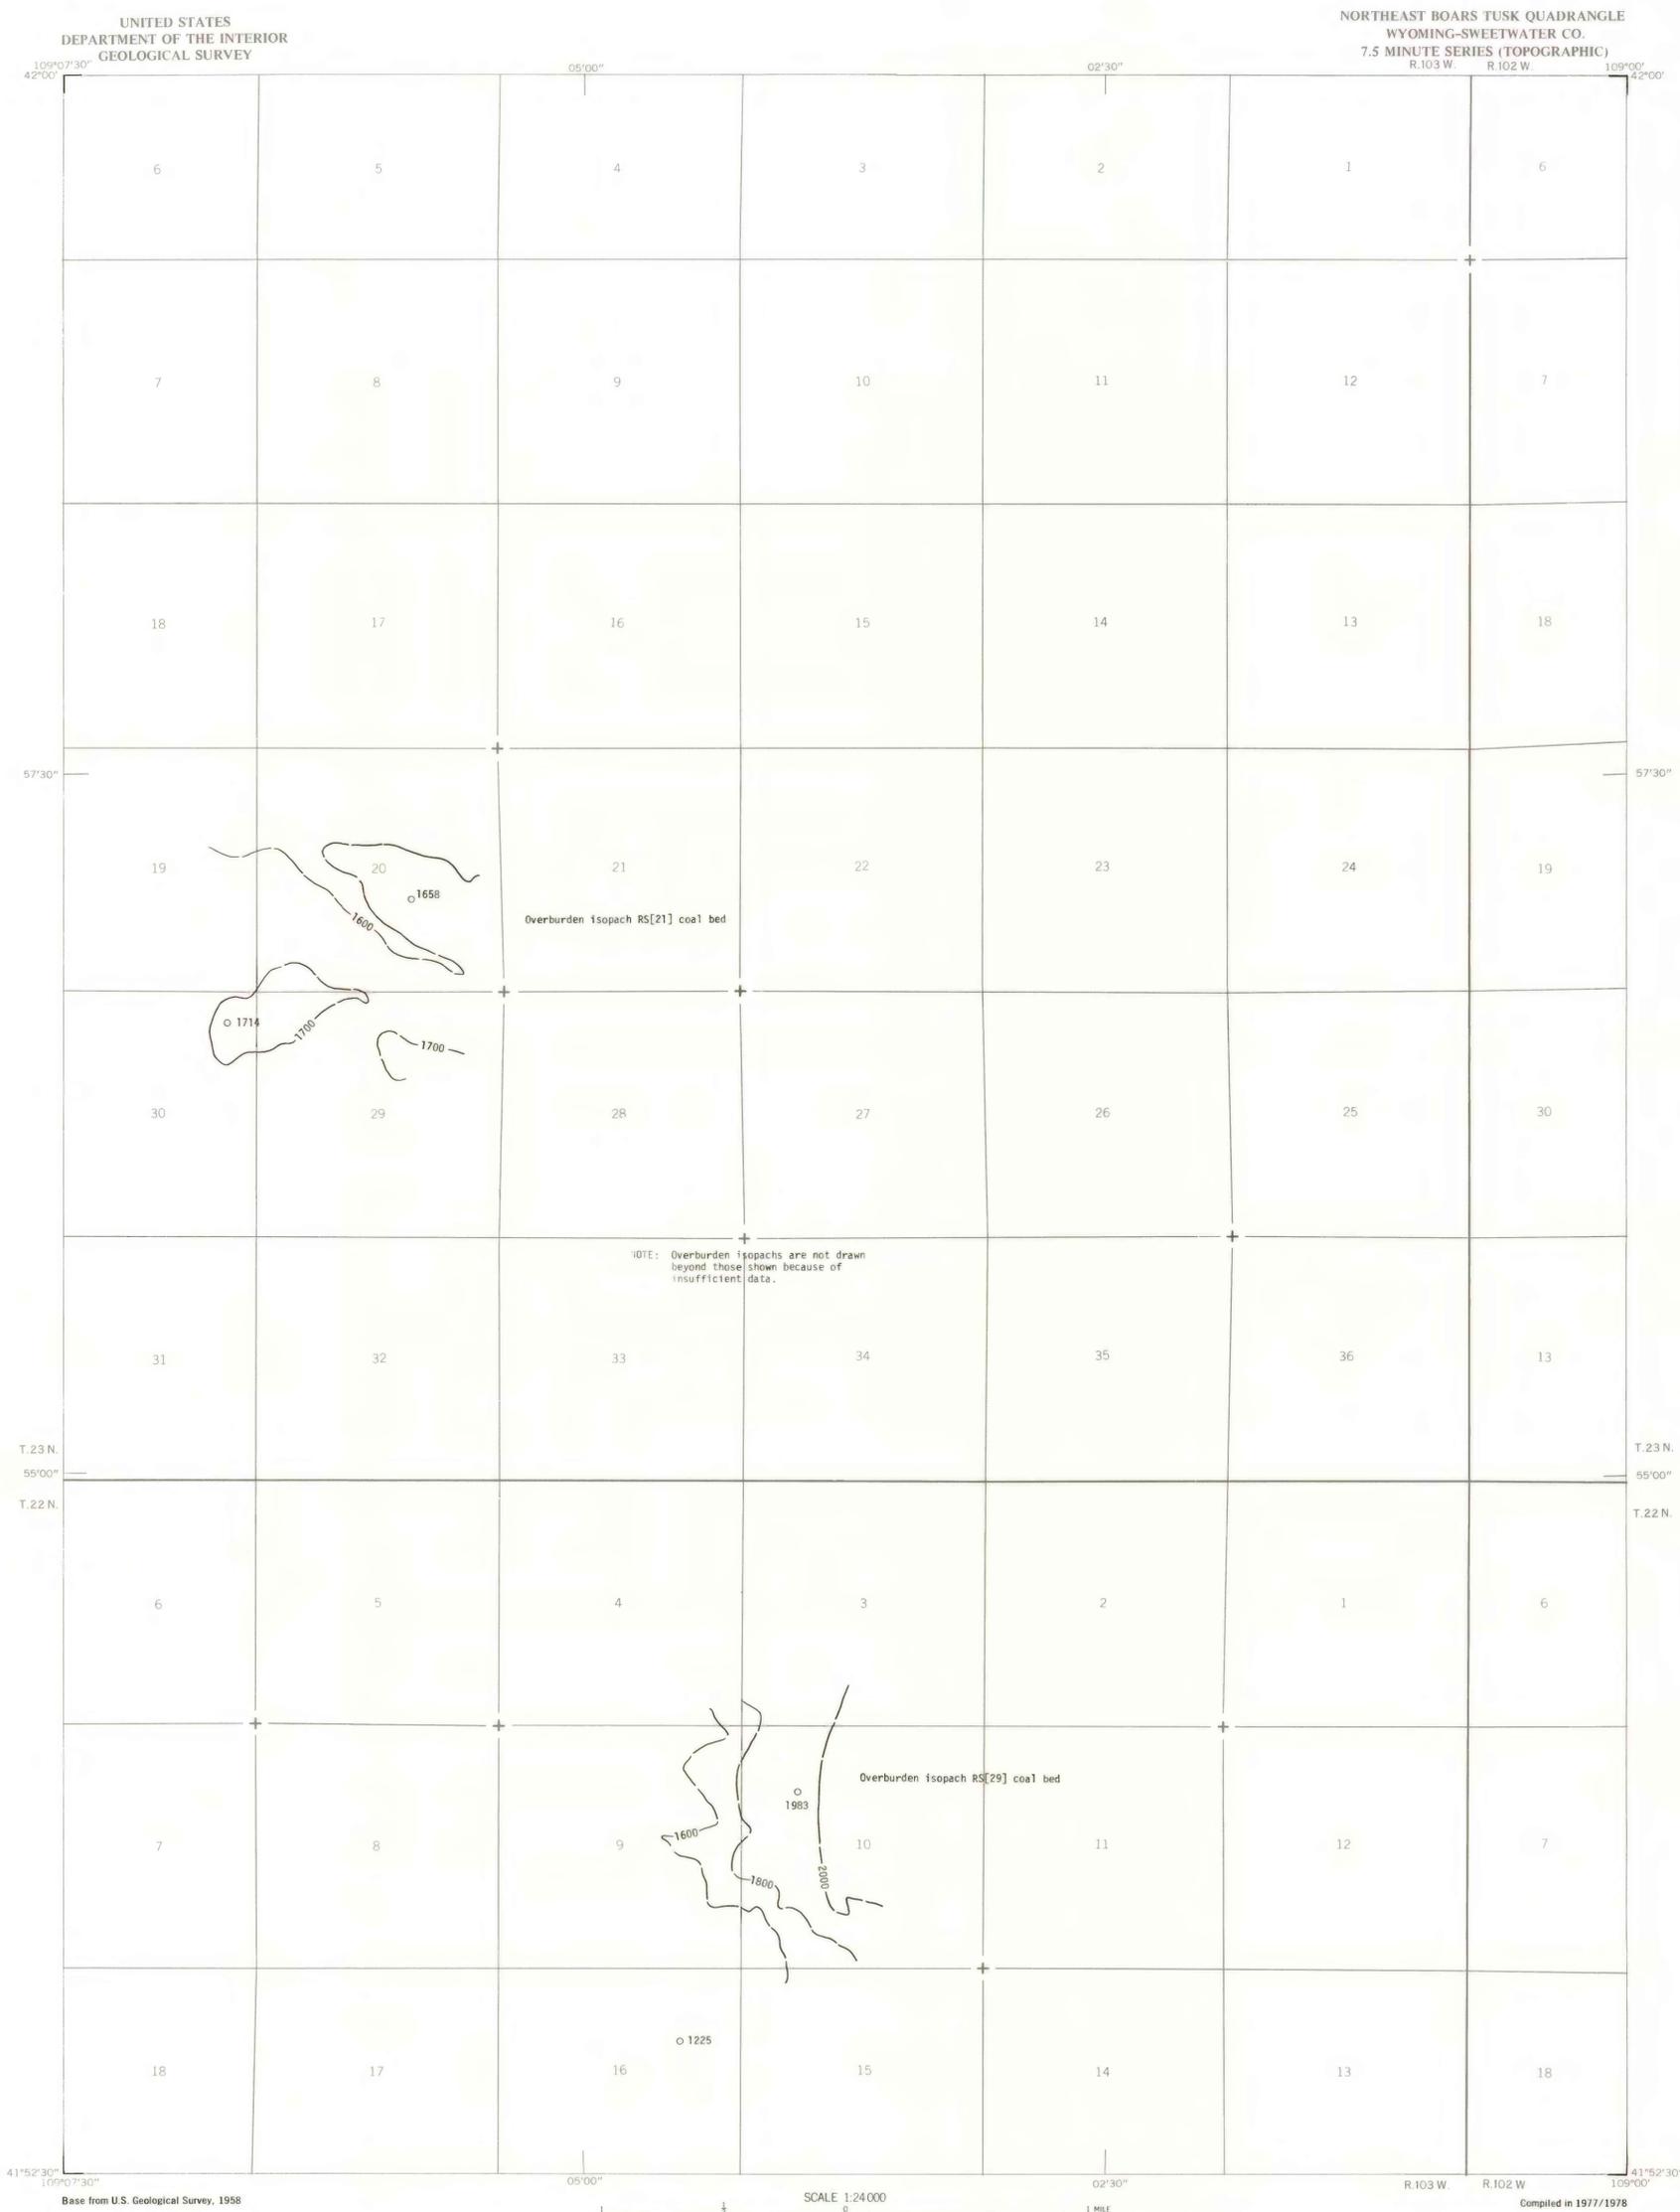

**COAL RESOURCE OCCURRENCE MAP OF THE NORTHEAST QUARTER OF THE BOARS TUSK
15-MINUTE QUADRANGLE, SWEETWATER COUNTY, WYOMING**
BY
DAMES & MOORE
1979

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.