




EXPLANATION



- ISOPACHS - Showing thickness of coal, in feet. Long dashed where inferred. Isopach interval 5 feet.
- 11.3
- DRILL HOLE - Showing thickness of coal, in feet.
- 7.7/3.9
- INTERBEDDED COAL AND ROCK - Showing total coal thickness/total rock thickness.
- RS-7 - Rock Springs No. 7
- COAL BED SYMBOL AND NAME
- ↑ RS-7
- TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred; short dashed where inferred by present authors.
- ↑ C
- INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.
- ↑
- TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.
- To convert feet to meters, multiply feet by 0.3048.

Base from U.S. Geological Survey, 1958

SCALE 1:24 000

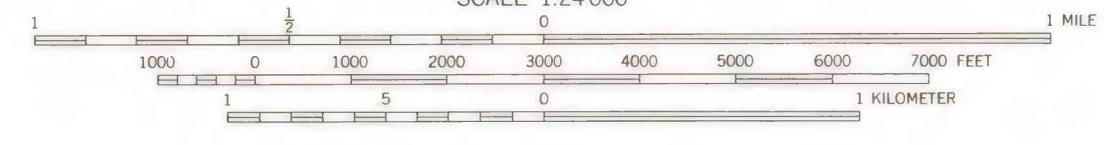

Compiled in 1977/1978



This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

COAL RESOURCE OCCURRENCE MAP OF THE SOUTHEAST QUARTER OF THE BOARS TUSK 15-MINUTE QUADRANGLE, SWEETWATER COUNTY, WYOMING
BY
DAMES & MOORE
1979