

EXPLANATION

— 7000 —  
- - - 6920 - - -  
STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval is 80 feet (24 m). Datum is mean sea level.

○ 6532  
DRILL HOLE - Showing altitude of top of coal bed, in feet.

▲ 6840  
POINT OF MEASUREMENT - Showing altitude of top of coal bed, in feet.

DmL - Lower Deadman  
Dm - Deadman  
COAL BED SYMBOLS AND NAMES


— Dm —  
TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Dashed where inferred, short dashed where inferred by present authors.

—|—  
TRACE OF FAULT - Bar and ball on downthrown side when direction of movement is known. Dashed where inferred or approximately located.

—|—  
INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.

—|—  
COAL STRIP MINE - Hachures point toward mined area. Dashed where approximately located.

To convert feet to meters, multiply feet by 0.3048.

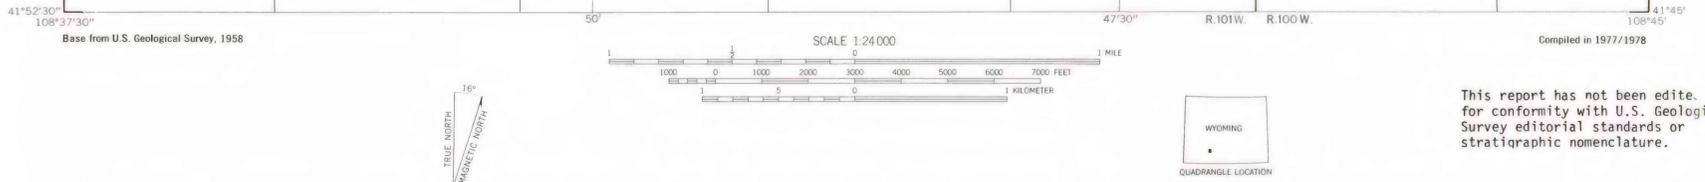

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

**COAL RESOURCE OCCURRENCE MAP OF THE SOUTHEAST QUARTER OF THE SUPERIOR  
15-MINUTE QUADRANGLE, SWEETWATER COUNTY, WYOMING  
BY  
DAMES & MOORE  
1979**