
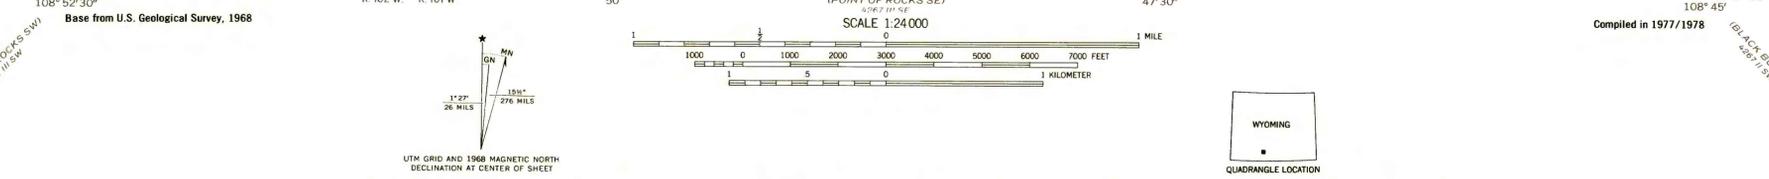


EXPLANATION

- 5 —
— 6 —
 - ISOPACHS - Showing thickness of coal, in feet. Isopach interval 1 foot.
 - 6600 —
— 6680 —
 - STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; short dashed where projected above ground surface. Contour interval 80 feet (24 m). Datum is mean sea level.
 - ▲ 6580
5.0
 - POINT OF MEASUREMENT - Showing altitude of top of coal bed, and thickness of coal, in feet. Altitudes not shown for underground mine measured sections. Includes all points of measurement other than drill holes.
 - Al[1] - Almond [1]
 - COAL BED SYMBOL AND NAME - Coal bed identified by bracketed numbers is not formally named, but is numbered for identification purposes in this quadrangle only.
 - Al[1] —
 - TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred; short dashed where inferred by present authors.
 -
 - TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.
- To convert feet to meters, multiply feet by 0.3048.

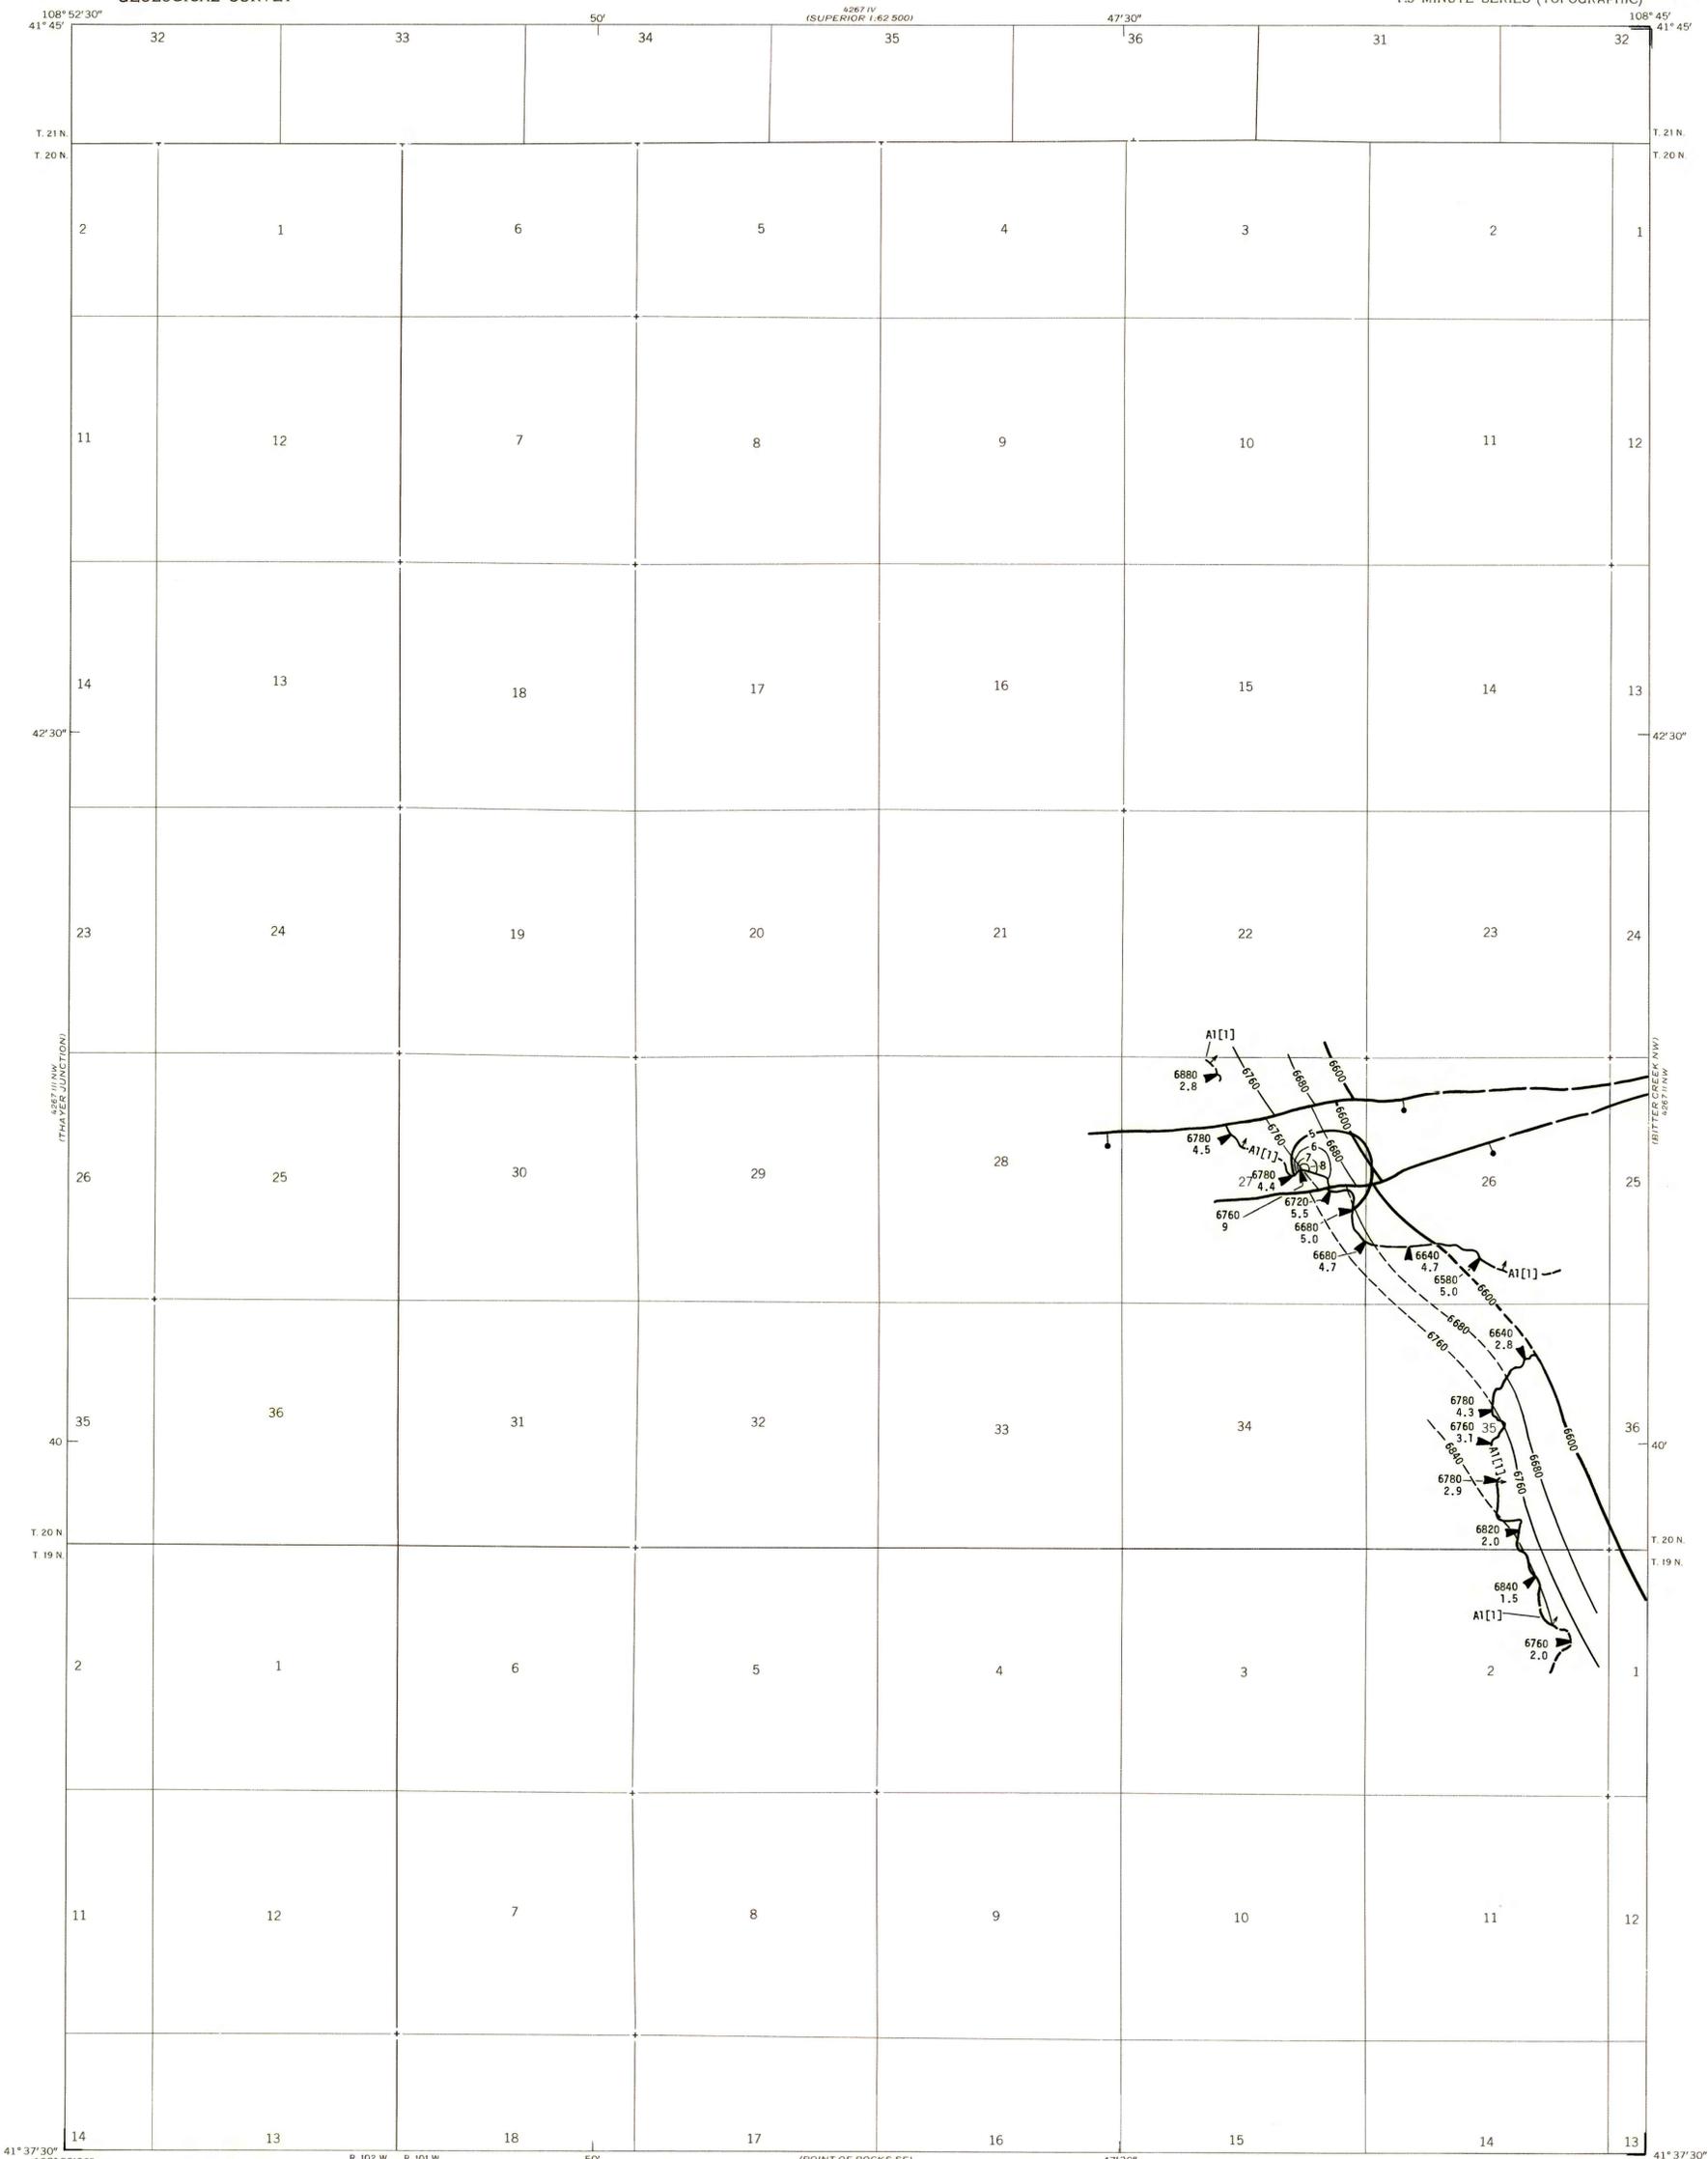

**COAL RESOURCE OCCURRENCE MAP OF THE POINT OF ROCKS
QUADRANGLE, SWEETWATER COUNTY, WYOMING**

**BY
DAMES & MOORE
1979**

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.