

EXPLANATION

— 5 —
— 6 —

ISOPACHS - Showing thickness of coal, in feet. Isopach interval 1 foot.

— 7000 —
— 6920 —

STRUCTURE CONTOURS - Drawn on top of coal bed. Solid where vertical accuracy within 40 feet; long dashed where vertical accuracy possibly not within 40 feet; short dashed where projected above ground surface. Contour interval 80 feet (24 m). Datum is mean sea level.

○ 6817
2.0

DRILL HOLE - Showing altitude of top of coal bed, and thickness of coal, in feet.

▲ 6890
3.5

POINT OF MEASUREMENT - Showing altitude of top of coal bed, and thickness of coal, in feet. Includes all points of measurement other than drill holes.

A1[5] - Almond [5]

COAL BED SYMBOL AND NAME - Coal beds identified by bracketed numbers are not formally named, but are numbered for identification purposes in this quadrangle only.

— A1[5] —

TRACE OF COAL BED OUTCROP - Showing symbol of name of coal bed as listed above. Arrow points toward coal-bearing area. Dashed where inferred; short dashed where inferred by present authors.


— A1[5] —

INFERRED LIMIT OF BURNED AND CLINKERED COAL - Arrow points toward area of baked and fused rock.

— A1[5] —

TRACE OF FAULT - Bar and ball on down-thrown side when direction of movement is known. Dashed where inferred or approximately located.

To convert feet to meters, multiply feet by 0.3048.

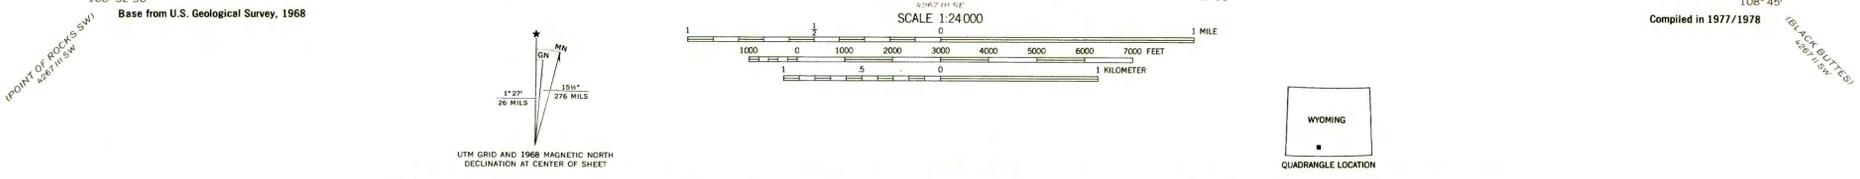

**COAL RESOURCE OCCURRENCE MAP OF THE POINT OF ROCKS
QUADRANGLE, SWEETWATER COUNTY, WYOMING**

**BY
DAMES & MOORE
1979**

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.