

EXPLANATION


● 7  
DRILL HOLE-Showing coal thickness  
in feet.

— 28 —  
— 30 —  
ISOPACHS OF COAL BED-Showing  
thickness in feet. Isopach  
interval 2 feet.


— 15 —  
MINING RATIO CONTOUR-Number indicates  
cubic yards of overburden per ton  
of recoverable coal by surface mining  
methods. Contours shown only in  
area suitable for surface mining  
within the stripping limit.

— SL — ↑  
STRIPPING LIMIT LINE-500 foot  
overburden isopach boundary for  
surface mining of coal. Arrows  
point toward area suitable for  
surface mining.

To convert feet to meters,  
multiply feet by 0.3048.

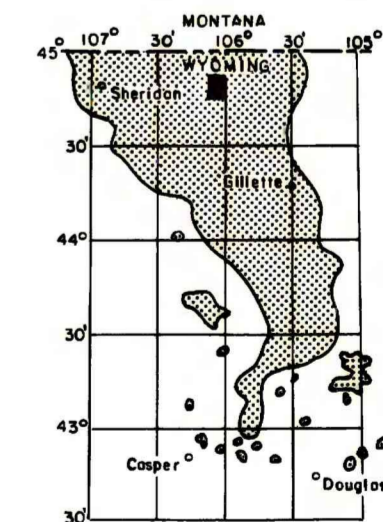

MAP SHOWING LOCATION OF THE  
CABIN CREEK SE QUADRANGLE  
AND THE POWDER RIVER BASIN  
KNOWN RECOVERABLE COAL  
RESOURCE AREA (STIPPLED),  
WYOMING

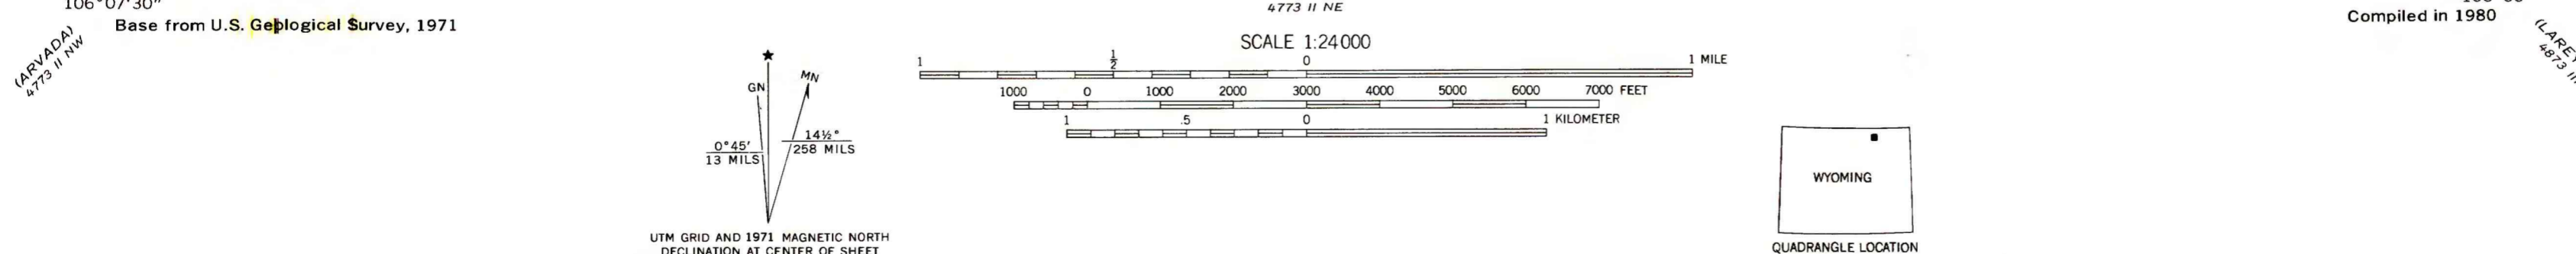

COAL RESOURCE OCCURRENCE MAP OF THE CABIN CREEK SE  
QUADRANGLE, SHERIDAN AND CAMPBELL COUNTIES, WYOMING

BY  
IntraSearch  
1980

PLATE 29  
ISOPACH AND MINING RATIO  
MAP OF COOK COAL BED

This report has not been edited  
for conformity with U.S. Geological  
Survey editorial standards or  
stratigraphic nomenclature.