


ISOPACHS—Showing thickness of coal, in feet. Dashed where inferred. Isopach interval 5 feet.

○ 44.6

DRILL HOLE—Showing thickness of coal bed, in feet. Drill holes which did not intersect top of coal bed or from which bed altitude could not be determined, are not shown.

▲ 36.4

POINT OF MEASUREMENT—Showing thickness of coal, in feet. Includes all points of measurement other than drill holes.




TRACE OF COAL BED OUTCROP—Showing symbol of name of coal bed. Arrow points toward coal-bearing area. Dashed where inferred by present authors. Dotted where concealed.

INSUFFICIENT DATA LINE—Coal resources were not calculated for areas beyond line shown because of insufficient data.




FAULT—Dashed where approximately located; bar and ball on downthrown side where direction of movement is known.

To convert feet to meters, multiply feet by 0.3048.

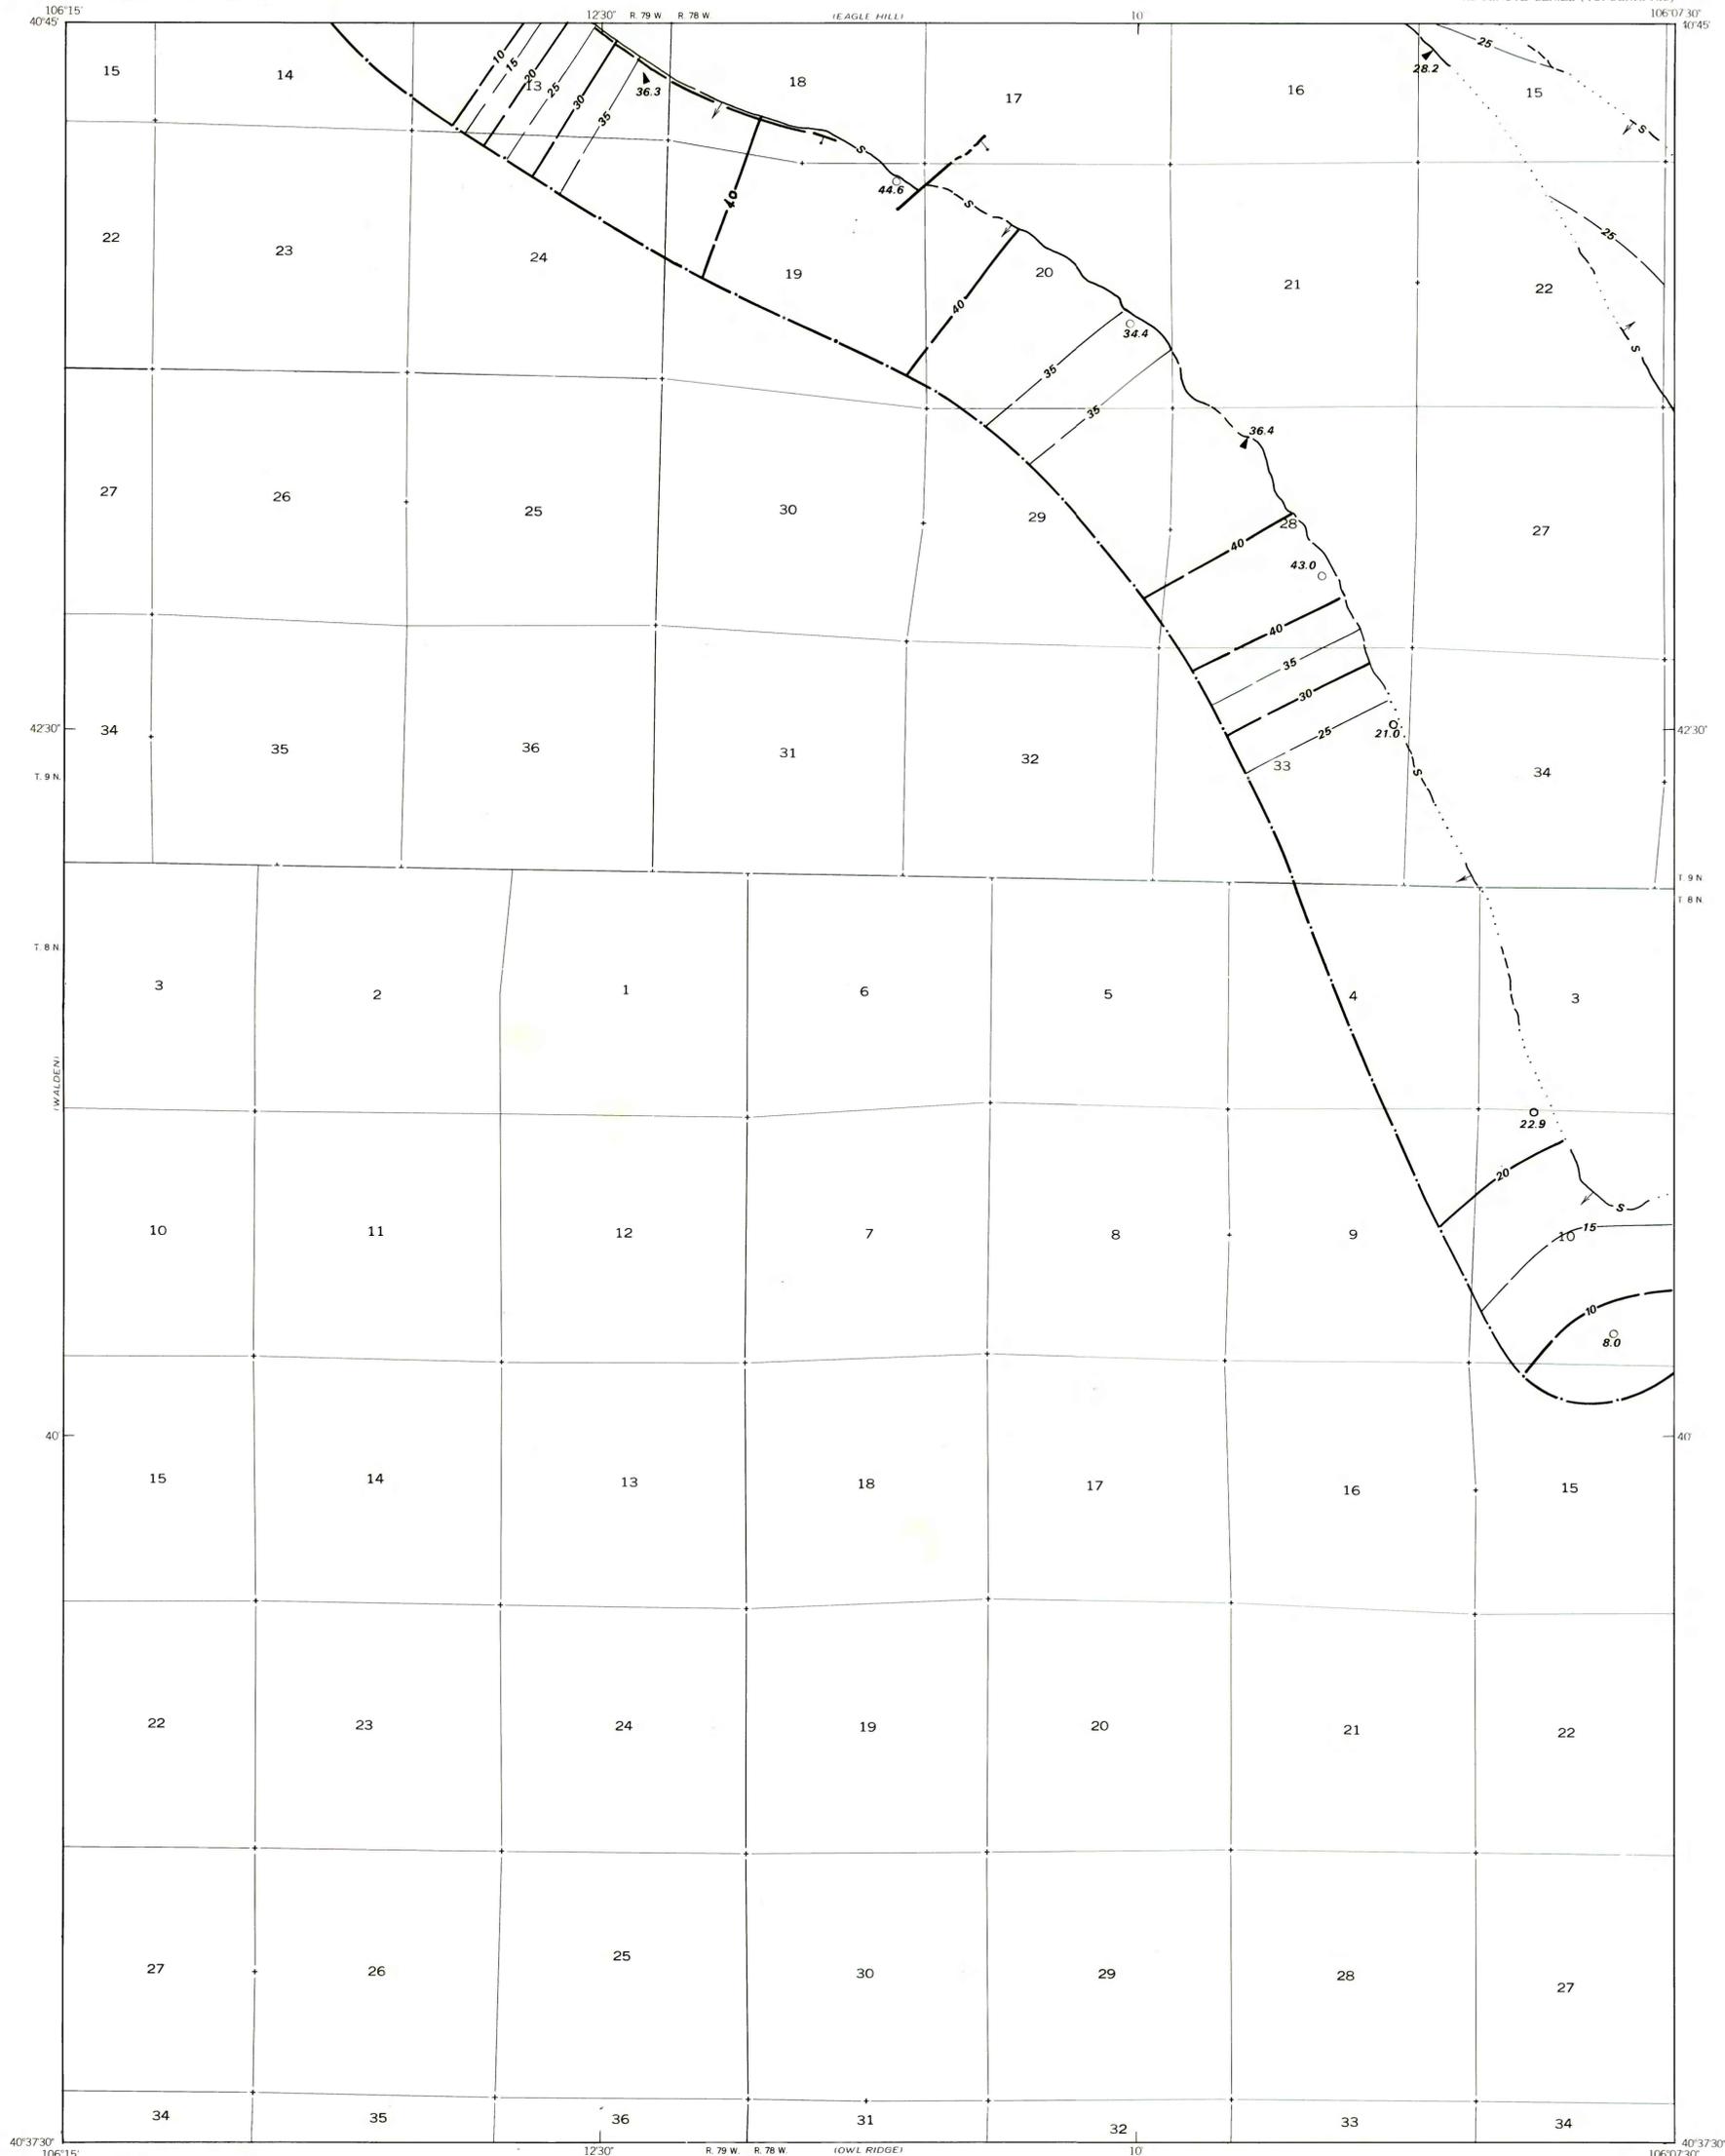

Base from U.S. Geological Survey, 1955



**COAL RESOURCE OCCURRENCE MAP OF THE GOULD NW QUADRANGLE,  
JACKSON COUNTY, COLORADO  
BY  
AAA ENGINEERING AND DRAFTING, INC.  
1980**