



NON-FEDERAL COAL LAND—Land for which the Federal Government does not own the coal rights, and for which the coal-development potential is not rated.




OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to top of the Capron coal bed. Isopach interval 200 feet (61.0 m).



DRILL HOLE—Showing altitude of top of coal bed, in feet. Drill holes which did not intersect top of coal bed or from which bed altitude could not be determined, are not shown.



TRACE OF COAL BED OUTCROP—Showing symbol of name of coal bed. Dashed where inferred by present authors.



MINING-RATIO CONTOURS—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in areas suitable for surface mining within the stripping limit.



POINT OF MEASUREMENT—Point from which boundary lines for measured, indicated, and inferred coal resources were drawn.



INSUFFICIENT DATA LINE—Coal resources were not calculated for areas beyond line shown because of insufficient data.




STRIPPING-LIMIT LINE—Boundary for surface mining (in this quadrangle, the 200-foot-overburden isopach). Arrow points toward the area suitable for surface mining where the recovery factor is 85 percent, and away from the area suitable for subsurface mining (down dip to the 3,000-foot-overburden isopach) where the recovery factor is 50 percent.

Surface		Subsurface	
RB	R(50%)	RB	R(50%)
0.4	0.4	0.1	—
1.0	0.8	2.2	—
0.2	0.2	1.2	—

(Measured)
(Indicated)
(Inferred)


IDENTIFIED COAL RESOURCES—Showing totals for Reserve Base (RB) and Reserves (R), in millions of short tons, for each section or part of section of non-leased Federal coal land, both within and beyond the stripping-limit line. Reserve (R) tonnage is calculated by multiplying the Reserve Base (RB) tonnage by the appropriate recovery factor. Dash indicates no resources in that category. Underground Reserves have been calculated for only that part of the Reserve Base that is suitable for underground mining, and do not include Reserves for areas where the dip of the coal bed exceeds 15°. Also, Reserves have been calculated for a constant thickness of 12 feet for areas where the coal beds are more than 12 feet thick. Therefore, in some instances, underground Reserves may be less than 50 percent of the Reserve Base.

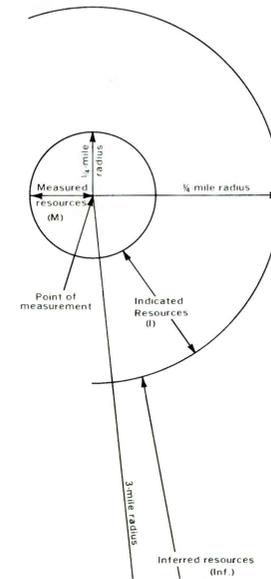

BOUNDARY LINES—Enclosed areas of measured, indicated, and inferred coal resources of the coal bed.

To convert short tons to metric tons, multiply short tons by 0.9072.

To convert feet to meters, multiply feet by 0.3048.

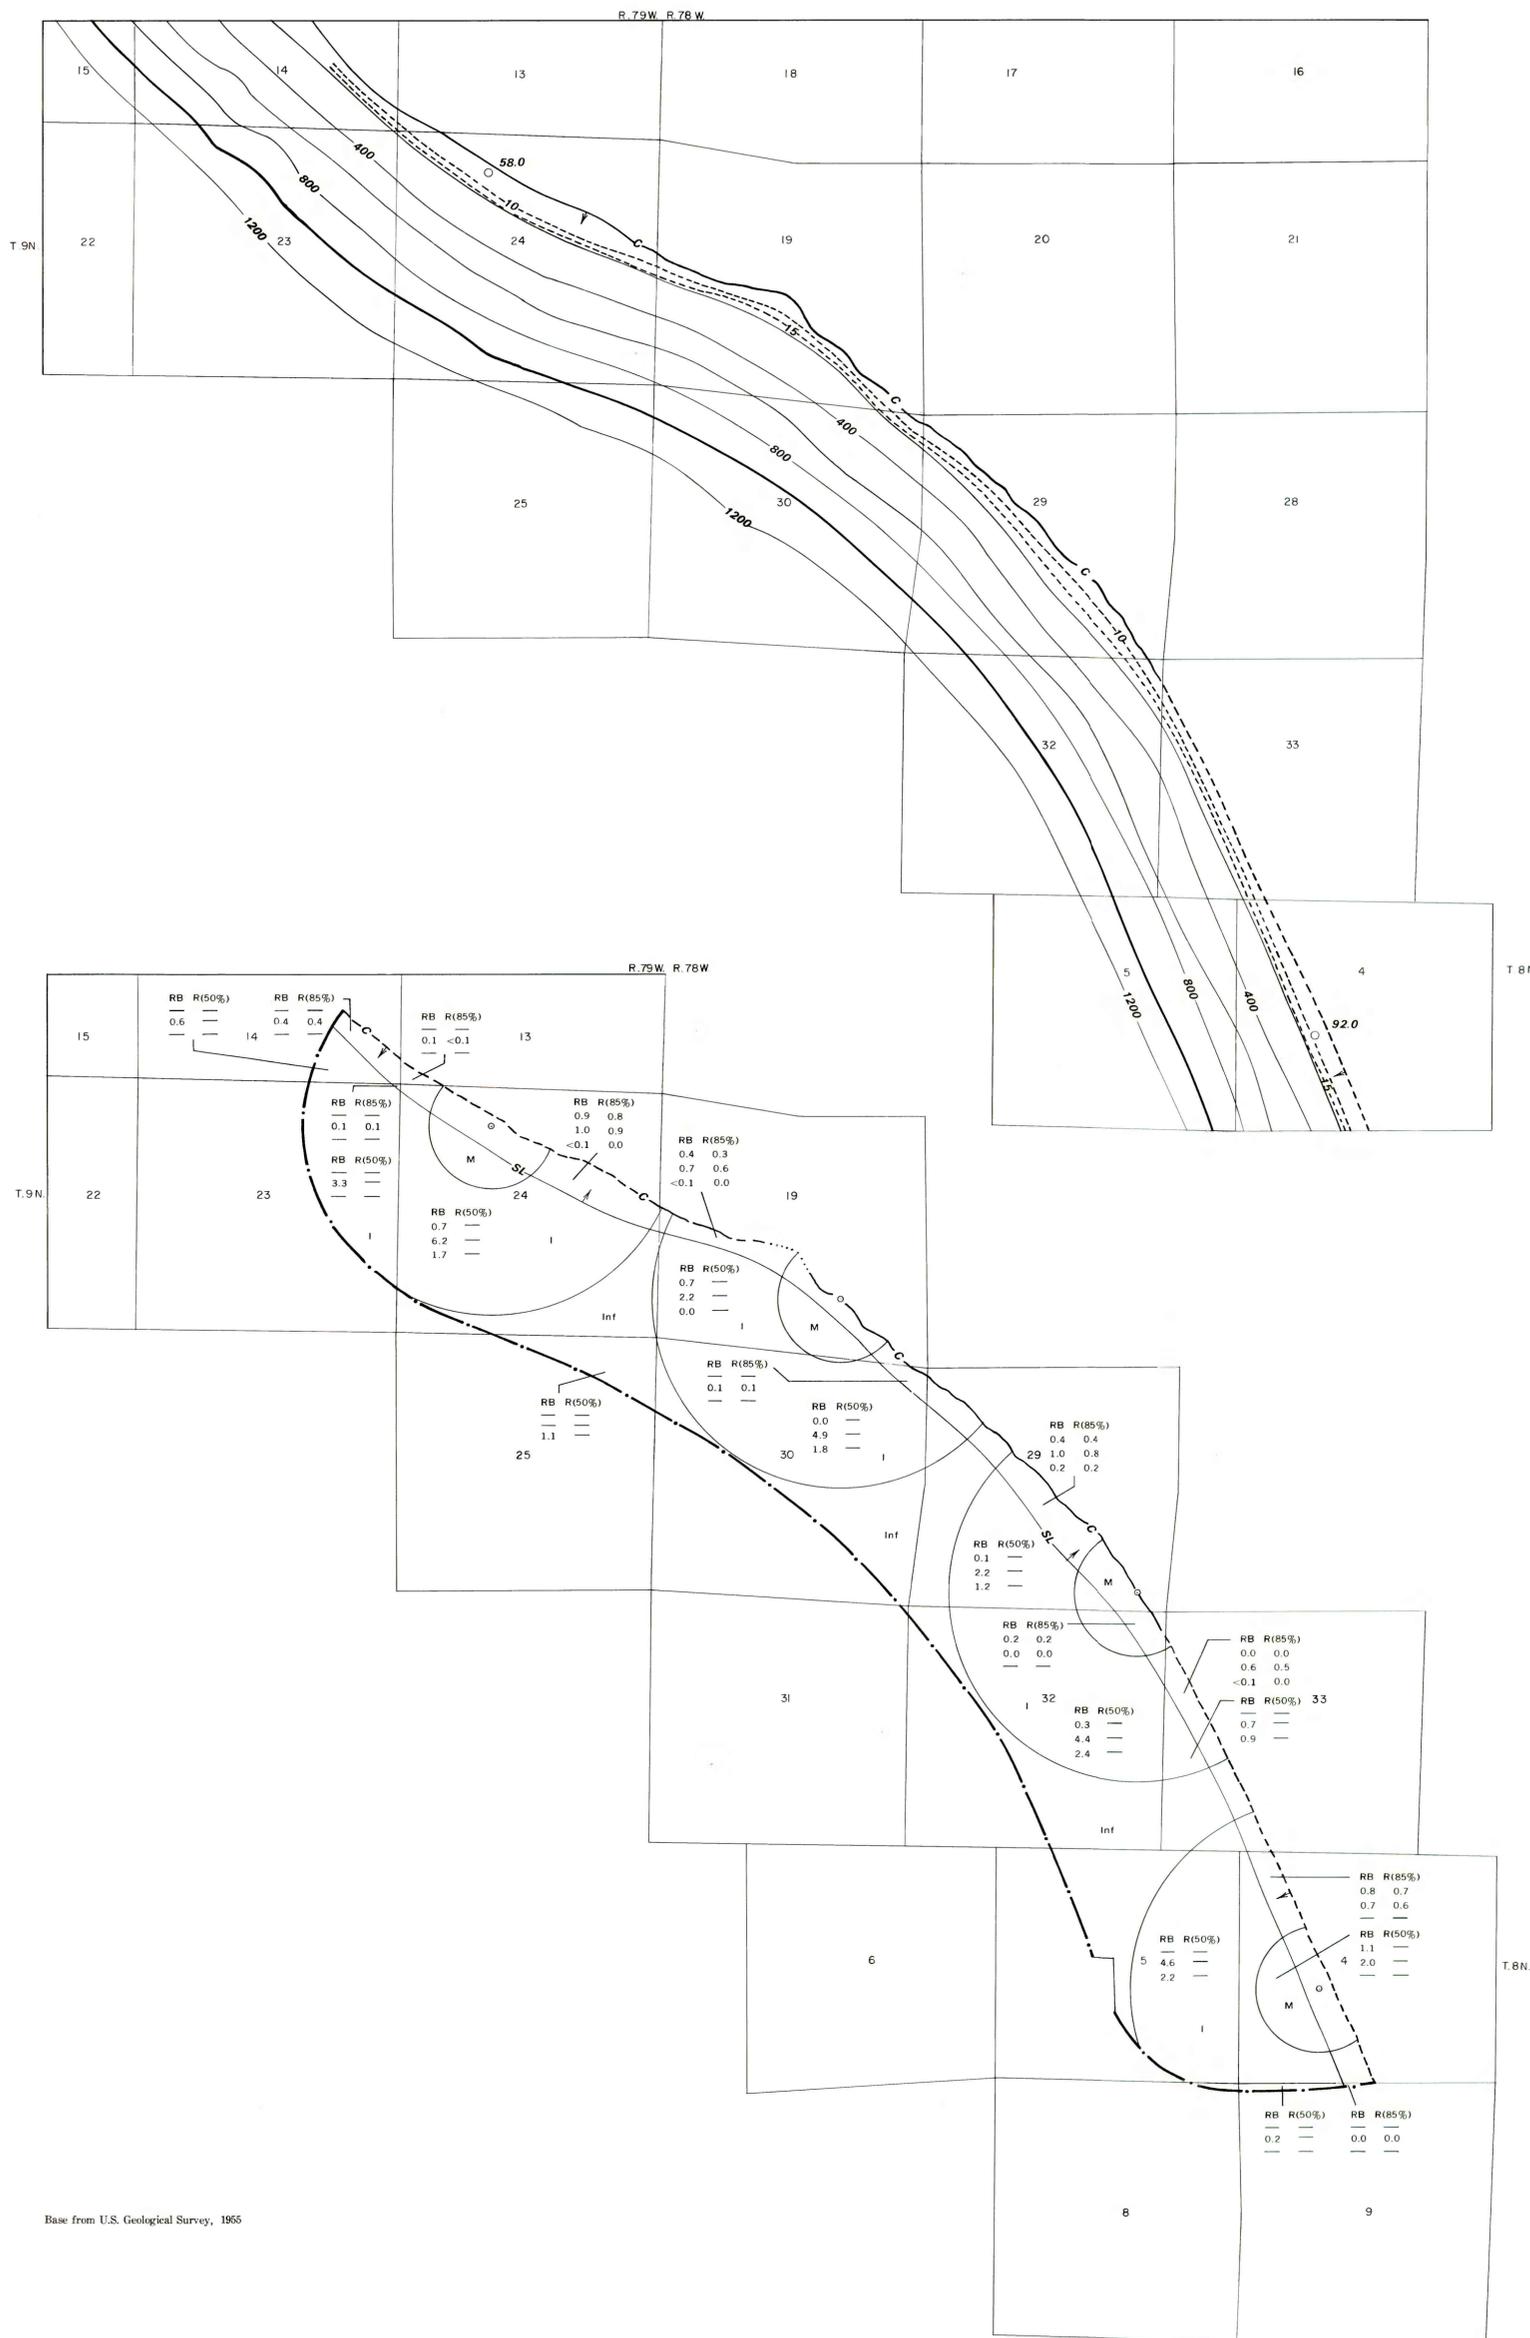

COAL RESOURCE OCCURRENCE MAP OF THE GOULD NW QUADRANGLE,
JACKSON COUNTY, COLORADO

BY
AAA ENGINEERING AND DRAFTING, INC.
1980