


EXPLANATION

- ISOPACHS OF COAL BED—Showing thickness in feet, interval 5 feet.
- DRILL HOLE—Showing coal thickness in feet.
- TRACE OF COAL BED OUTCROP—Showing coal thickness in feet, measured at triangle. Asterisk indicates measured section was used in isopach mapping. Arrow points toward the coal-bearing area. "V" symbol indicates burned rock with dotted line showing limit of burning. Coal bed dashed where inferred.
- MINING RATIO CONTOUR—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours shown only in area suitable for surface mining within the stripping limit.

To convert feet to meters multiply feet by 0.3048.

This outcrop mapping is derived and enlarged from a 1:125,000 scale publication (Winchester, 1912). Numerous irregularities in outcrop elevations and the areal geology-topographic map relationship emphasize that this map presents a generalized configuration of the coal bed outcrop. Horizontal accuracy of outcrop location is estimated at ± 1000 feet (305 m).




MAP SHOWING LOCATION OF THE ESAU SPRING QUADRANGLE AND THE POWDER RIVER BASIN KNOWN RECOVERABLE COAL RESOURCE AREA (STIPPLED), WYOMING

This report has not been edited for conformity with U.S. Geological Survey editorial standards or stratigraphic nomenclature.

Base from U.S. Geological Survey, 1971

Compiled in 1979

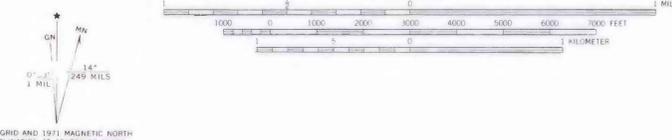

COAL RESOURCE OCCURRENCE MAP OF THE ESAU SPRING QUADRANGLE, CONVERSE COUNTY, WYOMING

BY
IntraSearch
1979

PLATE 4
ISOPACH AND MINING RATIO
MAP OF
UPPER-MIDDLE WILDCAT COAL BEDS