


OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to top of the Blind Canyon coal bed. Isopach interval 200 feet (61.0 m).



INTERBURDEN ISOPACH—Showing thickness of interburden, in feet, between the Upper and Lower Blind Canyon coal bed. Isopach interval 5 feet (1.5m).


○ 808

DRILL HOLE—Showing thickness of overburden, in feet, from the surface to top of the Blind Canyon coal bed.


— BC ———
TRACE OF COAL BED OUTCROP—Showing symbol of name of coal bed. Arrow points toward coal-bearing area. Dashed where inferred by present authors.

FAULT—Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048

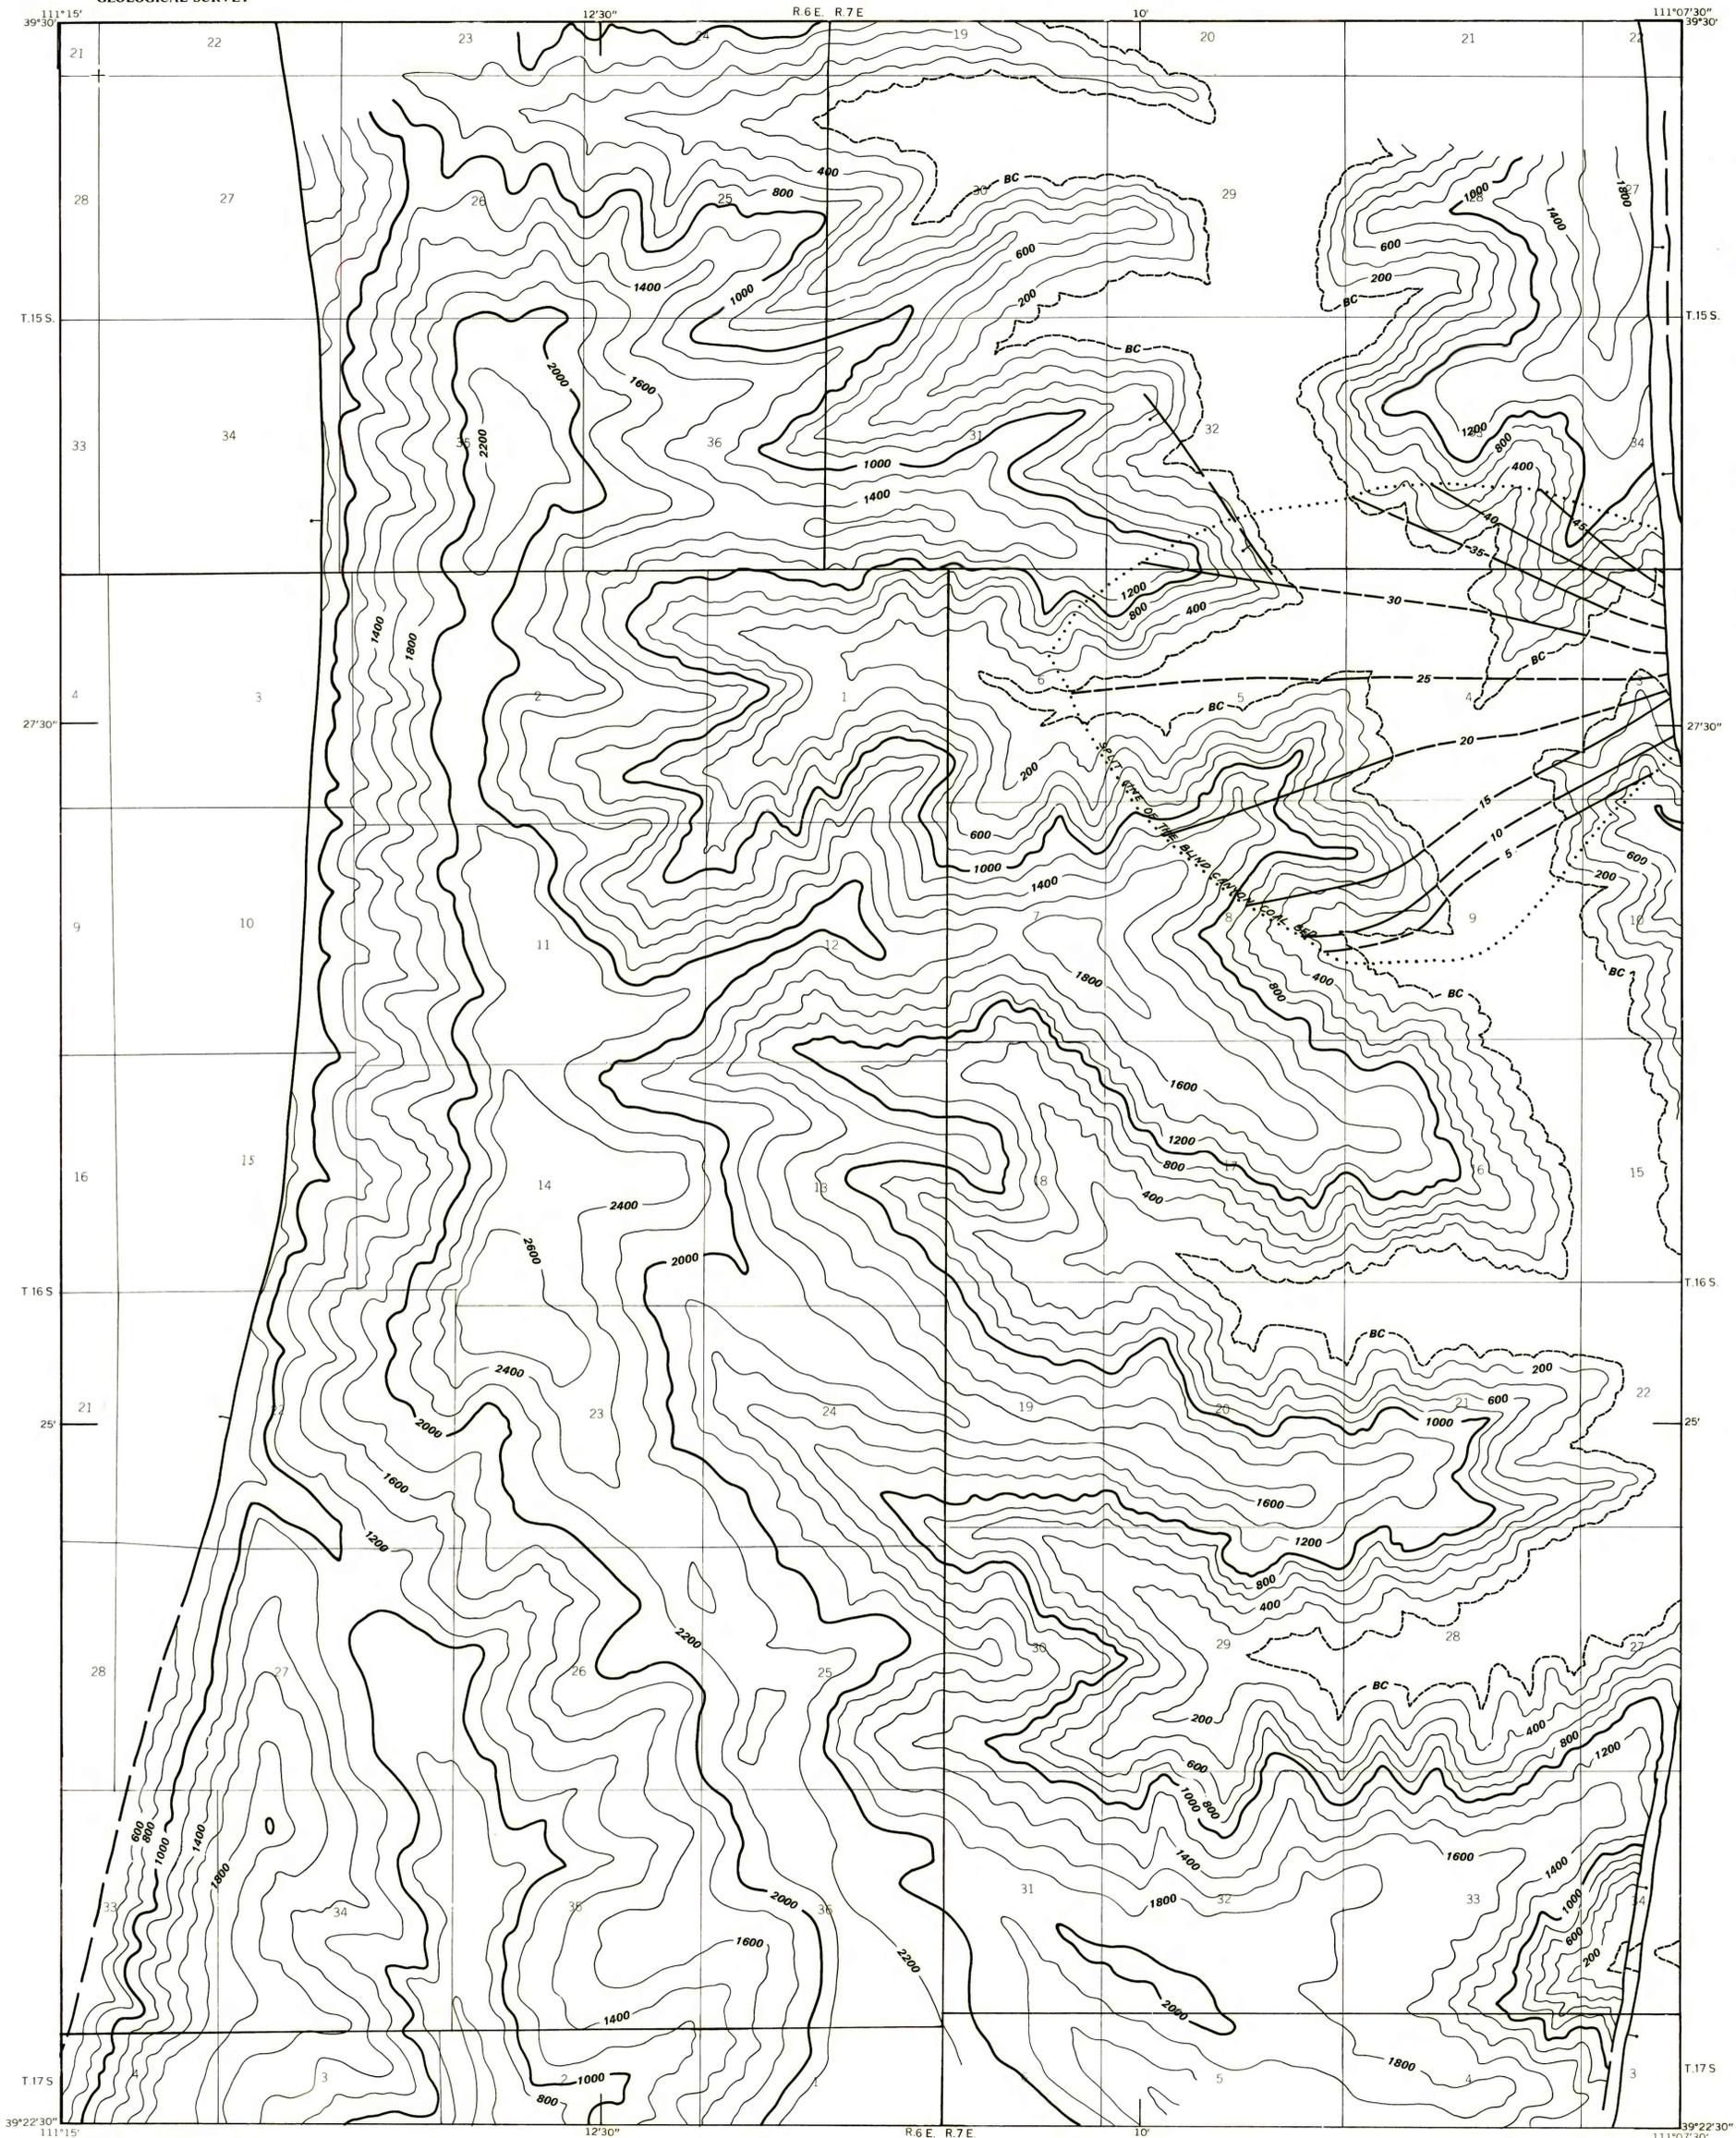

Base from U.S. Geological Survey, 1928



Compiled in 1977/1978

**COAL RESOURCE OCCURRENCE MAP OF THE NORTHWEST QUARTER OF THE
HIAWATHA 15-MINUTE QUADRANGLE, EMERY AND SANPETE COUNTIES, UTAH
BY
AAA ENGINEERING AND DRAFTING, INC.
1979**

PLATE 22
OVERBURDEN ISOPACH MAP
OF THE
BLIND CANYON COAL BED
AND ITS SPLIT