

STRUCTURE CONTOURS—Drawn on top of coal bed. Solid where vertical accuracy within 25 feet; long dashed where vertical accuracy possibly not within 25 feet; short dashed where projected above land surface. Hachures indicate closed contours of basin. Contour interval is 50 feet (15.2 m). Datum is mean sea level.

○ 7879

DRILL HOLE—Showing altitude of top of coal bed, in feet. Drill holes which did not intersect top of coal bed or from which bed altitude could not be determined, are not shown.

▲ 7830

POINT OF MEASUREMENT—Showing altitude of top of coal bed, in feet.




TRACE OF COAL BED OUTCROP—Showing symbol of name of coal bed. Arrow points toward coal-bearing area. Dashed where inferred by present authors.




FAULT—Dashed where approximately located; bar and ball on downthrown side.

To convert feet to meters, multiply feet by 0.3048

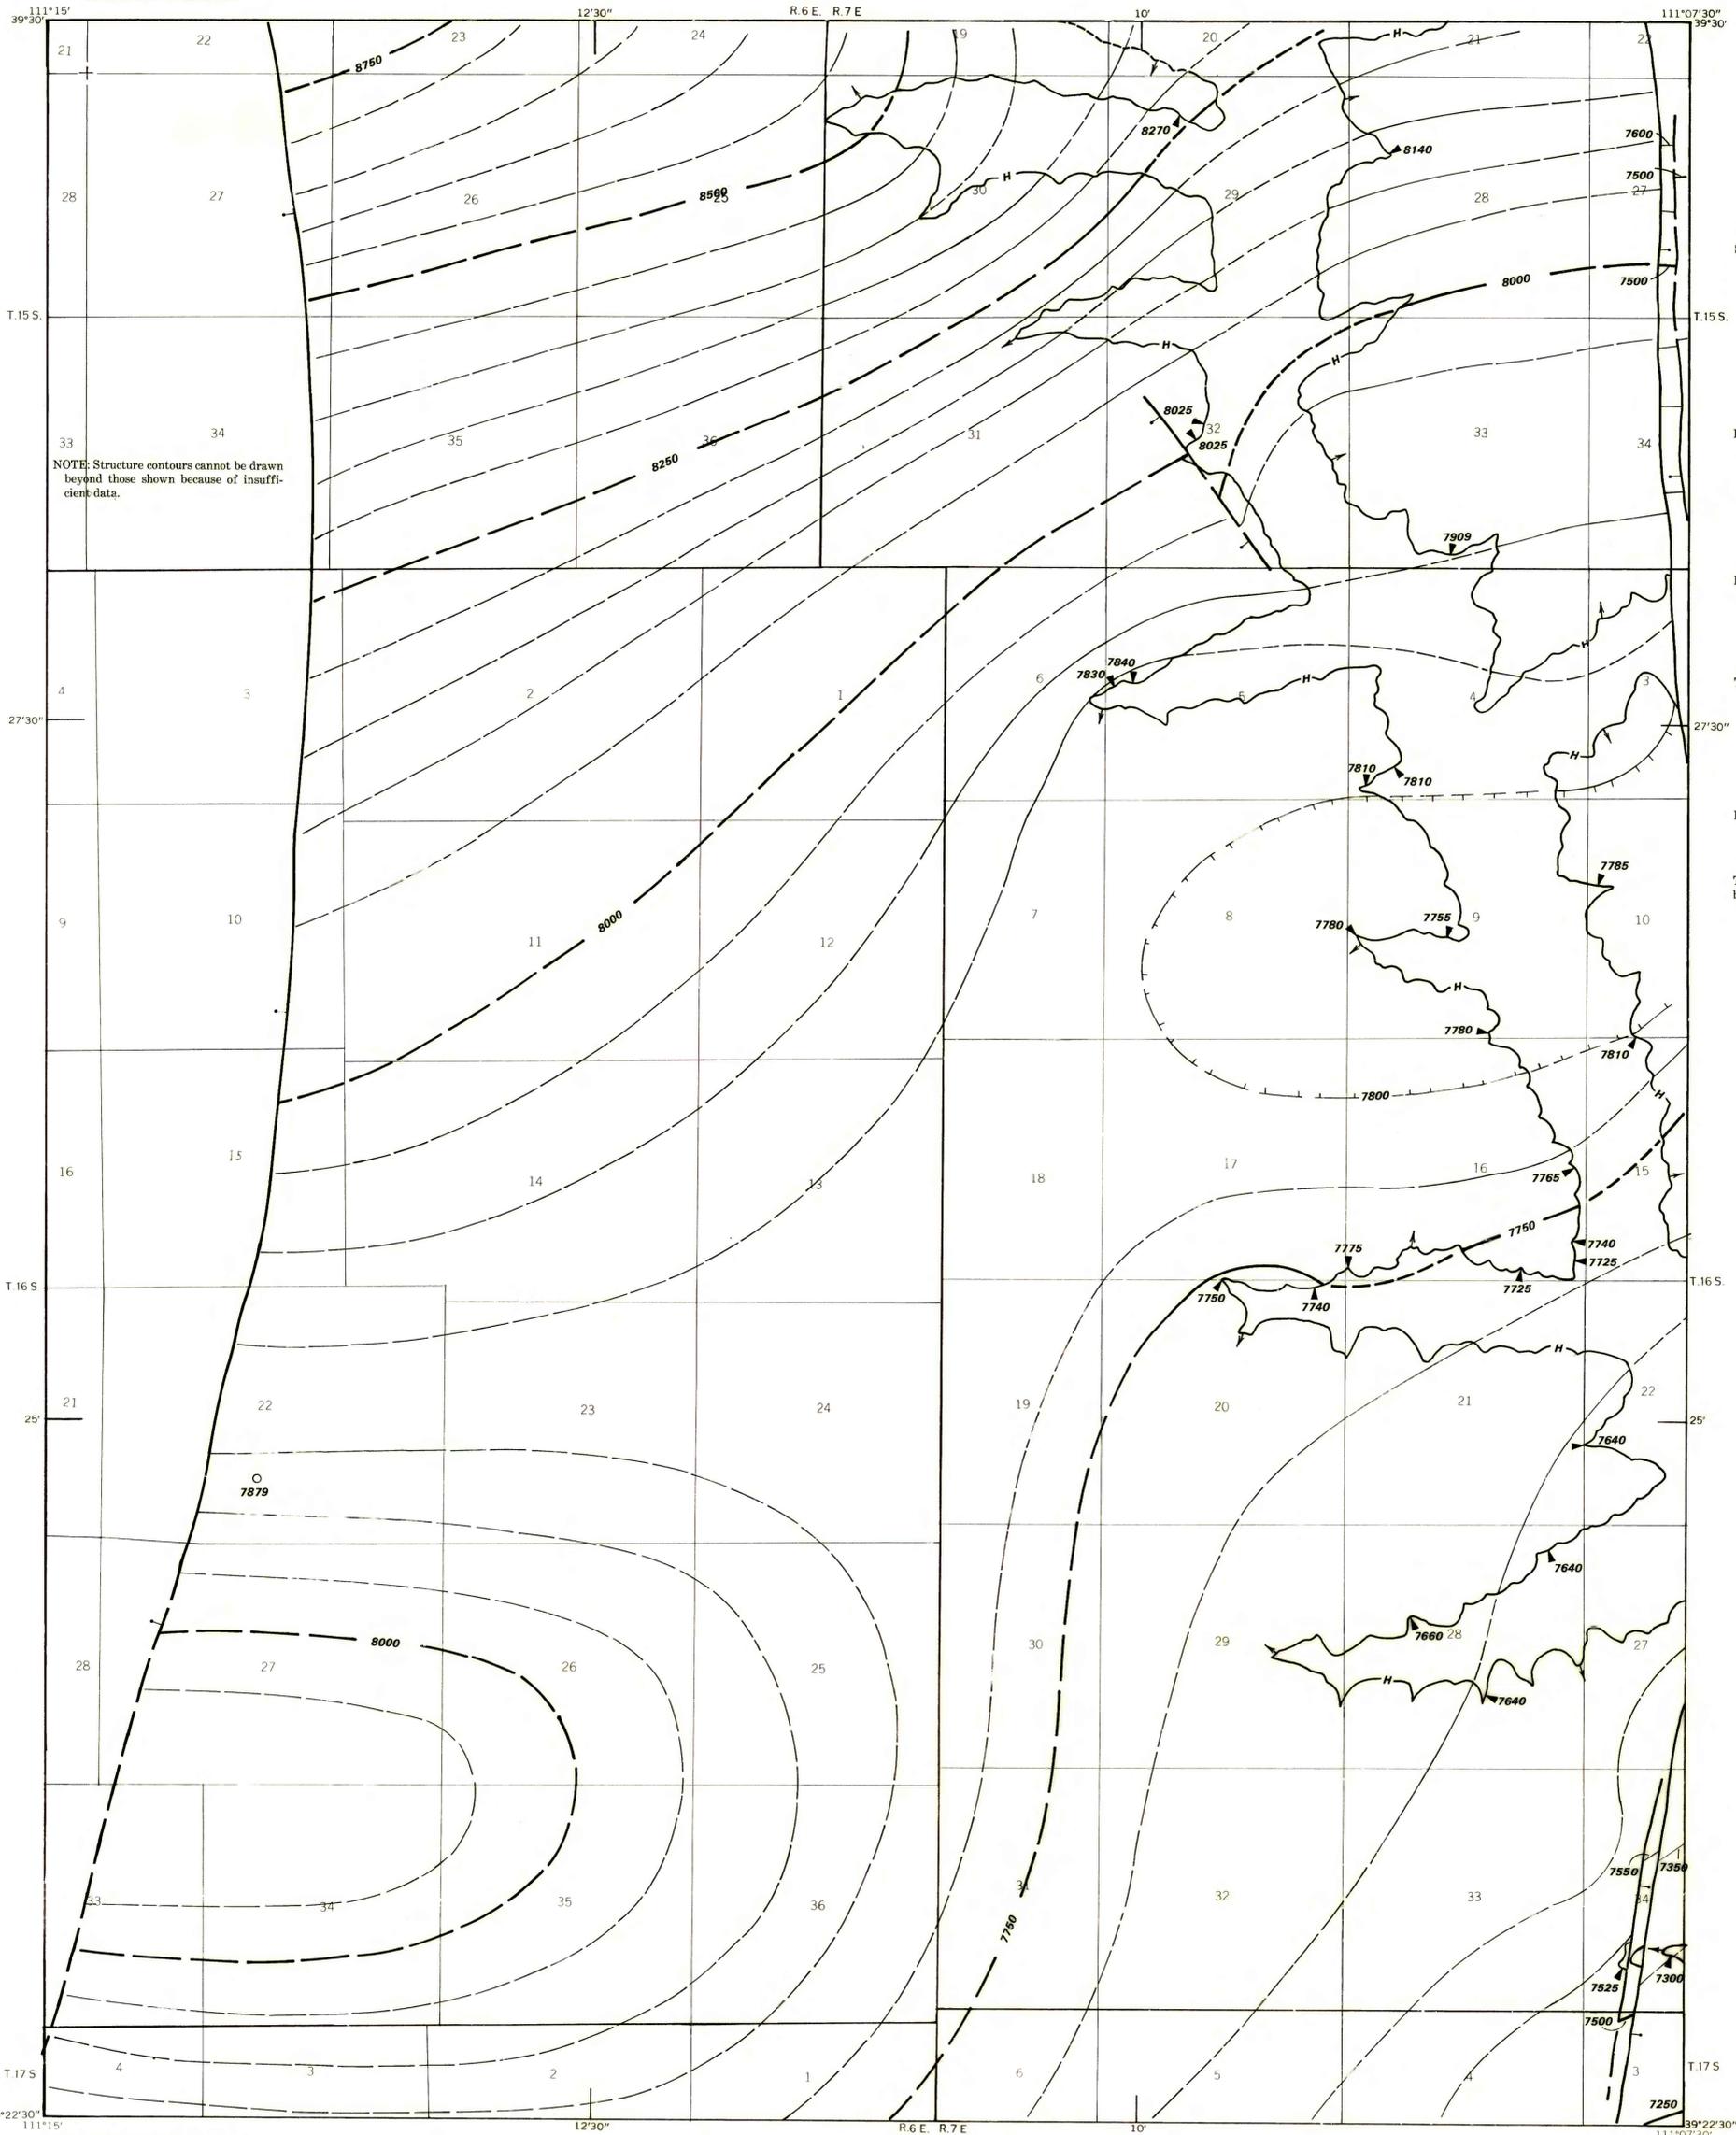

Base from U.S. Geological Survey, 1928



Compiled in 1977/1978

COAL RESOURCE OCCURRENCE MAP OF THE NORTHWEST QUARTER OF THE HIAWATHA 15-MINUTE QUADRANGLE, EMERY AND SANPETE COUNTIES, UTAH
BY
AAA ENGINEERING AND DRAFTING, INC.
1979