

27%5'

INTRODUCTION

Brevard County is an area of some 1,300 square miles located on the east coast of central Florida. The Kenansville SE quadrangle, in south Brevard, includes part of the St. Johns River valley with extensive areas of relatively low marshlands. The southern and northwestern parts of the quadrangle are, respectively, in Indian River and Osceola Counties (sheet 1).

PURPOSE AND SCOPE

The purpose of this report is to present ground-water data in a usable, readily available format for county planning needs. The scope includes a complete inventory of wells, water-level measurements in selected wells, sampling selected wells for water-quality analysis, literature search, and storage of all data in the U.S. Geological Survey computer bank or manual data library. Wells shown on sheet 1 are those used in the preparation of this report.

Brevard Water Well Survey

This report was prepared by the U.S. Geological Survey and the Brevard Water Well Survey team in cooperation with the Brevard County Board of County Commissioners. The Brevard Water Well Survey is funded through the Comprehensive Education and Training Act and sponsored by Brevard County through the Development Division, Brevard County Planning Department. Primary supervision of the Brevard Water Well Survey was under the U.S. Geological Survey as principal investigator. The following Brevard Water Well Survey team members were instrumental in the production of this report:

Grady Brown, Steven Frasure, Charles Marple, Wayne Thompson, and Richard Wheelus. The Browned Water Well Survey consisted of as many as 19 members during the course of the investigation.


ACKNOWLEDGEMENTS

The authors wish to acknowledge the assistance of the Brevard County Planning Department, County Engineers office, Cartography Department; South Brevard Water Resources Committee; Agricultural Extension Service; the well drillers of Brevard County; and the cooperation of local residents.

WELL-NUMBERING SYSTEM

The well-numbering system used in this report is based on latitude and longitude coordinates derived from a grid of 1-minute parallels of latitude and meridians of longitude (sheet 1). Wells within these minute grids are assigned numbers that consist of the last digit of the degree and the two digits of the minute of the line of latitude on the south side of the grid, the last digit of the degree and the two digits of the minute of the line of longitude on the east side of the grid, and a sequence number assigned in the order in which the well within the minute grid was inventoried. For example, well number 751-048-004 was the fourth well inventoried in the 1-minute grid north of latitude 27°51' and west of longitude 80°48'.

In order to conserve space on sheet 1, only the well sequence number is shown. The well number can be reconstructed if necessary by gridding off the maps according to the latitude and longitude tick marks in sheet 1 and observing the methodology in the preceding paragraph.

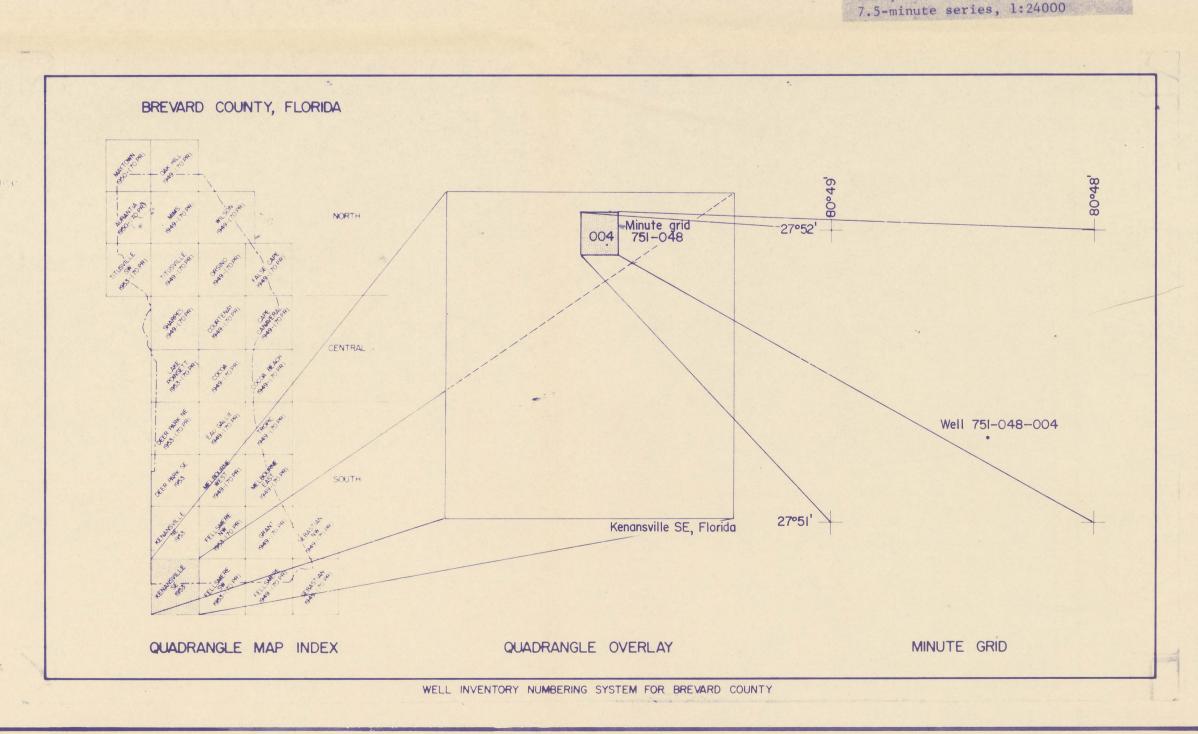

OVERLAY MAP OF THE KENANSVILLE SE QUADRANGLE, FLORIDA; WELL LOCATIONS AND NUMBERING SYSTEM AND QUADRANGLE MAP INDEX,

BREVARD COUNTY

By
James M. Frazee, Jr.,
and
C. P. Laughlin
1979



KENANSVILLE SE QUADRANGLE, FLORIDA

1953, PHOTOREVISED 1972,