

This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.

**EXPLANATION**

**300**  
OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to the top of the Menefee Cleary coal bed. Isopach interval 100 feet. Supplemental contour between 0 and 100 feet. Stripping limit is 200 feet. Isopachs dashed where inferred.

**51**  
DRILL HOLE OR MEASURED SECTION—Showing thickness of overburden, in feet, from surface to top of the Menefee Cleary No. 3 coal bed.

**10**  
MINING RATIO CONTOUR FOR THE MENEFEE CLEARY NO. 3 COAL BED—Number indicates cubic yards of overburden per ton of recoverable coal by surface mining methods. Contours show only in areas suitable for surface mining within the stripping limit (less than 200 feet of overburden).



To convert feet to meters, multiply feet by 0.3048.

NOTE: The measured sections were taken on the outcrop line, as shown above.

INSUFFICIENT DATA

Base from U.S. Geological Survey, 1961

Compiled in 1978

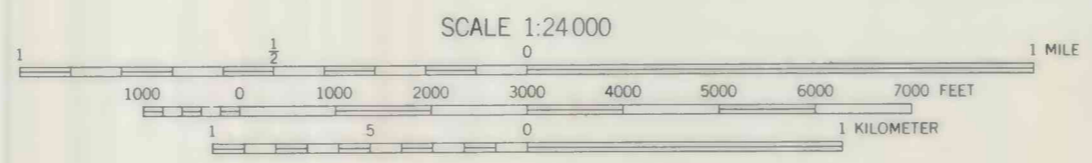

COAL RESOURCE OCCURRENCE MAP OF THE CERRO PARIDO  
QUADRANGLE, SANDOVAL AND MCKINLEY COUNTIES, NEW MEXICO  
BY  
BERGE EXPLORATION, INC.  
1979