



This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.

EXPLANATION

 200
OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to the top of the Menefee Allison No. 3 bed. Isopach interval 200 feet. Stippling limit is 200 feet.


 359
DRILL HOLE OR MEASURED SECTION—Showing thickness of overburden, in feet, from surface to top of the Menefee Allison No. 3 bed.


FAULT—Dashed where approximately located; bar and half on down-thrown side.

To convert feet to meters, multiply feet by 0.3048.


NOTE: Measured sections taken along the outcrop line as shown above. Arrow points toward the coal bearing area. Outcrop is long dashed where inferred and short dashed along inferred contact between burned and unburned coal.

NOTE: Certain isopach lines in the high density areas have been shown in part for clarification in mapping.

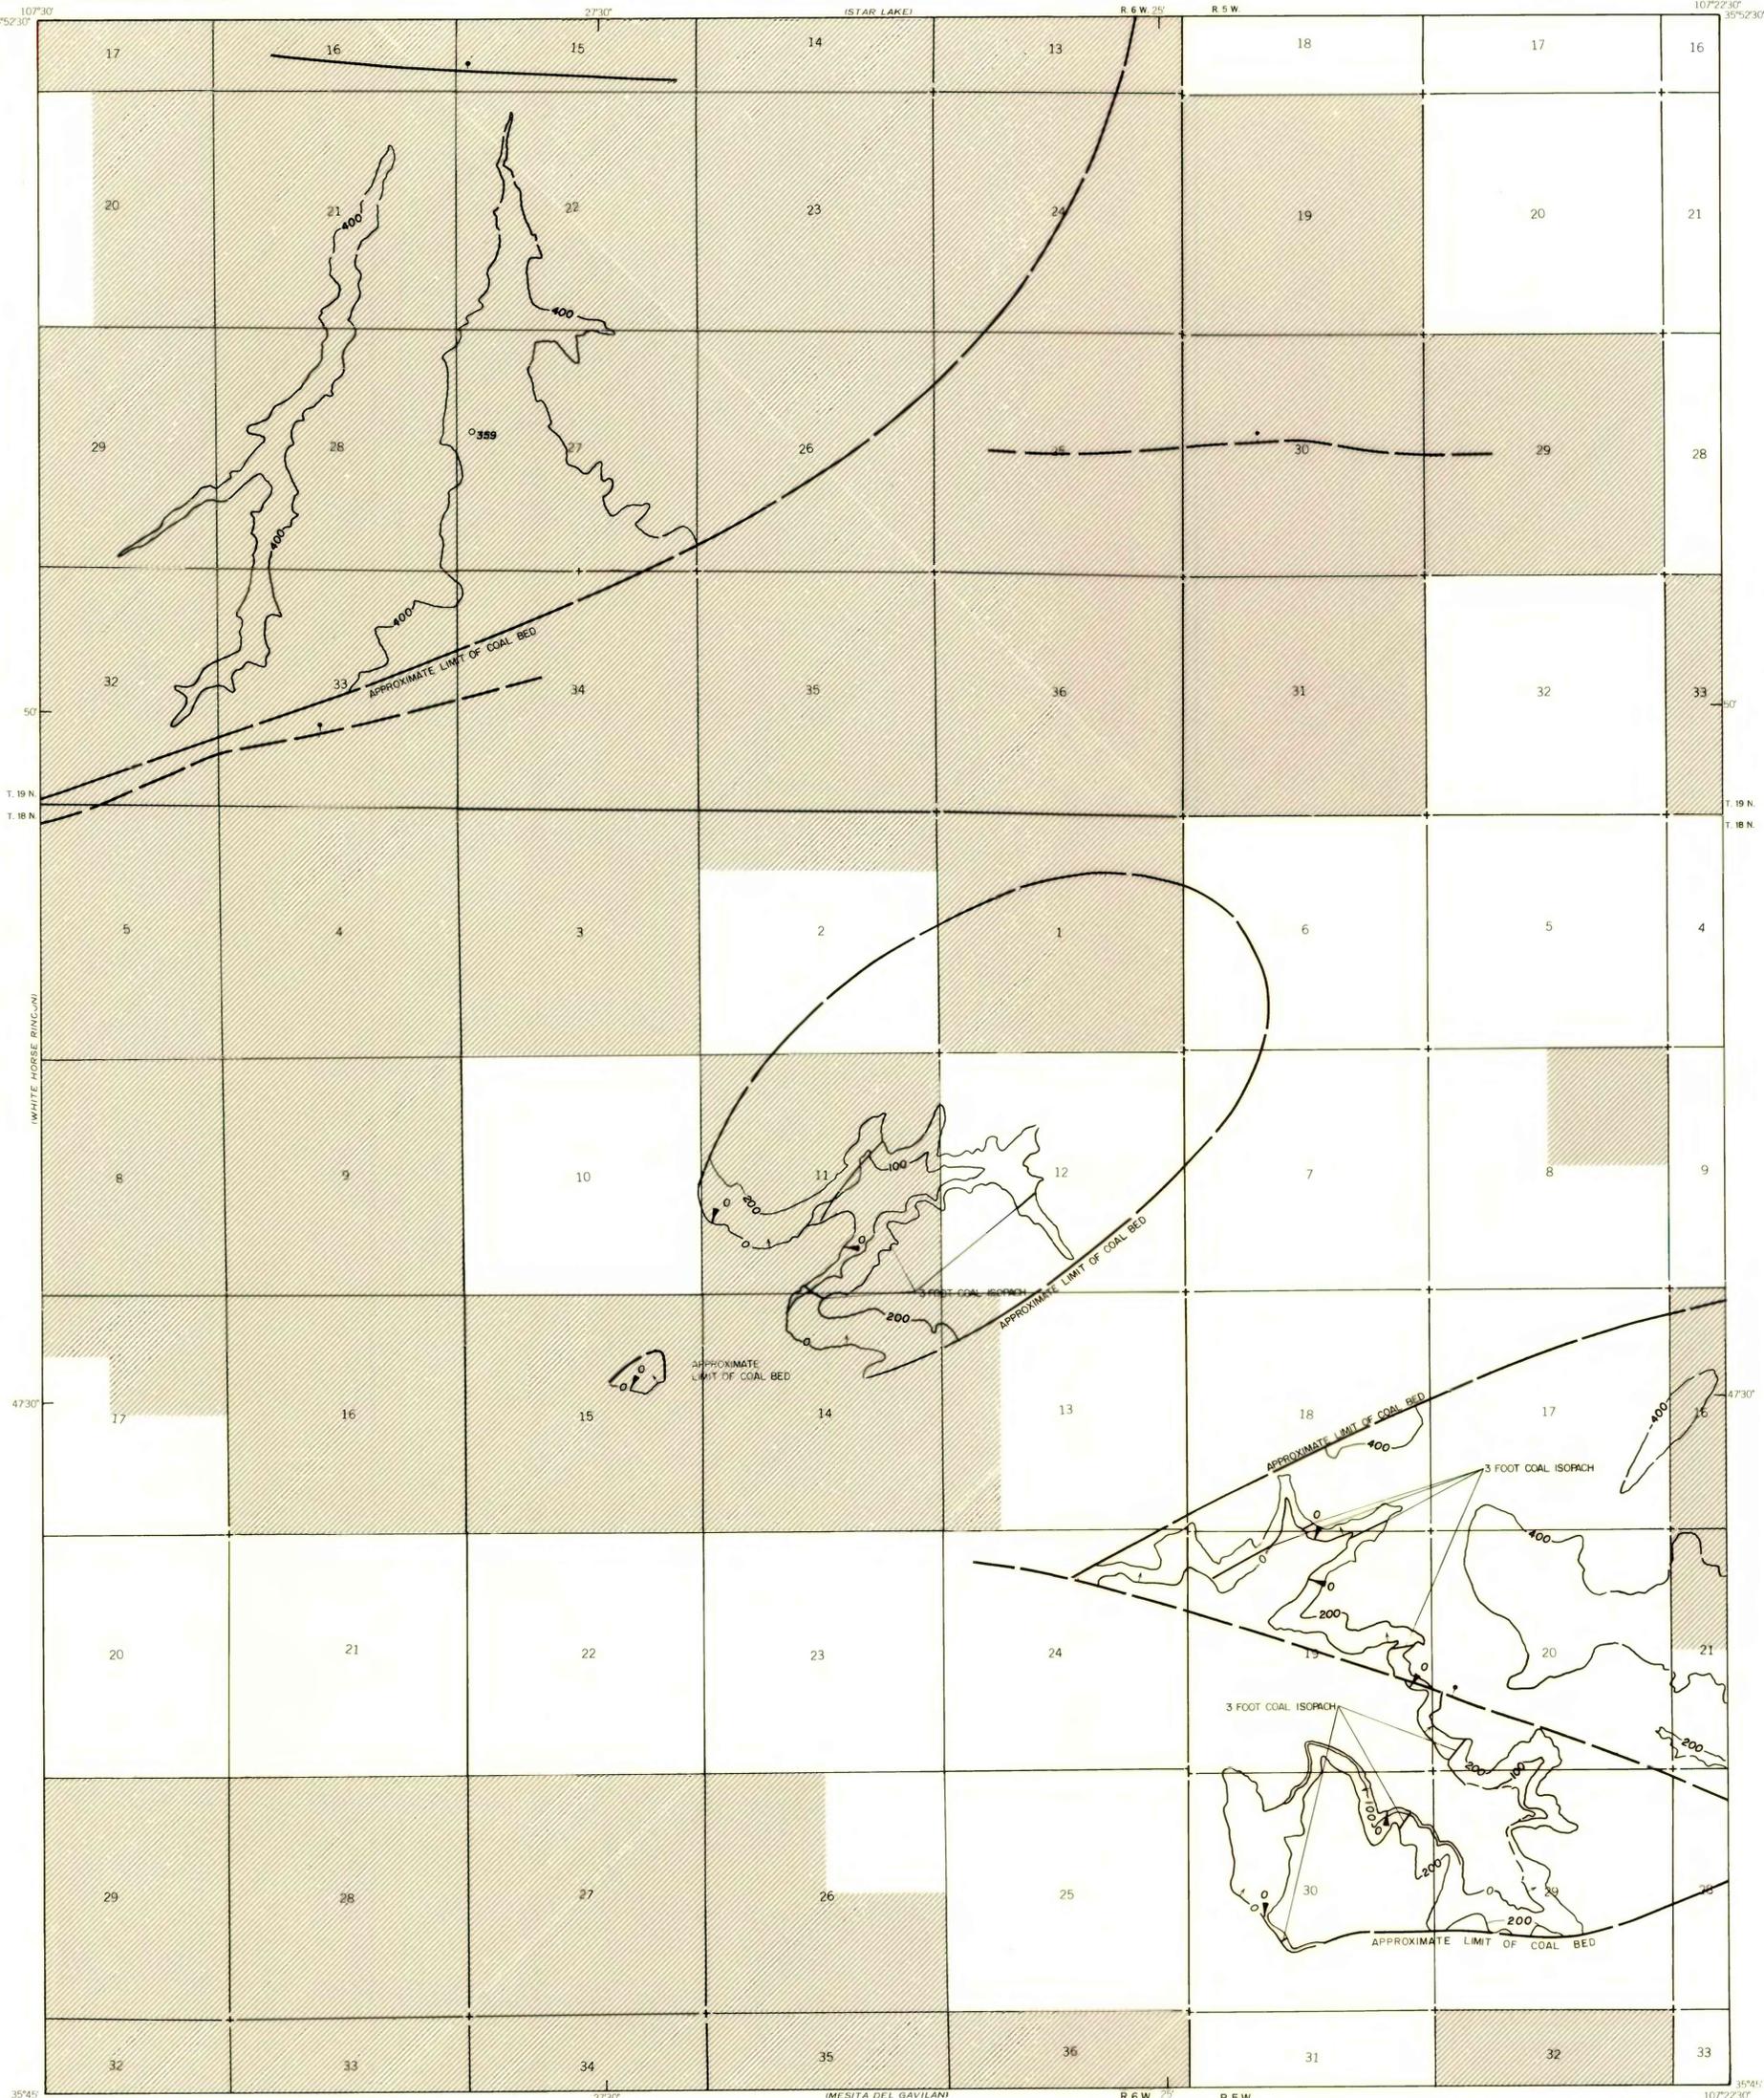

Base from U.S. Geological Survey, 1961

Compiled in 1978



COAL RESOURCE OCCURRENCE MAP OF THE RINCON MARQUEZ
QUADRANGLE, MCKINLEY COUNTY, NEW MEXICO

BY
BERGE EXPLORATION, INC.
1979