

This report has not been edited for conformity with Geological Survey editorial standards or stratigraphic nomenclature.



EXPLANATION

100
OVERBURDEN ISOPACHS—Showing thickness of overburden, in feet, from the surface to the top of the Menefee Cleary No. 2 coal bed. Isopach interval 100 feet (30.5 meters). Isopachs dashed where inferred. Striping limit is 200 feet (61 meters).

15
MINING RATIO CONTOUR FOR THE MENEFEE CLEARY NO. 2 COAL BED—Number indicates cubic yards of overburden per ton of recoverable coal by surface-mining methods. Contours shown only in areas suitable for surface mining within the stripping limit, less than 200 feet (61 meters) of overburden.



FAULT—Dashed where approximately located; bar and bell on downthrown side.

To convert feet to meters, multiply feet by 0.3048.

NOTE:
All section lines short dashed ----- are projected & shown in approximate locations only. Certified data not available. Refer to B.L.M. MT plats for related information.

Base from U.S. Geological Survey, 1963

Compiled in 1978

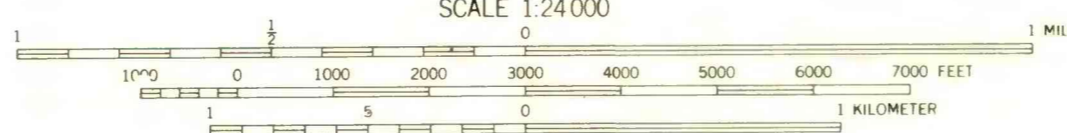

COAL RESOURCE OCCURRENCE MAP OF THE SAN LUCAS DAM
QUADRANGLE, MCKINLEY COUNTY, NEW MEXICO
BY
BERGE EXPLORATION, INC.
1979