

UNITED STATES DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

Seismic, Magnetic, and Geotechnical  
Properties of a Landslide and  
Clinker Deposits, Powder River  
Basin, Wyoming and Montana

By Carter H. Miller

1979

Open-File Report 79-952

This report is preliminary and has not  
been reviewed or edited for conformity  
with Geological Survey standards.

## CONTENTS

	Page
Abstract-----	1
Acknowledgments-----	2
Introduction-----	2
Preliminary discussion of seismic properties of clastic and clinker rocks-----	5
Calculator programs-----	12
Landslides-----	12
General geology-----	12
Springer Ranch landslide-----	13
Seismic investigations in the field surveys-----	15
Low-velocity layer-----	15
Thickness and configuration of the low-velocity layer-----	17
Correlation of the low-velocity layer with weathering and ground water-----	17
Shear waves, shear strength, and elastic moduli-----	18
Landslide model-----	19
Summary and conclusions-----	21
Clinker Deposits-----	22
Geology-----	22
Mode of ignition-----	22
Formation of clinkers-----	22
Geotechnical properties-----	23
Temperature-dependent properties-----	24
Density, porosity, and fracture intensity-----	24
Hardness-----	27
Drillability-----	27
Geophysical properties, clinker study site, Gillette, Wyo.--	27
Magnetic properties-----	27
Magnetic survey-----	29
Measurement of hand samples compared to the results of laboratory and field surveys-----	32
Seismic properties-----	32
Laboratory measurements compared to field measurements-----	35
Summary and conclusions-----	38
References-----	40

## ILLUSTRATIONS

Page

<p>Figure 1. Index map of the Powder River Basin, Wyoming and Montana, showing the sites of the Springer Ranch landslide, Gillette clinker study, and seven additional seismic lines (X SL-1)-----</p>	3
<p>2. Compressional-wave velocity distribution of the low-velocity layer (<math>V_{p1}</math>) and the underlying "layer" (<math>V_{p2}</math>) at the S-2 core hole, Sheridan, Wyo.  <u>A</u>, Seismic velocity curves from ground-surface data. <u>B</u>, Lithology and least-squared seismic velocity from drill hole data-----</p>	7
<p>3. Compressional-wave velocity distribution of the low-velocity layer (<math>V_{p1}</math>) and the underlying "layer" (<math>V_{p2}</math>) at the B-1 core hole, Buffalo, Wyo.  <u>A</u>, Seismic velocity curves from ground-surface data. <u>B</u>, Lithology and least-squared seismic velocity from drill hole data-----</p>	8
<p>4. Compressional-wave velocities and estimated economical dozing, ripping, and blasting capabilities of various rock types (    nonweathered, --- weathered). Data from surface measurements in the Powder River Basin, Wyoming, from literature, and from estimates-----</p>	9
<p>5. A semiquantitative relationship of the texture and lithology of rocks and soils to <math>V_p/V_s</math> ratio and <math>V_p</math> magnitude (after Darracott, 1976)-----</p>	11
<p>6. The Springer Ranch landslide, showing topography, geologic structure, and location of seismic lines and drill holes-----</p>	14
<p>7. Velocity layering in the Springer Ranch landslide.  <u>A</u>, Time-distance curves and geologic interpretations along seismic lines 1 and 2 (fig. 5) and <u>A-A'</u>. <u>B</u>, Isopach contours of the low-velocity layer determined by seismic refraction methods.  <u>C</u>, Cross sections (<u>B-B'</u>, fig. 5) of velocity layering in the Springer Ranch landslide-----</p>	16

Figure 8.	Seismic properties of the low- and high-velocity layers of the Springer Ranch landslide. <u>A</u> , Shear-wave velocity as a function of approximate shear strength at failure (Imai and Yoshimura, 1975; Terzaghi and Peck, 1967). <u>B</u> , Seismic velocities, densities, elastic moduli, Poisson's ratio, and shear strength at failure-----	20
9.	Clinker study area (fig. 1) showing sites of geotechnical, magnetic, and seismic investigations of clinkers (stippled) near Gillette, Wyo., along survey lines <u>A-A'</u> and <u>B-B'</u> -----	25
10.	Some properties of clinkers as a function of temperature-----	26
11.	Coefficient of rock strength of clinkers tested by the USGS (open) and compared to those rock types tested by Tandanand and Unger (1975) (darkened)-----	28
12.	Representative net magnetism of various rock types (D. E. Watson, unpub. data, November 1976)---	30
13.	Magnetic field intensity (normalized to 58,595.0 gammas) and seismic surveys along <u>B-B'</u> (fig. 9)-----	31
14.	Geotechnical, magnetic, and seismic surveys along <u>A-A'</u> (fig. 9)-----	33
15.	Field and (hand samples (open)) and laboratory (core (dark)) measurements of remanent magnetism and Earth's total magnetic field intensity run on clinkers along <u>A-A'</u> (fig. 9, 14)-----	34
16.	In situ (open) and laboratory (dark) measurements of compressional- ( $V_p$ ) and shear- ( $V_s$ ) wave velocities, the dynamic-elastic moduli ( $E$ = Young's; $G$ = shear; $B$ = bulk), and Poissons's ratio ( ) run on clinkers along <u>A-A'</u> (figs. 9, 14)-----	36, 37

# TABLE

	Page
Table 1. Compressional- ( $V_{p1}$ ) and shear- ( $V_s$ ) wave velocities of the low- ( $V_1$ ) and high- ( $V_2$ ) velocity layers and approximate thickness of the $V_1$ layer for clastic and clinker rocks, Powder River Basin, Wyoming and some compressional velocities for clastic rocks from the Soviet Union-----	6

Seismic, Magnetic, and Geotechnical Properties  
of a Landslide and Clinker Deposits, Powder River  
Basin, Wyoming and Montana

By Carter H. Miller

ABSTRACT

Exploitation of vast coal and other resources in the Powder River Basin has caused recent, rapid increases in population and in commercial and residential development and has prompted land utilization studies. Two aspects of land utilization were studied for this report: (1) the seismic and geotechnical properties of a landslide and (2) the seismic, magnetic, and geotechnical properties of clinker deposits.

(1) The landslide seismic survey revealed two layers in the slide area. The upper (low-velocity) layer is a relatively weak mantle of colluvium and unconsolidated and weathered bedrock that ranges in thickness from 3.0 to 7.5 m and has an average seismic velocity of about 390 m/s. It overlies high-velocity, relatively strong sedimentary bedrock that has velocities greater than about 1330 m/s. The low-velocity layer is also present at the other eight seismic refraction sites in the basin; a similar layer has also been reported in the Soviet Union in a landslide area over similar bedrock.

The buried contact of the low- and high-velocity layers is relatively smooth and is nearly parallel with the restored topographic surface. There is no indication that any of the high-velocity layer (bedrock) has been displaced or removed.

The seismic data also show that the shear modulus of the low-velocity layer is only about one-tenth that of the high-velocity layer and the shear strength (at failure) is only about one-thirtieth. Much of the slide failure is clearly in the shear mode, and failure is, therefore, concluded to be confined to the low-velocity layer. The major immediate factor contributing to landslide failure is apparently the addition of moisture to the low-velocity layer.

The study implies that the low-velocity layer can be defined over some of the basin by seismic surveys and that they can help predict or delineate potential slides. Preventative actions that could then be taken include avoidance, dewatering, prevention of saturation, buttressing the toe, and unloading the head. The low-velocity layer is usually less than about 5 m thick and may be excavated by dozing, whereas the bedrock must be blasted. Thus, it would seem economically feasible to underpin a structure to nonweathered bedrock or, perhaps, to remove the low-velocity layer prior to construction.

(2) Many coal beds in the Powder River Basin have burned along their outcrops, and the resulting intense heat has baked and fused the overlying clastic (sedimentary) rocks into clinkers. The clinkers are very magnetic and a buried edge of a single layer of burn can easily be located by magnetic prospecting methods. Location of the edge is very important in estimating unburned coal deposits, locating clinker quarries, and planning drilling of seismic reflection lines.

The clinkers are very porous and highly fractured, and seismic and geotechnical tests show that they have relatively low strength and competency. Many of the laboratory tests, however, are inherently biased because the clinkers are so highly fractured that only competent samples are selected. The laboratory tests, for example, show that clinkers must be loosened by heavy ripping tractors or blasting, whereas the field data and practical experience indicate that clinkers may be mined with light equipment.

Heavy structures such as coal silos and bridge abutments may have to be sited on clinkers. However, differential settlement may occur, with failure in the shear mode, because chimneys of relatively greater strength occur among the weaker clinkers. Preliminary data indicate that the chimneys may be located by magnetic or possibly seismic surveys. Special foundation-preparation techniques could be used or, perhaps, the chimneys could be avoided altogether at a construction site.

### ACKNOWLEDGMENTS

This report was prepared as a graduate thesis in partial fulfillment of the requirements for a Master of Engineering degree from the Colorado School of Mines. It is based on research conducted under the Energy Lands Program of the U.S. Geological Survey.

Technical assistance and guidance from planning through completion stage were provided by members of the Colorado School of Mines: Phillip R. Romig (Chairman), Keith A. Turner, and George R. Pickett.

U.S. Geological Survey personnel who supported the studies include Richard A. Farrow, Abelardo L. Ramirez, and Thomas F. Bullard, who participated in the seismic surveys and data reductions, and Stanley L. Obernyer, who participated in the seismic surveys. Kent A. Hewitt, Jackson K. Odum, and Philip S. Powers did the drilling, and they and David M. Worley did most of the core testing. Alan F. Chleborad, Richard A. Farrow, William P. Hasbrouck, Frank W. Osterwald, and Donald E. Watson provided technical assistance.

We thank C. A. "Dick" Springer for permitting access to the landslide on his property and for his enthusiastic support.

### INTRODUCTION

Exploitation of vast coal and other resources in the Powder River Basin, Wyoming and Montana (fig. 1), has caused rapid increase in population and in commercial and residential development in the basin since the mid-1970's. This rapid expansion is expected to continue, and the results of engineering geology studies by the U.S. Geological Survey will help ensure intelligent land utilization during this sudden expansion. This report concerns two aspects of land utilization: (1) the seismic and geotechnical properties of a landslide and (2) the seismic, magnetic, and geotechnical properties of a clinker deposit. The objectives of the study are to investigate the character and properties of the landslide and the clinker deposits so that other landslide hazards can be dealt with and other clinker deposits can be delineated and exploited by using the principles learned in this study.

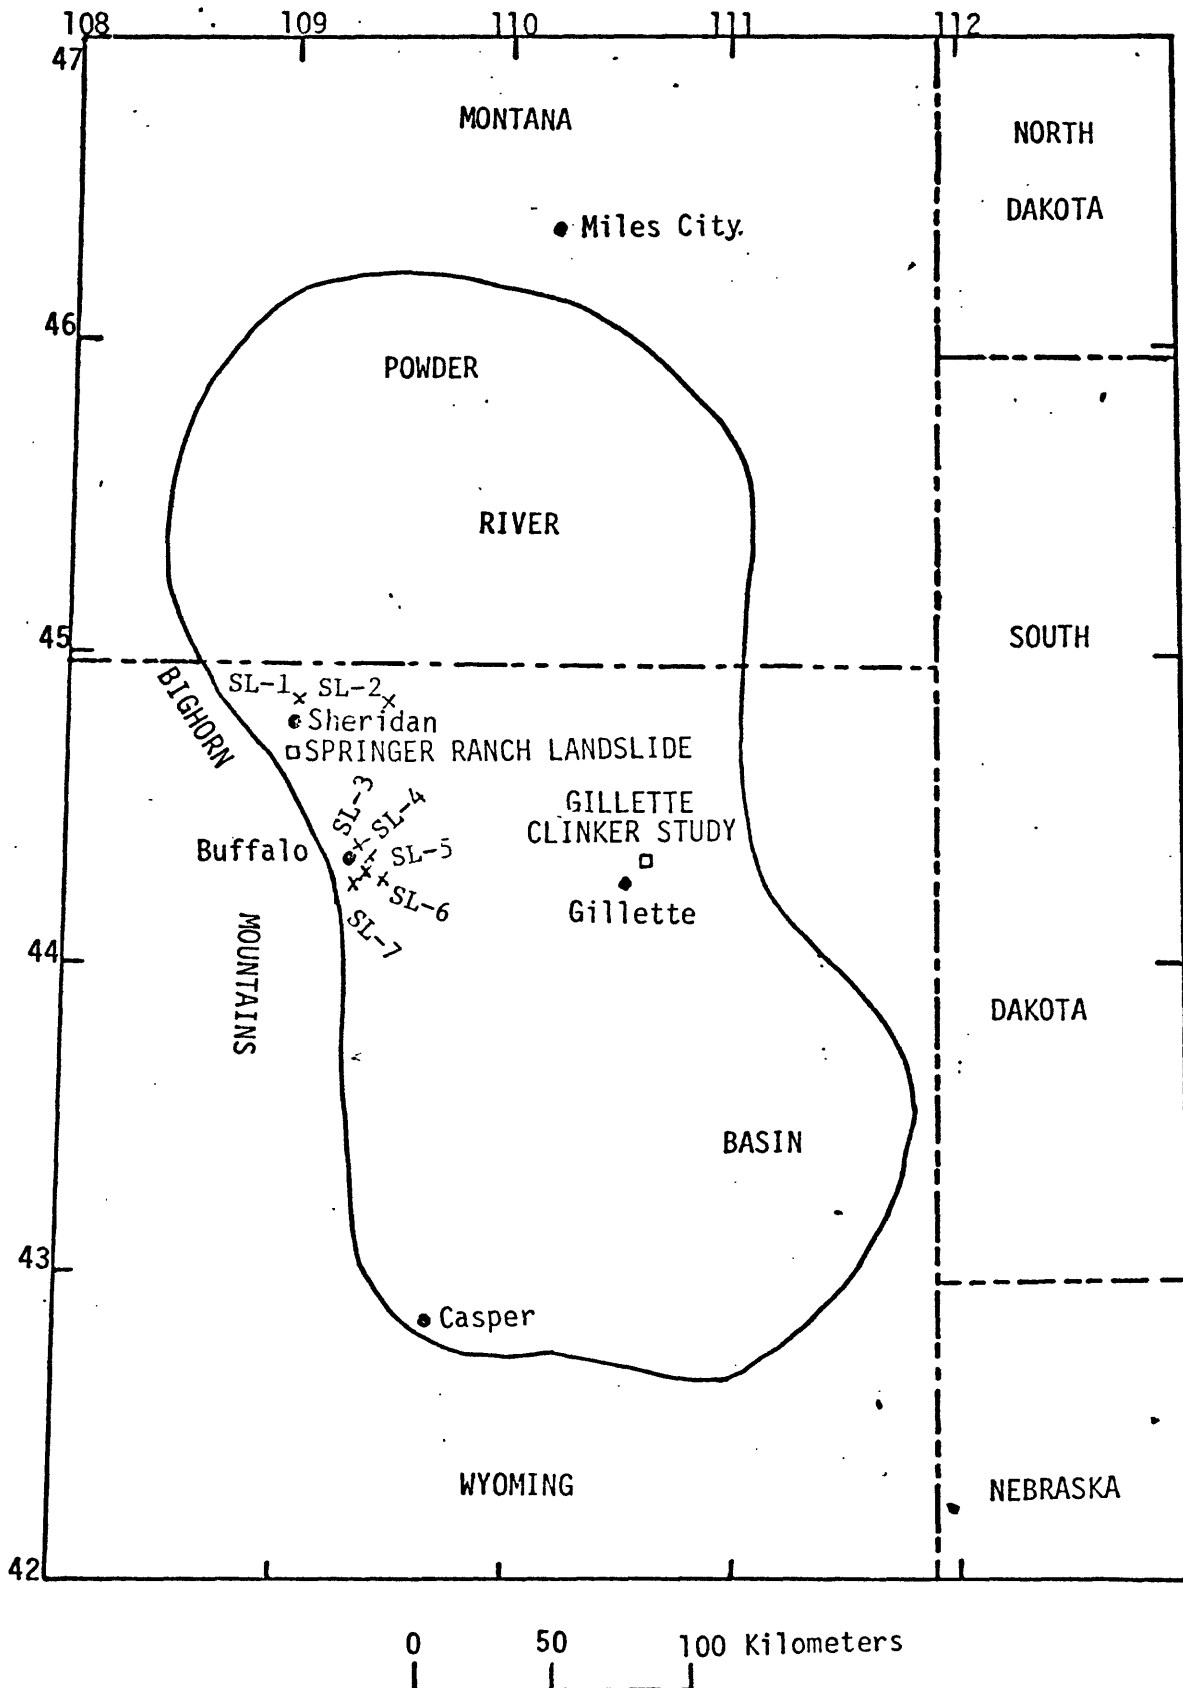


Figure 1.--Index map of the Powder River Basin, Wyoming and Montana, showing the sites of the Springer Ranch landslide, Gillette clinker study, and seven additional seismic lines (X SL-1).



The studies were done in the central part of the basin, where the bedrock may be either soft, interbedded sandstone, shale, clay, and coal of the Tertiary Wasatch or Fort Union Formation or clinker deposits. The soft sedimentary rocks of the Wasatch and Fort Union Formation are called clastic rocks in this report, and the term "clinker deposits" is meant to include all baked and fused clastic rocks as well as any coke and ash residue from the burned coal (Bauer, 1972). Both the clastic rocks and clinkers may be overlain by alluvium or colluvium, or by residual or eolian deposits, but the clinkers may be included in clastic rocks.

Landsliding is one of several geologic hazards to development in the Powder River Basin. These landslides presently cause damage mainly to highways and agricultural land, but future construction may be inadvertently or necessarily sited on a potential slide or in its path. The present report is a study of one such landslide, here called the Springer Ranch landslide (fig. 1), by seismic-refraction techniques that use both compressional waves and shear-waves.

There are striking and predictable similarities between the seismic properties at the Springer Ranch landslide and those at other seismic-measurement sites over soft, clastic bedrock. These sites include several in the Powder River Basin and one in the Soviet Union, and they will be discussed later in this report. These similarities imply that seismic and engineering geologic surveys can be applied in the delineation of unstable slopes in the Powder River Basin. If unstable slopes in the basin can be delineated, then corrective actions such as avoidance, dewatering, buttressing the toes, unloading the head, or removal of the potential slide material can be taken.

Many coal beds in the Powder River Basin have burned along their outcrops, and the resulting intense heat has baked and fused the overlying clastic rocks into clinkers. The extent that the coal has burned into the subsurface is not necessarily apparent from the surface, but magnetic methods can delineate the edge of a single layer of buried clinkers. Location of the edge is very important in estimating (nonburned) coal deposits, in locating clinker quarries, and in planning drilling or seismic reflection lines for projects, whose success may depend on the absence of clinkers. Much of the new construction in the basin may have to be sited near economic coal deposits, but not on them. Hence, clinker deposits may be the logical sites for some future construction, and knowledge of the extent of buried clinkers would, therefore, be necessary.

The clinkers are very porous and highly fractured, and their relatively low strength belies their erosion-resistant qualities. In much of the basin, however, the clinkers are the only hard material available for building highways and railroads and for use as lightweight aggregate.

Heavy structures such as coal silos and bridge abutments may have to be sited on clinkers. Differential settlement with failure in the shear mode may occur, however, because chimneys of relatively greater strength occur among the weaker clinkers. Special foundation-preparation techniques may have to be used or, perhaps, chimneys can be located by geophysical methods and avoided at the building sites.

## Preliminary discussion of seismic properties of clastic and clinker rocks

Seismic techniques and their results are the major part of both the landslide and clinker-deposit studies. Therefore, the subjects common to both places will be given a preparatory discussion here.

Seismic refraction lines were run at the Springer Ranch landslide, at the Gillette clinker-study site, and at seven additional sites shown in figure 1 (R. A. Farrow, C. H. Miller, and A. L. Ramirez, written commun., April 1977). All of these seismic lines were run over either clastic rocks or clinkers, and the resulting compressional- and shear-wave velocities are summarized in table 1. The compressional-wave data indicate that:

1. A low-velocity layer ( $V_{p1}$ ) overlies a high-velocity layer ( $V_{p2}$ ) at all of the sites in the Powder River Basin. The velocities of the low-velocity layer are essentially the same for both clinkers and clastic rocks: they range from 350 to 470 m/s and average 390 m/s.
2. The high-velocity  $V_{p2}$  layer of clinkers is poorly developed, but where it is present its compressional-wave velocities are considerably less than those for clastic rocks. The velocities for this  $V_{p2}$  layer in the clinkers range from 490 to 760 m/s and average 630 m/s, while those for clastic rocks range from 710 to 1950 m/s and average 1330 m/s.

Figures 2 and 3 show the compressional-wave velocity distribution of the low-velocity layer ( $V_{p1}$ ) and the underlying "layer" ( $V_{p2}$ ) at core holes (R. A. Farrow, written commun., 1978) in Sheridan (S-2) and Buffalo (B-1), Wyoming (R. A. Farrow, written commun., 1976). Sonic logs were run in the core holes to within about 12 m of the ground surface by Birdwell, Inc., Tulsa, Okla., and seismic refraction lines were run at ground surface by the author and R. A. Farrow (U.S. Geological Survey).

Although the S-2 hole is cored into the Fort Union Formation and the B-1 hole is in the Wasatch Formation, and the two holes are about 60 km apart, the compressional-wave velocities of both the low-velocity layer and the underlying high-velocity  $V_{p2}$  "layer" are quite similar. The inhole velocities of both holes were all recorded from the  $V_2$  "layer," and the best least-square fit was obtained for both linear and logarithmic functions of depth for each hole. The best fit for the velocities of each hole is probably the logarithmic curve, but the velocity gradients of the linear fits are more easily compared: these are 3.7 m/s/m of depth in the S-2 hole and 3.4 m/s/m in the B-1 hole.

The average seismic velocity for a 5-m-thick low-velocity layer at the S-2 hole is 349 m/s, while that for a 2.4-m thickness at the B-1 hole is 416 m/s. The  $V_{p1}$ - $V_{p2}$  interface at either core hole does not particularly correlate with the alluvium-clastic rock interface. Both core holes are collared on flood plains, however, and each velocity interface is apparently

Table 1.--Compressional- ( $V_{p1}$ ) and shear- ( $V_s$ ) wave velocities of the low- ( $V_1$ ) and high- ( $v_2$ ) layers and approximate thickness of the  $V_1$  layer for clastic and clinker rocks, Powder River Basin, Wyoming, and some compressional velocities for clastic rocks from the Soviet Union

Seismic Line	Velocity (m/s)				Approximate Thickness $V_1$ layer (m)	Lithology of $V_2$ layer
	Compressional wave $V_{p1}$ layer	$V_{p2}$ layer	$V_{s1}$ layer	Shear wave $V_{s2}$ layer		
1-----	350	1710	---	---	5	Clastic rocks.
3-----	420	1950	---	---	3	Do.
7-----	350	1210	---	---	3	Do.
Springer Ranch Landslide.	400	1470	127	530	4-8	Do.
4-----	440	910	---	---	8	Clastic rocks (coal/clinker?).
Gillette Clinker-Study Area.	370	710	---	---	4	Clastic rocks (coal?).
	350	710	230 <sup>1</sup>	---	>12	Clinkers.
2-----	350	760	---	---	4	Do.
5-----	440	610	---	---	2	Do.
6-----	470	650	---	---	6	Do.
Sochi, Black Sea Coast, Caucasus Mountains (Bogoslovsky and Ogilvy, 1977).	340-360	1360-1400	---	---	3-17	Fractured and "nonweathered" argillite.

<sup>1</sup> One shear-wave velocity line was run where there was no velocity layering.

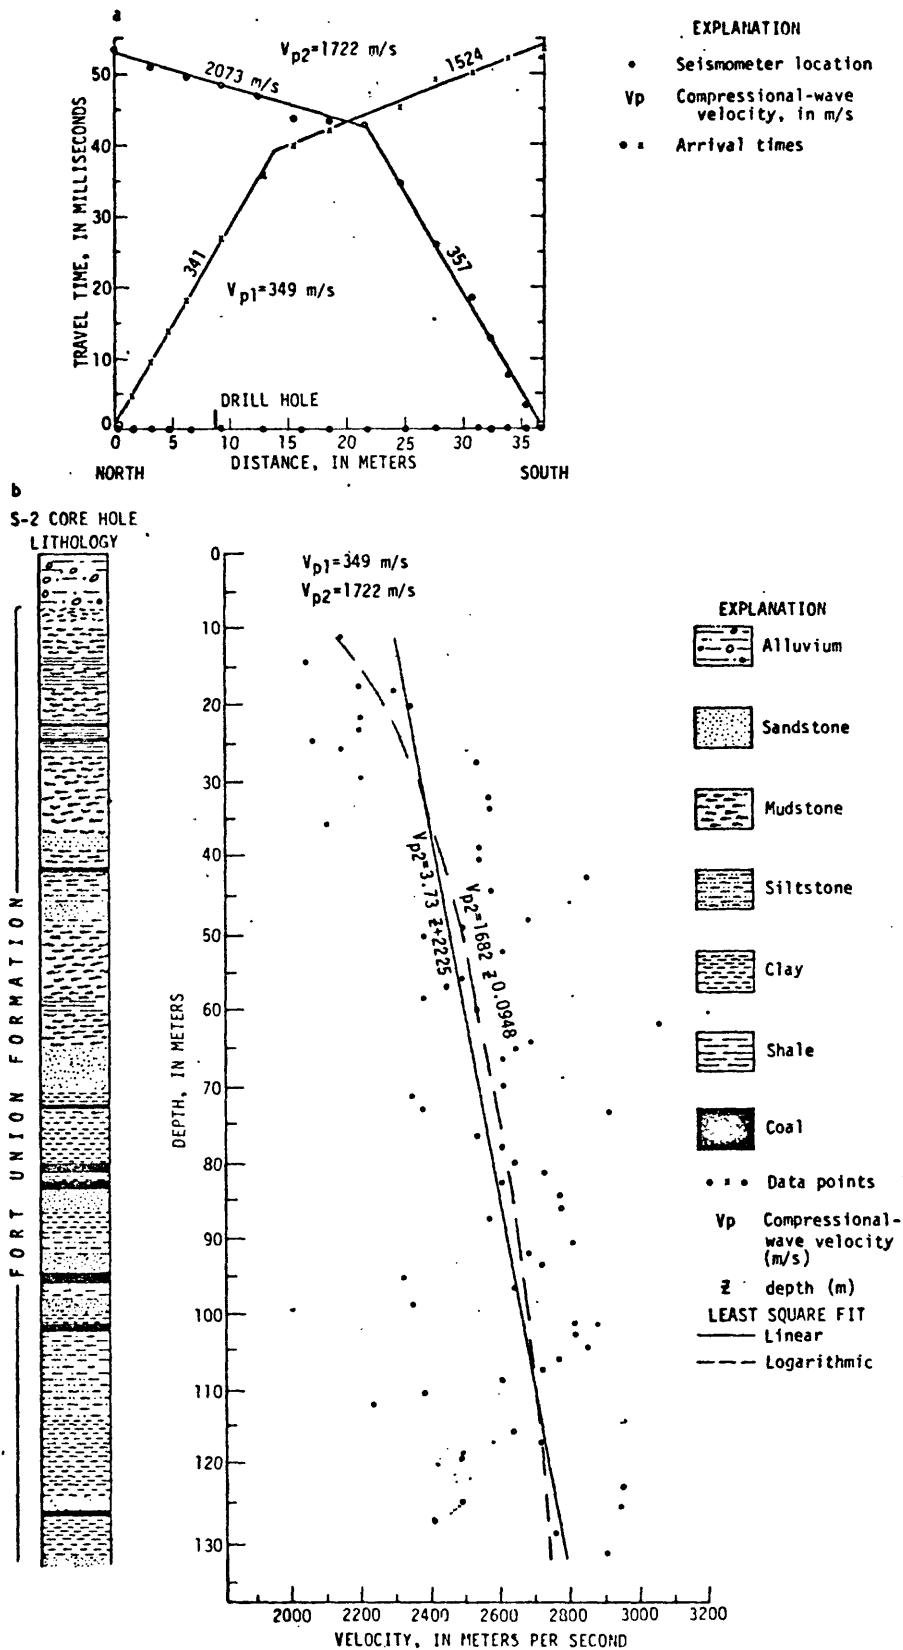


Figure 2-- Compressional-wave velocity distribution of the low-velocity layer ( $V_{p1}$ ) and the underlying "layer" ( $V_{p2}$ ) of the S-2 core hole Sheridan, Wyoming. a. Seismic velocity curves from ground. b. Lithology and least-squared seismic velocity from drill hole data.



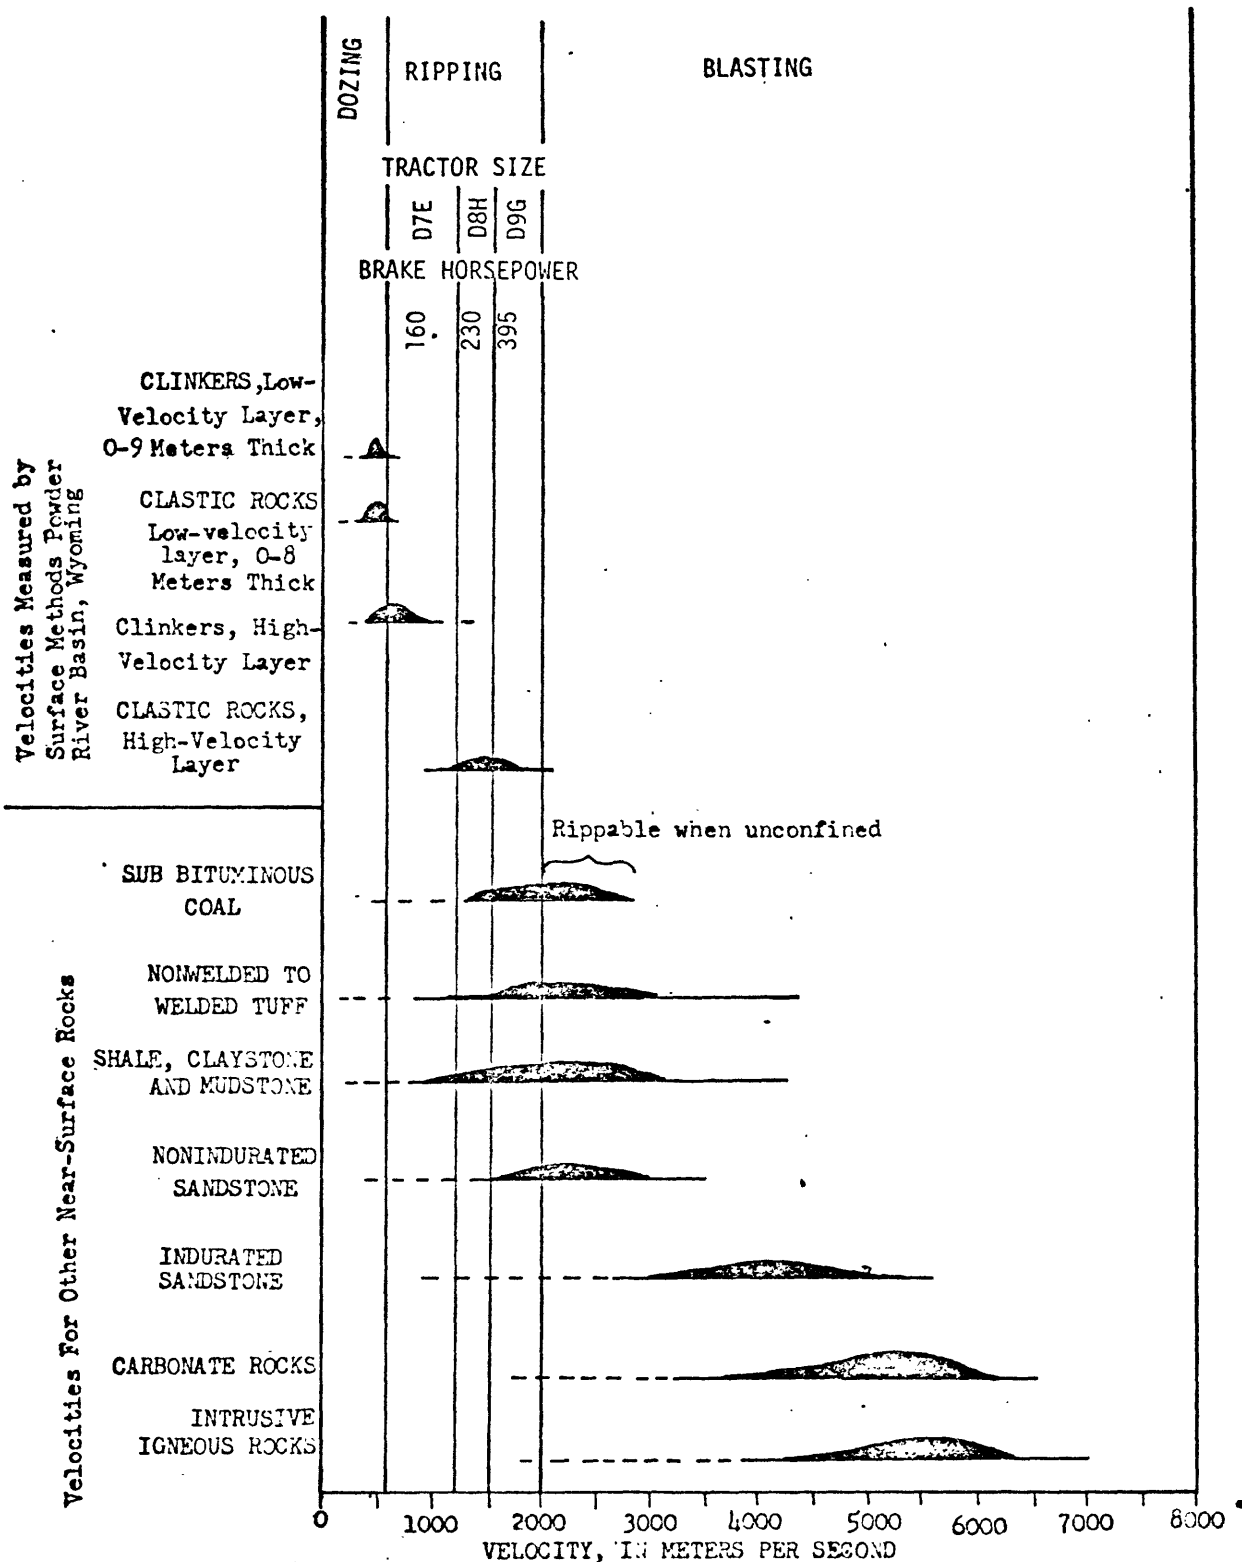


Figure 4- Compressional-wave velocities and estimated economical dozing, ripping, and blasting capabilities of various rock types (— nonweathered, --- weathered). Data from surface measurements in the Powder River Basin, Wyoming, from literature, and from estimates.

at the surface of a well-developed ground-water table in unconsolidated alluvium. The least-squares inhole velocity is 1960 m/s at the top of the  $V_{p2}$  "layer" in the S-2 hole, compared to 1722 m/s at the same depth by the surface-refraction method. The least-squares velocity in the  $V_{p2}$  "layer" for the B-1 hole is 1686 m/s, compared to 1954 m/s by the surface refraction method.

There is an empirical relation between the compressional-wave velocity and the quality or relative strength of most rocks and soils; the higher the compressional-wave velocity of the rocks and soil, the higher is their relative strength (Darracott, 1976). Figure 4 compares the compressional-wave velocities of clastic rocks and clinkers from near-surface measurements in the Powder River Basin with compressional-wave velocities of other rocks. All of the clastic rocks of the low-velocity layer have compressional-wave velocities and velocity ranges considerably lower than those of the other nonweathered rocks and are, therefore, apparently of relatively low strength.

Economical dozing, ripping, and blasting capabilities (Caterpillar Tractor Co., 1972) of rocks are also related to seismic compressional-wave velocities in figure 4. The graph indicates that all of the clinkers as well as the clastic rocks of the low-velocity layer may be dozed. The clastic rocks of the high-velocity layer may be ripped with a heavy tractor, but not dozed, and blasting is unnecessary for shallow excavations in this layer.

Degree of saturation and amount and size of voids are important parameters that affect rock and soil quality and relative strength, but which may not necessarily be accurately indicated by compressional-wave velocity. Shear waves, however, cannot be transmitted by either air or water in voids, and shear-wave velocity is, therefore, an indicator of the presence of air or water.

Much of the slope failure at the Springer Ranch landslide was clearly in the shear mode, and any differential settlement of a heavy structure sited on clinker deposits is also expected to promote failure in the shear mode. Shear strength of rocks and soil at failure varies with shear-wave velocity and, hence, relative shear strengths at the landslide and clinker-deposit site can be derived from shear-wave velocity measurements. The velocities of table 1, therefore, indicate that the shear strength (at failure) of the  $V_2$  layer associated with clastic bedrock is much greater than that of either the  $V_1$  layer of clastic rocks or of any layer of clinkers and that the shear strength of any of the clinkers is greater than that of the  $V_1$  layer of clastic rocks. This concept is applied to the Springer Ranch landslide and the Gillette clinker deposits.

Figure 5 shows a semiquantitative relationship of rock and soil texture and lithology to  $V_p/V_s$  ratio and  $V_p$  magnitude for a given layer (Darracott, 1976). The  $V_p$  velocities and  $V_p/V_s$  ratios for both layers of clinkers and clastic rocks (table 1) are plotted on figure 5. The plot indicates that the ratio is about 3.2 for the clastic rocks of the  $V_1$  layer in the Powder River Basin and 2.8 for the  $V_2$  layer, while the ratio is 1.5 for the  $V_1$  layer and 2.1 for the  $V_2$  layer of the clinker deposits at the Gillette, Wyo., site. The plot (fig. 5) also shows that the  $V_2$  layer for clastic rocks has higher relative strength than either the  $V_2$  layer for clinkers or  $V_1$  layers for clinkers and clastic rocks. Although the compressional-wave velocities for

# EXPLANATION

$V_{p1}$  Compressional wave velocity in meters per second (m/s), uppermost layer.

$V_{p2}$  Compressional wave velocity in meters per second (m/s), underlying layer.

$V_s$  Shear-wave velocity

○ clastic rocks  
X clinkers

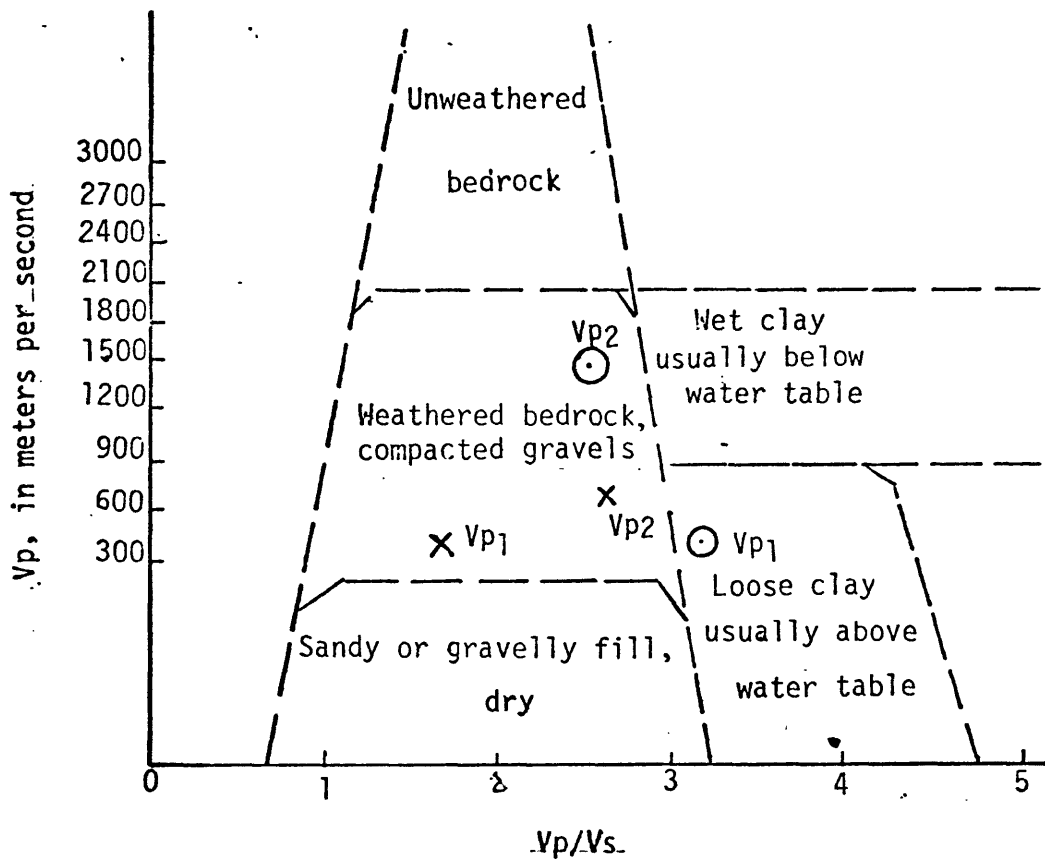


Figure 5- A semiquantitative relationship of the texture and lithology of rocks and soils to  $V_p/V_s$  ratio and  $V_p$  magnitude (after Darracott, 1976).



the  $V_1$  layer of clastic rocks and clinkers are similar, the  $V_1$  layer for clastic rocks is wetter, more clayey, and finer grained than is the  $V_1$  layer for clinkers.

### Calculator programs

Hewlett Packard 65 calculator<sup>1</sup> programs were written for much of the data reduction. These programs include: (1) depth and configuration of a buried refraction velocity layer, (2) elastic constants, and (3) stadia-alidade traverse reductions, all by Miller and Bullard, (1978a, b, c).

## LANDSLIDES

### General geology

Preliminary landslide investigations in the western Powder River Basin were made by Chleborad, Nichols, and Ebaugh (1976) and Ebaugh (1976, 1977) as part of continuing engineering geology studies. These investigations have included much of the northwestern part of the basin, but emphasis was placed on an area of 300 km<sup>2</sup> southeast, south, and west of the city of Sheridan, Wyo. (fig. 1), where extensive slope failures have occurred.

Bedrock in this area of greatest slope failure comprises shales, fine-grained sandstones, and coals of the Fort Union Formation and overlying Wasatch Formation (Mapel, 1959). Both of these Tertiary formations dip slightly to the east away from the Bighorn Mountains and toward the axis of the Powder River Basin (fig. 1). Ground-water resources have been reported by Lowry and Cummings (1966).

A mantle of unconsolidated or weathered bedrock, clay, silt, sand, gravel, boulders, and soil covers much of the bedrock in the study area. Terrace and pediment deposits of the area are as much as 14 m thick, and flood-plain deposits are as much as 30 m thick, but the thickness of colluvium seldom exceeds 3 m on the slopes (Mapel, 1959). Weak, weathered bedrock, however, locally underlies the colluvium.

Slopes that are cut in nonweathered bedrock for highways and coal strip mines in the basin do not readily fail. The strip-mine walls are nearly vertical and as much as 30 m high, but they rarely fail within a few months' time, and their lifespan may be years. Most highway cuts are of low angle slope, and the lifetime of these bedrock cuts may be decades of time. Slope failures, except for large slides that were promoted by highway construction and by streams that undercut the toes of potentially unstable slopes, seem to be confined to the mantle of alluvium, colluvium, and unconsolidated or weathered bedrock. Nonweathered bedrock apparently is not included in the relatively small landslides.

---

<sup>1</sup>Use of a brand name in this report is for descriptive purposes only and does not constitute endorsement by the U.S. Geological Survey.

In a detailed study of the factors that promote landsliding in the Big Horn quadrangle, which includes the Springer Ranch landslide, Ebaugh (1977) found that most slides occur on slopes facing in the direction of bedrock dip. He concluded that, on these slopes, artesian pore-water pressures can develop where clayey colluvium seals an outcropping bedrock aquifer. Through the principle of effective stress, these high pore pressures act to reduce effective normal stresses and thus the material's shear strength. Ebaugh believes that failures tend to occur at the base of the colluvial layer.

### Springer Ranch landslide

The Springer Ranch landslide is about 14 km south-southeast of Sheridan, Wyo. (fig. 1). It was selected for special study as representative of other slides in the area because of its geometry, slope, and orientation. The author did detailed seismic-refraction and elastic moduli investigations (C. H. Miller, A. L. Ramirez, and T. F. Bullard, oral commun., 1978), in conjunction with other members of the U.S. Geological Survey, who drilled the slide and installed piezometers and inclinometers in the drill holes. The drill holes were geologically logged, and static water levels and some physical properties of the mantle and underlying bedrock were measured.

Figure 6 shows the topography and geologic structure of the Springer Ranch landslide. The slide is on a northeast-facing slope. The limits of the slide are defined by either fresh fractures or by sudden changes in slope, where healed fractures are evident. It is about 75 m long by 75 m wide, and has moved down a gradient of about 5:1 ( $11^\circ$ ). Bedrock dip in this area is about  $1^\circ$  NE.

Tensional and shear failure, with resulting slumps and open fractures, occurs at the head of the slide. The conspicuous main scarp at the head of the slide has at least 3 or 4 m of horizontal displacement and 0.6 m of vertical displacement. Many small scarps are evident uphill from the main scarp.

Shear failure, with accompanying earthflow, is apparent in the toe of the slide. Net movement to the northeast was accompanied by an "overthrust" bulge and apparent relocation of the course of a small intermittent stream. The horizontal distance that the bulge has "overthrust" onto the old land surface is unknown.

Five holes (fig. 6) were drilled and studied in the slide area. Lithologies included clay, shale, and fine-grained, unconsolidated sandstone (Ebaugh, 1977). Both fresh unweathered bedrock and the overlying weathered zone were defined on the basis of the state of relative oxidation: dark-gray to blue-gray fresh bedrock was considered to be in the reduced state; the oxidized weathered zone above was brown, orange, and yellow, in varying proportions, and the contact between the weathered zone and the fresh unweathered bedrock is gradational. Drill hole CHP penetrated bedrock at 10.7 m, but bedrock was not found in the other four holes, whose depths ranged from 5.9 to 7.3 m.

Ground-water levels were also measured in three of the five holes. These levels were probably influenced by drilling fluids, and the true ground-water levels probably fluctuate seasonally.

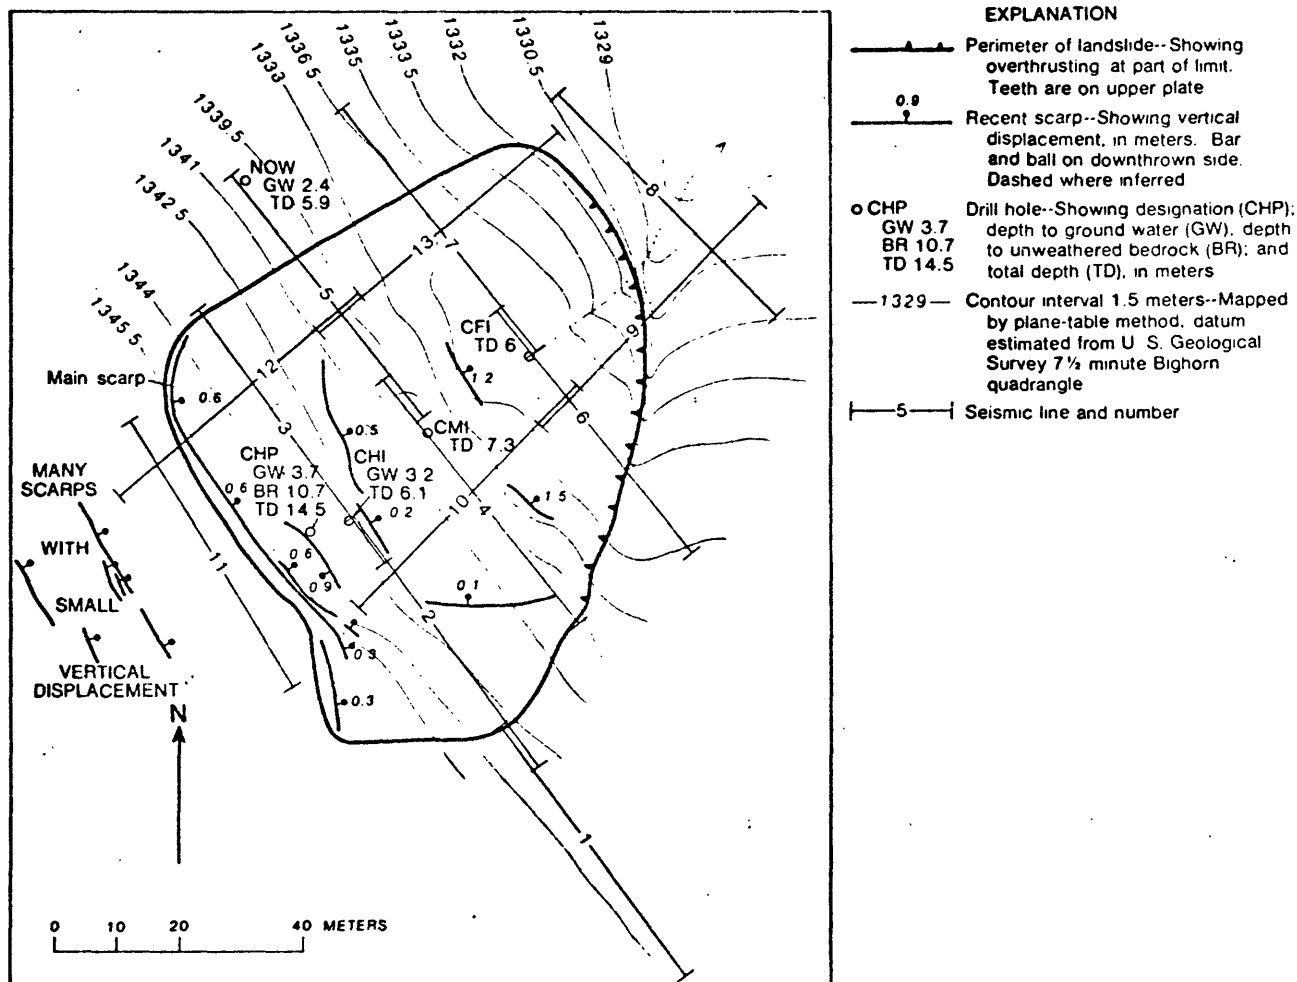


Figure 6-The Springer Ranch landslide, showing topography, geologic structure, and location of seismic lines and drill holes.

## Seismic investigations in the field surveys

Seismic investigations of the Springer Ranch landslide were of two types: a refraction (compressional-wave) survey to determine the thickness and configuration of the slide, and a shear-wave survey to determine the shear modulus and approximate shear strength of both the landslide and the underlying material that had not failed.

Thirteen seismic-refraction lines (fig. 6) were run, and one shear-wave line reoccupied the position of refraction line 2. The seismic lines were oriented mainly either parallel or perpendicular to the hillside, and lines were extended to the perimeter of the landslide. Line 1 was located completely off the landslide to provide seismic data that could be compared with data from lines on the slide.


Twelve seismometers were emplaced along each line at 4.2-m intervals for both the refraction and shear-wave surveys. Each line was 50.3 m long, and where the lines were end to end they were overlapped 8.4 m to provide continuous information at depth. The shotpoints for the refraction lines were directly under the end seismometers and were in shotholes that were about 0.6 m deep. Charges in the shotholes were equivalent to about 150 g of 60 percent dynamite, and were detonated with electric caps. The energy source for the shear-wave line was also at the end seismometers of line 2. This source was a wooden plank weighted down and oriented perpendicular to the seismic line. Horizontally oriented geophones were planted for the shear-wave surveys, and the ends of the plank were struck with a sledge hammer. The directions of the blows were alternated for each seismogram, so that reversed particle motion could be observed on the seismogram.

### Low-velocity layer

Figure 7A shows the time-distance curves for seismic lines 1 and 2. The methods of measurement along each line are the same, but line 1 is off the slide, whereas line 2 is on it.


Two velocity layers (table 1) are clearly defined by the time-distance curves of both lines 1 and 2: an upper low-velocity layer and an underlying high-velocity layer. These two velocity layers are also defined by all the other seismic lines on the landslide. In addition, the other seismic lines that have been run in the northern part of the Powder River Basin and away from the Springer Ranch landslide (table 1) also define two velocity layers. The average velocity of the low-velocity layer along line 1, off the slide, is 380 m/s, while the average velocity of the 12 lines on the slide is 407 m/s. The average velocity of the seismic lines in other parts of the basin is 390 m/s. I conclude, therefore, that (1) there is no appreciable velocity contrast within the low-velocity layer between the Springer Ranch landslide and adjacent undisturbed ground, (2) the low-velocity layer includes the landslide at the Springer Ranch, but then buried main surfaces of rupture of the slide will not all necessarily coincide with the lower boundary of the low-velocity layer, and (3) the low-velocity layer extends into at least part of the Powder River Basin.

A landslide near the town of Sochi, on the Black Sea coast of the Caucasus Mountains, was studied by Bogoslovsky and Ogilvy (1977), who

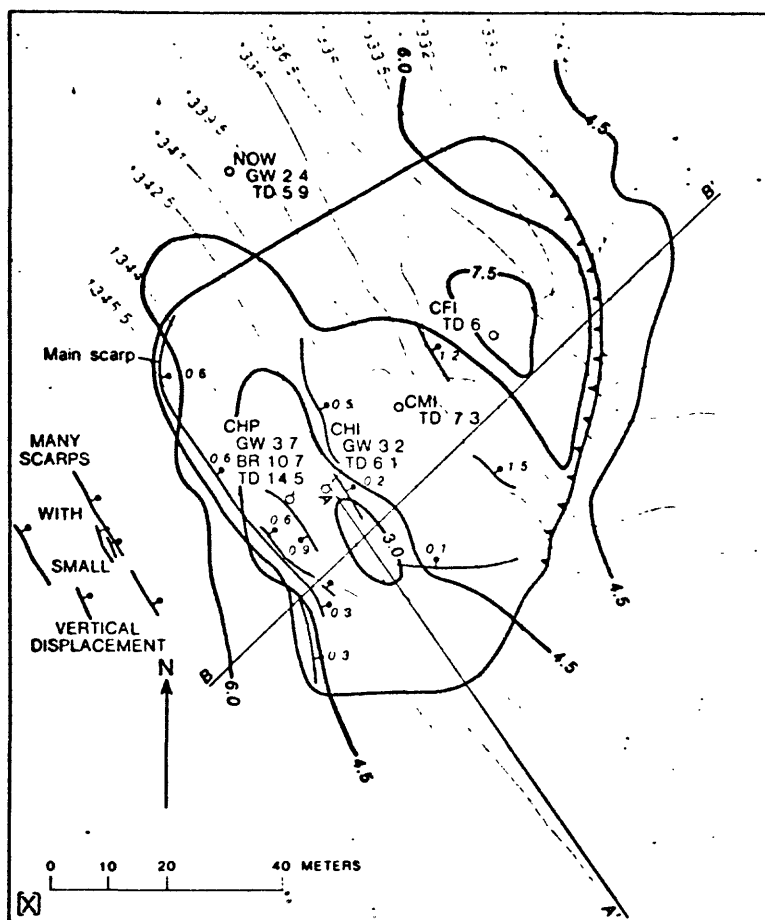


- EXPLANATION**
- Perimeter of landslide--Showing overthrusting at part of limit. Teeth are on upper plate.
  - 0.8— Recent scarp--Showing vertical displacement, in meters. Bar and ball on downthrown side. Dashed where inferred.
  - CHP Drill hole--Showing designation (CHP), depth to ground water (GW), depth to unweathered bedrock (BR), and total depth (TD), in meters.
  - 1.529— Contour interval 1.5 meters--Mapped by plane-table method, datum estimated from U. S. Geological Survey, 7½ minute Bighorn quadrangle.
  - 4.5— Isopach contour of the low-velocity layer--Contour interval is 1.5 meters.

(b.) Isopach contours of the low-velocity layer determined by seismic refraction methods.

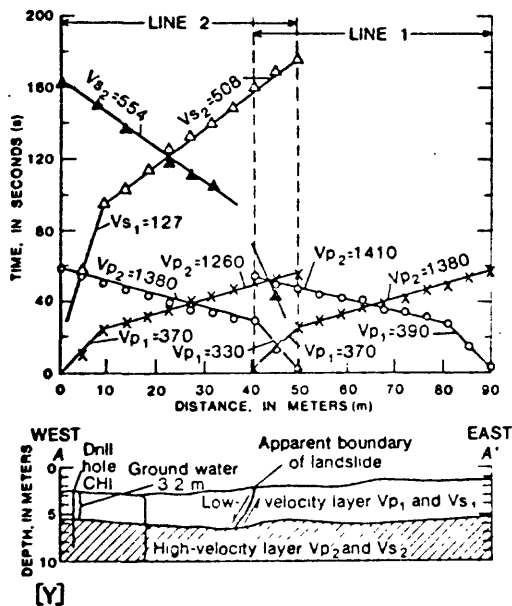

(a.) Time-distance curves and geologic interpretations along seismic lines 1 and 2 (fig. 5) and A-A'.

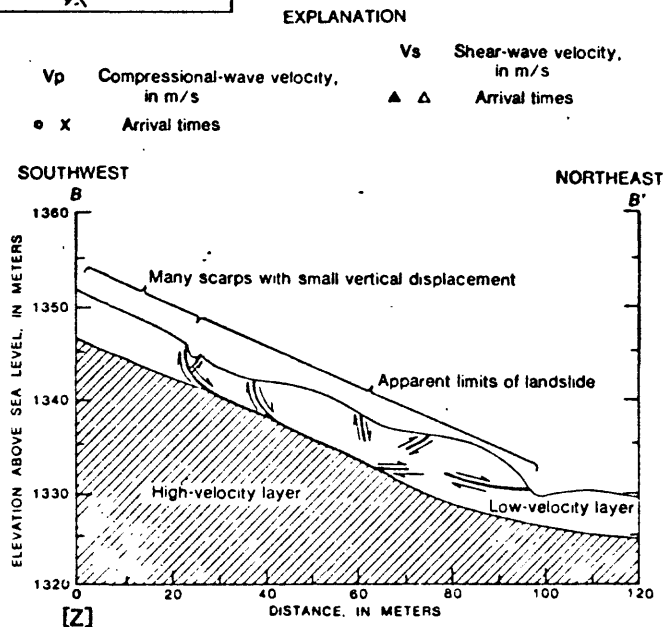

(c.) Cross section (B-B', fig. 6) of velocity layering in the Springer Ranch landslide.

Fig. 7-Velocity layering in the Springer Ranch landslide

described it as "composed of loamy rocks underlain by a weathered crust of argillites." The loam and weathered argillite is underlain by fractured but nonweathered argillite. "Seismic measurements identified a single boundary that divides the landslide slope into two distinct masses of rock. The upper one (with  $V = 340\text{--}360$  m/s) comprises the landslide body and the slip zones and the lower one (with  $V = 1360\text{--}1400$  m/s) corresponds to the upper surface of the argillites."

These velocities of the Sochi landslide are compared with those measured in the Powder River Basin and the Springer Ranch landslide in table 1. Although the studies were done independently the velocity measurements are very similar, which suggests that some seismic surveys over clastic rocks with  $V_1$  and  $V_2$  layers may be comparable.

#### Thickness and configuration of the low-velocity layer

Thickness and configuration of the low-velocity layer at the Springer Ranch landslide were interpreted from the seismic-refraction data by the method of differences (Laby, 1931, p. 637-671, modified by J. C. Hollister, Colo. School of Mines, unpub. data, 1957; Redpath, 1973). The advantage of this method is that it accounts for variations in thickness of the low-velocity layer. The variations may be due to changes in the surface topography, in the topography of the buried contact between the low-velocity and high-velocity layers, or in both. The results of the interpretation of thickness and configuration of the low-velocity layer at the slide are summarized by the isopach map and by cross sections A-A' of figures 4 and 5 and B-B' of figure 7C.

Although the seismic lines were run over undulating topography, the contact between velocity layers does not undulate, and it is nearly parallel with the restored topographic surface. The thickness of the low-velocity layer is about 3.0 m at the head of the slide, but it is more than 7.5 m at the toe bulge, which supports the observation that the toe of the slide is overthrust on a relatively undisturbed, low-velocity layer. The thickness of the undisturbed low-velocity layer away from the slide ranges from about 4.5 to 6.0 m.

#### Correlation of the low-velocity layer with weathering and ground water

Although the velocity curves (fig. 7A) clearly show two velocities whose layers contact at the depth shown by the isopach map (fig. 7B), the refraction path is through subweathered bedrock and above unweathered bedrock. The unweathered bedrock, however, is defined by visual inspection of cores from only one drill hole, CHP. The seismic waves, nevertheless, travel through the subweathered zone about four times faster than through the low-velocity layer. The velocity of propagation of compressional waves depends upon the elastic moduli of the media, and the high-velocity layer is proportionately stronger than the low-velocity layer. Relatively strong bedrock, therefore, is here defined by the high-velocity layer, and the relatively weak mantle that overlies it is defined by the low-velocity layer. The mantle includes colluvium and unconsolidated and weathered bedrock, and the high-velocity layer apparently includes subweathered as well as weathered bedrock.

Figure 6 shows that three of the five drill holes penetrated static ground-water level. The levels, however, are dependent on depth of casing, presence of drilling fluid, and time of measurement. Thus, these data are regarded as preliminary and must be used discreetly. There is no correlation between the thickness of the low-velocity zone and these preliminary static water levels. Density-moisture laboratory data from the five drill holes, moreover, show that the degree of saturation in the low-velocity layer ranges from very moist to almost completely saturated. Bogoslovsky and Ogilvy (1977) noted that compressional waves may refract along a ground-water surface, but also noted there is no distinct ground-water table where a landslide body contains clay.

In an idealized, shale-free, poorly consolidated sandstone that is saturated and under heavy static load, the velocity of compressional waves is averaged through sand grains and pore water (Wyllie, 1963, p. 130). The seismic velocity of water is about 1525 m/s, while that of silica grains is about 5000 m/s. This relationship does not hold, however, in fine-grained to clay-sized near-surface sediments, and the propagation velocity of compressional waves in these media can be much less than that in either the water or the grains (Bailey and Van Alstine, 1973). For example, a seismic line was run several kilometers away from the Springer Ranch landslide through a slough where ground water was within 0.5 m of the ground surface. The velocity of the 100-percent saturated layer, however, was only about half that of water. Evidently, the interstices of very fine-grained rocks that are not heavily loaded are ineffectively connected, so that neither fluid-borne nor grain-borne compressional waves are transmitted efficiently.

In an idealized, unconsolidated quartz sand (shale-free) that is not under heavy load, the compressional-wave velocity will greatly increase when water is added to full saturation, whereas the shear-wave velocity will decrease slightly (Gardner and Harris, 1968). I thus expect the ratio of compressional-wave velocity to shear-wave velocity in the unconsolidated material of the low-velocity layer to increase as water is added, even though the compressional-wave velocity may still be less than that of water.

#### Shear waves, shear strength, and elastic moduli

The slope at the Springer Ranch landslide has clearly failed in the shear mode to a great extent, and consequently, the slope failure depends on the shearing properties of the slope. A shear-wave line was, therefore, run along line 1 (fig. 5) to help define these shearing properties of both the low- and high-velocity layers.

Shearing strength is defined by the Coulomb equation (Terzaghi and Peck, 1967, p. 103) as shear strength at failure,  $T_f$ , by  $T_f = c + \sigma \tan \phi$ , where  $c$  is cohesion,  $\sigma$  is normal stress on the shear plane, and  $\phi$  is internal angle of friction. Cohesion is commonly equated to unconfined compressive strength,  $q_u$  at failure in engineering as

$$c_u = \frac{1}{2} q_u \tan (45 - \frac{\phi}{2}) \quad ;$$

but for small structures on cohesive soils that are not drained when tested,  $\phi = 0$  and

$$\tau_f \approx \frac{1}{2} q_u \quad , \quad (1)$$

regardless of the normal stress of overburden. Shear strength obtained by equation 1 is maximum for any test, because  $\phi$  is essentially always greater than zero for a cohesive soil. Imai and Yoshimura (1975) have related shear-wave velocity,  $V_s$ , for soils and relatively "soft" rocks to  $q_u$  by:

$$V_s = 147.6 q_u^{0.417} \quad . \quad (2)$$

Substituting equation 1 into equation 2,

$$V_s \approx 147.6 (2\tau_f)^{0.417} \quad . \quad (3)$$

Equation 3 is graphed in figure 8, and the shear-wave velocities of both the low- and high-velocity layers are compared as a function of approximate shear strength. The shear strength at failure for the low-velocity layer is about  $0.35 \text{ kg/cm}^3$ , while that for the high-velocity layer is about  $10.7 \text{ kg/cm}^3$ . Hence the shear strength of the low-velocity layer is about one-thirtieth that of the high-velocity layer at the landslide.

The elastic moduli and Poisson's ratio (Leet, 1950, p. 38-40; 1960, p. 70-72) are also parameters of relative rock strength, and they were computed from the shear- and compressional-wave velocities and from bulk densities measured on core. The results are summarized in figure 8. These data show that the shear moduli and the other elastic moduli of the low-velocity layer are about one-tenth those of the high-velocity layer.


Because the low-velocity layer is noticeably weaker than the high-velocity layer, and because the interface between the two layers does not show any evidence of having been disturbed, failure within the slope materials is very likely confined to the low-velocity layer. The number and position of main shear planes in the landslide are unknown, but in figure 7 the main slippage surface is assumed to be near the contact between the low- and high-velocity layers. Recent inclinometer data from the slide (A. F. Chleborad, unpub. data, 1978) indicate movement just below the colluvial(?) layer in weathered(?) bedrock.

#### Landslide model


These seismic investigations imply a shallow-slab landslide in weak earth materials, overlying shaly bedrock, with its toe at a break in the hillside slope, similar to the model described by Krynnine and Judd (1957, p. 642-654). Their model has a relatively pervious weathered zone developed over impervious bedrock. If the toe of the potential slide is near a decrease in gradient of the hillside below the toe, then any water introduced into the relatively pervious layer has difficulty discharging at the break in slope, where the gradient decreases. The ground water may or may not be visible at the surface, but in either case a hazardous condition is produced.

Cross section B-B' of figure 7 shows that the toe of the Springer Ranch landslide is at a break in slope. The immediate cause of failure is unknown, but A. F. Chleborad and W. F. Ebaugh (oral commun., 1977) believe that



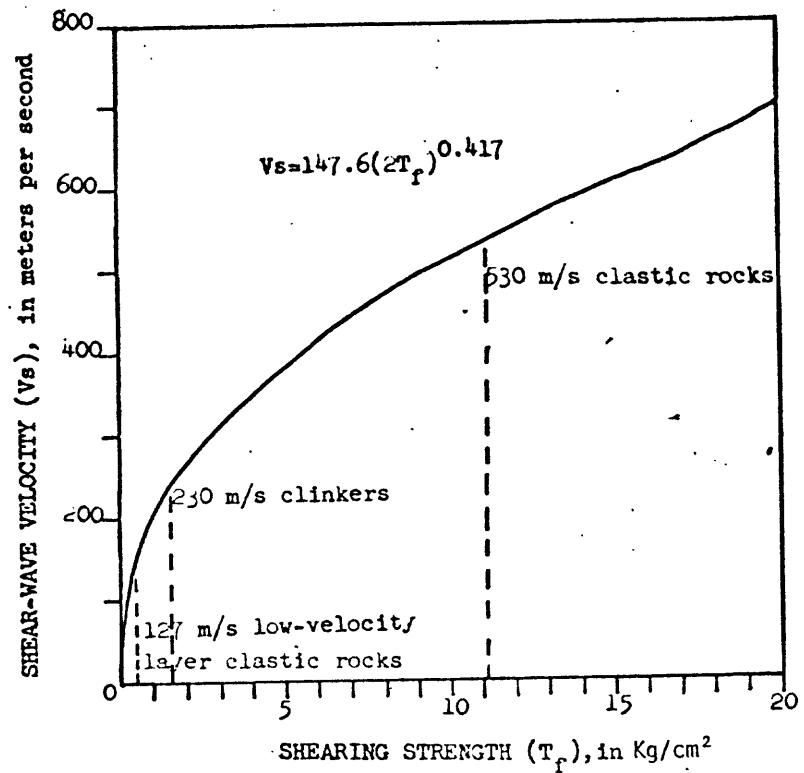

A. Shear-wave velocity as a function of approximate shear strength at failure (Imai and Yoshimura, 1975; Terzaghi and Peck, 1967).

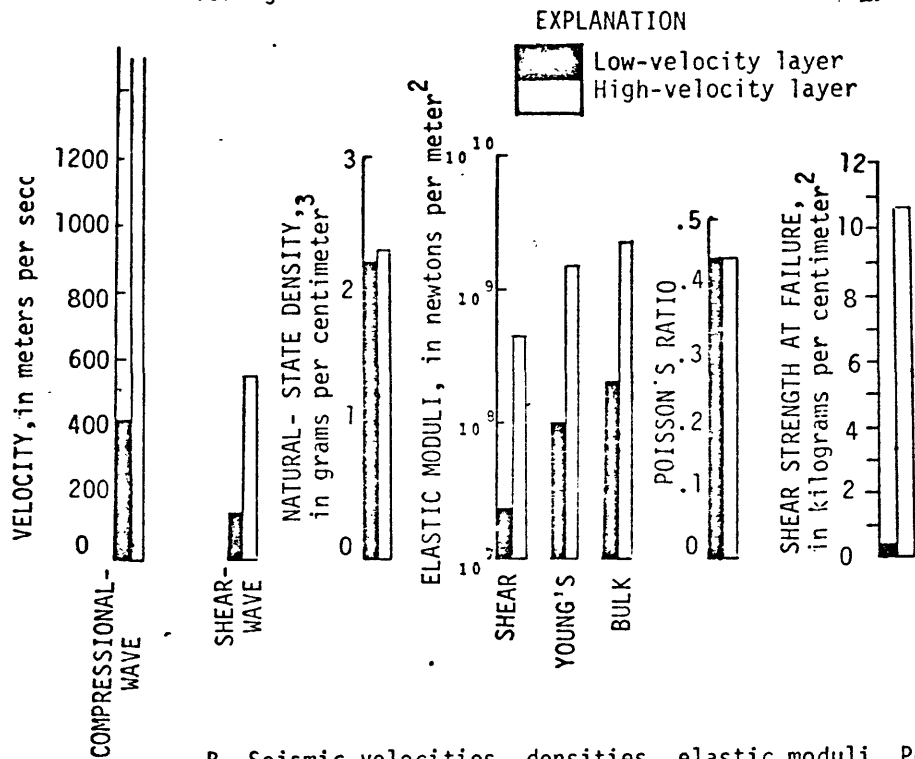

B. Seismic velocities, densities, elastic moduli, Poisson's ratio and approximate shear strength at failure for low and high velocity layers.

Figure 8. --Seismic properties of the low- and high-velocity layers of the Springer Ranch landslide.

moisture contributed to the weathered layer is the major factor. The moisture may come from an artesian system beneath the weathered layer, from precipitation on the surface of the layer, or from both. The moisture apparently promoted failure in two ways: (1) it increased pore pressure and lowered the shear strength of the already incompetent low-velocity layer, and (2) it added weight to the low-velocity layer.

Banks of snow have been observed lying on the slope of the Springer landslide. These banks are thickest during spring, and rainfall is greatest during May and June. However, no gullies have been cut through the grass by runoff in the vicinity of the slide, and therefore, much of the meltwater and rain apparently infiltrates rather than running off. Whether or not the hillside becomes saturated, the infiltrating water would greatly increase the weight of the mantle and reduce shear strength, and both changes would promote failure. If the hillside is saturated, though, then pore pressure would be established, and shear strength would decrease further; the pore pressure and seepage forces would be greatest near the toe, where support is effectively decreased, and failure would be promoted.

### Summary and conclusions

Landsliding is a geologic hazard to the rapid industrial, commercial, and residential development that is expected in the Powder River Basin. The first section of this report has presented the results of seismic-refraction and shear-wave surveys which are part of a detailed study of the Springer Ranch landslide south-southeast of Sheridan, Wyo. This landslide may be sufficiently representative of other landslides in the area that the principles learned from it can be applied to the others.

The surveys determined that a low-velocity layer overlies a high-velocity layer, both on the slide and nearby. The seismic velocities of these layers are very similar to those of other clastic rocks in other parts of the basin as well as in the Soviet Union. The low-velocity layer averages 400 m/s at the slide while the high velocity layer averages 1470 m/s. The low-velocity layer defines a relatively weak mantle of colluvium and unconsolidated or weathered bedrock, and the high-velocity layer defines relatively strong, subweathered to nonweathered bedrock. The thickness and configuration of the low-velocity layer were determined using the method of differences, which accounts for variations in thickness of the low-velocity layer. The variations may be due to a change in the surface topography, the topography of the buried contact between the low-velocity and high-velocity layers, or both. The interpreted buried contact is nearly parallel with the restored topographic surface.

The following observations indicate slope failure at the Springer Ranch landslide is confined to the low-velocity layer:

1. The buried contact of the low- and high-velocity layers is relatively smooth and is nearly parallel with the restored topographic surface. There is no indication that any of the high-velocity layer (bedrock) has been displaced or removed. Regional dip of the bedrock is but a few degrees which probably eliminates the possibility of most bedding plane slip surfaces.

2. Shear strength and elastic moduli are both parameters of rock strength. The ratio of the shear strength of the low-velocity layer to the high-velocity layer is approximately 1:30, while the ratio for the elastic moduli is 1:10.

The number and position of main shear planes in the landslide are unknown, but the main slippage surface is assumed to be near the contact between the low- and high-velocity layers.

The major immediate cause of landslide failure is probably the addition of moisture to the low-velocity layer. The moisture apparently promotes failure by increasing pore pressure, lowering shear strength, and adding weight to at least part of the incompetent low-velocity layer.

The predictable similarities of seismic properties between the slide and other parts of the Powder River Basin imply that seismic and engineering geology can be used to help predict or delineate landslides in the basin. Corrective action would be directed at the low-velocity zone and would include avoidance, dewatering, prevention of saturation, buttressing the toe, and unloading the head. The present seismic surveys show that the low-velocity layer on hillsides and over clastic rocks, where it was measured, is less than 5 m thick and may be excavated by dozing, whereas the bedrock must be blasted. This implies that underpinning a structure to nonweathered bedrock or, perhaps, removal of the low-velocity layer prior to construction would be feasible.

## CLINKER DEPOSITS

### Geology

Clinkers have been studied in many parts of the world, and they are known by a wide variety of names: scoria, baked shale, slag, natural slag, and porcellanite. Clinker deposits, as defined in this report, include all these baked and fused rocks as well as any coke and ash residue from the burned coal. The first descriptions of "burnt earth" in the Missouri River Basin were in the records of the 1804 expedition of Lewis and Clark (Hayden, 1873).

### Mode of ignition

The main mode of ignition of coal beds is thought to be spontaneous combustion. Rogers (1917) witnessed burning at six localities, and all of the burns apparently started spontaneously in relatively "fresh" outcrops along small, rapidly cutting streams. Combustion starts at a free surface, more commonly in a thick bed rather than in a thin one. Rogers related, however, accounts of ignition by prairie fires and one account of ignition by man's campfires. He also generally recognized that coals with a moderate to high proportion of volatiles are subject to spontaneous combustion. Finely divided coal is more susceptible to spontaneous ignition than are larger pieces, and small increments of heat are important in the process.

### Formation of clinkers

Clinkers in the Powder River Basin are formed from claystones, mudstones, siltstones, shales, and generally fine-grained sandstones of the Fort Union

Formation and overlying Wasatch Formation, which are Tertiary in age. Rocks that are superjacent to burned coal beds show variable appearances and properties that are related to original rock type and degree of alteration. The degree of baking of the rocks decreases with distance from the burned coal bed and, in places, clinker deposits can be traced laterally or upward from highly fused material, to virtually unaltered lignite deposits. Baking and fusing, however, is not seen in the rocks that underlie the burning coal.

Fusing occurs either within a few feet above the burning coal or along fracture-vents that conduct hot gases from the coal to the ground surface. The resulting clinkers are very porous, brittle, and highly fractured. Fine-grained rocks are apparently altered more easily than coarse grained ones. Rogers (1917) suggests that rocks may be fused as much as 23 m above the burning coal. Upon cooling, the fused rocks around the fracture vents form erosion-resistant chimney-like masses. The chimneys are darker colored and harder than the surrounding clinkers, and the radius of chimneys at one excavated site ranged from about 6 to 25 m (R. G. Warburton, Wyoming State Highway Department, written commun., 1976). Clinkers form in the clastic rocks overlying coal beds that have burned. Burning occurs most commonly at outcrops and apparently also under relatively shallow overburden in the Powder River Basin. Extensive coal-exploration drilling done throughout the basin by the Montana Bureau of Mines and Geology, in cooperation with the U.S. Geological Survey, did not penetrate clinkers below a depth of about 30 m (Eldon Woods, oral commun., 1975). Mapel (1959) reports clinkers that are more than 45 m thick east of Buffalo, Wyo. However, C. T. Reid (oral commun., 1976), a driller from Sheridan, Wyo., says that his drill penetrated more than 90 m of clinkers while drilling about 32 km east of Sheridan. Where cover over the coal is more than about 8 m thick in the Powder River Basin, the burning apparently does not extend more than 60-90 m into the hillside, unless fracture vents form and oxygen is conducted to the fire. Where the cover is less than about 6 m thick or where coal is exposed around buttes or long spurs, the burning can apparently extend much further into the hillside.

Numerous shallow depressions with interior drainage are characteristics of clinker-covered erosion-resistant topographic surfaces. The depressions evidently formed when clinkers slumped into the voids left by the burning coal beds. Lake De Smet, which lies between Sheridan and Buffalo, Wyo., and is more than 5 km long, apparently occupies a depression of this type (Mapel, 1959).

### Geotechnical properties

Both exploration and materials testing of clinkers have been done by the Wyoming State Highway Department in the Powder River Basin, according to Jack Hale (written commun., August 16, 1971), E. J. Bauer (written commun., March 23, 1975), and R. G. Warburton (written commun., 1976).

Exploration trenches and holes were excavated by the Department in some clinker deposits with equipment as light as backhoes and augers. Sandstones were mostly altered only to the extent of color change, whereas the clays were more vesicular and glassy, fractured, and darker colored. The relatively harder and stronger clinkers were of the shale type, particularly in the fused-chimney areas. Delineation of the chimneys by trenching, however, was very difficult because of differential alteration and collapse during

formation of the clinkers. Warburton concluded that each potential quarrying site for clinkers must be evaluated thoroughly and independently.

The material properties of the clinkers also varied widely because of differential alteration, and the specific gravities, therefore, ranged from 1.85 to 2.25. When samples were compacted in accordance with AASHTO (American Association of State Highway Officials) T-99 they had maximum dry bulk densities of 1.44-1.60 g/cm<sup>3</sup> and optimum moisture content ranging from 15 to 25 percent. When the samples were tested according to AASHTO T-180, the maximum dry bulk densities of 1.60-1.76 g/cm<sup>3</sup> and optimum-moisture range was 10-20 percent.

The Wyoming State Highway Department considers clinkers to be a very good highway subgrade material if quality control is exercised. They have successfully used crushed clinkers as a cement-treated base in combination with a sand filler and in seal coating of highways. They feel that selectively graded clinkers could be used as a coarse aggregate in concrete pavement provided it was not used as a wearing surface.

Some geotechnical and geophysical tests were also run on clinkers by R. A. Farrow and A. L. Ramirez of the U.S. Geological Survey. The tested properties include hardness, drillability, density, color, and magnetic and seismic properties. These tests were first run at the site east of Gillette, Wyo. (fig. 1), shown by figure 9, and were later repeated on laboratory samples from that site.

#### Temperature-dependent properties

Most of the tested properties of clinkers are dependent on the temperature during baking and fusing. Figure 10 shows (A) the concept some temperature-dependant properties observed in the field and laboratory and (B) the glass or crystal phase and color of heated shale and alluvial clay (Insley and Frechette, 1955, p. 229-235, after G. R. Shelton). The figures show that as the temperature of "gray," relatively reduced, clastic rocks increases, the rocks are first baked and then fused, and the rock colors correspondingly grade from light to dark. Most of the welding or fusing is done near chimneys, where the heat is intense. Similarly, the dark-colored rocks with high magnetism tend to be near these vents, which are also reducing environments. There is a dramatic increase of fracture intensity, porosity (including vesicularity), and magnetic intensity with increase of temperature accompanied by a rapid decrease in bulk density and seismic velocity. Welding occurs at the higher temperatures.

#### Density, porosity, and fracture intensity

Densities and porosities were measured in a U.S. Geological Survey laboratory on samples of clinkers from the site east of Gillette, Wyo. The dry bulk densities ranged from 1.56 to 1.87 g/cm<sup>3</sup> and averaged 1.68 g/cm<sup>3</sup>. Porosities ranged from 31 to 39 percent and averaged 36 percent. Average bulk density of nonaltered clastic rocks is about 2.25 g/cm<sup>3</sup>, and their porosities are about 15-25 percent. The total porosities of rocks measured in place, however, is considerably greater than those measured on samples in the laboratory, because the in situ clinkers display much more fracture porosity than the laboratory samples. The total porosity of most in situ clinker



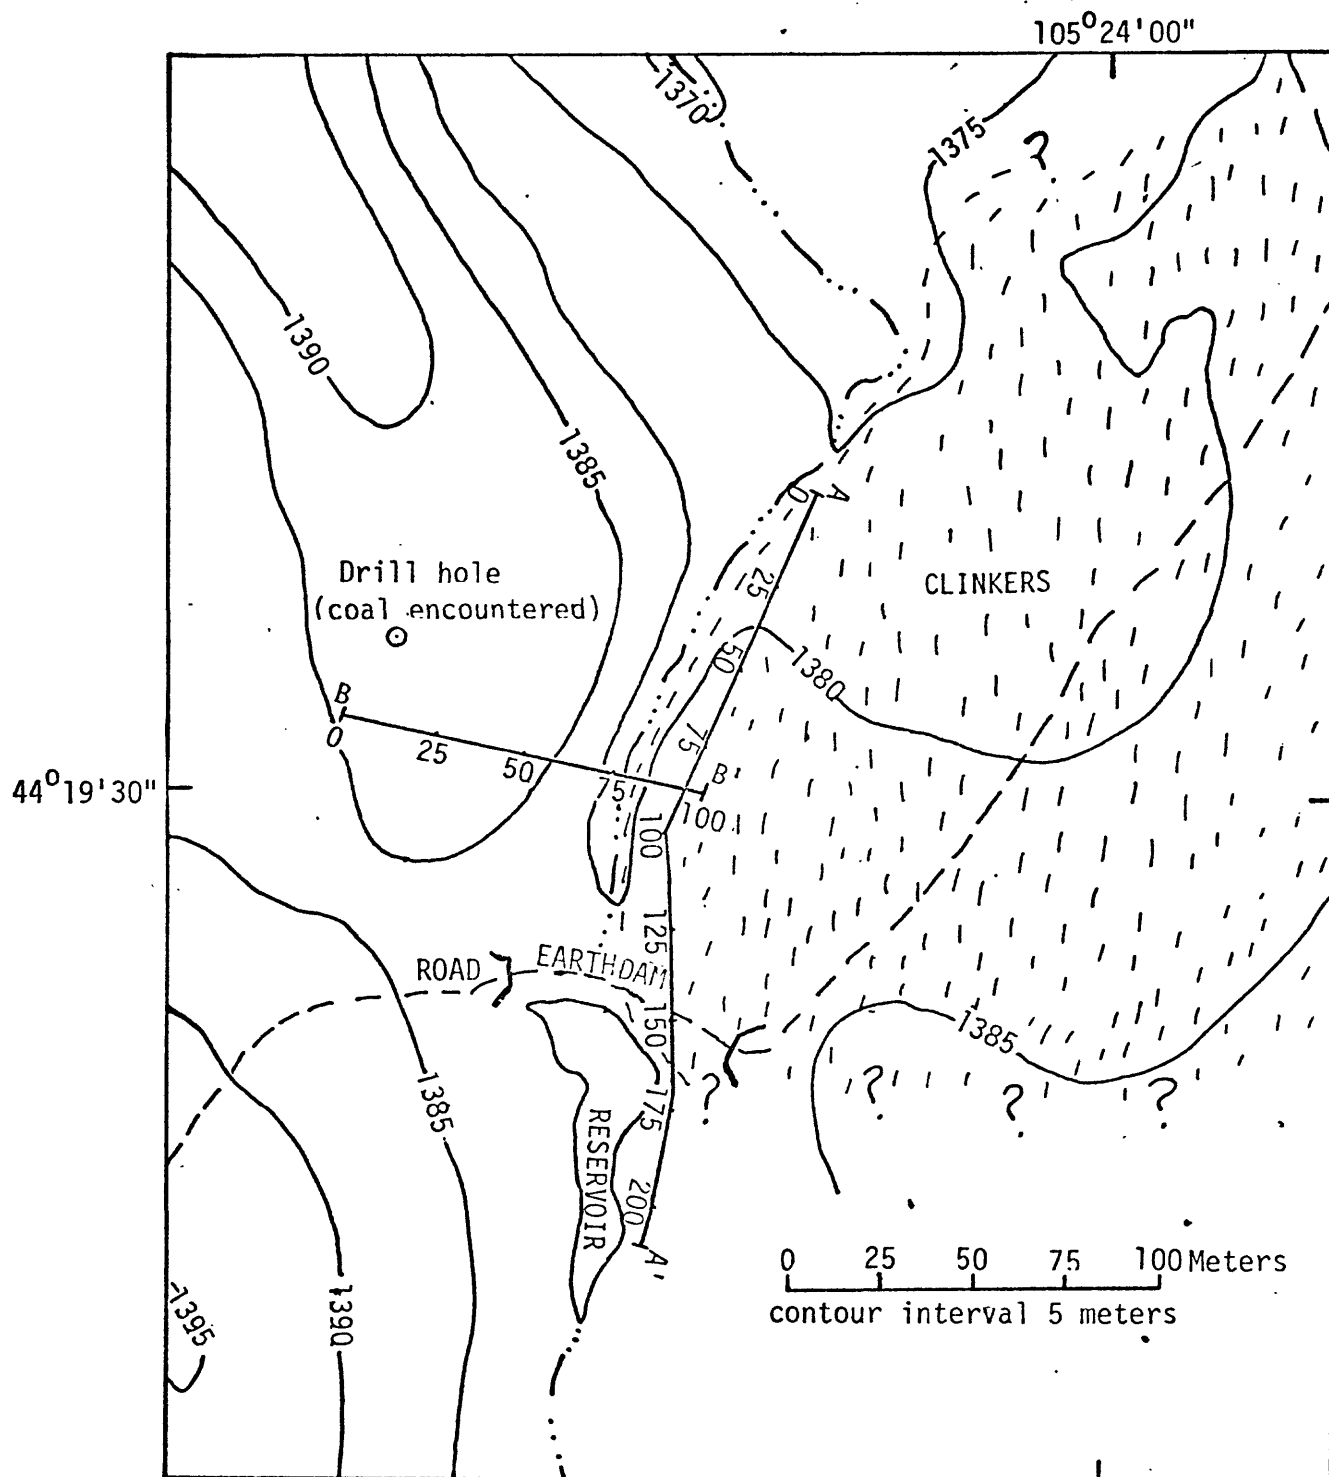


Figure 9- Clinker study area (Fig. 1) showing sites of geotechnical, magnetic, and seismic investigations of clinkers (stippled) near Gillette, Wyoming, along survey lines A-A' and B-B'.

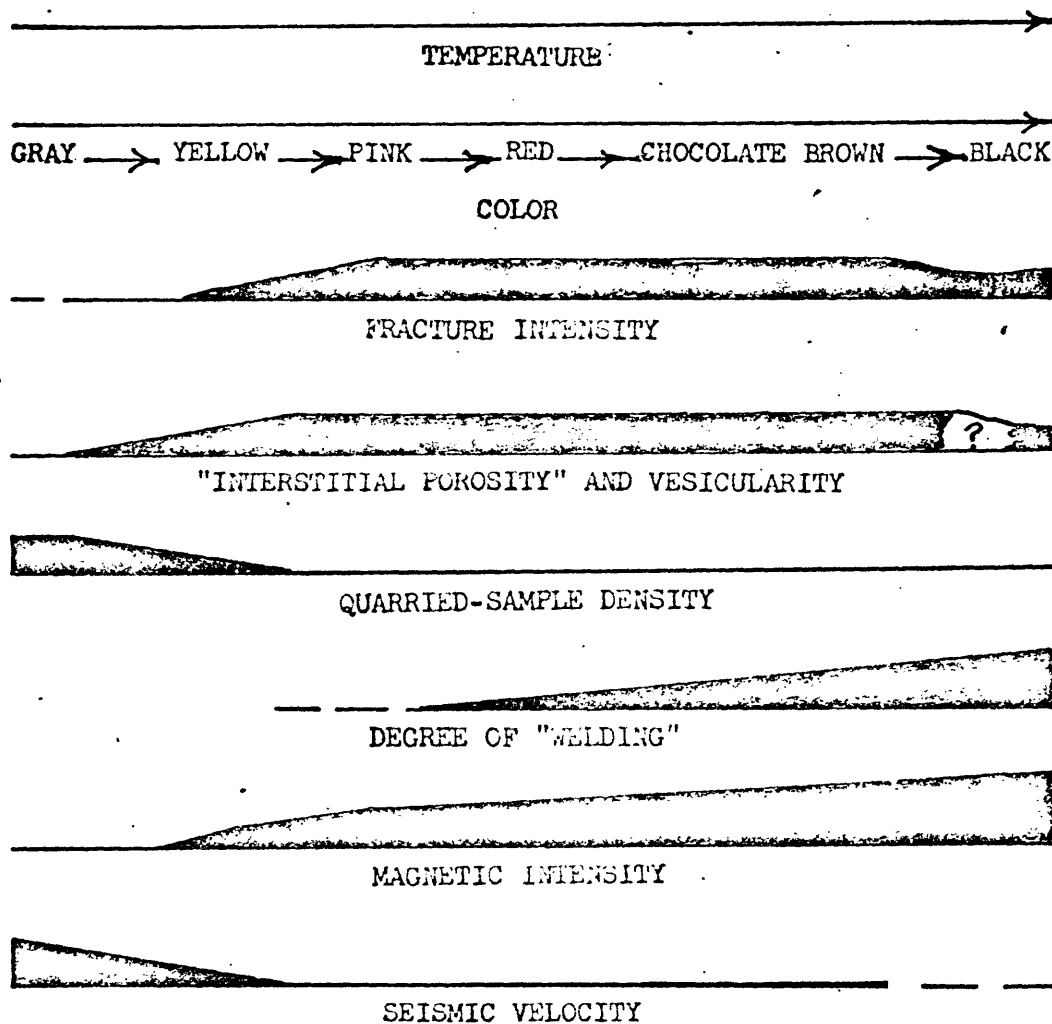

A, Generalized properties of clinkers.

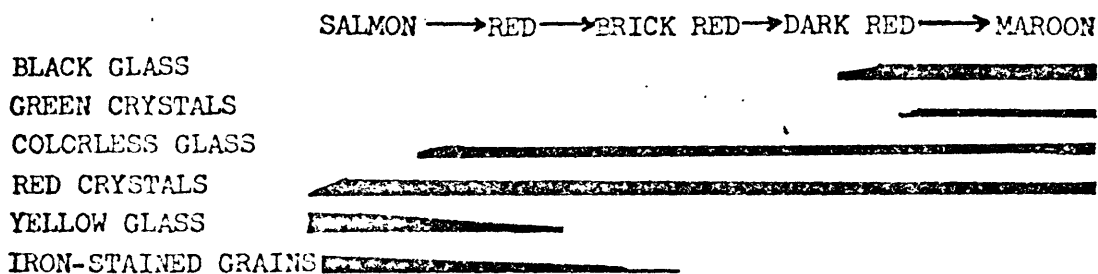

TEMPERATURE (°C) 945 1005 1050 1095 1125 1145 1180 1210

B, Color of glass and crystal phases of shale and alluvial clay (Insley and Frechette, 1955, after G.R. Shelton).

Figure 10- Some properties of clinkers as a function of temperature.

deposits is estimated to be on the order of 50 percent, which is about one-fourth to two-thirds more than that of the laboratory-measured samples.

Clinker samples are quarried only with great difficulty because of their highly fractured nature. An intact sample is, therefore, not representative of an outcrop, and laboratory samples are inherently biased toward the relatively stronger clinkers.

### Hardness

Hardness, as used here, implies resistance to deformation. Schmidt rebound hardness (Deere and Miller, 1966) was one kind of field test run on in situ clinkers. This test provides a Schmidt hardness number that is commonly compared to uniaxial compressive strength. These tests were run on fresh clinker surfaces in the outcrop along line A-A' of figure 9. The clinkers, however, were almost completely nonresponsive to the Schmidt hammer tests, and the data were not definitive. Because the clinkers are so highly fractured, it was impractical to core a clinker sample for uniaxial testing.

### Drillability

Clinkers were tested for drillability by a test originally developed by Protodyakonov (1963) and modified by Tandanand and Unger (1975). This laboratory test is related to percussion drilling in particular, and the drillability is a function of hardness and wearability as well as other parameters.

The drillability test (fig. 11) generates CRS (Coefficient of Rock Strength) numbers, which are proportional to the minimum number of blows needed to at least partly crush a sample, divided by the maximum volume of minus 0.5-mm material produced by the blows. Of course, the test requires certain normalizing conditions.

The average CRS number from 12 drillability tests on clinkers is compared in figure 11 with CRS numbers of other rock types. The CRS number of the clinkers is the lowest shown. Even so, the CRS number of the clinkers seems high considering that the other types of rocks are relatively competent.

Clinkers are usually rotary drilled, and the drilling is very difficult. The main problems are loss of circulation and caving above the drill bit.

## Geophysical properties, clinker study site Gillette, Wyoming

### Magnetic properties

When gray clastic rocks are heated, they tend to turn some shade of red or dark brown and become more magnetic. According to D. E. Watson (unpub. data, 1976) the reddish color can be mostly attributed to iron-oxide silicates, but the minerals that mainly contribute to the thermal-remanent magnetism are generally found to be ilmenohematites and titanomagnetites. The magnetic domains of these minerals are originally in a relatively random orientation, but heating reorients the domains so that they are parallel with



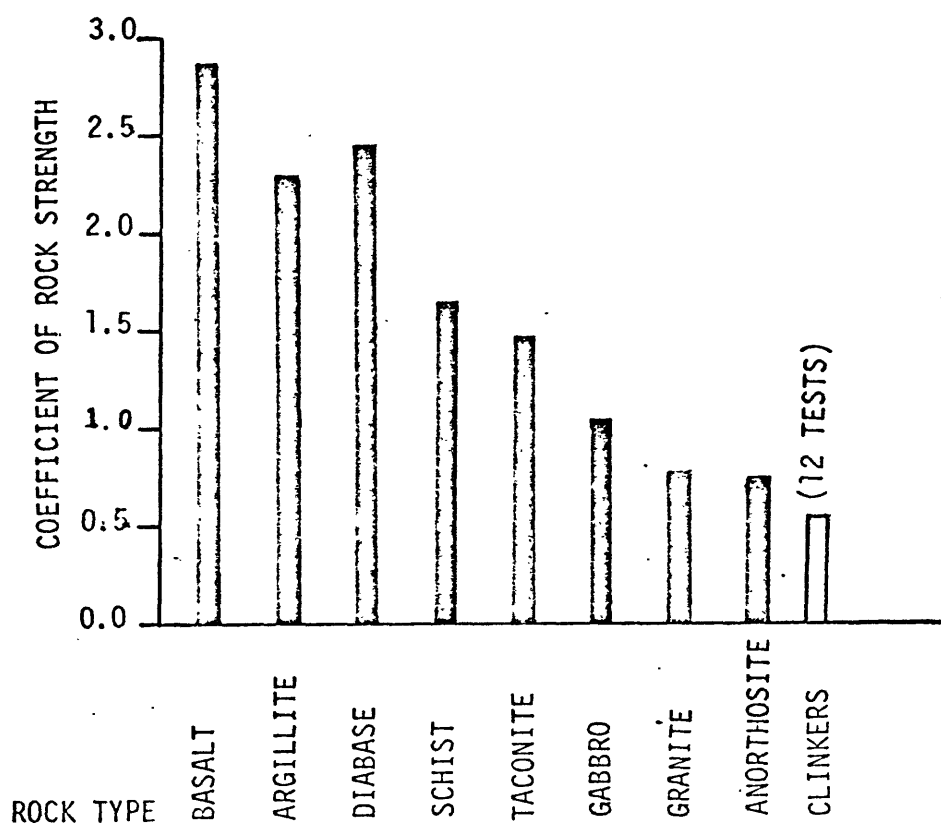


Figure 11. --Coefficient of rock strength of clinkers tested by the U.S. Geological Survey, compared to those of rock types tested by Tandarand and Unger, 1975.

the Earth's field at the time of the heating; thus, the net magnetization is greatly enhanced. The temperature does not have to exceed the Curie point, however, for the rocks to be remagnetized. Partial reheating is sufficient to realign many of the magnetic grains. Near the chimneys, however, the rocks tend to be much more magnetic. This is due to exposure to extremely high temperatures, which are frequently above the Curie temperatures of most minerals, and to the presence of slightly reducing gases, which keep the minerals from oxidizing to the more weakly magnetic hematite, for instance.

Comparison of the distribution of magnetization of various rock types is shown in figure 12. The net magnetization of a clastic rock is dramatically increased by several orders of magnitude when the rock is baked, and the strength of magnetization appears to relate to the degree of baking and fusing. The resulting clinkers are among the most magnetic rocks found in nature. This great magnetization is the basis of the present investigations of the lateral extent of buried clinker deposits.

Magnetic survey.--Magnetic surveys were run with a portable proton magnetometer at the Gillette, Wyo., clinker study site (fig. 9) along lines A-A', in conjunction with seismic and geotechnical surveys, and along line B-B'. Readings were taken at about 3-m intervals with the sensor at a constant height of about 2.1 m above the ground. Individual readings of total magnetic intensity were read to an accuracy of about 1 gamma (1 nanotesla). The readings were reduced to a base value of 58,595.0 gammas, which is representative of the Earth's total intensity magnetic field near Gillette, Wyo. Base readings were repeated within 15 minutes of the initial reading at an accuracy of 4 gammas, and this base drift was linearly distributed over the station readings.

The magnetic survey run along line B-B' (fig. 13) defines the extent of the clinkers, which crop out east of the streambed. Only small amounts of clinkers can be seen in the colluvium derived from clastic rocks along the west bank. Although traces of coal cannot be seen in the colluvium along the west bank, coal cuttings are visible at the collar of a drill hole about 80 m west of the stream. A magnetic anomaly of more than 700 gammas is shown over the clinker outcrop. The anomaly begins at about 45 m west of the stream and achieves greatest magnitude over the crown of the outcrop of clinkers. The midpoint of the anomaly is nearly over the streambed. Secondary, higher-frequency inflections are on the flank of the main magnetic anomaly. These seem to be caused mostly by higher frequencies due to a steep gradient of magnetization.

If the midpoint along the flank of the major anomaly is chosen as the contact of clinkers and clastic rocks, it would be approximately at the streambed. Presumably, the burn began somewhere along the east side of the young, rapidly cutting stream, because the clinker deposit apparently ends near the streambed. The midpoint method for determining the edge of clinkers is apparently accurate to within about 2 m.

This method of exploration for a lateral contact of clinkers with coal or clastic rocks was first described by Hasbrouck and Hadsell (1976). They demonstrated the relative ease of location of buried clinkers if only one seam has burned and found that the method is useful for locating clinker quarries, water wells, and other construction sites and for planning seismic exploration

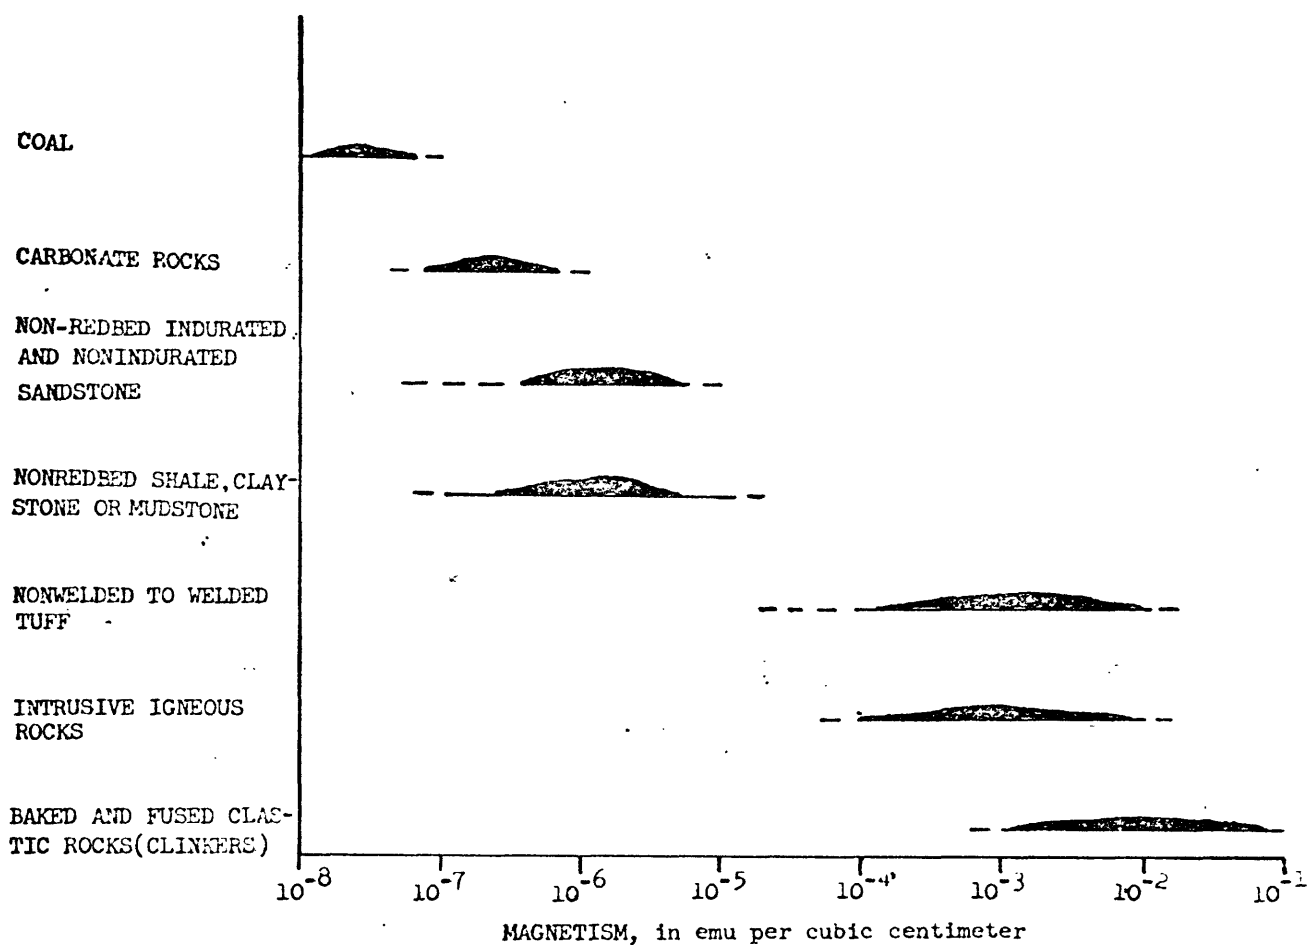


Figure 12- Representative net magnetism of various rock types (D.E. Watson, unpublished data, 1976).

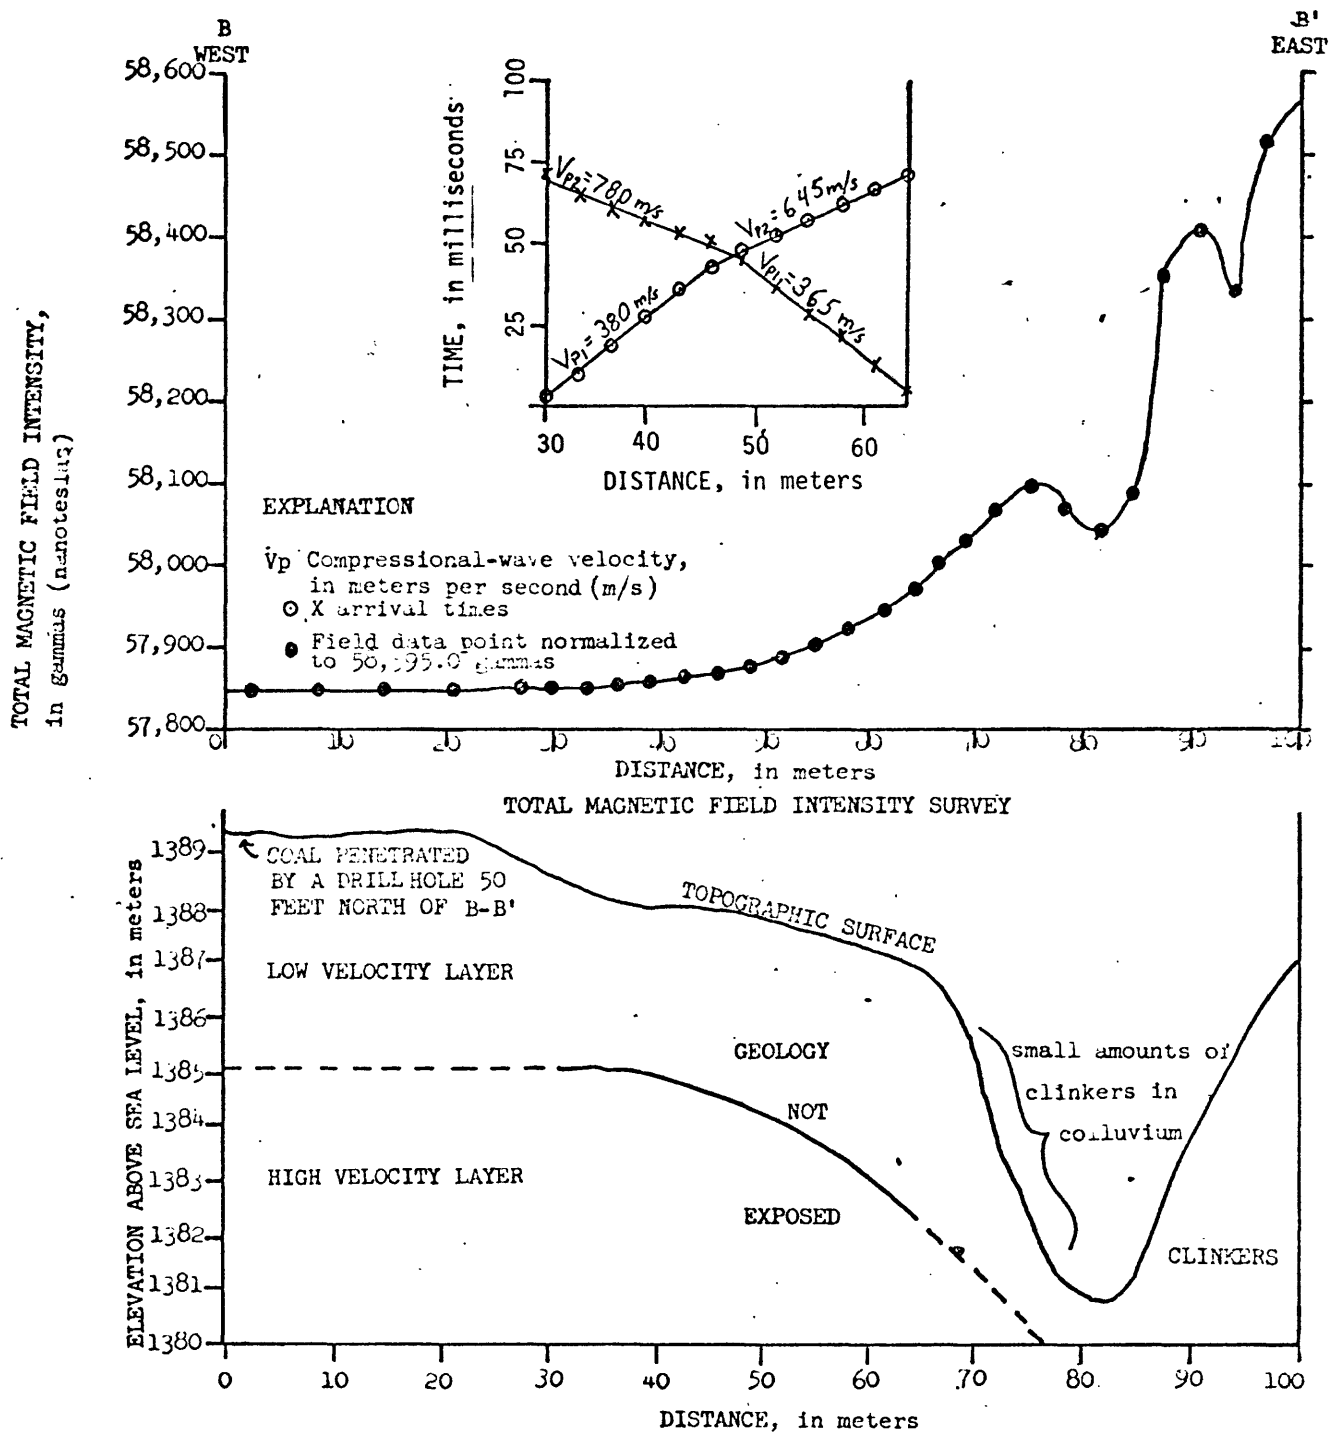


Figure 13- Magnetic field intensity (normalized to 58,595.0 gammas) and seismic surveys along B-B' (fig. 9)

surveys. Conversely, the method is useful for determining coal reserves by delineating the edge of unburned coal deposits without extensive drilling.

Magnetic line A-A' (fig. 14) was run parallel to the clinker outcrop to determine the magnetic field of the exposed clinkers. The cross section along A-A' shows a general anomaly over the outcrop of about 800 gammas, and the magnetic profile indicates that the clinkers probably terminate near the north end of the line. Three or four localized high anomalies of as much as 500 gammas are superimposed on the main anomaly. These localized anomalies probably are affected by subsurface features behind the outcrop and may be caused by highly magnetized chimneys. Only one chimney, about 10-15 ft wide, is exposed (at about 61 m, fig. 14), and there is a localized anomaly associated with it. D. E. Watson and M. L. Botsford (unpub. data, 1976) have run magnetic profiles near clinker quarries, and have also recorded these localized anomalies. They think that the anomalies are caused either by the fused rocks in chimneys or, perhaps, by random but large variations in magnetization.

Measurements of hand samples compared to the results of laboratory and field surveys.--Remanent magnetism was measured on hand samples with a portable magnetometer, using a field technique described by Briener (1973). These measurements are compared in figure 15 with remanent magnetism measured in the laboratory on two small cores and with the total magnetic field intensity along line A-A' (figs. 9, 14). Neither the hand nor core measurements compare well with the relative amplitude of the magnetic field survey over the outcrop. The laboratory measurements on the two cores, however, compare well with those on hand samples that were selected from the outcrop near the sites where the laboratory samples were selected. Six cores were submitted for laboratory analysis, but four of the samples fractured so badly during preparation that a suitable plug could not be drilled. I conclude that the field hand-sample technique is much faster and convenient, and perhaps as accurate as that of the laboratory core-measuring technique.

### Seismic properties

Seismic surveys were run along lines A-A' (fig. 14) and B-B' (fig. 13) at the clinker site (fig. 9). The surveys along A-A' were apparently all on clinkers, while the survey along B-B' was mostly on clastic rocks for comparison to clinkers. The average velocity of the low-velocity layer of clinkers is 344 m/s, which is very similar to that of 372 m/s for the clastic rocks. The average velocity of the high-velocity layer of clinkers, however, apparently averages about 490 m/s, although that of clastic rocks is 712 m/s.

The high-velocity layer of clastic rocks along B-B', however, is poorly developed, and its velocity is exceptionally low for clastic rocks. Perhaps the coal beneath B-B' is weathered enough in the high-velocity zone to account for the anomalously low velocity.

The range of compressional-wave velocity compared to the economical excavation graph of figure 4 indicates that the clinkers in the low-velocity layer may be easily dozed, and that ripping and blasting are not necessary. Clinkers in the high-velocity layer may be marginally dozed and easily ripped, and blasting is not necessary. In practice, however, clinkers in the Powder River Basin are quarried with equipment lighter than a D-7 tractor, although sandstone overburden must sometimes be loosened by explosives. The fused

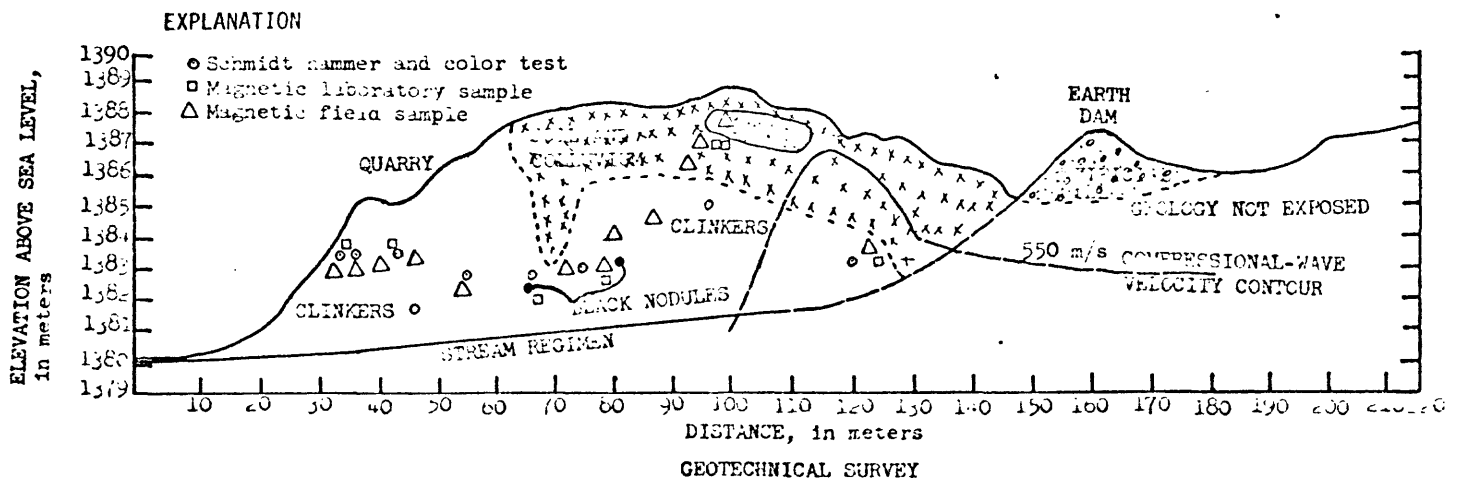
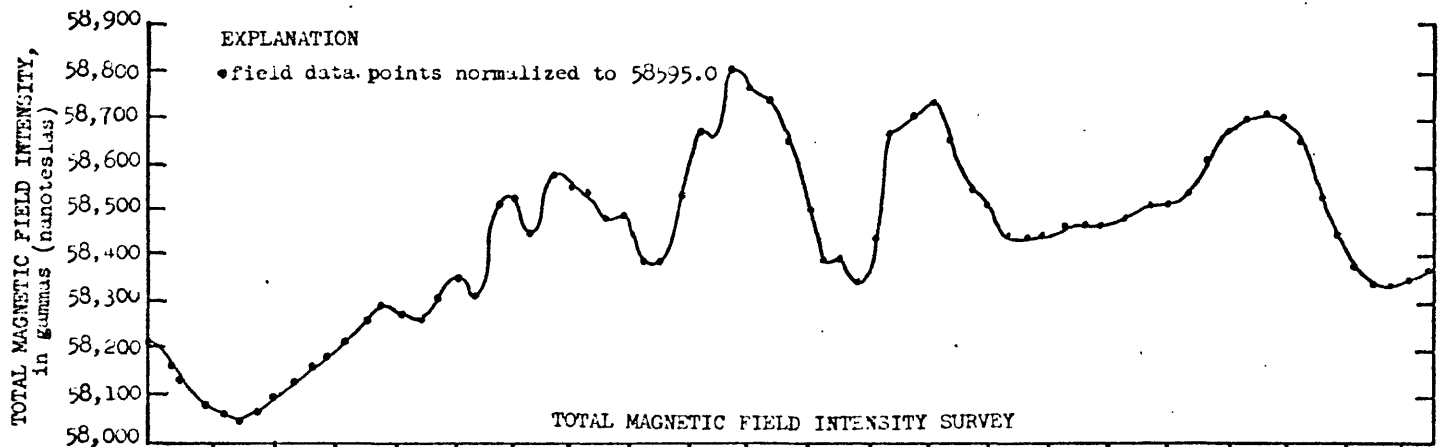
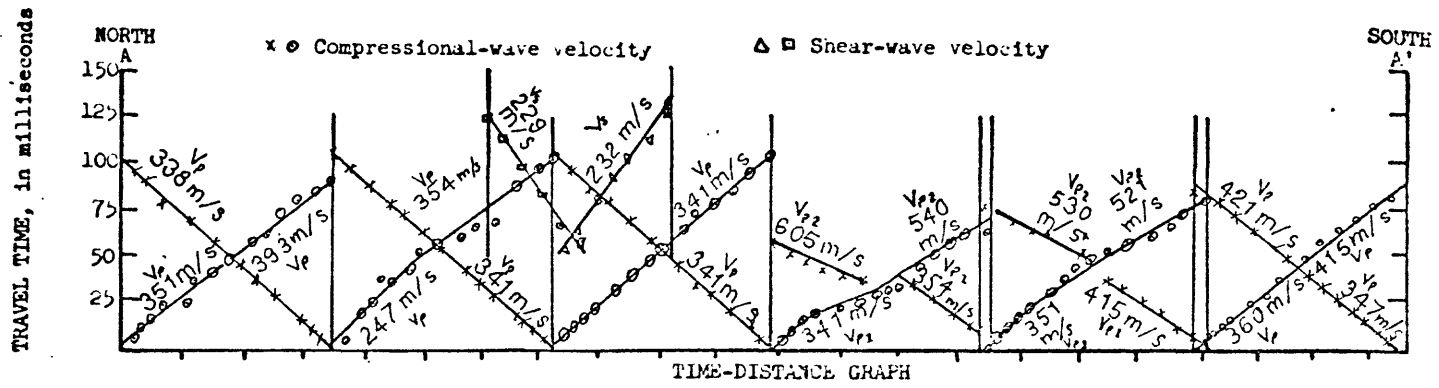


Figure 14- Geotechnical, magnetic, and seismic surveys along A-A' (fig. 9)

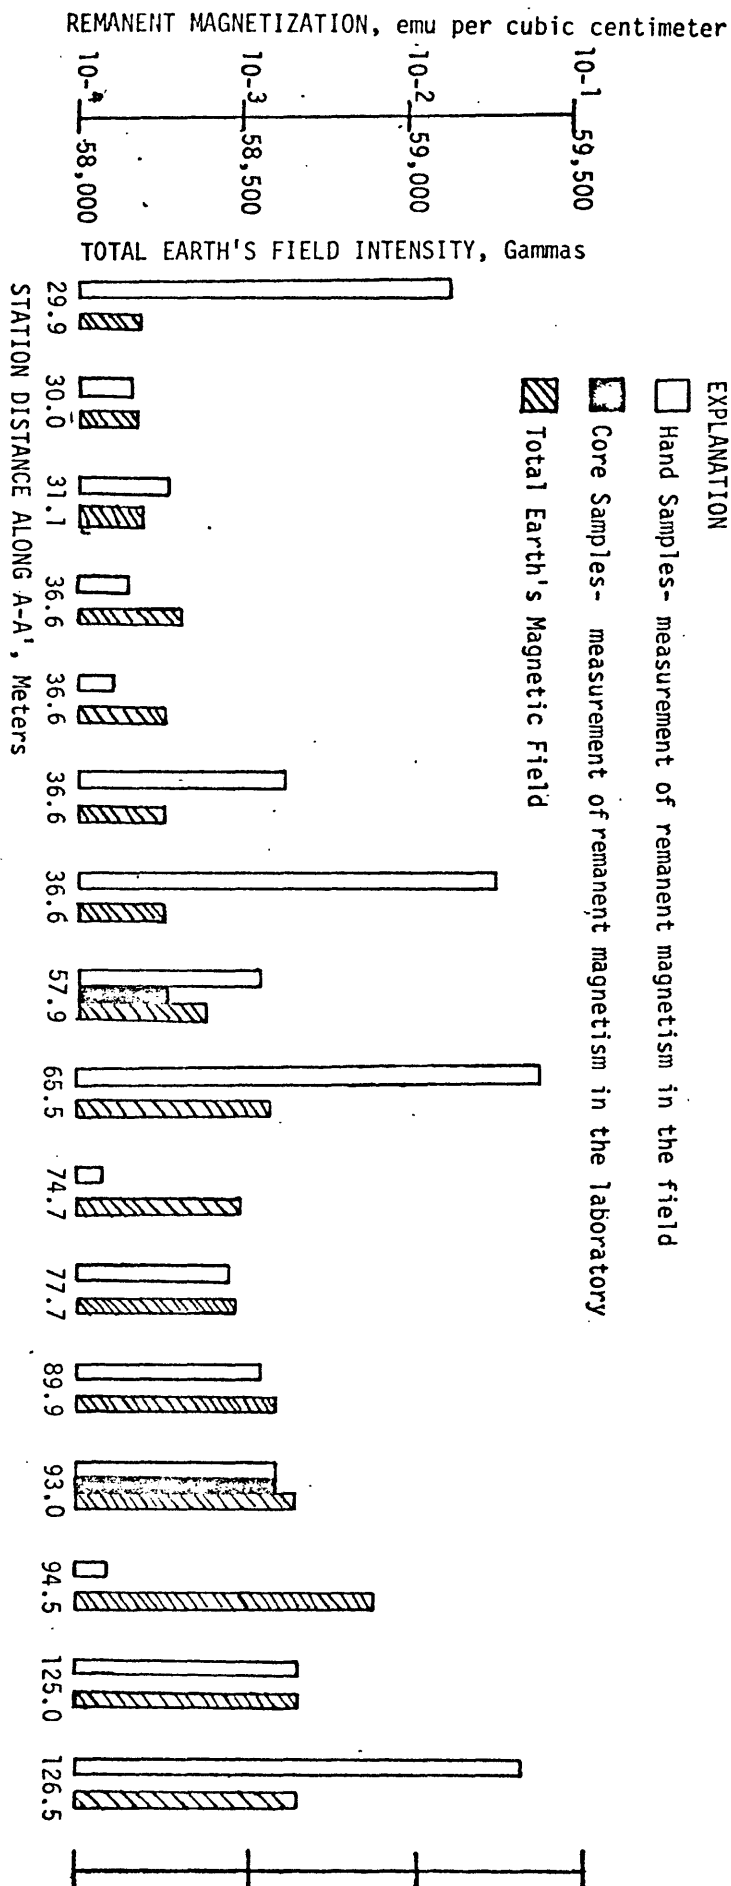


Figure 15- Measurements of remanent magnetism and Earth's total magnetic field intensity on clinkers along line A-A' (fig. 9, 14).

chimney material is also economically dozed, but it is quarried and crushed with much more difficulty than the clinkers that are merely baked. The chimneys, however, are not visually apparent from the level ground surface, but the success of quarrying with light equipment or of siting heavy structures on clinkers may depend on the presence of chimneys (Farooqui and others, 1977).

A small chimney was observed at about 61.0 m along line A-A'. This chimney is not discernible in the seismic data, but the diameter of the chimney is only 1-2 m. I speculate, however, that because chimneys in general are harder than the surrounding baked rocks, they have higher seismic velocities. If the diameter of a roughly circular chimney is a few meters or more, it may possibly be detected by seismic refraction methods as well as by magnetic methods.

Although the compressional-wave velocities of the low-velocity layers of both the clinkers and clastic rocks are similar, the shear-wave velocities in these same layers are different. The shear-wave velocities of the clinkers are higher than those of the low-velocity layer over clastic rocks (table 1). Furthermore, there is no shear-wave velocity layering apparent in the clinkers. The velocities and texture of the clinkers are compared to those of the clastic rocks and overburden in figure 5, and the shear strengths (at failure) are compared in figure 8. Shear strength of the clinkers is greater than that of the low-velocity layer of clastic rocks but less than that of the high-velocity layer.

The shear-wave velocities of the clinkers indicate some reasons why they do not readily exhibit slope failure. The clinkers are coarsely textured and have a high angle of internal friction. They are, therefore, relatively well drained and have approximately five times the shear strength of the low-velocity layer of clastic rocks.

Most manmade structures experience some settlement. Differential settlement beneath a structure, however, produces failure in the shear mode, first in the earth and then in the structure. The low-velocity layer, which overlies clastic rocks in some towns in the basin, clearly supports heavy structures such as grain silos and bridge abutments, but these structures apparently settle evenly. Even though the clinkers have higher shear strengths than the low-velocity layer over clastic rocks, the clinkers include relatively strong chimneys that may cause differential settlement.

Laboratory measurements compared to field measurements.--Seismic velocities of samples of clinkers along line A-A' were also measured in the laboratory. Compressional- and shear-wave velocities were measured on nine samples, and their elastic moduli and Poisson ratio's are compared in figure 16 with the equivalent field measurements. Shear-wave velocities were measured in the field only in the interval between 60 and 90 m along line A-A'.

Comparison of the laboratory-measured velocities of clinkers with those measured on clinkers in place shows the laboratory samples are much stronger. The reason for the disparity is that the high frequency of fracturing in clinkers in place is not indicated by the laboratory measurements. Intact samples are always chosen for these laboratory tests so





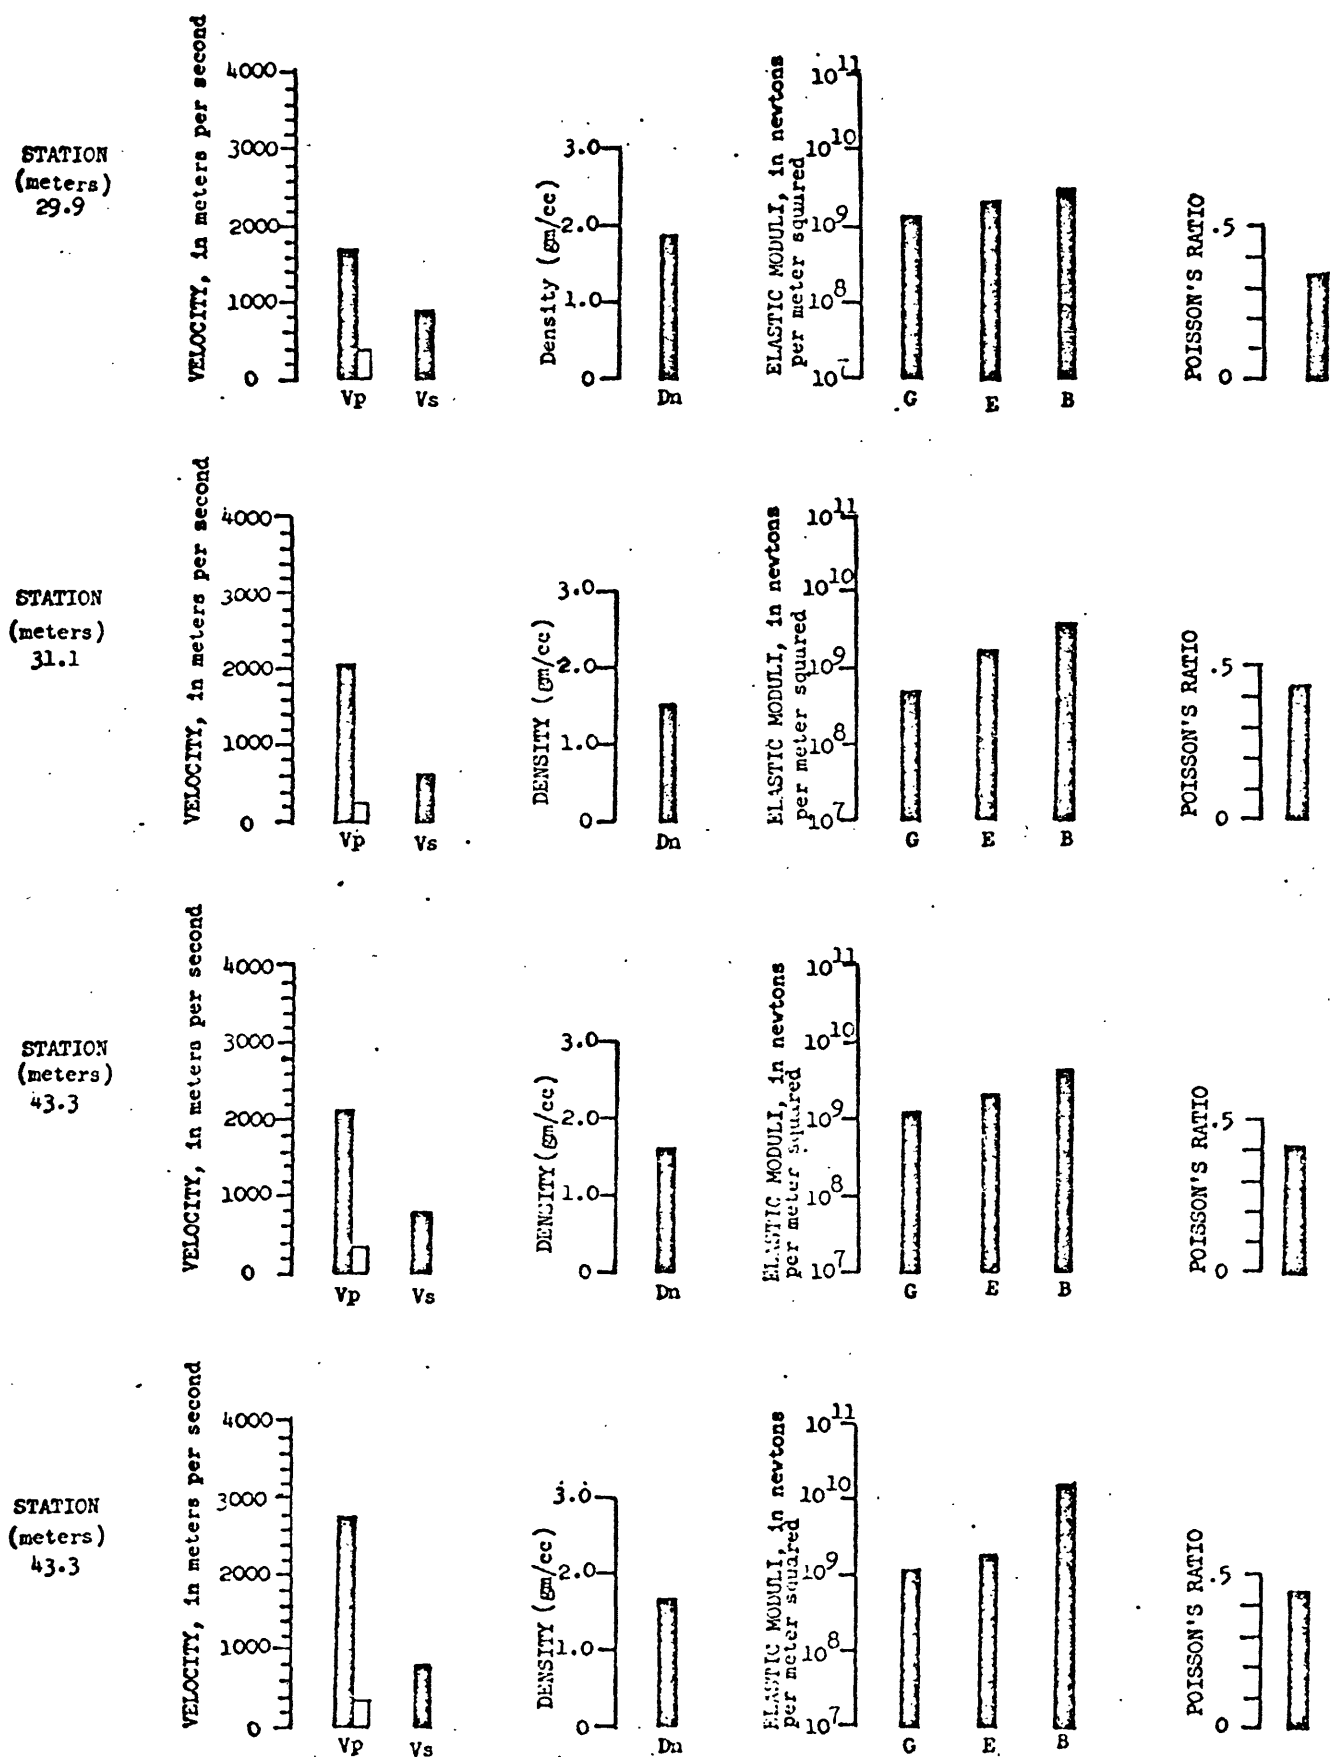


Figure 16. --In situ (open) and laboratory (shaded) measurements of compressional- ( $V_p$ ) and shear- ( $V_s$ ) wave velocities, the dynamic-elastic moduli ( $E$  = Young's,  $G$  = shear, and  $B$  = bulk), and Poisson's ratio ( $\sigma$ ) run on clinkers along A-A' (figs. 9, 14) (Figure continues on next page).


STATION  
(meters)  
43.3

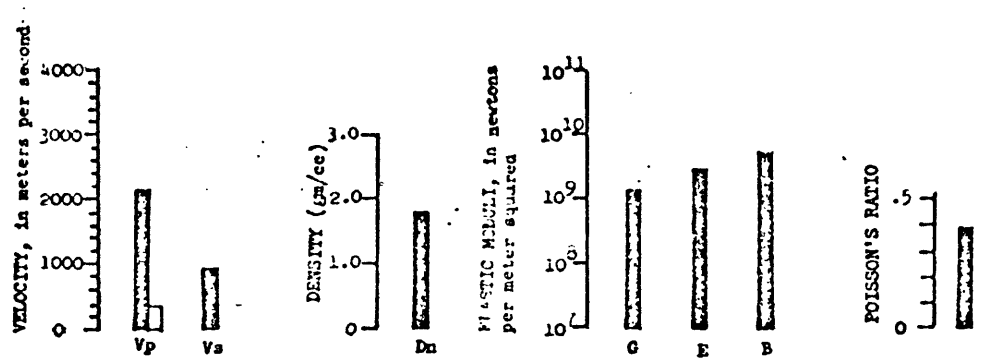


STATION  
(meters)  
54.9

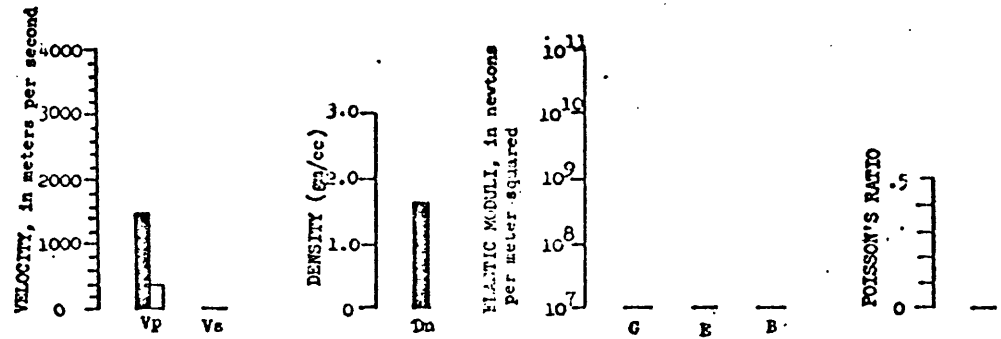

STATION  
(meters)  
65.8

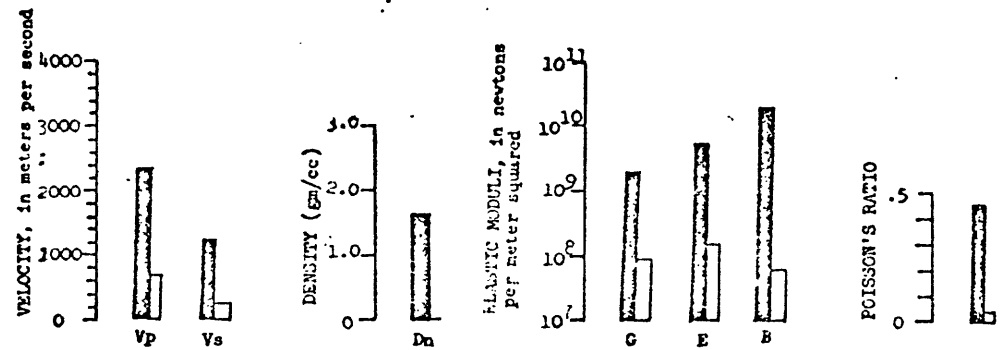

STATION  
(meters)  
121.9

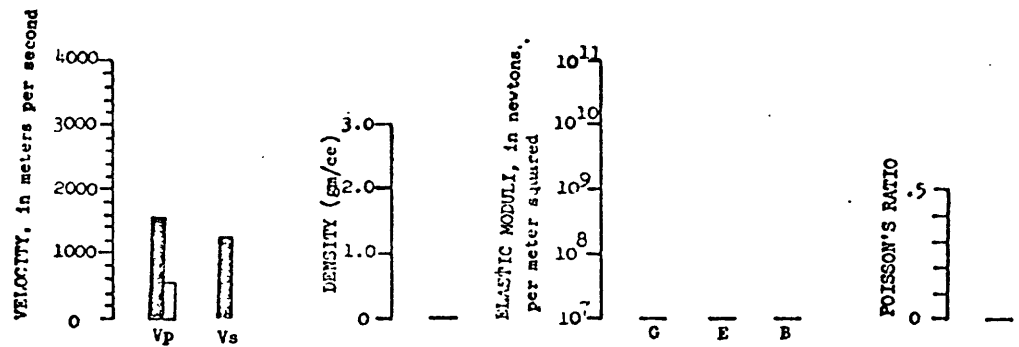

STATION  
(meters)  
124.4

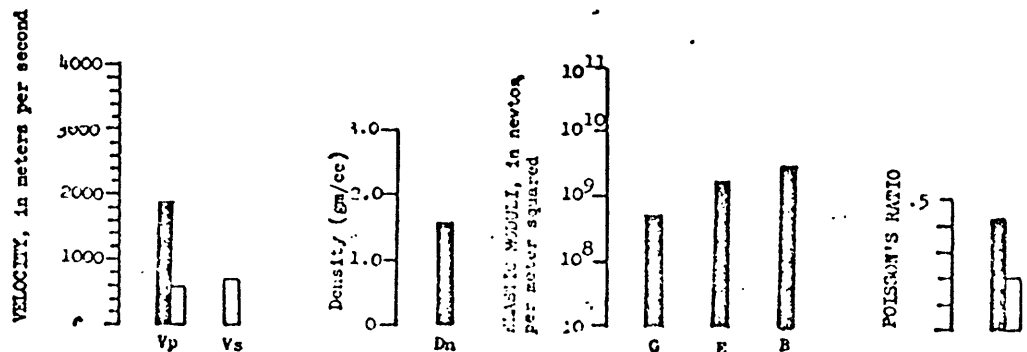


Figure 16. --continued.

that they may be cored. Consequently, the laboratory-derived velocities are heavily biased toward relatively stronger clinkers.

The compressional-wave velocities of the laboratory rock samples (fig. 16) range from 1830 to 4310 m/s and average 2490 m/s, compared to 420 m/s for in situ measurements--a ratio of about 6:1. If the velocities of laboratory rock samples were entered in the method-of-excavation graph (fig. 4), then excavation by blasting or marginal ripping with large tractors would be erroneously indicated.

### Summary and conclusions

Many coal beds in the Powder River Basin have burned along their outcrops, and the resulting intense heat has baked and fused the overlying clastic rocks into clinkers. The extent that the coal has burned into the subsurface is not necessarily apparent from the surface, but magnetic methods can delineate the edge of a single layer of buried clinkers. Location of the edge is very important in estimating nonburned coal deposits, locating clinker quarries, and planning drilling or seismic reflection lines for projects whose success may depend on the absence of clinkers.

The clinkers are very porous and highly fractured, and their erosion-resistant qualities belie their relatively low strength. In much of the basin, however, the clinkers are the only hard material available for building highways and railroads and for use as lightweight aggregate, even though they are weak relative to most other building stone and aggregate. Compressional-wave velocities and observation of quarrying operations show the clinkers can easily be mined without heavy equipment. Drilling and blasting are not necessary, except to loosen some overlying clastic rocks. Compressional-wave velocities done in the laboratory, however, are inherently biased. Only intact samples can be selected for testing, and hence the laboratory erroneously indicates that the clinkers must be loosened either by blasting or, perhaps, by heavy ripping tractors.

The approximate shear strength of the clinkers is five times that of the low-velocity layer overlying clastic rocks but is only one-sixth that of the clastic rocks themselves. Landslides in the basin do not readily occur along slopes of clinkers. Some reasons for this relative slope stability include the coarse texture of the clinkers, which promotes relatively good drainage and permits a high angle of repose, and the greater shear strength of the clinkers, compared to that of the low-velocity layer associated with clastic rocks.

Heavy structures such as coal silos and bridge abutments may have to be sited on clinkers. Differential settlement with failure in the shear mode may occur, however, because chimneys of relatively greater strength occur within the clinkers. Special foundation-preparation techniques may, therefore, have to be used or, perhaps, chimneys in a single layer of clinkers can be located by geophysical methods and avoided at the construction site. Preliminary investigations indicate that the chimney rocks may be more magnetic, and they are known to be harder than the surrounding clinkers. Consequently, I think that chimneys may be located by measuring three-dimensional magnetic fields and, perhaps, by closely spaced seismic refraction lines.

Remanent magnetism measurements on hand samples in the field may be as accurate as those made in the laboratory. The measurements on hand samples are much faster and more efficient because the highly fractured clinkers are very difficult to prepare for the laboratory tests.

There is no apparent correlation between change in remanent magnetization along the outcrop and changes in total intensity of the Earth's field along the same outcrop.

## REFERENCES

- Bailey, A. D., and Van Alstine, C. L., 1973, A downhole shear wave and soils study: Sacramento, California, Nimbus Instruments, 13 p.
- Bauer, L. P., 1972, The alteration of sedimentary rocks due to burning coal in the Powder River Basin, Campbell County, Wyoming: Texas Tech University, M.S. thesis, 65 p.
- Bogoslovsky, V. A., and Ogilvy, A. A., 1977, Geophysical methods for the investigation of landslides: *Geophysics*, v. 42, no. 3, p. 562-571.
- Briener, Sheldon, 1973, Applications manual for portable magnetometers: Sunnyvale, California, Geometrics, 62 p.
- Caterpillar Tractor Company, 1972, Caterpillar performance handbook [6th ed.]: Peoria, Illinois, Caterpillar Tractor Co. Press, 29 secs.
- Chleborad, A. F., Nichols, T. C., Jr., and Ebaugh, W. F., 1976, A preliminary inventory, description, and statistical evaluation of landslides in a region of projected urban development, Sheridan, Wyoming: U.S. Geological Survey Open-File Report 76-571, 105 p.
- Darracott, B. W., 1976, Seismic surveys and civil engineering: The civil engineer of South Africa, p. 35-40.
- Deere, D. U., and Miller, R. P., 1966, Engineering classification and index properties for intact rock: Available from U.S. Department of Commerce National Technical Information Service, Springfield, Virginia 22161, as report AFWL-TR-65-116, p. 162-171.
- Ebaugh, W. F., 1976, Surficial and bedrock geologic map of the Big Horn quadrangle, Wyoming: U.S. Geological Survey Miscellaneous Field Studies Map MF-801, 1:24,000, 1 sheet.
- \_\_\_\_\_, 1977, Landslide-factor mapping and slope-stability analysis of the Big Horn quadrangle, Sheridan County, Wyoming: Boulder, Colorado University Ph. D. thesis, 194 p.
- Farooqui, S. M., Deacon, R. J., and Kent, R. C., 1977, Geology of combustion metamorphosed strata near Decker, Montana [abs.]: Seattle, Washington, Association of Engineering Geologists, 20th Annual Meeting, p. 4.
- Farrow, R. A., 1976, Preliminary report on the geotechnical properties of the Wasatch Formation at Buffalo, Wyoming: U.S. Geological Survey Open-File Report 76-877, 78 p.
- Gardner, G. H. F., and Harris, M. H., 1968, Velocity and attenuation of elastic waves in sands, in *Transactions of the Society of Professional Well Log Analysts, Ninth Annual Logging Symposium*, Houston, Texas: p. 1-19.

- Hasbrouck, W. P., and Hadsell, F. A., 1976, Geophysical exploration techniques applied to western United States coal deposits, in Coal exploration: 1st International Coal Exploration Symposium, London, England, 1976, Proc., 664 p.
- Hayden, F. V., 1873, A report of progress for the year 1872 embracing portions of Montana, Idaho, Wyoming, and Utah: U.S. Geological Survey, 6th Annual Report, p. 358-359.
- Imai, Tsuneo, and Yoshimura, Masayoshi, 1975, The relation of mechanical properties of soils to P- and S-wave velocities for soil ground in Japan: Oyo Technical Note 07, 15 p.
- Insley, Herbert, and Frechette, Van Derck, 1955, Microscopy of ceramics and cements, including glasses, slags and foundry sands: New York, Academic Press, 286 p.
- Krynine, D. P., and Judd, W. R., 1957, Principles of engineering geology and geotechnics: New York, McGraw-Hill, p. 637-671.
- Laby, T. H., 1931, The principles and practice of geophysical prospecting, in Edge, A. B. B., ed., Imperial geophysical experimental survey: Cambridge, England, Cambridge University Press, p. 637-671.
- Leet, L. D., 1950, Earth waves: Cambridge, Mass., Harvard Monographs in Applied Science, no. 2, 122 p.
- \_\_\_\_\_, 1960, Vibrations from blasting rock: Cambridge, Mass., Harvard University Press, 134 p.
- Lowry, M. E., and Cummings, T. R., 1966, Ground-water resources of Sheridan County, Wyoming: U.S. Geological Survey Water-Supply Paper 1807, 77 p.
- Mapel, W. J., 1959, Geology and coal resources of the Buffalo-Lake De Smet area, Johnson and Sheridan Counties, Wyoming: U.S. Geological Survey Bulletin 1078, 148 p. [1961].
- Miller, C. H., and Bullard, T. F., 1978a, Elastic constants, in Catalog of contributed programs: Corvallis, Oregon, Hewlett Packard 65 Users Library, Program 05374-A, 5 p.
- \_\_\_\_\_, 1978b, Stadia-alidade traverse reductions, in Catalog of contributed programs: Corvallis, Oregon, Hewlett Packard 65 Users Library, Program 05393-A, 5 p.
- \_\_\_\_\_, 1978c, Depth and configuration of a buried refraction-velocity layer, in Catalog of contributed programs: Corvallis, Oregon, Hewlett Packard 65 Users Library, Program 05394-A, 5 p.
- Protodyakonov, M. M. 1963, Mechanical properties and drillability of rocks in Fairhurst, C., ed, 5th Symposium on Rock Mechanics, Minnesota University, May 1962, Proc.: New York, Macmillan, p. 103-118.

- Redpath, B. B., 1973, Seismic refraction exploration for engineering site investigations: U.S. Army Corps Engineers Technical Report E-73-4, 51 p.
- Rogers, G. S., 1917, Baked shale and slag formed by the burning of coal beds: U.S. Geological Survey Professional Paper 108, 10 p.
- Tandanand, Sathit, and Unger, H. F., 1975, Drillability determination--a drillability index for percussion drills: U.S. Bureau of Mines Report of Investigations 8073, 20 p.
- Terzaghi, Karl, and Peck, R. B., 1967, Soil mechanics in engineering practice: John Wiley and Sons, 729 p.
- Wyllie, M. R. J., 1963, The fundamentals of well log interpretation [3d ed.]: New York, Academic Press, 238 p.